
CEMENT BOND
GAMMA RAY
COLLAR LOCATION LOG
Company: CHEVRON U.S.A.
Well: 58-7 TENNECO
Field: WILMINGTON
County: LOS ANGELES
State: CALIFORNIA
Location: API Serial No.
Sec. 7 T. 13S R. 14W S.B.B.M.
Permanent Datum: GROUND LEVEL
Elev.: K.B. 30 ft above perm. datum
D.F. 29 ft above perm. datum
G.L. 0 ft above perm. datum
Log Measured From: KELLY BUSHING
Drilling Measured From: KELLY BUSHING
Date: 10-7-1969
Run No.: ONE
Depth-Driller: 5,000 ft
Depth-Logger: 4,998 ft
Bottom Logged Interval: 4,998 ft
Top Logged Interval: 1,000 ft
Type Fluid in Hole: LIGNOSULFONATE
Salinity: 10,000 PPM CHLORIDE
Density: 9.6 LB/GAL
Level: FULL
Max. Rec. Temp.: 150 °F
Equipment No.: 1
Location: 58-7 TENNECO
Recorded By: R. MOORE
Witnessed By: J. MARTIN
Run No. ONE
Bit Size: 7 7/8 in
Type Fluid in Hole: LIGNOSULFONATE
Density: 9.6 LB/GAL
Viscosity: 40 SEC
Fluid Loss: 8 CC
Source of Sample: PIT
Rm @ Meas. Temp.: 0.45 @ 150 °F
Rmf @ Meas. Temp.: 0.35 @ 150 °F
Rmc @ Meas. Temp.: 0.55 @ 150 °F
Source of Rmf & Rmc: MEASURED
Rm @ BHT: 0.28 @ 175 °F
Time Since Circ.: 12 HRS

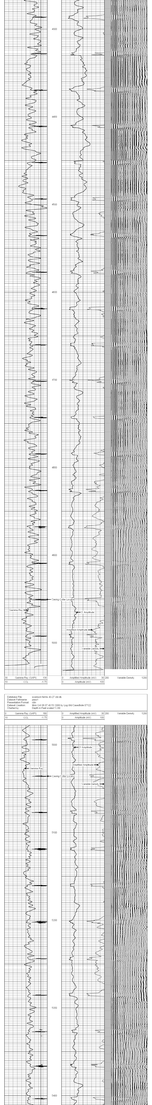
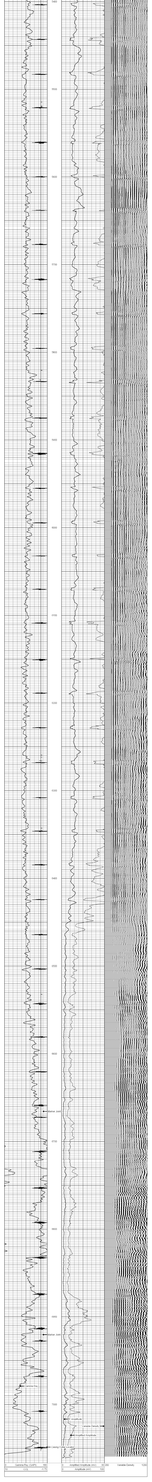
Caliper Log
Gamma Ray
Deep Induction Log
Medium Induction Log
Shallow Induction Log
Neutron Porosity Log (sandstone matrix)
Density Log
Photoelectric Factor Log
Caliper Log
Gamma Ray
Deep Induction Log
Medium Induction Log
Shallow Induction Log
Neutron Porosity Log (sandstone matrix)
Density Log
Photoelectric Factor Log