



SUPERIOR
Black Lick, Pa.
Mercer, Pa.
Wooster, Oh.
Cleveland, Ok.
Trinidad, Co.

CEMENT BOND GAMMA RAY

Company XTO Energy Inc.
Well Golden Eagle 30-16
Field Purgatorie River
County Las Animas
State CO

Company XTO Energy Inc.
Well Golden Eagle 30-16
Field Purgatorie River
County Las Animas
State CO

Location: API # : 05 071 09109 00

294' FSL & 881' FWL

SEC 30 TWP 33S RGE 67W

Permanent Datum Ground Level Elevation 7419'
Log Measured From Ground Level
Drilling Measured From Ground Level

Elevation
K.B. -----
D.F. -----
G.L. 7419'

Date 3/5/07

Run Number one
Depth Driller 2050'
Depth Logger 2005'
Bottom Logged Interval 2001'
Top Log Interval Surf.
Open Hole Size 7 7/8"
Type Fluid water
Density / Viscosity
Max. Recorded Temp. 111
Estimated Cement Top 544'
Time Well Ready ROA
Time Logger on Bottom 1:00
Equipment Number 0703
Location Trinidad
Recorded By Worley
Witnessed By Mr. Polley

Run Number Bit From To Size Weight From To

Casing Record Size Wgt/Ft Top Bottom
Surface String 8 5/8" 00 500'

Prot. String
Production String 5 1/2" 00 NA

Liner

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Turn at Bosque 4 miles past Weston, up Ciruela Canyon, stay right at windmill,
next right to location.





SUPERIOR
Black Lick, Pa.
Mercer, Pa.
Wooster, Oh.
Cleveland, Ok.
Trinidad, Co.

Main Pass

Database File: ge30-16b3507.db
Dataset Pathname: pass2
Presentation Format: cblrt
Dataset Creation: Mon Mar 05 13:05:26 2007 by Log Warrior 7.0 STD Cas
Charted by: Depth in Feet scaled 1:240

0	GR (GAPI)	200	0	AMP3 (mV)	100	200	Variable Density	1200
400	TT3 (usec)	200	18	CCL	-2			
			200	CBL5	1200			

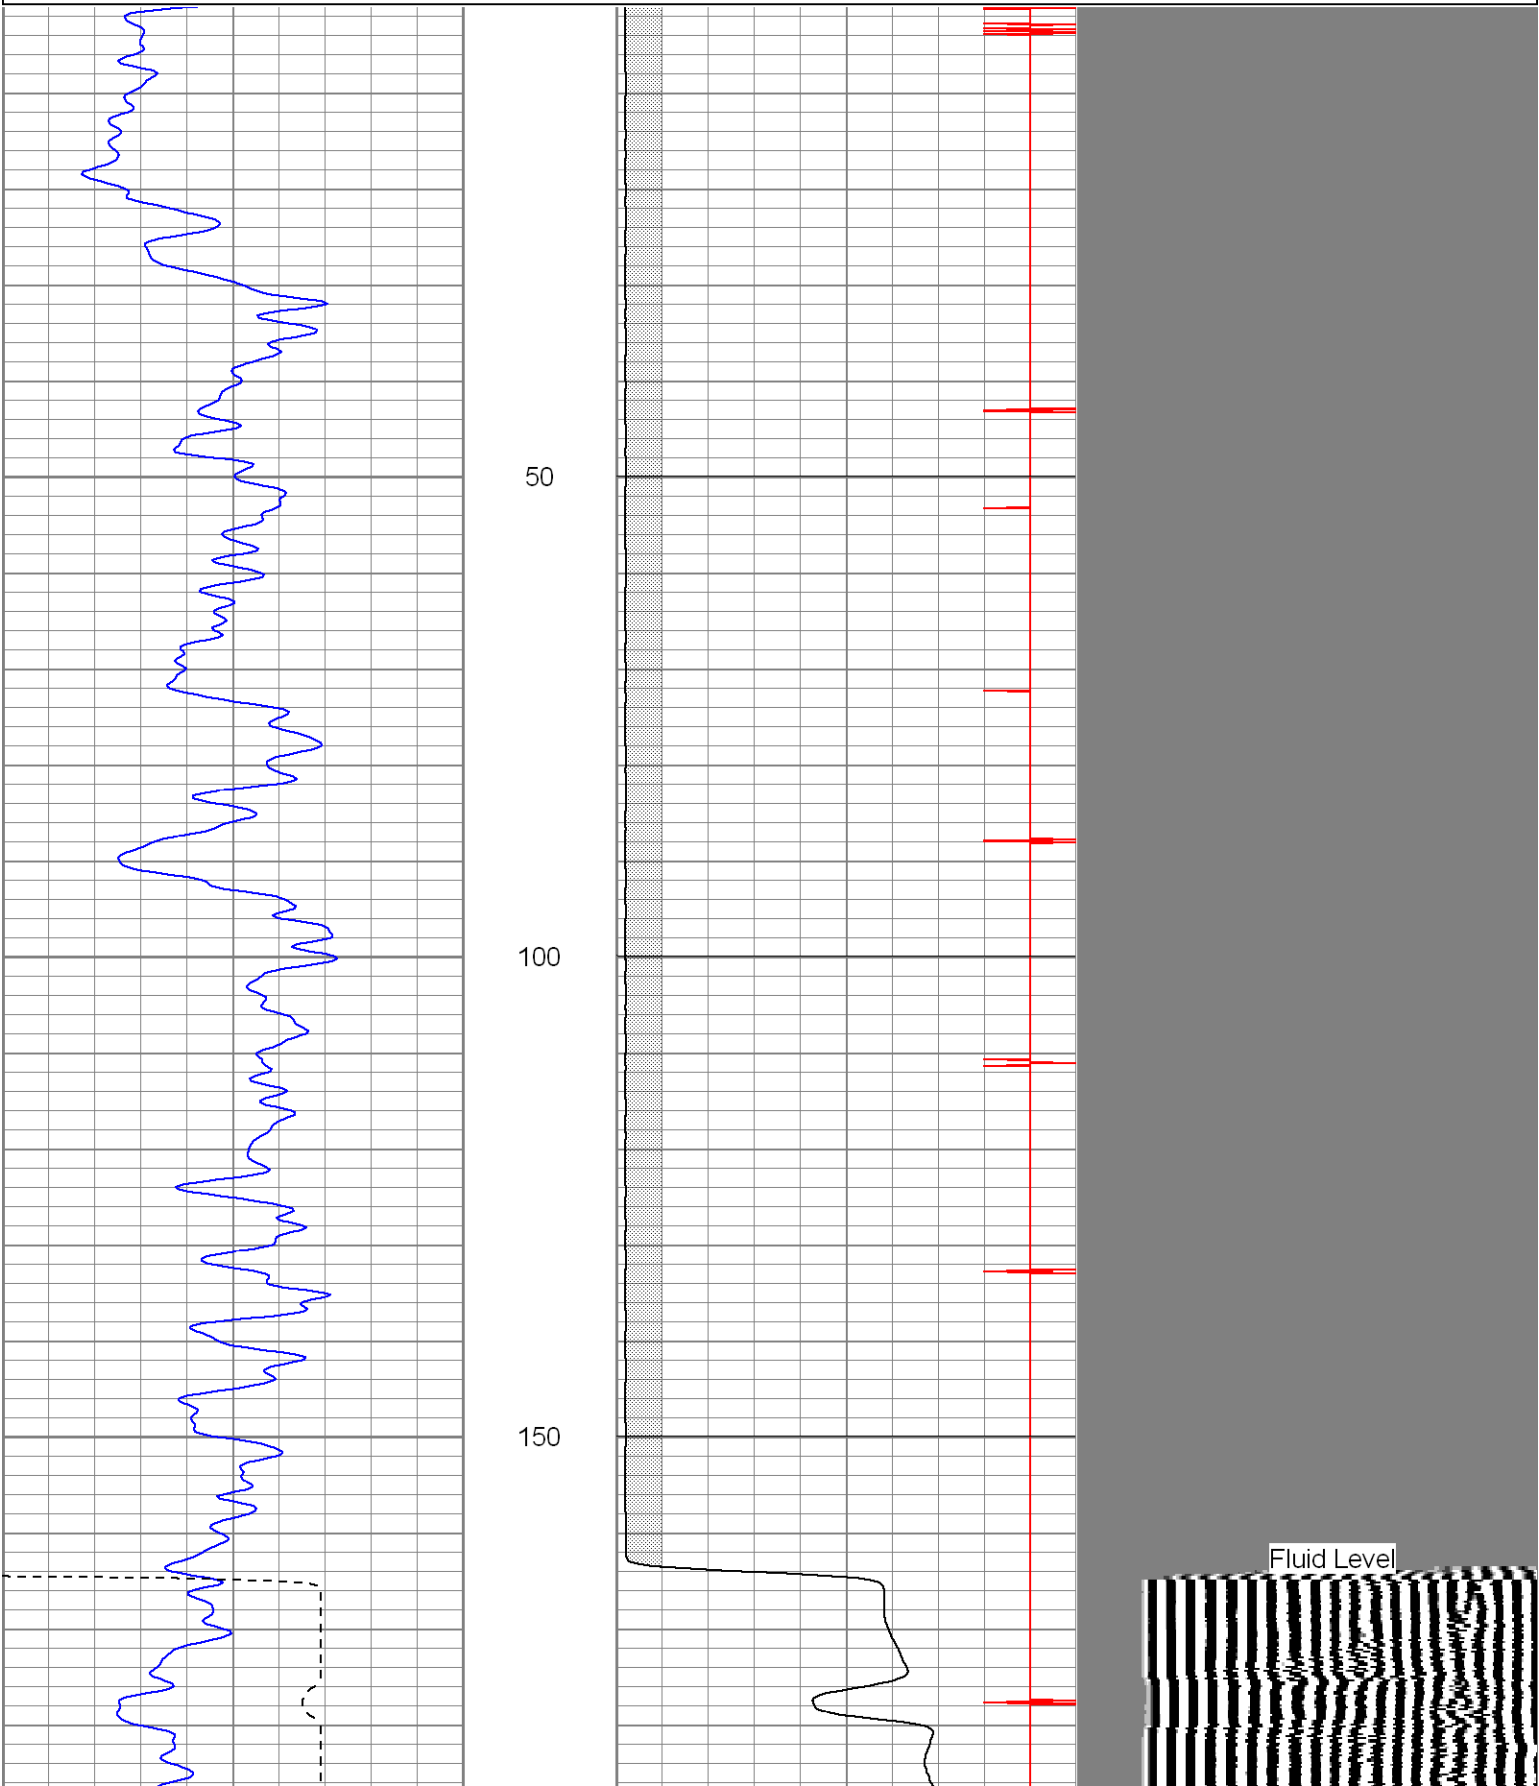

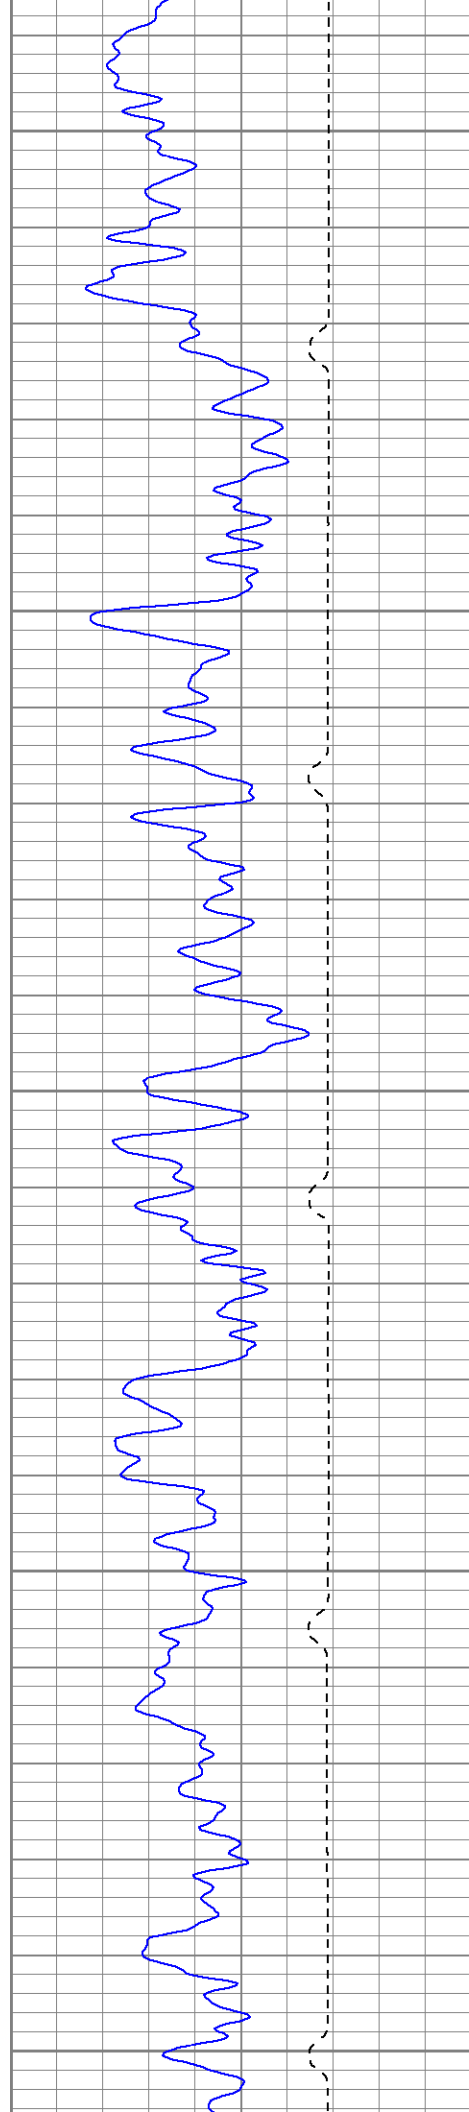



200


250


300

350

400

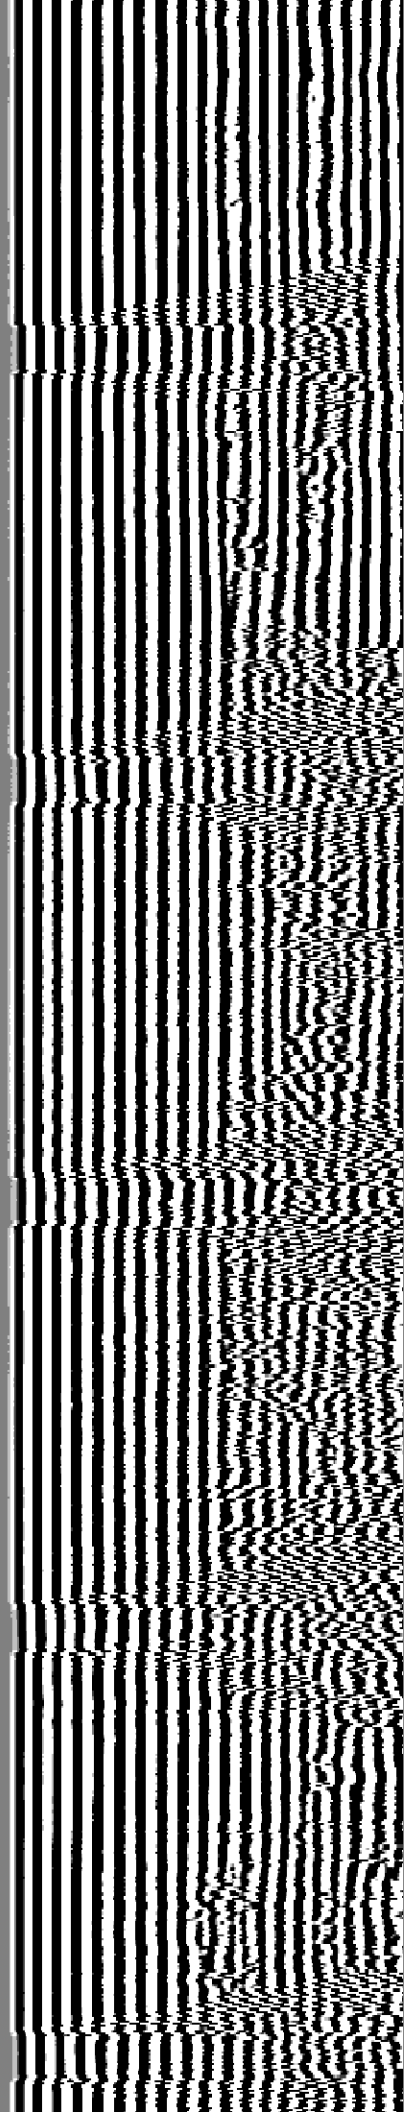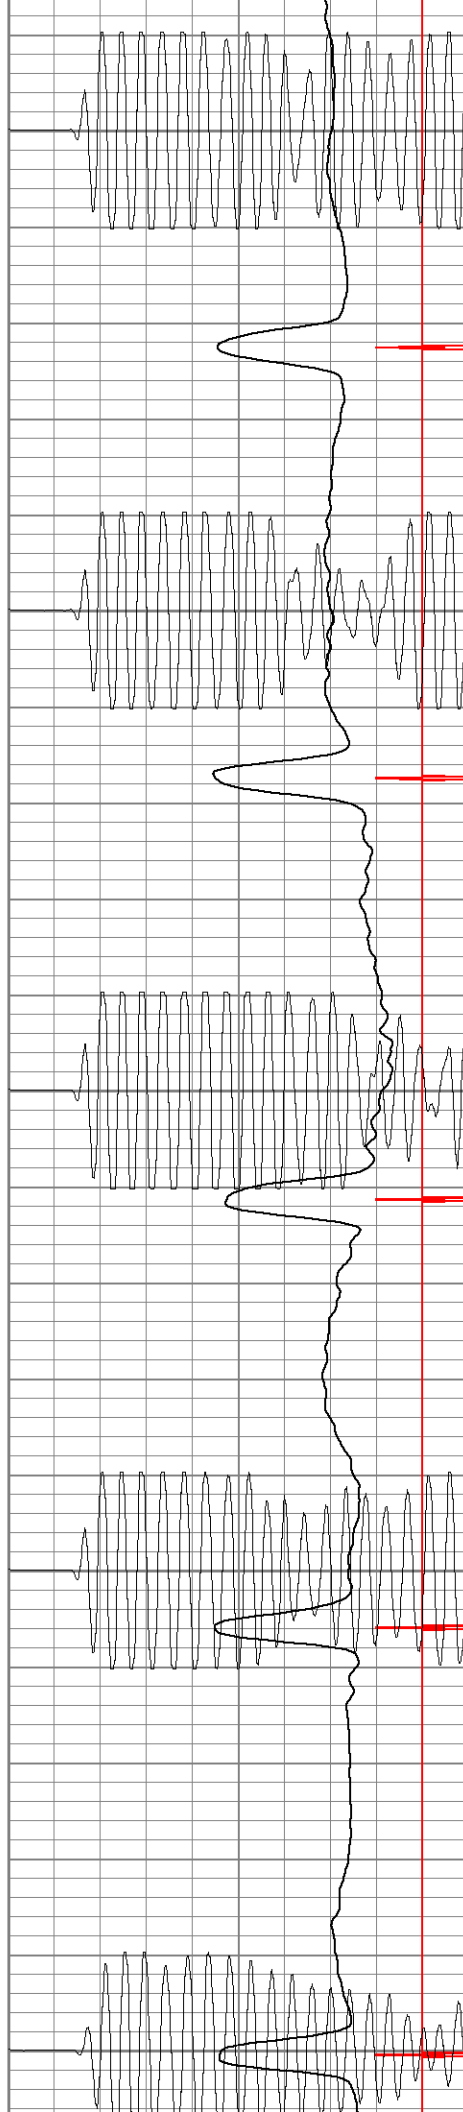

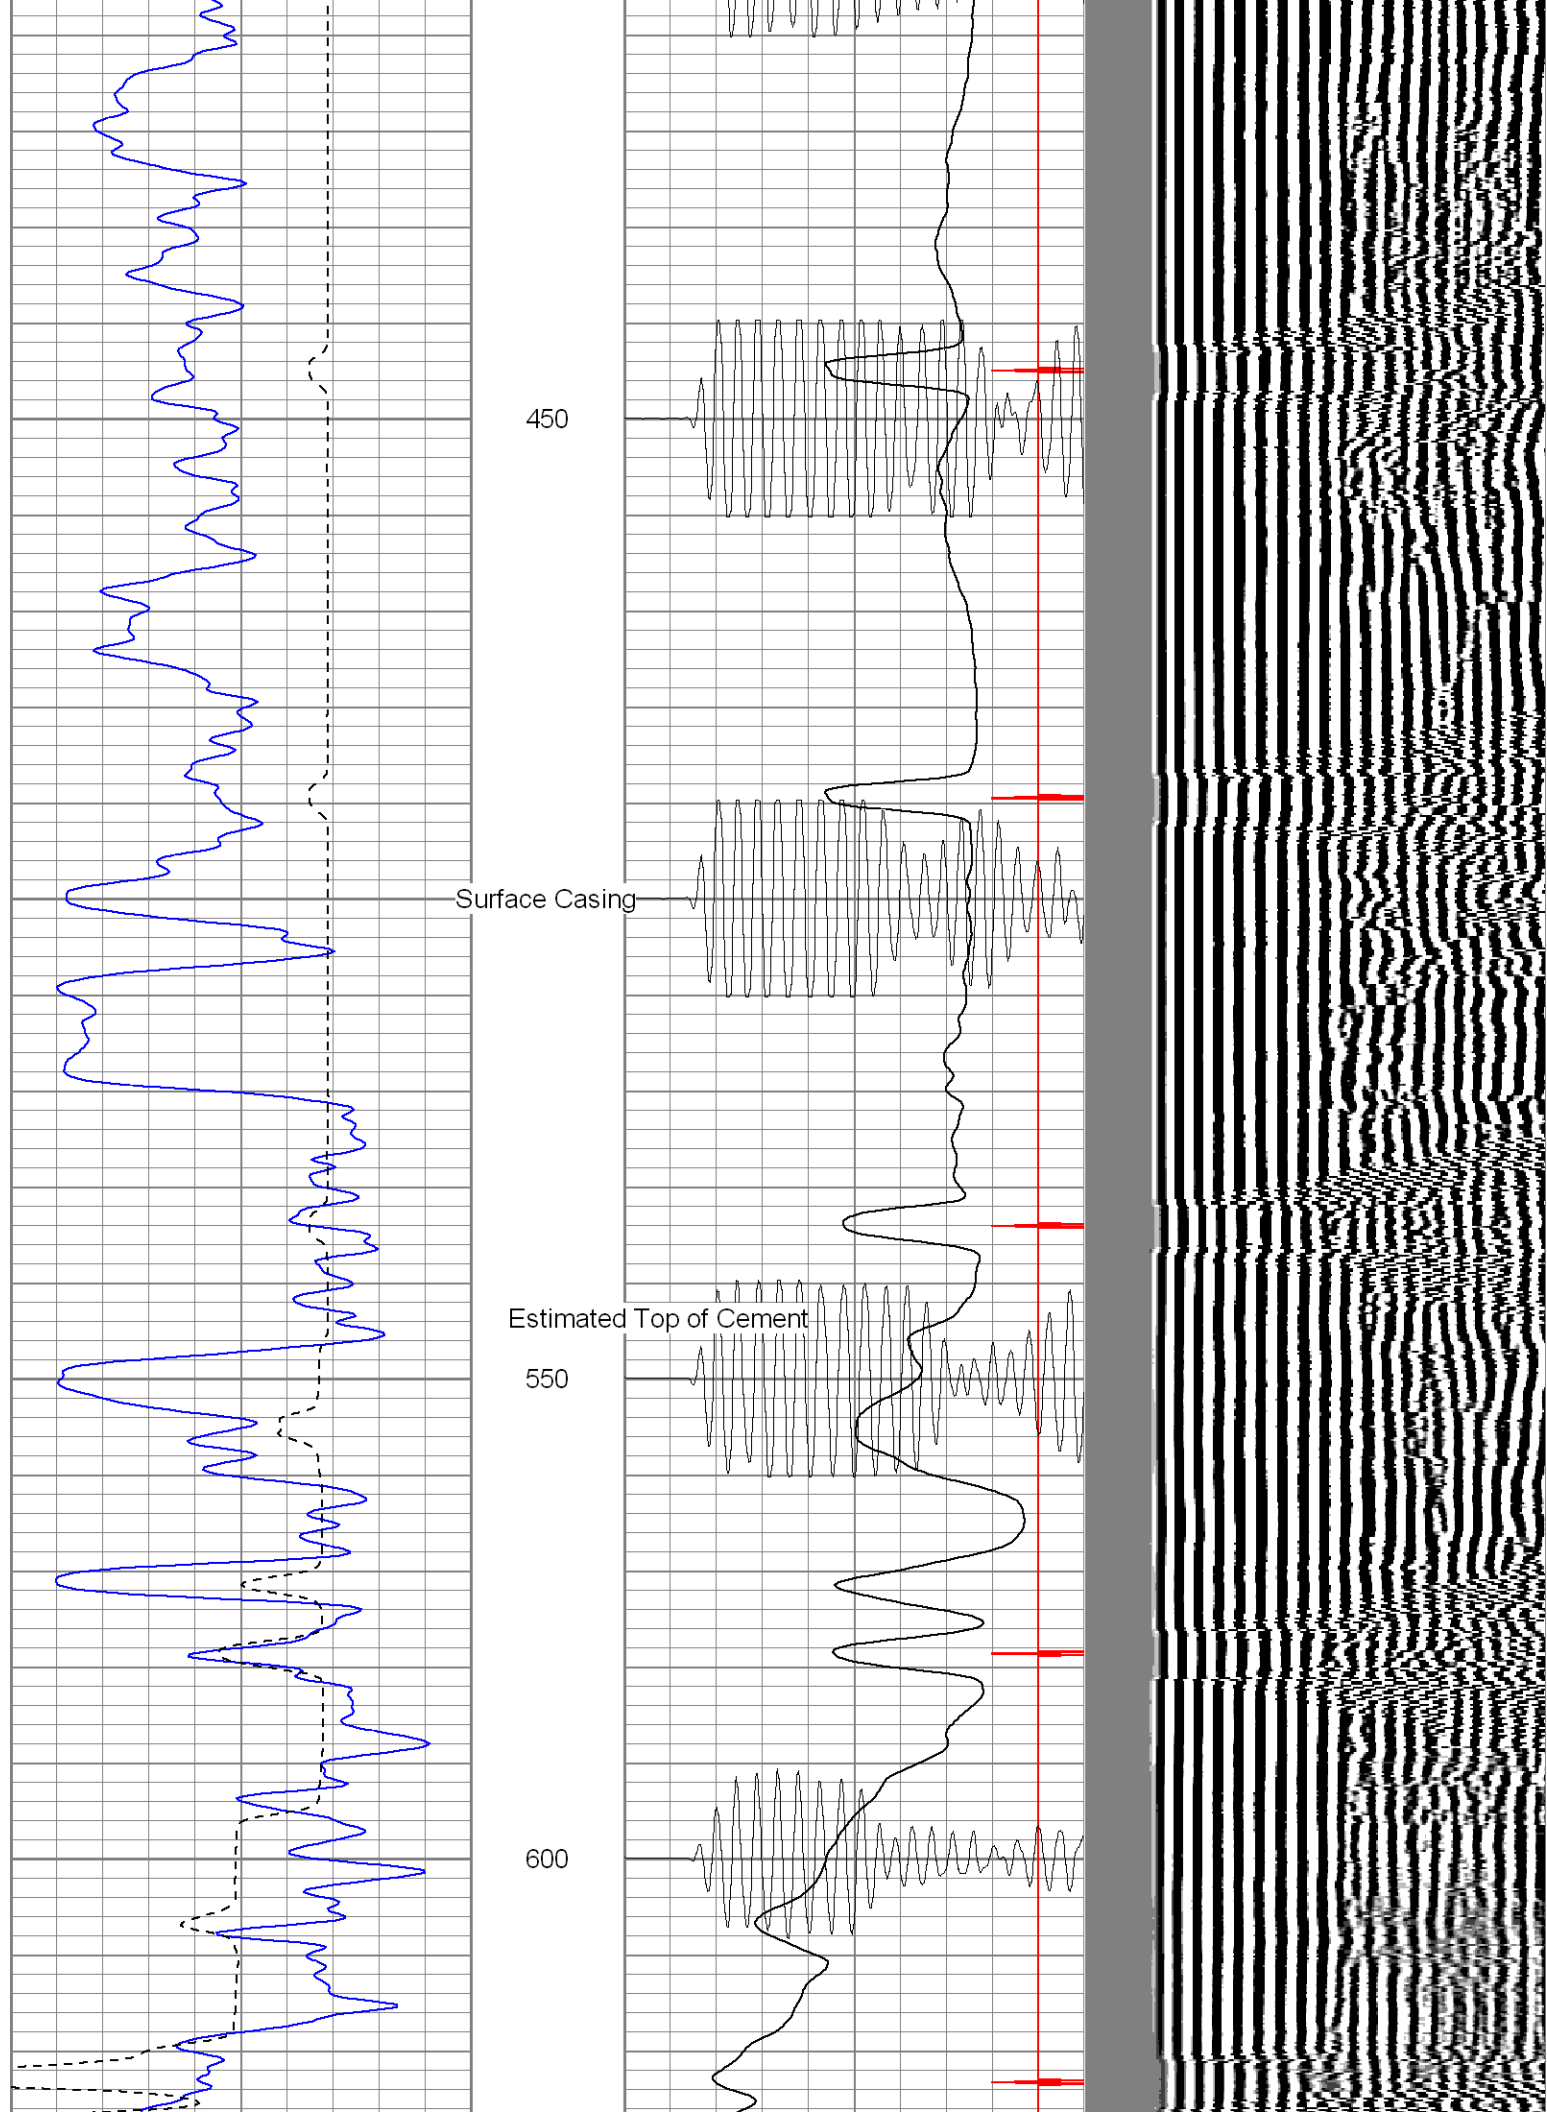


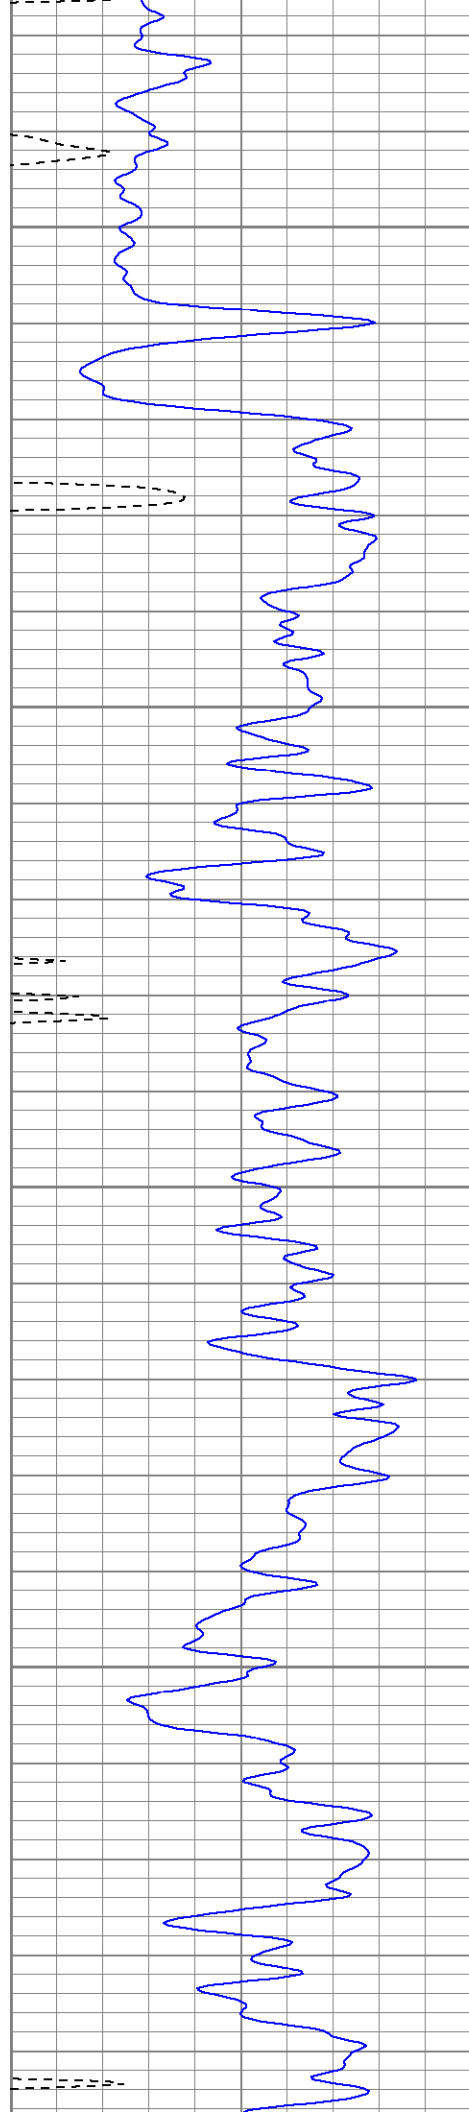





650




700


750

800

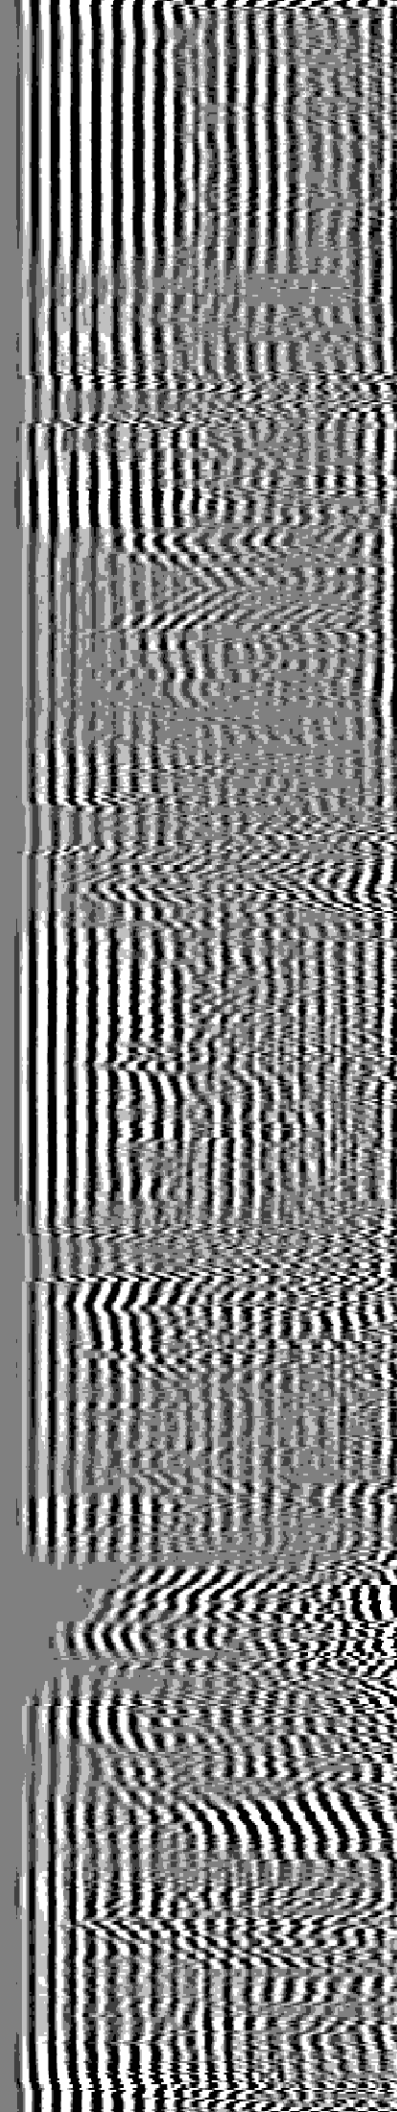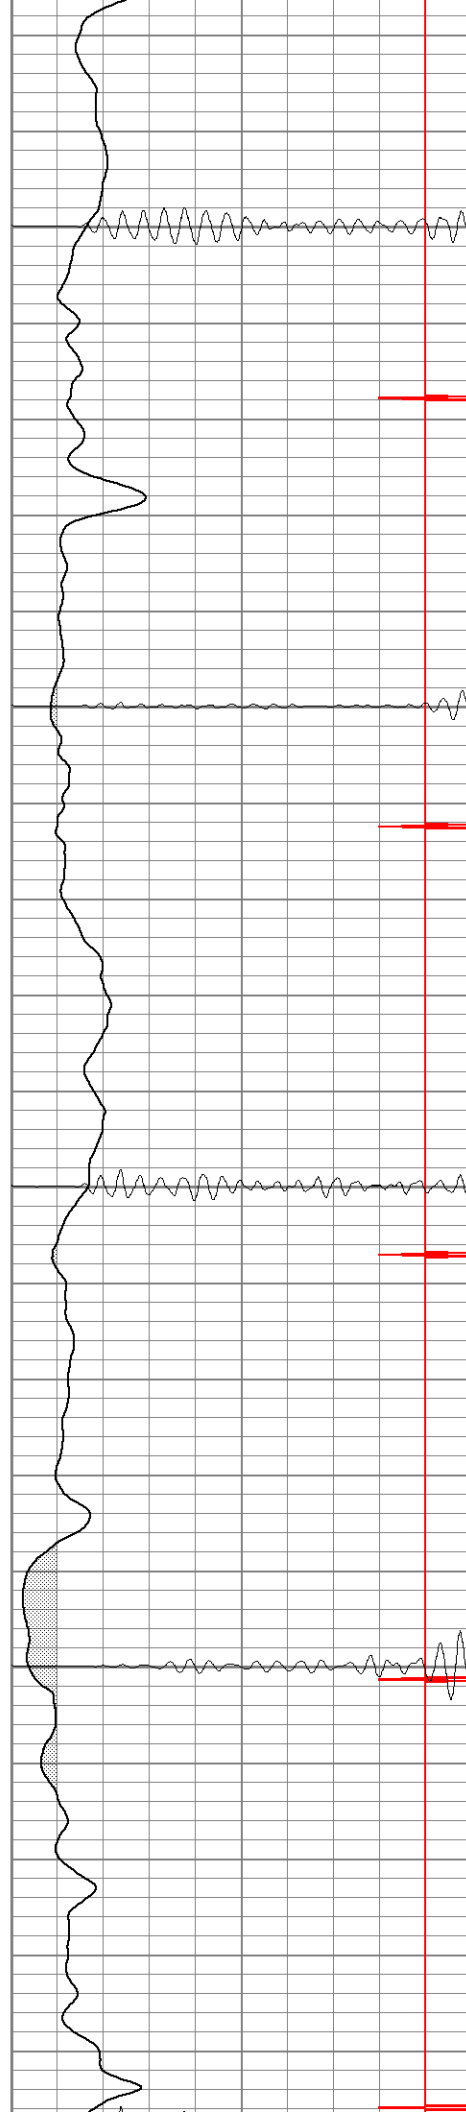

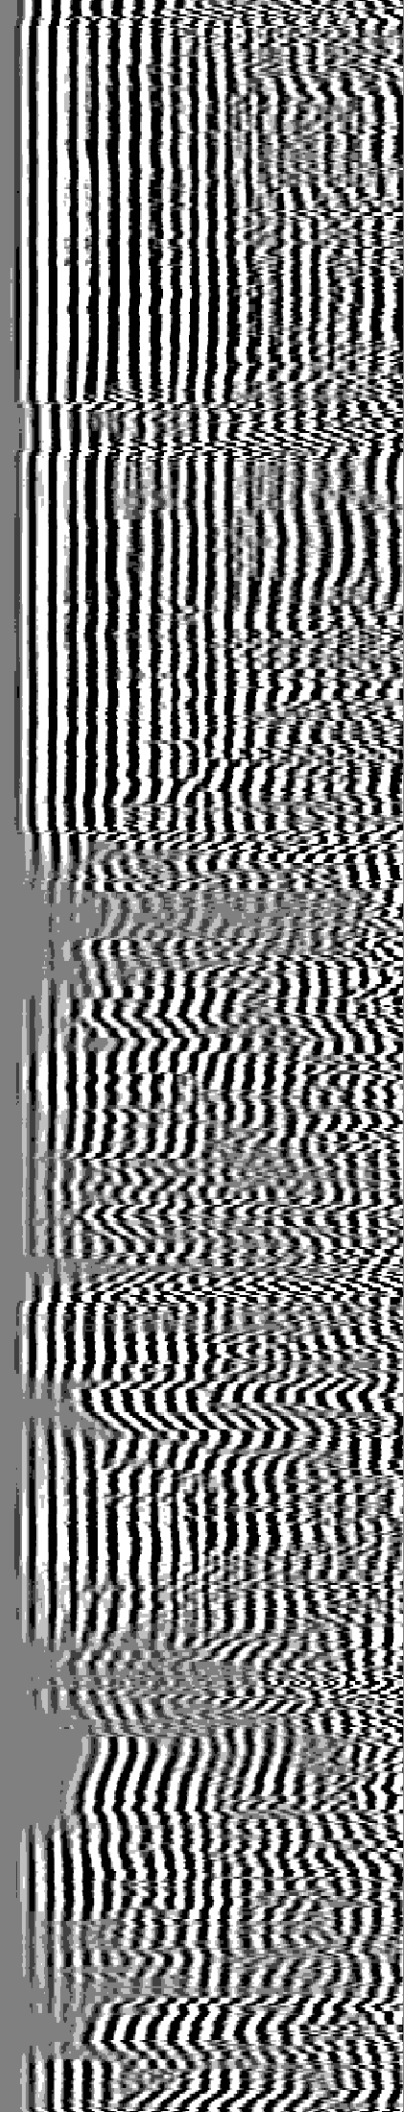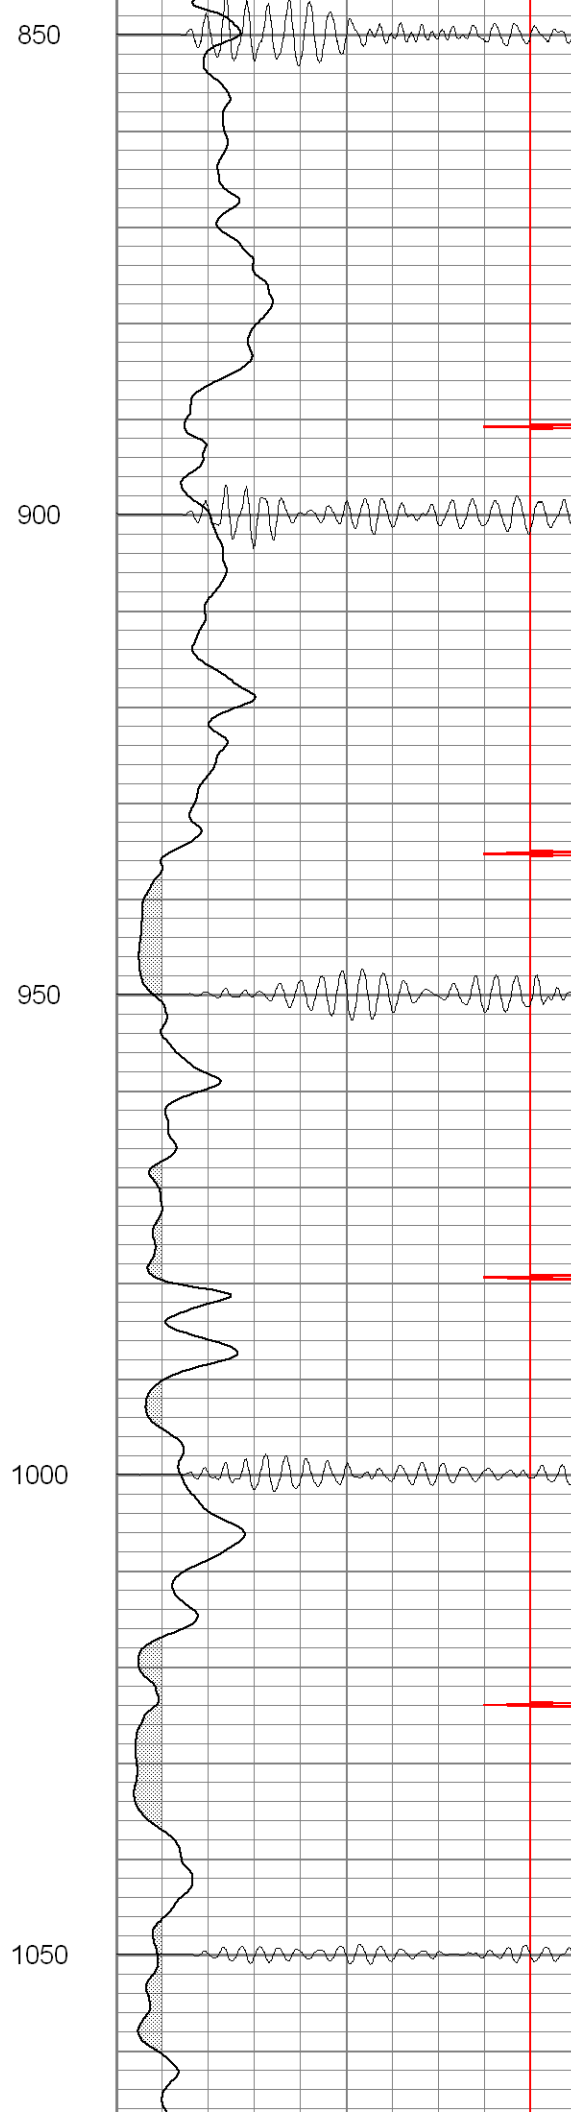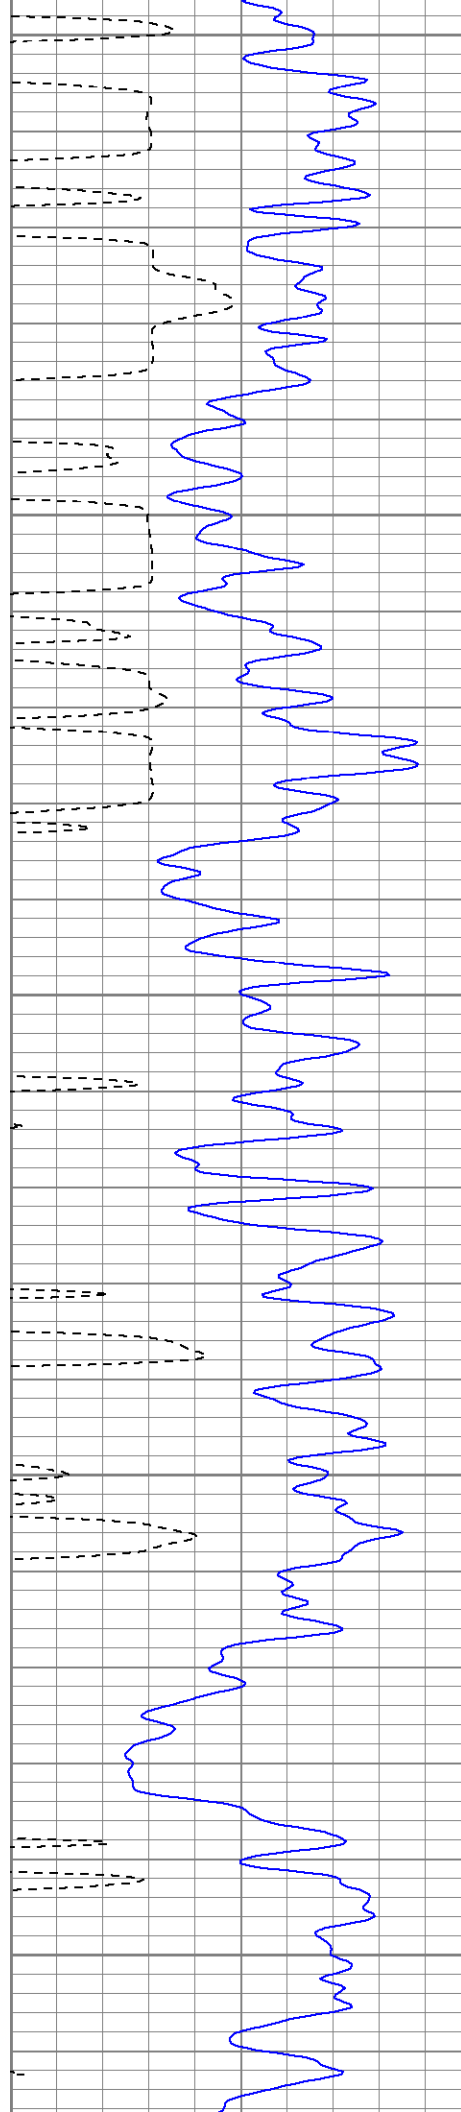

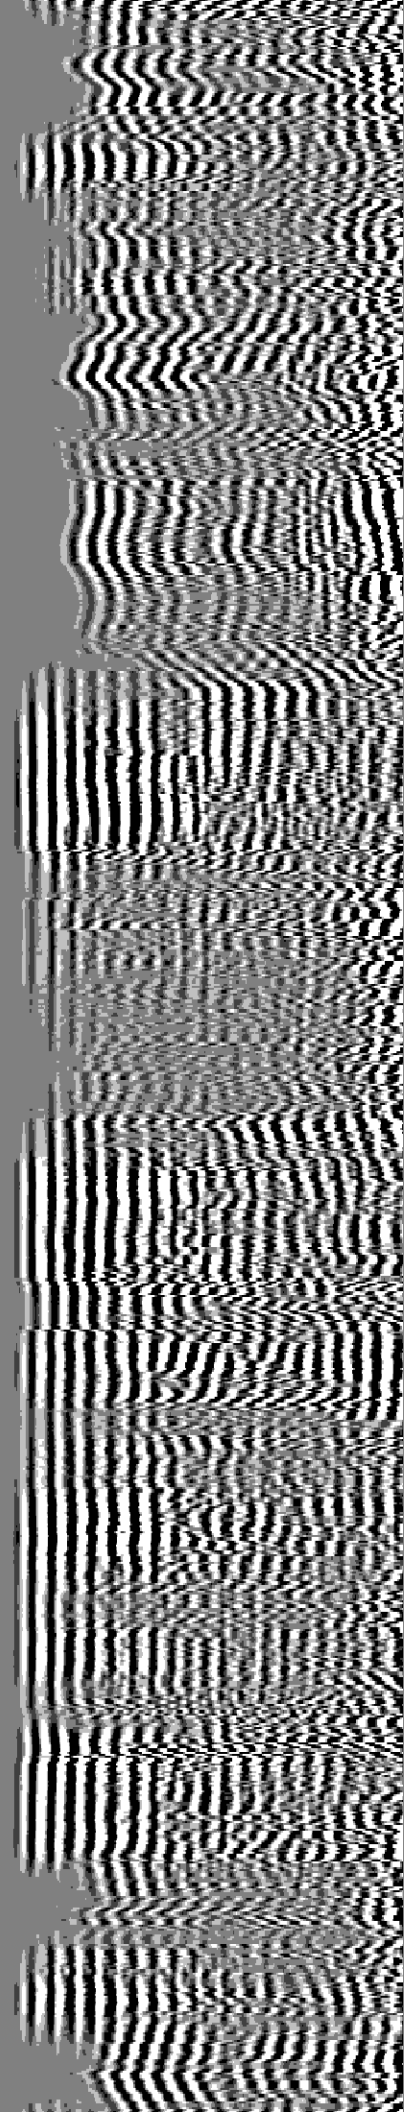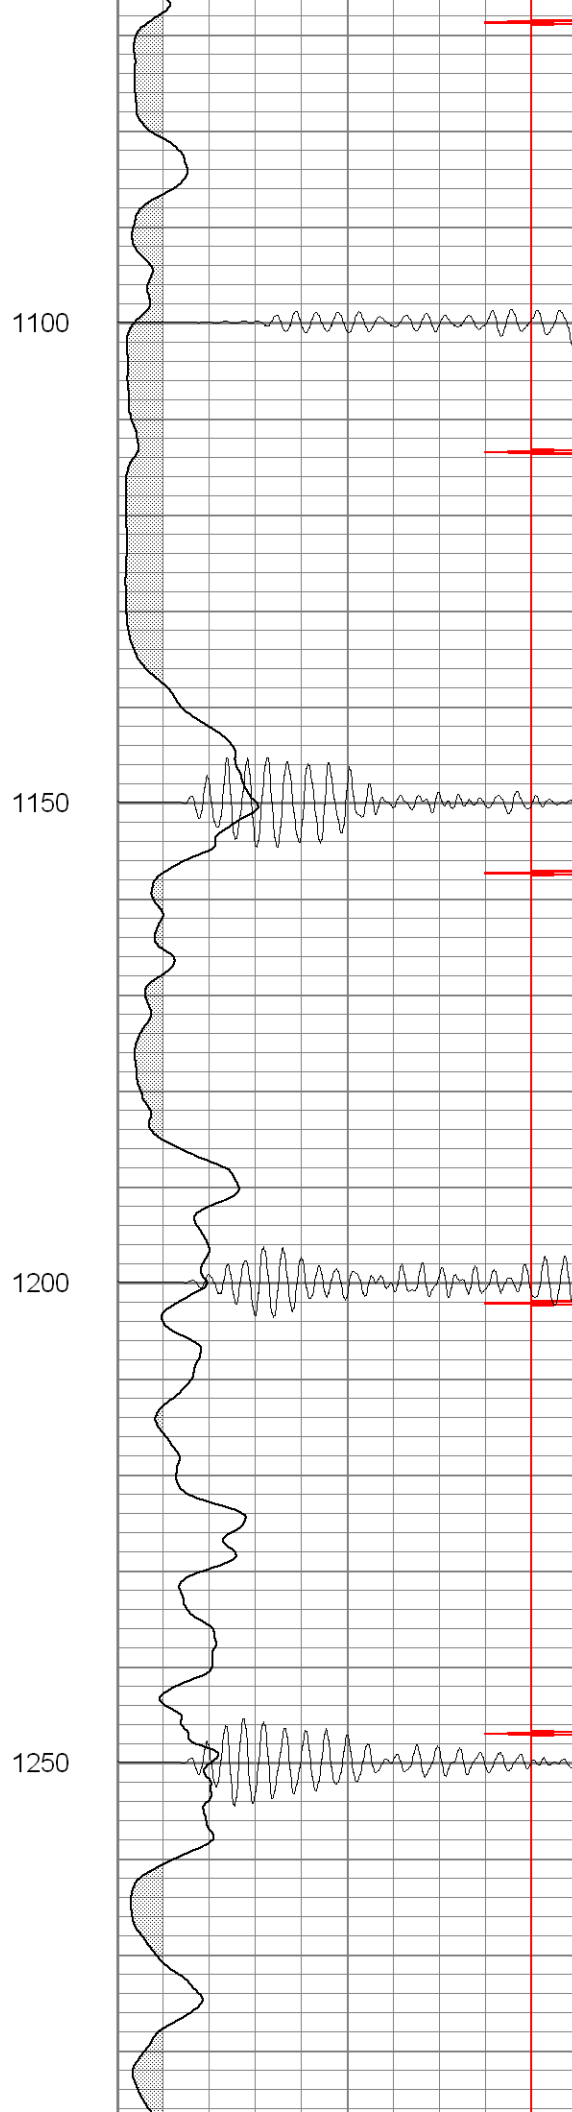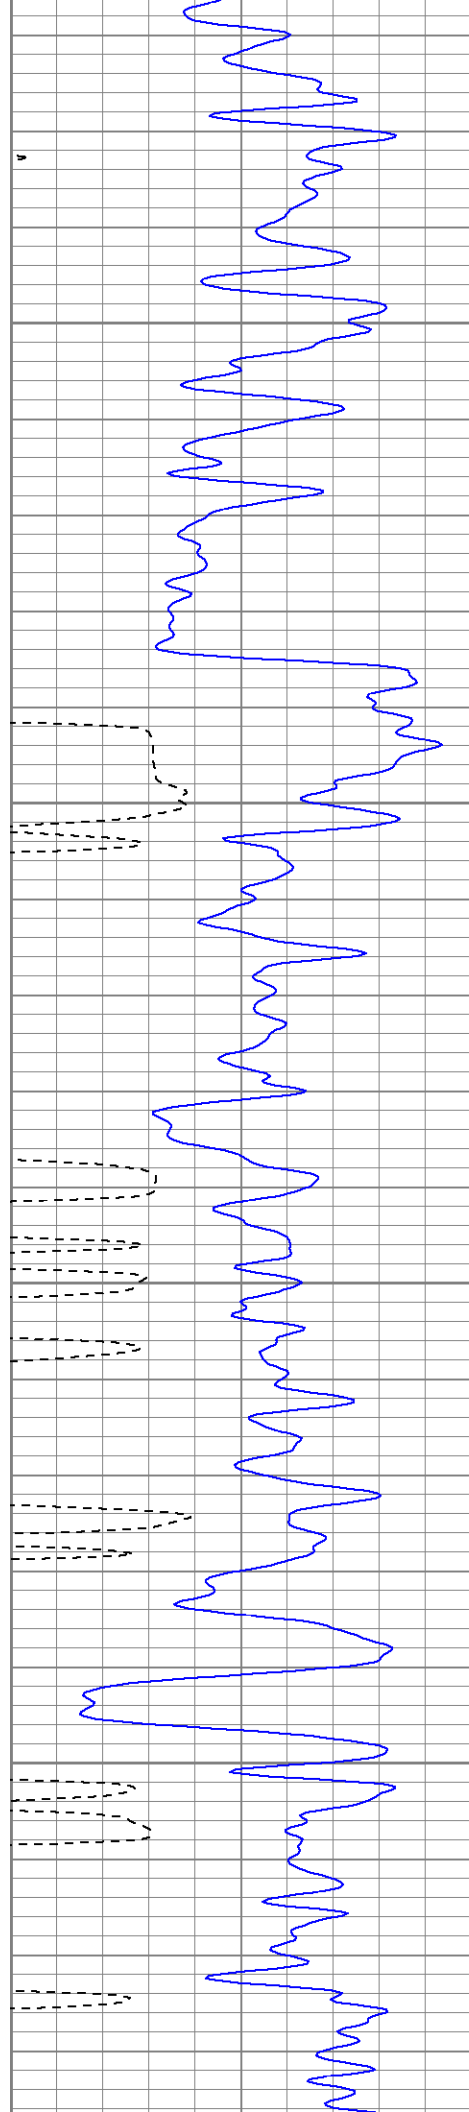

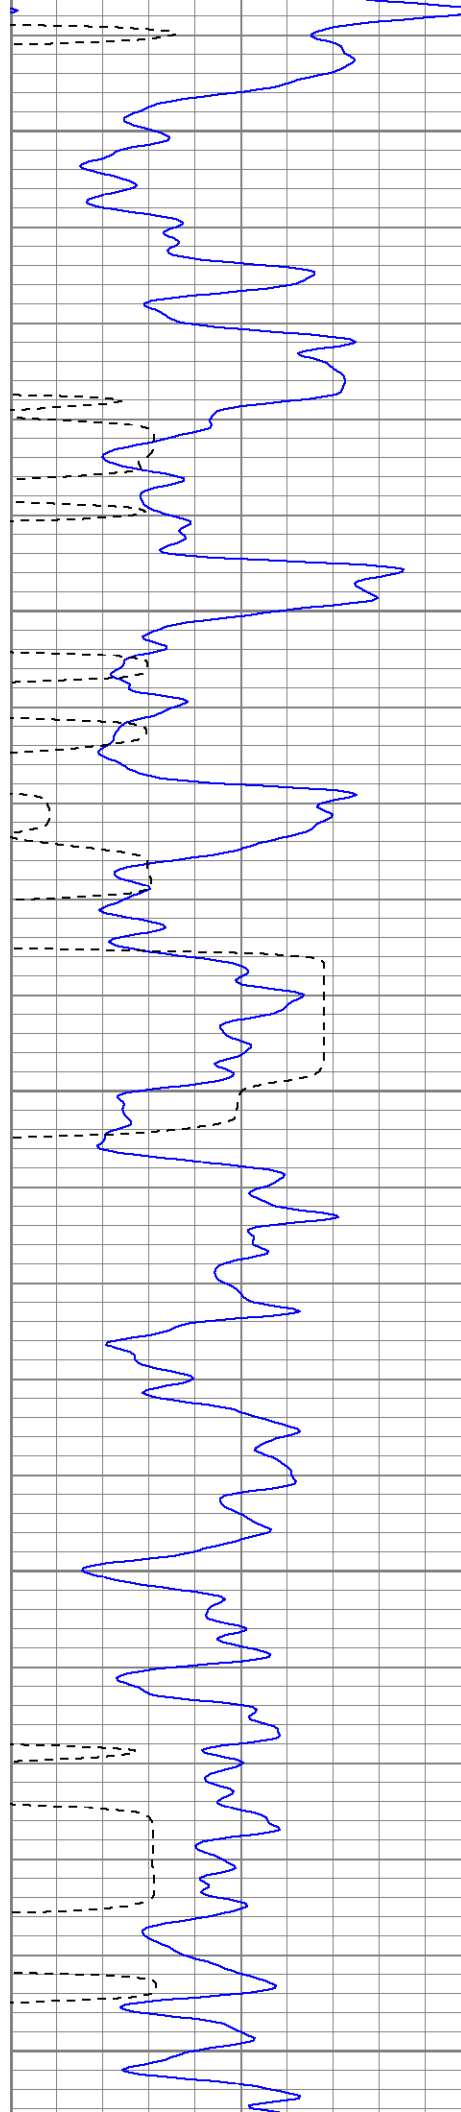

1300

1350

1400

1450

1500

