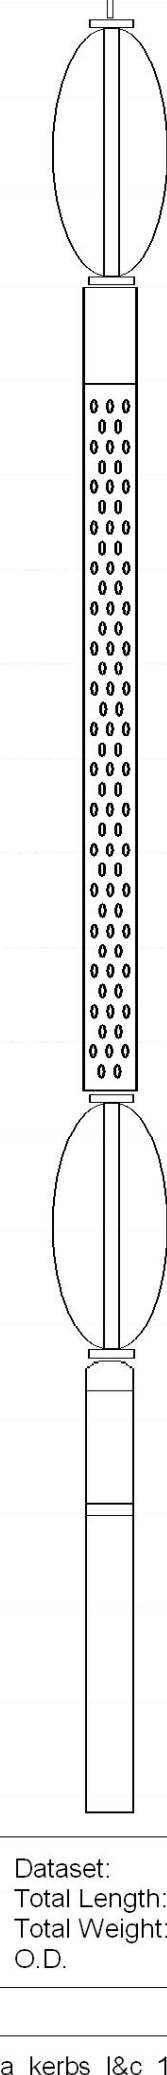


<div>PSI PHOENIX SURVEYS, INC.</div>		Cement Bond Log Gamma Ray - CCL - VDL	
Company Rosetta Resources Operating, LP		Location: 1569 FUL & 653 FWL	
Well Kerbs L&C 17-05		AP # : 05-125-11765-00	
Field Duke		Other Services	
County Yuma		MAST PERF	
State Colorado		SEC 17 TWP 1S RGE 45W	
Date 15-JUN-2010		Permanent Down	
Run Number 1		Ground Level	
Depth Driller 2565		Kelly Busting	
Depth Logger 2489		Elevation 3912	
Bottom Logged Interval 1745		KB 3924	
Top Log Interval 6.125'		DT 3923	
Open Hole Size		GL 3912	
Type Fluid		Water	
Density / Viscosity		8.34 lb/gal	
Max. Recorded Temp.		107 / DEG F	
Estimated Cement Top		1945	
Time Well Ready		N/A	
Time Logger on Bottom		N/A	
Equipment Number		#54	
Recorded By		Fort Morgan, CO	
Witnessed By		Sam Hopper	
Boothole Record		Tubing Record	
Run Number		Bit	
From		To	
Size		Weight	
From		To	
Casing Record		VaryFI	
Surface String		Top	
Prod. String		Bottom	
Production String		4.5"	
Line		11.6 lb/ft	
		Surface	
		2565	
<<< Fold Here >>>			

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments	
Depth Ref to PSI Tripple Combo Log dated 10-JUN-2010. Run CBL from TD to 200' above cement top. Perforate 2332-2342 @ 4 SPF, 10' NET, 40 Shots, using Titan 19gm, 0.40"EHD, 40.89"PENE, 120deg phasing. Casing reflection at 2249' - not a collar. Flag joint is at 2275-2296. API# 05-125-11765-00 Thank you for using Phoenix Surveys!!	

Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)
			STNDRD Standard Cable Head	1.00	1.69	1.00
			SDSCENT Centralizer	2.87	2.75	24.00
WVF3	12.04		CBL-Probe (050215)	8.75	2.75	93.00
WVF5	11.04					
			SDSCENT Centralizer	2.87	2.75	24.00
CCL	3.63		GR_CCL-SDS (SDSSEMO) GR/CCL (050-GR275-001)	4.92	2.75	60.00
GR	0.90					

Dataset: rosetta_kerbs_l&c_17-05.db: field/well/run1/pass2
Total Length: 20.41 ft
Total Weight: 202.00 lb
O.D. 2.75 in

Database File: rosetta_kerbs_l&c_17-05.db	
Dataset Pathname: pass2	
Presentation Format: cbl_dr	
Dataset Creation: Sat Jun 19 07:59:05 2010 by Log Std Casedhole 09061	
Charted by: Depth in Feet scaled 1:240	

