



**Scientific Drilling**  
Rocky Mountain Operations

Company: OXY USA RMAT  
Project: Garfield County, CO NAD27  
Site: Cascade Creek 697-04D Pad





Well Details: CC 697-04-67

TVD Reference: GL 8629' & RKB 30' @ 8659.00ft (H&P) Ground Level: 8629.00  
+N/-S 0.00 +E/-W 0.00 Northing 636358.91 Easting 1230422.09 Latitude 39° 32' 55.986 N Longitude 108° 13' 46.025 W Slot C



Azimuths to True North  
Magnetic North: 10.47°

Magnetic Field  
Strength: 52282.7snT  
Dip Angle: 65.76°  
Date: 2011/03/23  
Model: IGRF2005-10

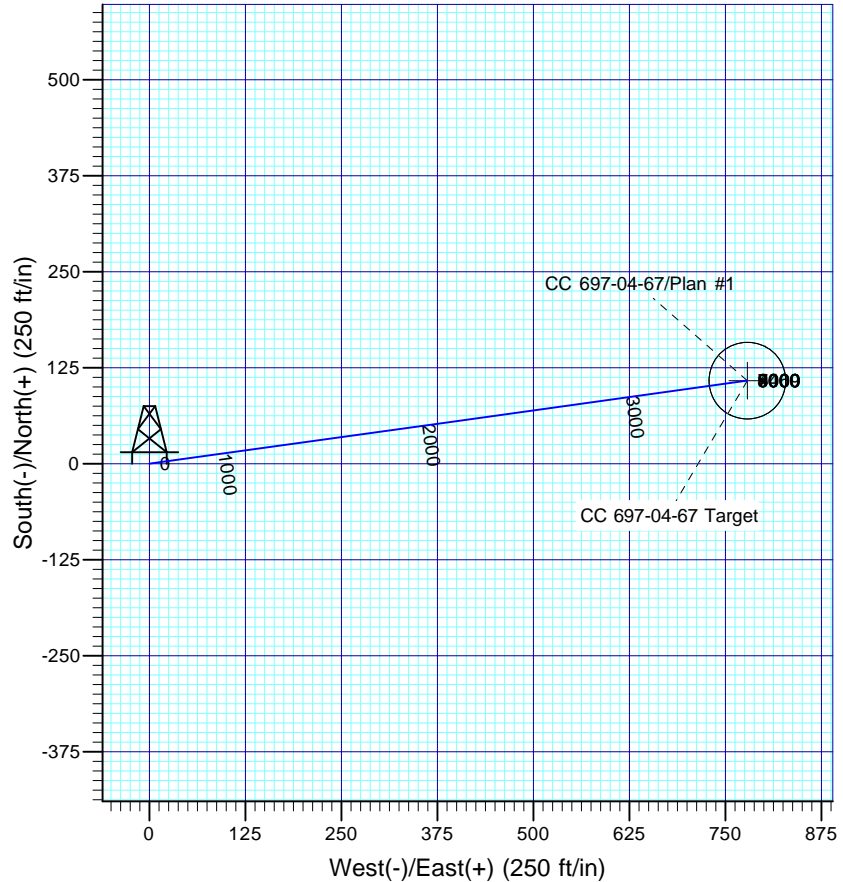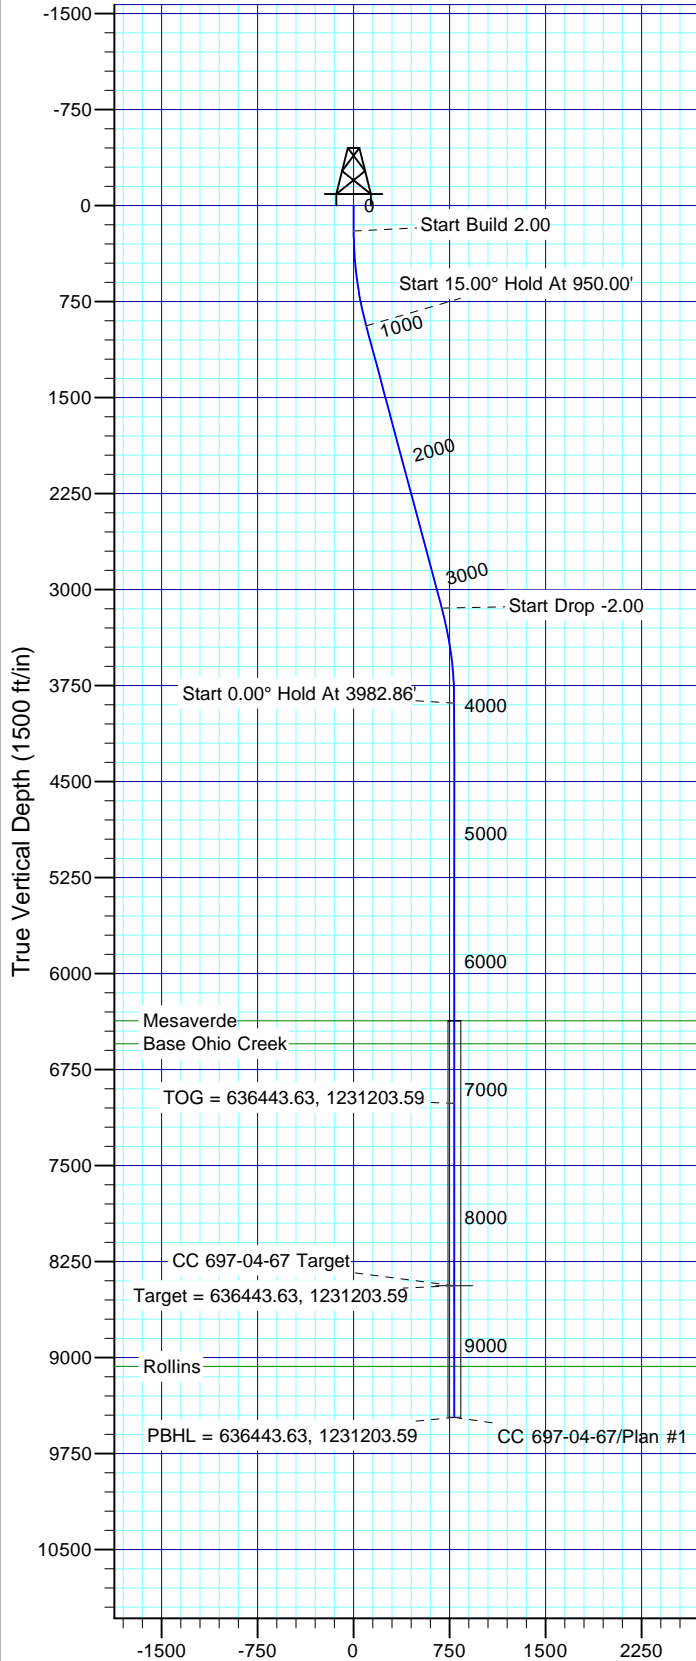

#### FORMATION TOP DETAILS

TVDPath	MDPath	Formation
6369.00	6463.86	Mesaverde
6549.00	6643.86	Base Ohio Creek
9069.00	9163.86	Rollins

#### Plan: Plan #1

**14:58, March 29 2011**  
**Created By: Rex Hall**

PROJECT DETAILS: Garfield County, CO NAD27

Geodetic System: US State Plane 1927 (Exact solution)  
Datum: NAD 1927 (NADCON CONUS)  
Ellipsoid: Clarke 1866  
Zone: Colorado Central 502

System Datum: Mean Sea Level

#### SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	
3	950.00	15.00	82.09	941.46	13.43	96.69	2.00	82.09	97.62	
4	3232.86	15.00	82.09	3146.54	94.73	681.92	0.00	0.00	688.46	
5	3982.86	0.00	0.00	3888.00	108.16	778.60	2.00	180.00	786.08	
6	8533.86	0.00	0.00	8439.00	108.16	778.60	0.00	0.00	786.08	CC 697-04-67 Target
7	9563.86	0.00	0.00	9469.00	108.16	778.60	0.00	0.00	786.08	

# **OXY USA RMAT**

**Garfield County, CO NAD27  
Cascade Creek 697-04D Pad  
CC 697-04-67 - Slot C**

**OH**

**Plan: Plan #1**

## **Standard Planning Report**

**29 March, 2011**

# Scientific Drilling International

## Planning Report

<b>Database:</b>	EDM-RexH-Local	<b>Local Co-ordinate Reference:</b>	Well CC 697-04-67 - Slot C
<b>Company:</b>	OXY USA RMAT	<b>TVD Reference:</b>	GL 8629' & RKB 30' @ 8659.00ft (H&P)
<b>Project:</b>	Garfield County, CO NAD27	<b>MD Reference:</b>	GL 8629' & RKB 30' @ 8659.00ft (H&P)
<b>Site:</b>	Cascade Creek 697-04D Pad	<b>North Reference:</b>	True
<b>Well:</b>	CC 697-04-67	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #1		

<b>Project</b>	Garfield County, CO NAD27		
<b>Map System:</b>	US State Plane 1927 (Exact solution)	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	NAD 1927 (NADCON CONUS)		
<b>Map Zone:</b>	Colorado Central 502		

Site		Cascade Creek 697-04D Pad			
Site Position:		Northing:	635,530.62 usft	Latitude:	39° 32' 47.760 N
From:	Map	Easting:	1,230,276.10 usft	Longitude:	108° 13' 47.570 W
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in	Grid Convergence:	-1.72 °

Well	CC 697-04-67 - Slot C					
Well Position	+N/-S	832.30 ft	Northing:	636,358.91 usft	Latitude:	39° 32' 55.986 N
	+E/-W	121.04 ft	Easting:	1,230,422.09 usft	Longitude:	108° 13' 46.025 W
Position Uncertainty		0.00 ft	Wellhead Elevation:		Ground Level:	8,629.00 ft

<b>Wellbore</b>	OH				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2005-10	2011/03/23	10.47	65.76	52,283

<b>Design</b>	Plan #1			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PLAN	<b>Tie On Depth:</b>	0.00
<b>Vertical Section:</b>	<b>Depth From (TVD) (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Direction (°)</b>
	0.00	0.00	0.00	82.09

<b>Plan Sections</b>										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	
950.00	15.00	82.09	941.46	13.43	96.69	2.00	2.00	0.00	82.09	
3,232.86	15.00	82.09	3,146.54	94.73	681.92	0.00	0.00	0.00	0.00	
3,982.86	0.00	0.00	3,888.00	108.16	778.60	2.00	-2.00	0.00	180.00	
8,533.86	0.00	0.00	8,439.00	108.16	778.60	0.00	0.00	0.00	0.00	CC 697-04-67 Target
9,563.86	0.00	0.00	9,469.00	108.16	778.60	0.00	0.00	0.00	0.00	

# Scientific Drilling International

## Planning Report

<b>Database:</b>	EDM-RexH-Local	<b>Local Co-ordinate Reference:</b>	Well CC 697-04-67 - Slot C
<b>Company:</b>	OXY USA RMAT	<b>TVD Reference:</b>	GL 8629' & RKB 30' @ 8659.00ft (H&P)
<b>Project:</b>	Garfield County, CO NAD27	<b>MD Reference:</b>	GL 8629' & RKB 30' @ 8659.00ft (H&P)
<b>Site:</b>	Cascade Creek 697-04D Pad	<b>North Reference:</b>	True
<b>Well:</b>	CC 697-04-67	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 2.00									
300.00	2.00	82.09	299.98	0.24	1.73	1.75	2.00	2.00	0.00
400.00	4.00	82.09	399.84	0.96	6.91	6.98	2.00	2.00	0.00
500.00	6.00	82.09	499.45	2.16	15.54	15.69	2.00	2.00	0.00
600.00	8.00	82.09	598.70	3.84	27.61	27.88	2.00	2.00	0.00
700.00	10.00	82.09	697.47	5.99	43.11	43.52	2.00	2.00	0.00
800.00	12.00	82.09	795.62	8.61	62.01	62.60	2.00	2.00	0.00
900.00	14.00	82.09	893.06	11.71	84.29	85.10	2.00	2.00	0.00
950.00	15.00	82.09	941.46	13.43	96.69	97.62	2.00	2.00	0.00
Start 15.00° Hold At 950.00'									
1,000.00	15.00	82.09	989.76	15.21	109.50	110.56	0.00	0.00	0.00
1,100.00	15.00	82.09	1,086.35	18.77	135.14	136.44	0.00	0.00	0.00
1,200.00	15.00	82.09	1,182.94	22.33	160.78	162.32	0.00	0.00	0.00
1,300.00	15.00	82.09	1,279.54	25.90	186.41	188.20	0.00	0.00	0.00
1,400.00	15.00	82.09	1,376.13	29.46	212.05	214.08	0.00	0.00	0.00
1,500.00	15.00	82.09	1,472.72	33.02	237.68	239.97	0.00	0.00	0.00
1,600.00	15.00	82.09	1,569.31	36.58	263.32	265.85	0.00	0.00	0.00
1,700.00	15.00	82.09	1,665.91	40.14	288.95	291.73	0.00	0.00	0.00
1,800.00	15.00	82.09	1,762.50	43.70	314.59	317.61	0.00	0.00	0.00
1,900.00	15.00	82.09	1,859.09	47.26	340.23	343.49	0.00	0.00	0.00
2,000.00	15.00	82.09	1,955.68	50.82	365.86	369.38	0.00	0.00	0.00
2,100.00	15.00	82.09	2,052.28	54.39	391.50	395.26	0.00	0.00	0.00
2,200.00	15.00	82.09	2,148.87	57.95	417.13	421.14	0.00	0.00	0.00
2,300.00	15.00	82.09	2,245.46	61.51	442.77	447.02	0.00	0.00	0.00
2,400.00	15.00	82.09	2,342.05	65.07	468.40	472.90	0.00	0.00	0.00
2,500.00	15.00	82.09	2,438.65	68.63	494.04	498.78	0.00	0.00	0.00
2,600.00	15.00	82.09	2,535.24	72.19	519.68	524.67	0.00	0.00	0.00
2,700.00	15.00	82.09	2,631.83	75.75	545.31	550.55	0.00	0.00	0.00
2,800.00	15.00	82.09	2,728.42	79.31	570.95	576.43	0.00	0.00	0.00
2,900.00	15.00	82.09	2,825.02	82.88	596.58	602.31	0.00	0.00	0.00
3,000.00	15.00	82.09	2,921.61	86.44	622.22	628.19	0.00	0.00	0.00
3,100.00	15.00	82.09	3,018.20	90.00	647.85	654.08	0.00	0.00	0.00
3,200.00	15.00	82.09	3,114.80	93.56	673.49	679.96	0.00	0.00	0.00
3,232.86	15.00	82.09	3,146.54	94.73	681.92	688.46	0.00	0.00	0.00
Start Drop -2.00									
3,300.00	13.66	82.09	3,211.59	97.02	698.37	705.08	2.00	-2.00	0.00
3,400.00	11.66	82.09	3,309.15	100.03	720.07	726.99	2.00	-2.00	0.00
3,500.00	9.66	82.09	3,407.42	102.58	738.39	745.48	2.00	-2.00	0.00
3,600.00	7.66	82.09	3,506.28	104.65	753.30	760.53	2.00	-2.00	0.00
3,700.00	5.66	82.09	3,605.60	106.24	764.78	772.13	2.00	-2.00	0.00
3,800.00	3.66	82.09	3,705.26	107.36	772.82	780.25	2.00	-2.00	0.00
3,900.00	1.66	82.09	3,805.15	108.00	777.42	784.88	2.00	-2.00	0.00
3,982.86	0.00	0.00	3,888.00	108.16	778.60	786.08	2.00	-2.00	0.00
Start 0.00° Hold At 3982.86'									
4,000.00	0.00	0.00	3,905.14	108.16	778.60	786.08	0.00	0.00	0.00
4,100.00	0.00	0.00	4,005.14	108.16	778.60	786.08	0.00	0.00	0.00
4,200.00	0.00	0.00	4,105.14	108.16	778.60	786.08	0.00	0.00	0.00
4,300.00	0.00	0.00	4,205.14	108.16	778.60	786.08	0.00	0.00	0.00
4,400.00	0.00	0.00	4,305.14	108.16	778.60	786.08	0.00	0.00	0.00
4,500.00	0.00	0.00	4,405.14	108.16	778.60	786.08	0.00	0.00	0.00
4,600.00	0.00	0.00	4,505.14	108.16	778.60	786.08	0.00	0.00	0.00

# Scientific Drilling International

## Planning Report

<b>Database:</b>	EDM-RexH-Local	<b>Local Co-ordinate Reference:</b>	Well CC 697-04-67 - Slot C
<b>Company:</b>	OXY USA RMAT	<b>TVD Reference:</b>	GL 8629' & RKB 30' @ 8659.00ft (H&P)
<b>Project:</b>	Garfield County, CO NAD27	<b>MD Reference:</b>	GL 8629' & RKB 30' @ 8659.00ft (H&P)
<b>Site:</b>	Cascade Creek 697-04D Pad	<b>North Reference:</b>	True
<b>Well:</b>	CC 697-04-67	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,700.00	0.00	0.00	4,605.14	108.16	778.60	786.08	0.00	0.00	0.00
4,800.00	0.00	0.00	4,705.14	108.16	778.60	786.08	0.00	0.00	0.00
4,900.00	0.00	0.00	4,805.14	108.16	778.60	786.08	0.00	0.00	0.00
5,000.00	0.00	0.00	4,905.14	108.16	778.60	786.08	0.00	0.00	0.00
5,100.00	0.00	0.00	5,005.14	108.16	778.60	786.08	0.00	0.00	0.00
5,200.00	0.00	0.00	5,105.14	108.16	778.60	786.08	0.00	0.00	0.00
5,300.00	0.00	0.00	5,205.14	108.16	778.60	786.08	0.00	0.00	0.00
5,400.00	0.00	0.00	5,305.14	108.16	778.60	786.08	0.00	0.00	0.00
5,500.00	0.00	0.00	5,405.14	108.16	778.60	786.08	0.00	0.00	0.00
5,600.00	0.00	0.00	5,505.14	108.16	778.60	786.08	0.00	0.00	0.00
5,700.00	0.00	0.00	5,605.14	108.16	778.60	786.08	0.00	0.00	0.00
5,800.00	0.00	0.00	5,705.14	108.16	778.60	786.08	0.00	0.00	0.00
5,900.00	0.00	0.00	5,805.14	108.16	778.60	786.08	0.00	0.00	0.00
6,000.00	0.00	0.00	5,905.14	108.16	778.60	786.08	0.00	0.00	0.00
6,100.00	0.00	0.00	6,005.14	108.16	778.60	786.08	0.00	0.00	0.00
6,200.00	0.00	0.00	6,105.14	108.16	778.60	786.08	0.00	0.00	0.00
6,300.00	0.00	0.00	6,205.14	108.16	778.60	786.08	0.00	0.00	0.00
6,400.00	0.00	0.00	6,305.14	108.16	778.60	786.08	0.00	0.00	0.00
6,463.86	0.00	0.00	6,369.00	108.16	778.60	786.08	0.00	0.00	0.00
<b>Mesaverde</b>									
6,500.00	0.00	0.00	6,405.14	108.16	778.60	786.08	0.00	0.00	0.00
6,600.00	0.00	0.00	6,505.14	108.16	778.60	786.08	0.00	0.00	0.00
6,643.86	0.00	0.00	6,549.00	108.16	778.60	786.08	0.00	0.00	0.00
<b>Base Ohio Creek</b>									
6,700.00	0.00	0.00	6,605.14	108.16	778.60	786.08	0.00	0.00	0.00
6,800.00	0.00	0.00	6,705.14	108.16	778.60	786.08	0.00	0.00	0.00
6,900.00	0.00	0.00	6,805.14	108.16	778.60	786.08	0.00	0.00	0.00
7,000.00	0.00	0.00	6,905.14	108.16	778.60	786.08	0.00	0.00	0.00
7,100.00	0.00	0.00	7,005.14	108.16	778.60	786.08	0.00	0.00	0.00
7,108.86	0.00	0.00	7,014.00	108.16	778.60	786.08	0.00	0.00	0.00
<b>TOG = 636443.63, 1231203.59</b>									
7,200.00	0.00	0.00	7,105.14	108.16	778.60	786.08	0.00	0.00	0.00
7,300.00	0.00	0.00	7,205.14	108.16	778.60	786.08	0.00	0.00	0.00
7,400.00	0.00	0.00	7,305.14	108.16	778.60	786.08	0.00	0.00	0.00
7,500.00	0.00	0.00	7,405.14	108.16	778.60	786.08	0.00	0.00	0.00
7,600.00	0.00	0.00	7,505.14	108.16	778.60	786.08	0.00	0.00	0.00
7,700.00	0.00	0.00	7,605.14	108.16	778.60	786.08	0.00	0.00	0.00
7,800.00	0.00	0.00	7,705.14	108.16	778.60	786.08	0.00	0.00	0.00
7,900.00	0.00	0.00	7,805.14	108.16	778.60	786.08	0.00	0.00	0.00
8,000.00	0.00	0.00	7,905.14	108.16	778.60	786.08	0.00	0.00	0.00
8,100.00	0.00	0.00	8,005.14	108.16	778.60	786.08	0.00	0.00	0.00
8,200.00	0.00	0.00	8,105.14	108.16	778.60	786.08	0.00	0.00	0.00
8,300.00	0.00	0.00	8,205.14	108.16	778.60	786.08	0.00	0.00	0.00
8,400.00	0.00	0.00	8,305.14	108.16	778.60	786.08	0.00	0.00	0.00
8,500.00	0.00	0.00	8,405.14	108.16	778.60	786.08	0.00	0.00	0.00
8,533.86	0.00	0.00	8,439.00	108.16	778.60	786.08	0.00	0.00	0.00
<b>Target = 636443.63, 1231203.59</b>									
8,600.00	0.00	0.00	8,505.14	108.16	778.60	786.08	0.00	0.00	0.00
8,700.00	0.00	0.00	8,605.14	108.16	778.60	786.08	0.00	0.00	0.00
8,800.00	0.00	0.00	8,705.14	108.16	778.60	786.08	0.00	0.00	0.00
8,900.00	0.00	0.00	8,805.14	108.16	778.60	786.08	0.00	0.00	0.00
9,000.00	0.00	0.00	8,905.14	108.16	778.60	786.08	0.00	0.00	0.00
9,100.00	0.00	0.00	9,005.14	108.16	778.60	786.08	0.00	0.00	0.00

# Scientific Drilling International

## Planning Report

<b>Database:</b>	EDM-RexH-Local	<b>Local Co-ordinate Reference:</b>	Well CC 697-04-67 - Slot C
<b>Company:</b>	OXY USA RMAT	<b>TVD Reference:</b>	GL 8629' & RKB 30' @ 8659.00ft (H&P)
<b>Project:</b>	Garfield County, CO NAD27	<b>MD Reference:</b>	GL 8629' & RKB 30' @ 8659.00ft (H&P)
<b>Site:</b>	Cascade Creek 697-04D Pad	<b>North Reference:</b>	True
<b>Well:</b>	CC 697-04-67	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
9,163.86	0.00	0.00	9,069.00	108.16	778.60	786.08	0.00	0.00	0.00
Rollins									
9,200.00	0.00	0.00	9,105.14	108.16	778.60	786.08	0.00	0.00	0.00
9,300.00	0.00	0.00	9,205.14	108.16	778.60	786.08	0.00	0.00	0.00
9,400.00	0.00	0.00	9,305.14	108.16	778.60	786.08	0.00	0.00	0.00
9,500.00	0.00	0.00	9,405.14	108.16	778.60	786.08	0.00	0.00	0.00
9,563.86	0.00	0.00	9,469.00	108.16	778.60	786.08	0.00	0.00	0.00
PBHL = 636443.63, 1231203.59									

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
CC 697-04-67 Target - plan hits target center - Circle (radius 50.00)	0.00	82.09	8,439.00	108.16	778.60	636,443.64	1,231,203.59	39° 32' 57.055 N	108° 13' 36.085 W

Formations					
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
6,463.86	6,369.00	Mesaverde		0.00	
6,643.86	6,549.00	Base Ohio Creek		0.00	
9,163.86	9,069.00	Rollins		0.00	

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
200.00	200.00	0.00	0.00	Start Build 2.00
950.00	941.46	13.43	96.69	Start 15.00° Hold At 950.00'
3,232.86	3,146.54	94.73	681.92	Start Drop -2.00
3,982.86	3,888.00	108.16	778.60	Start 0.00° Hold At 3982.86'
7,108.86	7,014.00	108.16	778.60	TOG = 636443.63, 1231203.59
8,533.86	8,439.00	108.16	778.60	Target = 636443.63, 1231203.59
9,563.86	9,469.00	108.16	778.60	PBHL = 636443.63, 1231203.59