





Project: Mamm Creek
Site: SW S19-T6S-R29W (K19CNE Pad)
Well: EnCana Fee 19-10B (K19CNE)
Wellbore: DD
Design: Plan #1

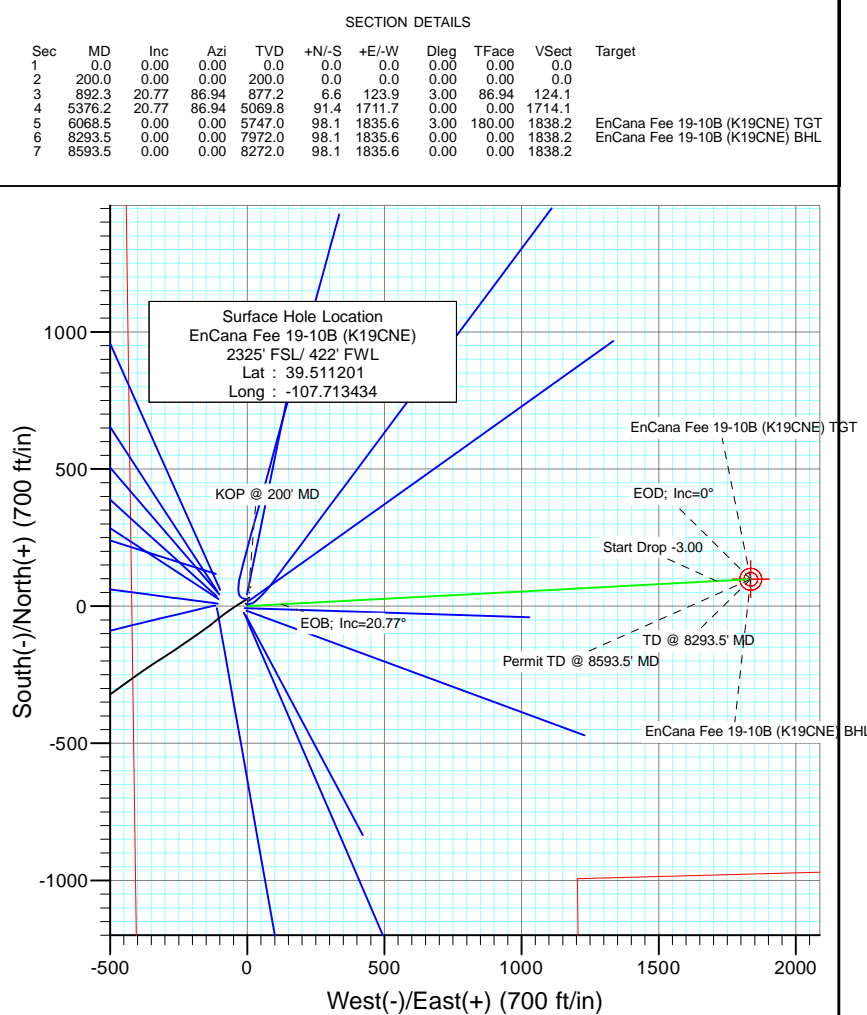


FORMATION TOP DETAILS		
TVDPath	MDPath	Formation
1123.0	1155.1	Molina Base
1484.0	1541.2	Atwell Gulch
3708.0	3919.8	Mesa Verde
4376.0	4634.2	Williams Fork
5422.0	5741.9	Top of Gas; 9.8° Inc
6546.0	6867.5	Coal Ridge
7339.0	7660.5	Base Cameo A Coal
7422.0	7743.5	Rollins

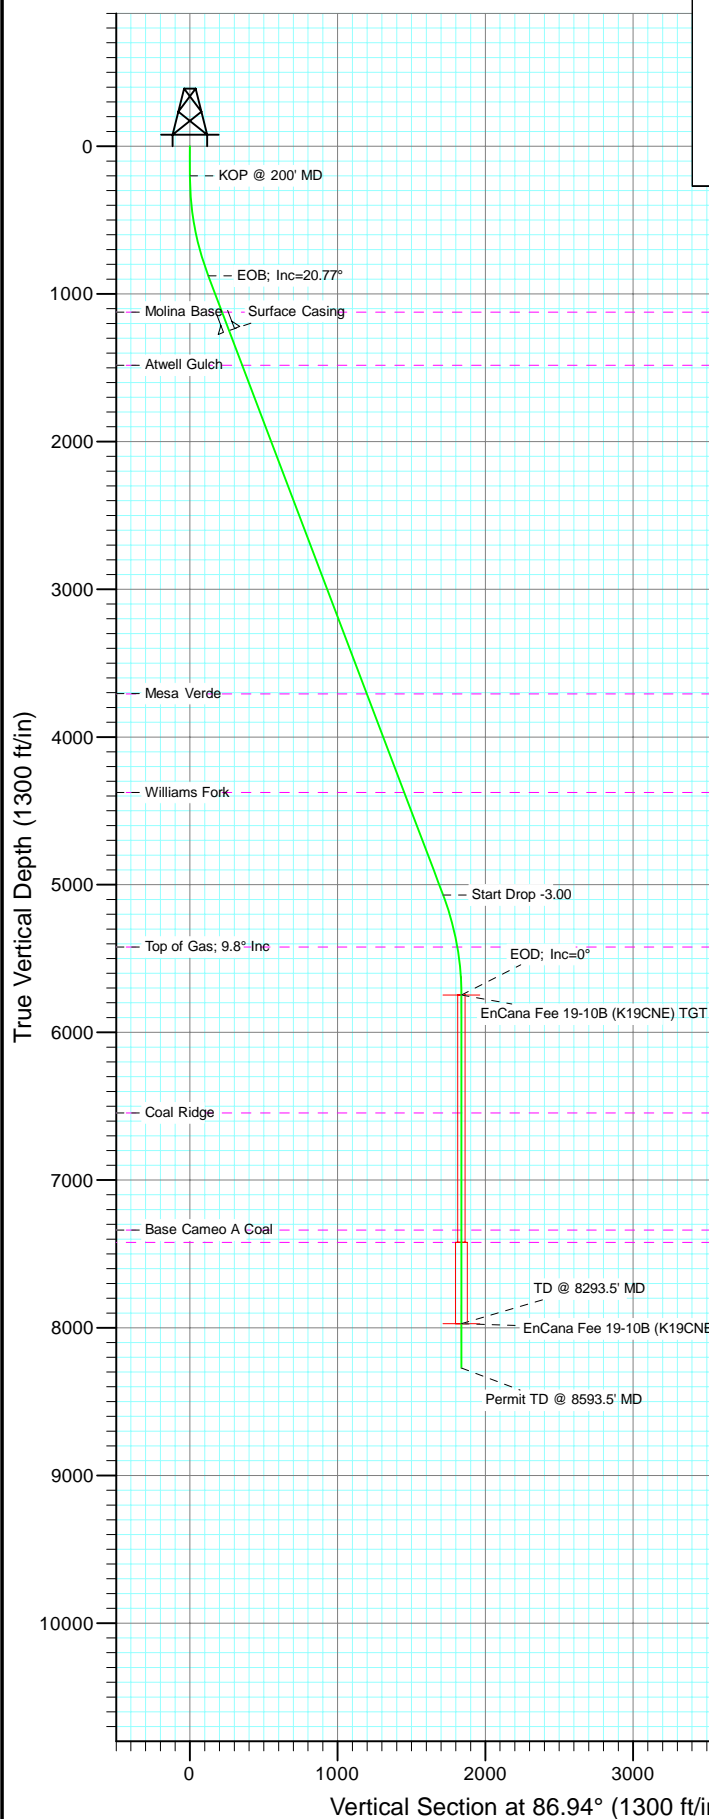

Azimuths to True North
Magnetic North: 10.26°


Magnetic Field
Strength: 52325.0snT
Dip Angle: 65.81°
Date: 3/9/2011
Model: IGRF2010

Plan #1 EnCana Fee 19-10B (K19CNE) (2000 FSL - 240 FWL) 115XXX; BH					
KBE @ 5688.0ft (Original Well Elev) North American Datum 1983 Well EnCana Fee 19-10B (K19CNE), True North					
Target	Azimuth	Origin	Type	N/S	E/W
EnCana Fee 19-10B (K19CNE) BHL	86.94	Slot	0.0	0.0	0.0
Name	TVD	+N/-S	+E/-W	Latitude	Longitude
EnCana Fee 19-10B (K19CNE) TGT	5747.0	98.1	1835.6	39.511470	-107.706928
EnCana Fee 19-10B (K19CNE) BHL	7972.0	98.1	1835.6	39.511470	-107.706928

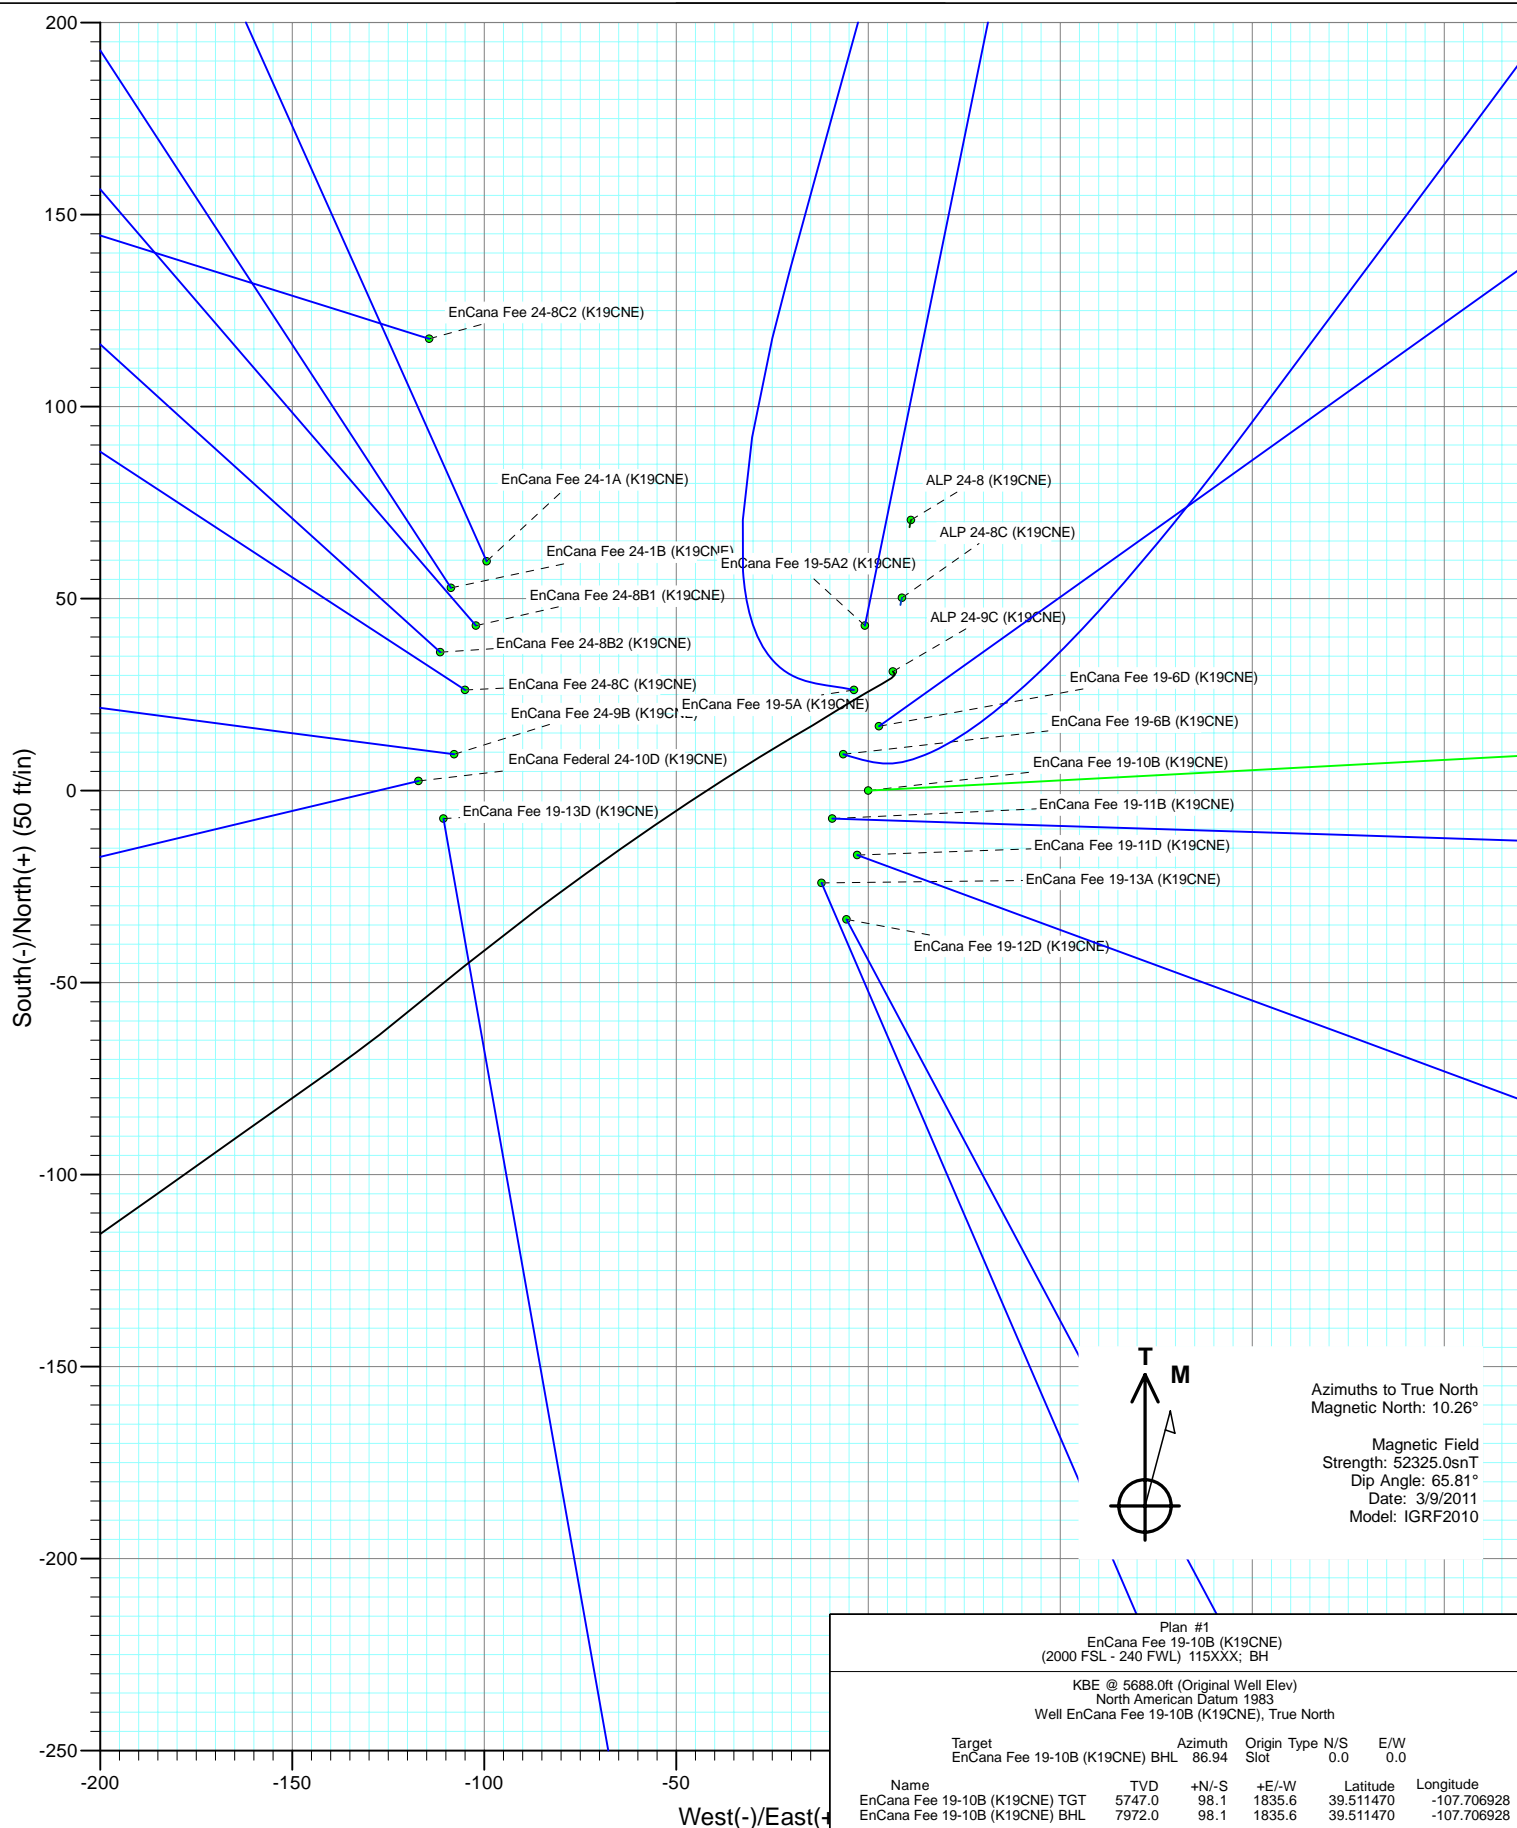



Project: Mamm Creek
 Site: SW S19-T6S-R29W (K19CNE Pad)
 Well: EnCana Fee 19-10B (K19CNE)
 Wellbore: DD
 Design: Plan #1

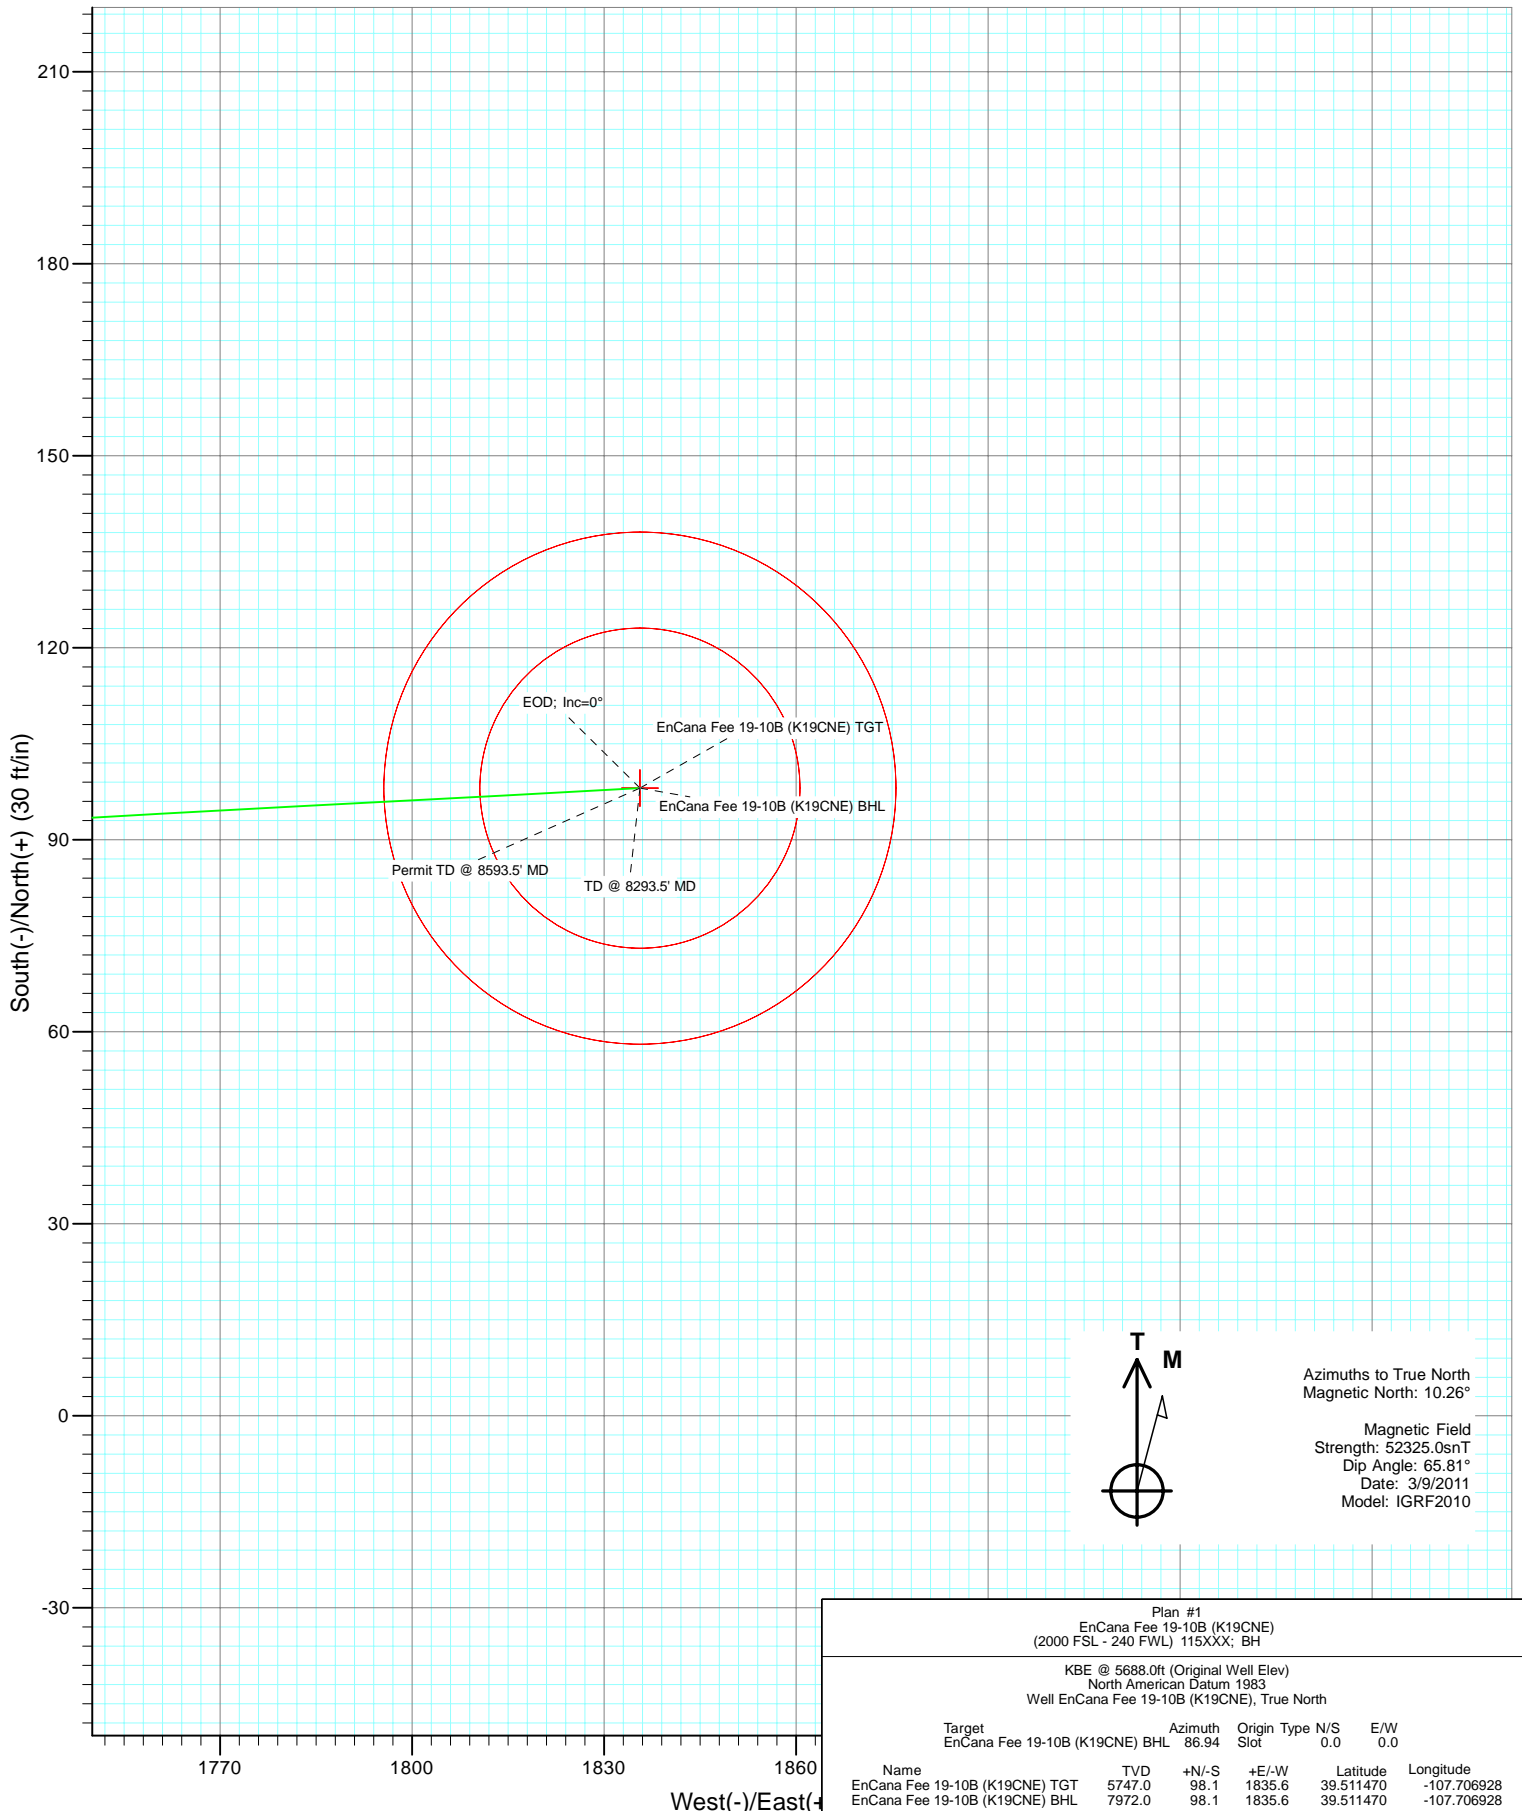

Cathedral Energy Services

Planning Report

Database:	EDM 5000.1 US Multi Users DB	Local Co-ordinate Reference:	Well EnCana Fee 19-10B (K19CNE)
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KBE @ 5688.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KBE @ 5688.0ft (Original Well Elev)
Site:	SW S19-T6S-R29W (K19CNE Pad)	North Reference:	True
Well:	EnCana Fee 19-10B (K19CNE)	Survey Calculation Method:	Minimum Curvature
Wellbore:	DD		
Design:	Plan #1		

Project	Mamm Creek		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Central Zone		

Site		SW S19-T6S-R29W (K19CNE Pad)			
Site Position:		Northing:	1,618,725.17 ft	Latitude:	39.511286
From:	Lat/Long	Easting:	2,375,576.53 ft	Longitude:	-107.713411
Position Uncertainty:	0.0 ft	Slot Radius:	0.000 in	Grid Convergence:	-1.40 °

Well	EnCana Fee 19-10B (K19CNE)					
Well Position	+N/-S	0.0 ft	Northing:	1,618,694.33 ft	Latitude:	39.511201
	+E/-W	0.0 ft	Easting:	2,375,569.32 ft	Longitude:	-107.713434
Position Uncertainty		0.0 ft	Wellhead Elevation:	ft	Ground Level:	5,666.0 ft

Wellbore	DD				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(nT)
	IGRF2010	3/9/2011	10.26	65.81	52,325

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(ft)	(ft)	(ft)	(°)
	0.0	0.0	0.0	86.94

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.00	0.00	0.00	0.00	
892.3	20.77	86.94	877.2	6.6	123.9	3.00	3.00	0.00	86.94	
5,376.2	20.77	86.94	5,069.8	91.4	1,711.7	0.00	0.00	0.00	0.00	
6,068.5	0.00	0.00	5,747.0	98.1	1,835.6	3.00	-3.00	0.00	180.00	EnCana Fee 19-10B (
8,293.5	0.00	0.00	7,972.0	98.1	1,835.6	0.00	0.00	0.00	0.00	EnCana Fee 19-10B (
8,593.5	0.00	0.00	8,272.0	98.1	1,835.6	0.00	0.00	0.00	0.00	

Cathedral Energy Services

Planning Report

Database:	EDM 5000.1 US Multi Users DB	Local Co-ordinate Reference:	Well EnCana Fee 19-10B (K19CNE)
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KBE @ 5688.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KBE @ 5688.0ft (Original Well Elev)
Site:	SW S19-T6S-R29W (K19CNE Pad)	North Reference:	True
Well:	EnCana Fee 19-10B (K19CNE)	Survey Calculation Method:	Minimum Curvature
Wellbore:	DD		
Design:	Plan #1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Comments / Formations
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	KOP @ 200' MD
300.0	3.00	86.94	300.0	0.1	2.6	2.6	3.00	3.00	
400.0	6.00	86.94	399.6	0.6	10.4	10.5	3.00	3.00	
500.0	9.00	86.94	498.8	1.3	23.5	23.5	3.00	3.00	
600.0	12.00	86.94	597.1	2.2	41.7	41.7	3.00	3.00	
700.0	15.00	86.94	694.3	3.5	65.0	65.1	3.00	3.00	
800.0	18.00	86.94	790.2	5.0	93.3	93.5	3.00	3.00	
892.3	20.77	86.94	877.2	6.6	123.9	124.1	3.00	3.00	EOB; Inc=20.77°
900.0	20.77	86.94	884.4	6.8	126.7	126.8	0.00	0.00	
1,000.0	20.77	86.94	977.9	8.7	162.1	162.3	0.00	0.00	
1,100.0	20.77	86.94	1,071.4	10.5	197.5	197.8	0.00	0.00	
1,155.1	20.77	86.94	1,123.0	11.6	217.0	217.3	0.00	0.00	Molina Base
1,200.0	20.77	86.94	1,164.9	12.4	232.9	233.2	0.00	0.00	
1,289.0	20.77	86.94	1,248.2	14.1	264.4	264.8	0.00	0.00	Surface Casing
1,300.0	20.77	86.94	1,258.4	14.3	268.3	268.7	0.00	0.00	
1,400.0	20.77	86.94	1,351.9	16.2	303.7	304.1	0.00	0.00	
1,500.0	20.77	86.94	1,445.4	18.1	339.1	339.6	0.00	0.00	
1,541.2	20.77	86.94	1,484.0	18.9	353.7	354.2	0.00	0.00	Atwell Gulch
1,600.0	20.77	86.94	1,539.0	20.0	374.5	375.1	0.00	0.00	
1,700.0	20.77	86.94	1,632.5	21.9	409.9	410.5	0.00	0.00	
1,800.0	20.77	86.94	1,726.0	23.8	445.3	446.0	0.00	0.00	
1,900.0	20.77	86.94	1,819.5	25.7	480.8	481.4	0.00	0.00	
2,000.0	20.77	86.94	1,913.0	27.6	516.2	516.9	0.00	0.00	
2,100.0	20.77	86.94	2,006.5	29.5	551.6	552.4	0.00	0.00	
2,200.0	20.77	86.94	2,100.0	31.4	587.0	587.8	0.00	0.00	
2,300.0	20.77	86.94	2,193.5	33.2	622.4	623.3	0.00	0.00	
2,400.0	20.77	86.94	2,287.0	35.1	657.8	658.7	0.00	0.00	
2,500.0	20.77	86.94	2,380.5	37.0	693.2	694.2	0.00	0.00	
2,600.0	20.77	86.94	2,474.0	38.9	728.6	729.7	0.00	0.00	
2,700.0	20.77	86.94	2,567.5	40.8	764.0	765.1	0.00	0.00	
2,800.0	20.77	86.94	2,661.0	42.7	799.4	800.6	0.00	0.00	
2,900.0	20.77	86.94	2,754.5	44.6	834.9	836.0	0.00	0.00	
3,000.0	20.77	86.94	2,848.0	46.5	870.3	871.5	0.00	0.00	
3,100.0	20.77	86.94	2,941.5	48.4	905.7	907.0	0.00	0.00	
3,200.0	20.77	86.94	3,035.0	50.3	941.1	942.4	0.00	0.00	
3,300.0	20.77	86.94	3,128.5	52.2	976.5	977.9	0.00	0.00	
3,400.0	20.77	86.94	3,222.0	54.1	1,011.9	1,013.3	0.00	0.00	
3,500.0	20.77	86.94	3,315.5	55.9	1,047.3	1,048.8	0.00	0.00	
3,600.0	20.77	86.94	3,409.0	57.8	1,082.7	1,084.3	0.00	0.00	
3,700.0	20.77	86.94	3,502.5	59.7	1,118.1	1,119.7	0.00	0.00	
3,800.0	20.77	86.94	3,596.0	61.6	1,153.5	1,155.2	0.00	0.00	
3,900.0	20.77	86.94	3,689.5	63.5	1,188.9	1,190.6	0.00	0.00	
3,919.8	20.77	86.94	3,708.0	63.9	1,196.0	1,197.7	0.00	0.00	Mesa Verde
4,000.0	20.77	86.94	3,783.0	65.4	1,224.4	1,226.1	0.00	0.00	
4,100.0	20.77	86.94	3,876.5	67.3	1,259.8	1,261.6	0.00	0.00	
4,200.0	20.77	86.94	3,970.0	69.2	1,295.2	1,297.0	0.00	0.00	
4,300.0	20.77	86.94	4,063.5	71.1	1,330.6	1,332.5	0.00	0.00	
4,400.0	20.77	86.94	4,157.0	73.0	1,366.0	1,367.9	0.00	0.00	
4,500.0	20.77	86.94	4,250.5	74.9	1,401.4	1,403.4	0.00	0.00	
4,600.0	20.77	86.94	4,344.0	76.8	1,436.8	1,438.9	0.00	0.00	

Cathedral Energy Services

Planning Report

Database:	EDM 5000.1 US Multi Users DB	Local Co-ordinate Reference:	Well EnCana Fee 19-10B (K19CNE)
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KBE @ 5688.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KBE @ 5688.0ft (Original Well Elev)
Site:	SW S19-T6S-R29W (K19CNE Pad)	North Reference:	True
Well:	EnCana Fee 19-10B (K19CNE)	Survey Calculation Method:	Minimum Curvature
Wellbore:	DD		
Design:	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Comments / Formations
4,634.2	20.77	86.94	4,376.0	77.4	1,448.9	1,451.0	0.00	0.00	Williams Fork
4,700.0	20.77	86.94	4,437.5	78.6	1,472.2	1,474.3	0.00	0.00	
4,800.0	20.77	86.94	4,531.0	80.5	1,507.6	1,509.8	0.00	0.00	
4,900.0	20.77	86.94	4,624.5	82.4	1,543.0	1,545.2	0.00	0.00	
5,000.0	20.77	86.94	4,718.0	84.3	1,578.5	1,580.7	0.00	0.00	
5,100.0	20.77	86.94	4,811.5	86.2	1,613.9	1,616.2	0.00	0.00	
5,200.0	20.77	86.94	4,905.0	88.1	1,649.3	1,651.6	0.00	0.00	
5,300.0	20.77	86.94	4,998.5	90.0	1,684.7	1,687.1	0.00	0.00	
5,376.2	20.77	86.94	5,069.8	91.4	1,711.7	1,714.1	0.00	0.00	Start Drop -3.00
5,400.0	20.05	86.94	5,092.1	91.9	1,720.0	1,722.4	3.00	-3.00	
5,500.0	17.05	86.94	5,186.9	93.6	1,751.7	1,754.2	3.00	-3.00	
5,600.0	14.05	86.94	5,283.2	95.0	1,778.5	1,781.0	3.00	-3.00	
5,700.0	11.05	86.94	5,380.8	96.2	1,800.2	1,802.8	3.00	-3.00	
5,741.9	9.80	86.94	5,422.0	96.6	1,807.8	1,810.4	3.00	-3.00	Top of Gas; 9.8° Inc
5,800.0	8.05	86.94	5,479.4	97.1	1,816.8	1,819.4	3.00	-3.00	
5,900.0	5.05	86.94	5,578.7	97.7	1,828.2	1,830.8	3.00	-3.00	
6,000.0	2.05	86.94	5,678.5	98.0	1,834.4	1,837.0	3.00	-3.00	
6,068.5	0.00	0.00	5,747.0	98.1	1,835.6	1,838.2	3.00	-3.00	EOD; Inc=0° - EnCana Fee 19-10B (K19CNE) 1
6,100.0	0.00	0.00	5,778.5	98.1	1,835.6	1,838.2	0.00	0.00	
6,200.0	0.00	0.00	5,878.5	98.1	1,835.6	1,838.2	0.00	0.00	
6,300.0	0.00	0.00	5,978.5	98.1	1,835.6	1,838.2	0.00	0.00	
6,400.0	0.00	0.00	6,078.5	98.1	1,835.6	1,838.2	0.00	0.00	
6,500.0	0.00	0.00	6,178.5	98.1	1,835.6	1,838.2	0.00	0.00	
6,600.0	0.00	0.00	6,278.5	98.1	1,835.6	1,838.2	0.00	0.00	
6,700.0	0.00	0.00	6,378.5	98.1	1,835.6	1,838.2	0.00	0.00	
6,800.0	0.00	0.00	6,478.5	98.1	1,835.6	1,838.2	0.00	0.00	
6,867.5	0.00	0.00	6,546.0	98.1	1,835.6	1,838.2	0.00	0.00	Coal Ridge
6,900.0	0.00	0.00	6,578.5	98.1	1,835.6	1,838.2	0.00	0.00	
7,000.0	0.00	0.00	6,678.5	98.1	1,835.6	1,838.2	0.00	0.00	
7,100.0	0.00	0.00	6,778.5	98.1	1,835.6	1,838.2	0.00	0.00	
7,200.0	0.00	0.00	6,878.5	98.1	1,835.6	1,838.2	0.00	0.00	
7,300.0	0.00	0.00	6,978.5	98.1	1,835.6	1,838.2	0.00	0.00	
7,400.0	0.00	0.00	7,078.5	98.1	1,835.6	1,838.2	0.00	0.00	
7,500.0	0.00	0.00	7,178.5	98.1	1,835.6	1,838.2	0.00	0.00	
7,600.0	0.00	0.00	7,278.5	98.1	1,835.6	1,838.2	0.00	0.00	
7,660.5	0.00	0.00	7,339.0	98.1	1,835.6	1,838.2	0.00	0.00	Base Cameo A Coal
7,700.0	0.00	0.00	7,378.5	98.1	1,835.6	1,838.2	0.00	0.00	
7,743.5	0.00	0.00	7,422.0	98.1	1,835.6	1,838.2	0.00	0.00	Rollins
7,800.0	0.00	0.00	7,478.5	98.1	1,835.6	1,838.2	0.00	0.00	
7,900.0	0.00	0.00	7,578.5	98.1	1,835.6	1,838.2	0.00	0.00	
8,000.0	0.00	0.00	7,678.5	98.1	1,835.6	1,838.2	0.00	0.00	
8,100.0	0.00	0.00	7,778.5	98.1	1,835.6	1,838.2	0.00	0.00	
8,200.0	0.00	0.00	7,878.5	98.1	1,835.6	1,838.2	0.00	0.00	
8,293.5	0.00	0.00	7,972.0	98.1	1,835.6	1,838.2	0.00	0.00	TD @ 8293.5' MD - EnCana Fee 19-10B (K19C
8,300.0	0.00	0.00	7,978.5	98.1	1,835.6	1,838.2	0.00	0.00	
8,400.0	0.00	0.00	8,078.5	98.1	1,835.6	1,838.2	0.00	0.00	
8,500.0	0.00	0.00	8,178.5	98.1	1,835.6	1,838.2	0.00	0.00	
8,593.5	0.00	0.00	8,272.0	98.1	1,835.6	1,838.2	0.00	0.00	Permit TD @ 8593.5' MD

Cathedral Energy Services

Planning Report

Database:	EDM 5000.1 US Multi Users DB	Local Co-ordinate Reference:	Well EnCana Fee 19-10B (K19CNE)
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KBE @ 5688.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KBE @ 5688.0ft (Original Well Elev)
Site:	SW S19-T6S-R29W (K19CNE Pad)	North Reference:	True
Well:	EnCana Fee 19-10B (K19CNE)	Survey Calculation Method:	Minimum Curvature
Wellbore:	DD		
Design:	Plan #1		

Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(ft)		
EnCana Fee 19-10B (K1 - plan hits target center - Circle (radius 40.0)	0.00	0.00	7,972.0	98.1	1,835.6	1,618,747.63	2,377,406.76	39.511470	-107.706928
EnCana Fee 19-10B (K1 - plan hits target center - Circle (radius 25.0)	0.00	0.00	5,747.0	98.1	1,835.6	1,618,747.63	2,377,406.76	39.511470	-107.706928

Casing Points					
Measured Depth	Vertical Depth	Name		Casing Diameter	Hole Diameter
(ft)	(ft)			(in)	(in)
1,289.0	1,248.2	Surface Casing		0.000	0.000

Formations						
Measured Depth	Vertical Depth	Name		Lithology	Dip	Dip Direction
(ft)	(ft)				(°)	(°)
1,155.1	1,123.0	Molina Base			0.00	
1,541.2	1,484.0	Atwell Gulch			0.00	
3,919.8	3,708.0	Mesa Verde			0.00	
4,634.2	4,376.0	Williams Fork			0.00	
5,741.9	5,422.0	Top of Gas; 9.8° Inc			0.00	
6,867.5	6,546.0	Coal Ridge			0.00	
7,660.5	7,339.0	Base Cameo A Coal			0.00	
7,743.5	7,422.0	Rollins			0.00	

Plan Annotations					
Measured Depth	Vertical Depth	Local Coordinates		Comment	
(ft)	(ft)	+N/-S	+E/-W		
(ft)	(ft)	(ft)	(ft)		
200.0	200.0	0.0	0.0	KOP @ 200' MD	
892.3	877.2	6.6	123.9	EOB; Inc=20.77°	
5,376.2	5,069.8	91.4	1,711.7	Start Drop -3.00	
6,068.5	5,747.0	98.1	1,835.6	EOD; Inc=0°	
8,293.5	7,972.0	98.1	1,835.6	TD @ 8293.5' MD	
8,593.5	8,272.0	98.1	1,835.6	Permit TD @ 8593.5' MD	