
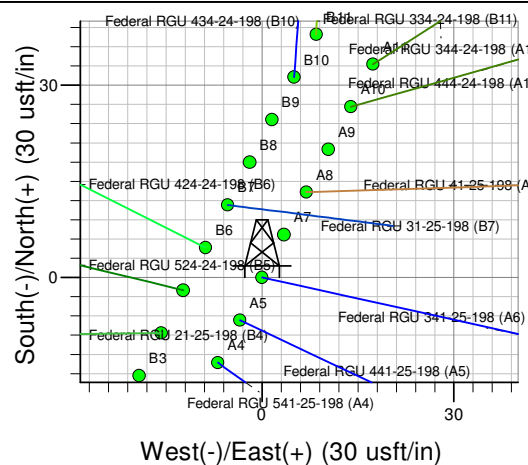


Well Name: Federal RGU 341-25-198
 Surface Location: RGU 31-25-198 Pad
 NAD 1927 (NADCON CONUS), US State Plane 1927 (Exact solution) Colorado North 501
 Ground Elevation: 6640.0
 +N/-S +E/-W Northing Easting Latitude Longitude Slot
 0.0 0.0 234068.11 1203932.86 39° 56' 27.311 N 108° 20' 22.162 W A6
 Cyclone 29 (21' RKB) jlb BUSHING @ 6661.0usft (Cyclone 29 (21' RKB) jlb)

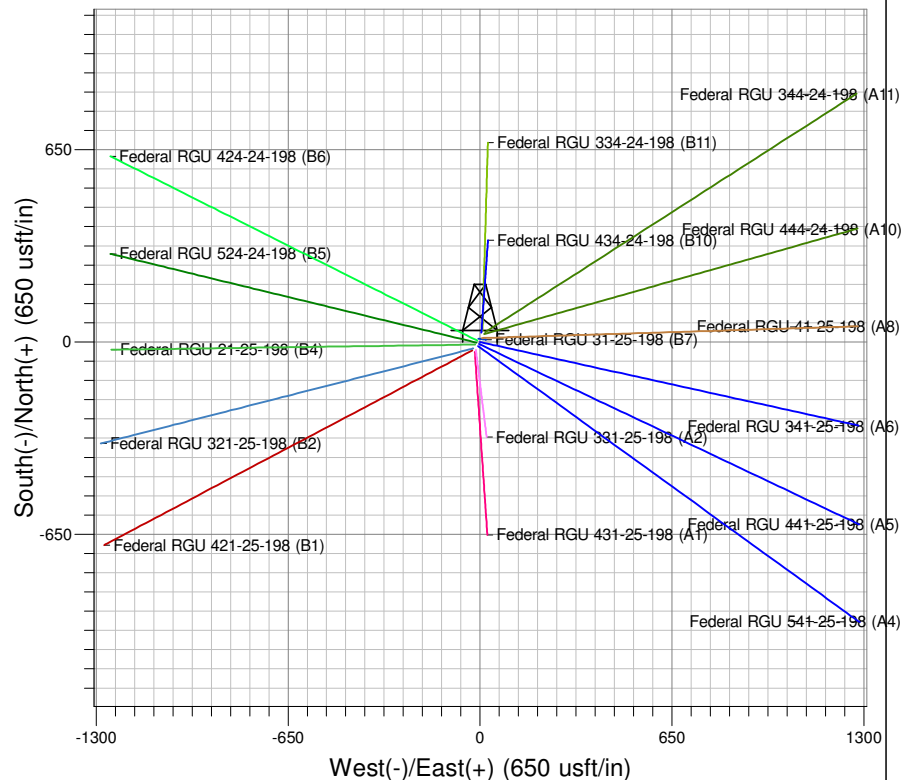

Project: RG 25-01S-098W
 Site: RGU 31-25-198 Pad
 Well: Federal RGU 341-25-198
 Plan: Plan #1 14Jan09 kjs

Azimuths to True North
 Magnetic North: 10.86°
 Magnetic Field
 Strength: 52710.0snT
 Dip Angle: 66.12°
 Date: 1/12/2009
 Model: IGRF200510

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.000	0.0	
120.0	0.00	0.00	120.0	0.0	0.0	0.00	0.000	0.0	
639.3	10.39	102.42	636.4	-10.1	45.8	2.00	102.417	46.6	
7314.6	10.39	102.42	7202.4	-268.9	1221.1	0.00	0.000	1240.5	
8007.0	0.00	0.00	7891.0	-282.3	1282.2	1.50	180.000	1302.6	Mesaverde (25' Radius) Federal RGU 341-25-198
2927.0	0.00	0.00	12811.0	-282.3	1282.2	0.00	0.000	1302.6	

TVD	MD	Inc	Azi	+N/-S	+E/-W	VSect	Departure	Annotation
120.0	120.0	0.00	0.00	0.0	0.0	0.0	0.0	Start Build 2.00
636.4	639.3	10.39	102.42	-10.1	45.8	46.6	46.9	Hold 10.39 inc
7202.4	7314.6	10.39	102.42	-268.9	1221.1	1240.5	1250.3	Start Drop -1.50
7891.0	8007.0	0.00	0.00	-282.3	1282.2	1302.6	1312.9	Vertical
12811.0	12927.0	0.00	0.00	-282.3	1282.2	1302.6	1312.9	TD at 12927.0

PICEANCE HL NAD 27

RG 25-01S-098W

RGU 31-25-198 Pad

Federal RGU 341-25-198 - Slot A6

Wellbore #1

Plan: Plan #1 14Jan09 kjs

Standard Planning Report - Geographic

25 January, 2010

Williams
Planning Report - Geographic

Database:	Compass R5000 WIN AUTH	Local Co-ordinate Reference:	Well Federal RGU 341-25-198 (A6) - Slot A6
Company:	PICEANCE HL NAD 27	TVD Reference:	KELLY BUSHING @ 6661.0usft (Cyclone 29 (21' RKB) jib)
Project:	RG 25-01S-098W	MD Reference:	KELLY BUSHING @ 6661.0usft (Cyclone 29 (21' RKB) jib)
Site:	RGU 31-25-198 Pad	North Reference:	True
Well:	Federal RGU 341-25-198	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 14Jan09 kjs		

Project	RG 25-01S-098W, Rio Blanco County, CO, RG 25-01S-098W		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	Colorado North 501		Using geodetic scale factor

Site	RGU 31-25-198 Pad		
Site Position:		Northing:	234,112.07 usft
From:	Map	Easting:	1,203,931.20 usft
Position Uncertainty:	0.0 usft	Slot Radius:	0.000 in
		Latitude:	39° 56' 27.745 N
		Longitude:	108° 20' 22.202 W
		Grid Convergence:	-1.835 °

Well	Federal RGU 341-25-198 - Slot A6		
Well Position	+N/-S	0.0 usft	Northing: 234,068.11 usft
	+E/-W	0.0 usft	Easting: 1,203,932.86 usft
Position Uncertainty	0.0 usft	Wellhead Elevation:	Latitude: 39° 56' 27.311 N
			Longitude: 108° 20' 22.162 W
			Ground Level: 6,640.0 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	1/12/2009	10.859	66.116	52,710

Design	Plan #1 14Jan09 kjs			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	95.25

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.000	
120.0	0.00	0.00	120.0	0.0	0.0	0.00	0.00	0.00	0.000	
639.3	10.39	102.42	636.4	-10.1	45.8	2.00	2.00	0.00	102.417	
7,314.6	10.39	102.42	7,202.4	-268.9	1,221.1	0.00	0.00	0.00	0.000	
8,007.0	0.00	0.00	7,891.0	-282.3	1,282.2	1.50	-1.50	0.00	180.000	Mesaverde (25' Radiu
12,927.0	0.00	0.00	12,811.0	-282.3	1,282.2	0.00	0.00	0.00	0.000	

Williams
Planning Report - Geographic

Database:	Compass R5000 WIN AUTH	Local Co-ordinate Reference:	Well Federal RGU 341-25-198 (A6) - Slot A6
Company:	PICEANCE HL NAD 27	TVD Reference:	KELLY BUSHING @ 6661.0usft (Cyclone 29 (21' RKB) jib)
Project:	RG 25-01S-098W	MD Reference:	KELLY BUSHING @ 6661.0usft (Cyclone 29 (21' RKB) jib)
Site:	RGU 31-25-198 Pad	North Reference:	True
Well:	Federal RGU 341-25-198	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 14Jan09 kjs		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	234,068.11	1,203,932.86	39° 56' 27.311 N	108° 20' 22.162 W
120.0	0.00	0.00	120.0	0.0	0.0	234,068.11	1,203,932.86	39° 56' 27.311 N	108° 20' 22.162 W
639.3	10.39	102.42	636.4	-10.1	45.8	234,056.55	1,203,978.35	39° 56' 27.212 N	108° 20' 21.574 W
7,314.6	10.39	102.42	7,202.4	-268.9	1,221.1	233,760.30	1,205,144.65	39° 56' 24.654 N	108° 20' 6.486 W
8,007.0	0.00	0.00	7,891.0	-282.3	1,282.2	233,744.90	1,205,205.30	39° 56' 24.521 N	108° 20' 5.701 W
12,927.0	0.00	0.00	12,811.0	-282.3	1,282.2	233,744.90	1,205,205.30	39° 56' 24.521 N	108° 20' 5.701 W

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
East Harline Federal RG	0.00	0.00	10.0	-282.3	1,282.2	233,744.90	1,205,205.30	39° 56' 24.521 N	108° 20' 5.701 W
- plan misses target center by 1312.9usft at 10.0usft MD (10.0 TVD, 0.0 N, 0.0 E)									
- Polygon									
Point 1			10.0	-200.0	52.0	233,543.34	1,205,250.87		True
Point 2			10.0	200.0	52.0	233,943.12	1,205,263.67		True
Mesaverde (50' Radius)	0.00	0.00	7,891.0	-282.3	1,282.2	233,744.90	1,205,205.30	39° 56' 24.521 N	108° 20' 5.701 W
- plan hits target center									
- Circle (radius 50.0)									
Mesaverde (25' Radius)	0.00	0.00	7,891.0	-282.3	1,282.2	233,744.90	1,205,205.30	39° 56' 24.521 N	108° 20' 5.701 W
- plan hits target center									
- Circle (radius 25.0)									

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (in)	Hole Diameter (in)	
3,960.0	3,902.8	9 5/8"	9.625	13.500	

Williams
Planning Report - Geographic

Database:	Compass R5000 WIN AUTH	Local Co-ordinate Reference:	Well Federal RGU 341-25-198 (A6) - Slot A6
Company:	PICEANCE HL NAD 27	TVD Reference:	KELLY BUSHING @ 6661.0usft (Cyclone 29 (21' RKB) jjb)
Project:	RG 25-01S-098W	MD Reference:	KELLY BUSHING @ 6661.0usft (Cyclone 29 (21' RKB) jjb)
Site:	RGU 31-25-198 Pad	North Reference:	True
Well:	Federal RGU 341-25-198	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 14Jan09 kjs		

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,284.4	1,271.0	Green River Fm				
1,482.7	1,466.0	A Groove				
1,691.1	1,671.0	B Groove				
1,985.9	1,961.0	Dissolution Surface				
3,048.3	3,006.0	Garden Gulch				
3,226.2	3,181.0	Orange Marker				
3,460.1	3,411.0	Wasatch				
5,935.6	5,846.0	G' Sand				
6,316.9	6,221.0	Ft. Union				
7,716.7	7,601.0	Ohio Creek				
8,007.0	7,891.0	Mesaverde				
8,977.0	8,861.0	Top Gas				
11,327.0	11,211.0	Cameo Coals				
11,707.0	11,591.0	Rollins SS				
11,842.0	11,726.0	Cozzette				
12,057.0	11,941.0	Corcoran				
12,447.0	12,331.0	Upper Sego				
12,677.0	12,561.0	Lower Sego				
12,927.0	12,811.0	TD		0.000		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
120.0	120.0	0.0	0.0	Start Build 2.00
639.3	636.4	-10.1	45.8	Hold 10.39 inc
7,314.6	7,202.4	-268.9	1,221.1	Start Drop -1.50
8,007.0	7,891.0	-282.3	1,282.2	Vertical
12,927.0	12,811.0	-282.3	1,282.2	TD at 12927.0