

HALLIBURTON

DUAL SPACED NEUTRON  
SPECTRAL DENSITY  
ARRAY COMPENSATED  
TRUE RESISTIVITY  
LOG

COMPANY		NOBLE ENERGY INC	
WELL		WALCKER USX AB01-07P	
FIELD		WATTENBERG	
COUNTY		WELD	
STATE		CO	
Permanent Datum		GL	
Log measured from		KB	
Drilling measured from		KB	
Date		24-Aug-10	
Run No.		ONE	
Depth - Driller		9031.00 ft	
Depth - Logger		9030.0 ft	
Bottom - Logged Interval		9019 ft	
Top - Logged Interval		805 ft	
Casing - Driller		8.625 in @ 803.0 ft	
Casing - Logger		805.0 ft	
Bit Size		7.875 in	
Type Fluid in Hole		WBM	
Density		9.5 ppq	
Viscosity		62.00 s/qt	
PH		11.50 pH	
Fluid Loss		6.4 cpm	
Source of Sample		FLOWLINE	
Rm @ Meas. Temperature		0.335 ohmm @ 90.00 degF	
Rmf @ Meas. Temperature		0.31 ohmm @ 75.00 degF	
Rmc @ Meas. Temperature		0.400 ohmm @ 75.00 degF	
Source Rmf		CHART	
Rmc		CHART	
Rm @ BHT		0.14 ohmm @ 222.0 degF	
Time Since Circulation		6.0 hr	
Time on Bottom		24-Aug-10 07:04	
Max. Rec. Temperature		222.0 degF @ 9033.0 ft	
Equipment		11454566	
Location		BRIGHTON	
Recorded By		F. LODER	
Witnessed By		R. FRANK	

COMPANY	NOBLE ENERGY INC
WELL	WALCKER USX AB01-07P
FIELD	WATTENBERG
COUNTY	WELD
STATE	CO
API No.	05123312250000
Location	SURFACE LOCATION: 1800' FEL & 1800' FNL SWNE LATITUDE: 40.604640° LONGITUDE: -104.494020°
Other Services:	RWCH BSAT CSNG

Elev. 4886.0 ft  
D.F. 4898.0 ft  
G.L. 4886.0 ft  
13.0 ft above perm. Datum

Fold here

Service Ticket No.: 7588454						API Serial No.: 05123312250000						PGM Version: WL INSITE R3.0.4 (Build 6)											
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE												RESISTIVITY SCALE CHANGES											
Date		Sample No.										Type Log		Depth		Scale Up Hole		Scale Down Hole					
Depth-Driller																							
Type Fluid in Hole																							
Density		Viscosity																					
Ph		Fluid Loss																					
Source of Sample												RESISTIVITY EQUIPMENT DATA											
Rm @ Meas. Temp				@				@				Run No.		Tool Type & No.		Pad Type		Tool Pos.		Other			
Rmf @ Meas. Temp.				@				@				ONE		ACRtS817-E353		N/A		1.5" S.O.		N/A			
Rmc @ Meas. Temp.				@				@															
Source Rmf		Rmc																					
Rm @ BHT				@				@															
Rmf @ BHT				@				@															
Rmc @ BHT				@				@															
EQUIPMENT DATA																							
GAMMA				ACOUSTIC				DENSITY				NEUTRON											
Run No.		ONE		Run No.		ONE		Run No.		ONE		Run No.		ONE									
Serial No.		11277436		Serial No.		1105780		Serial No.		I132M275		Serial No.		11301132									
Model No.		GTET-I		Model No.		BSAT-I		Model No.		SDLT-I		Model No.		DSNT-I									
Diameter		3.625"		No. of Cent.		2		Diameter		4.5"		Diameter		3.625"									
Detector Model No.		T102-A		Spacing		0.5'		Log Type		GAM-GAM		Log Type		NEU-NEU									
Type		SCINT						Source Type		Cs137		Source Type		Am241Be									
Length		8"		LSA [Y/N]		N		Serial No.		2770 GW		Serial No.		DSN-434									
Distance to Source		35'		FWDA [Y/N ]		N		Strength		1.5 Ci		Strength		15 Ci									

GENERAL			GAMMA		ACOUSTIC		DENSITY		NEUTRON					
Run	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix		Scale	Matrix
No.	From	To	ft/min	L	R	L	R		L	R	L	R		
ONE	9030'	7511'	REC	0 API	250 API	30 %	-10 %	55.5 us/ft	20 %	0 %	2.65 g/cc	20 %	0 %	SAND
ONE	7511'	7040'	REC	0 API	250 API	30 %	-10 %	55.5 us/ft	20 %	0 %	2.68 g/cc	20 %	0 %	SAND
ONE	7040'	6746'	REC	0 API	250 API	30 %	-10 %	47.5 us/ft	20 %	0 %	2.71 g/cc	20 %	0 %	LIME
ONE	6746'	805'	REC	0 API	250 API	30 %	-10 %	55.5 us/ft	20 %	0 %	2.68 g/cc	20 %	0 %	SAND
DIRECTIONAL INFORMATION														
Maximum Deviation @									KOP @					
Remarks: RWCH-GTET-CSNG-DSNT-SDLT-FLEX-BSAT-ACRT RAN IN COMBINATION														
ANNULAR HOLE VOLUME CALCULATED USING 4.5 INCH PRODUCTION CASING														
TENSION PULLS AND BOREHOLE RUGOSITY AFFECT LOG RESPONSE														
CREW: A. LEWIS, J. WALKER RIG: CADE 21														
THANK YOU FOR USING HALLIBURTON ENERGY SERVICES -- BRIGHTON, CO -- 303.825.4346														
HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.														
HALLIBURTON														





# PARAMETERS REPORT


Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	DSNT	NLIT	Neutron Lithology	Sandstone	
	SDLT	DMA	Formation Density Matrix	2.680	g/cc
	BSAT	DTMT	Delta -T Matrix Type	Sandstone 55.5	
6746.00					
	DSNT	NLIT	Neutron Lithology	Limestone	
	SDLT	DMA	Formation Density Matrix	2.710	g/cc
	BSAT	DTMT	Delta -T Matrix Type	Limestone 47.5	
7040.00					
	SDLT	DMA	Formation Density Matrix	2.680	g/cc
7511.00					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDWT	Borehole Fluid Weight	9.100	ppg
	SHARED	OBM	Oil Based Mud System?	No	
	SHARED	RMUD	Mud Resistivity	0.335	ohmm
	SHARED	TRM	Temperature of Mud	90.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	4.500	in
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	9031.00	ft
	SHARED	BHT	Bottom Hole Temperature	223.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	


SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
SHARED	TEMM	Temperature Master Tool	NONE	
SHARED	BHSM	Borehole Size Master Tool	NONE	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GRSO	Gamma Tool Standoff	0.000	in
GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	POTA	Potassium	0.00	%
GTET	MDTP	Mud Type	Natural	
GTET	TPOS	Tool Position	Standoff	
CSNG	CGOK	Process CSNG Data?	Yes	
CSNG	CENT	Is Tool Centralized?	No	
CSNG	MUDT	Mud Type?	Natural	
CSNG	KPCT	Percent K in Mud by Weight?	0.00	%
CSNG	GBOK	Gamma Enviromental Corrections?	Yes	
CSNG	BARF	Barite Correction Factor	1.00	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Sandstone	
DSNT	DSNO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.000	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	DNOK	Process Density?	Yes	
SDLT	DNOK	Process Density EVR?	No	
SDLT	AD	Is Hole Air Drilled?	No	
SDLT	CB	Logging Calibration Blocks?	No	
SDLT	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT	DTWN	Disable temperature warning	No	
SDLT	MDTP	Weighted Mud Correction Type?	None	
SDLT	DMA	Formation Density Matrix	2.650	g/cc
SDLT	DFL	Formation Density Fluid	1.000	g/cc
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT	MLOK	Process MicroLog Outputs?	Yes	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Semblance Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Semblance Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	Sandstone 55.5	
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt	RTOK	Process ACRt?	Yes	
ACRt	MNSO	Minimum Tool Standoff	1.50	in
ACRt	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt	TPOS	Tool Position	Free Hanging	
ACRt	RMOP	Rmud Source	Mud Cell	
ACRt	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt	THQY	Threshold Quality	0.50	
BOTTOM				
Data: WLCKR_AB01_07P0001 NOBLE_BLACK_BSAT004.02 24-Aug-10 10:27 Up				Date: 24-Aug-10 10:49:48


MAIN PASS 5" = 100'

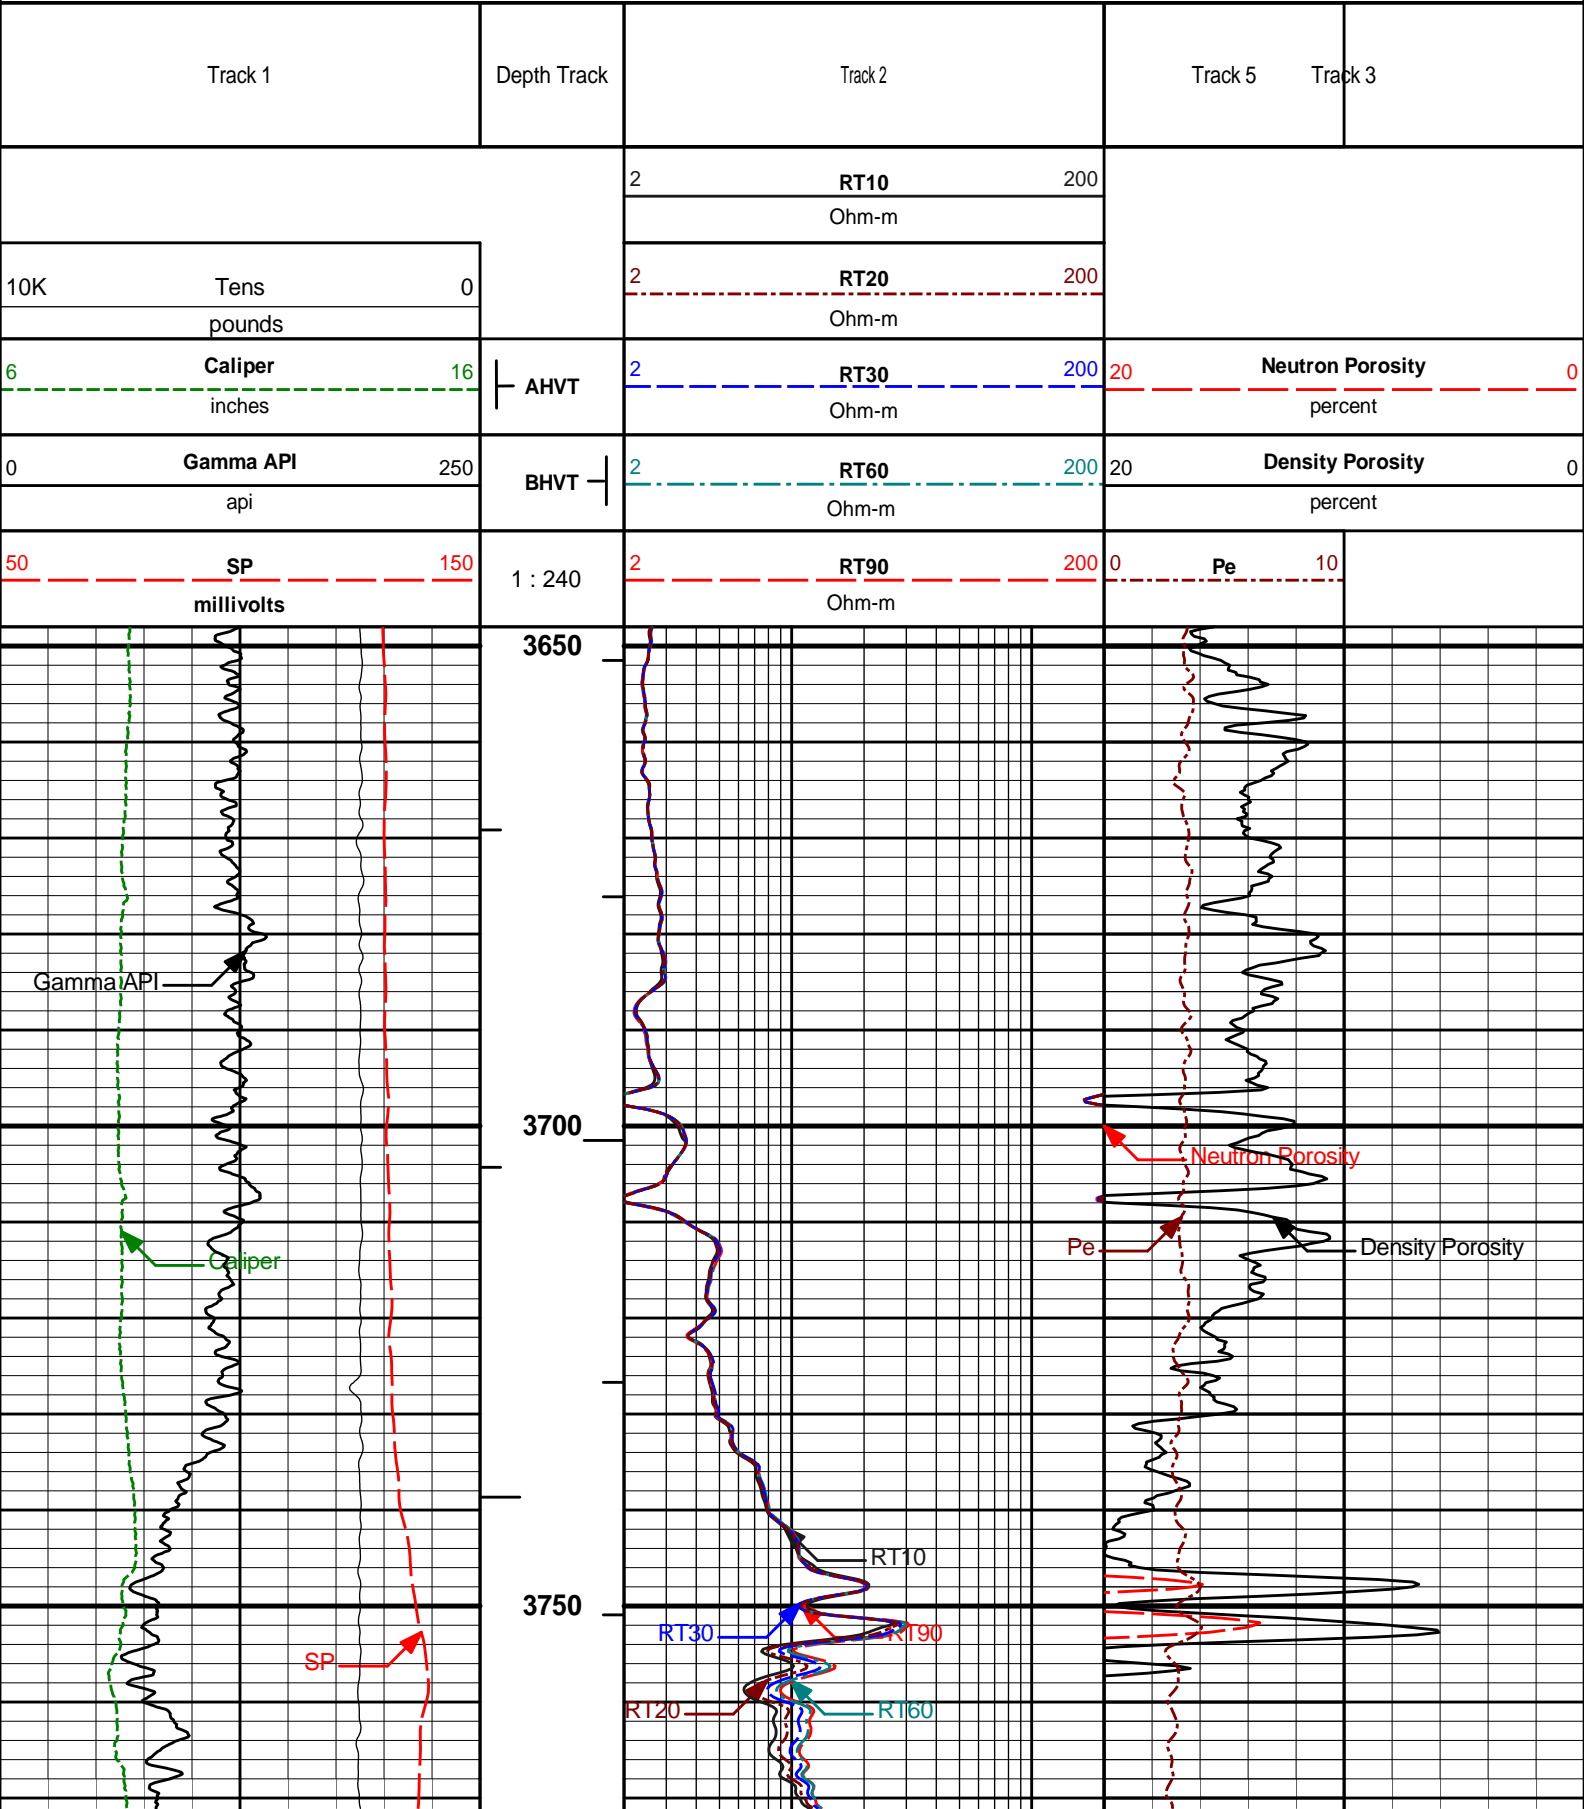

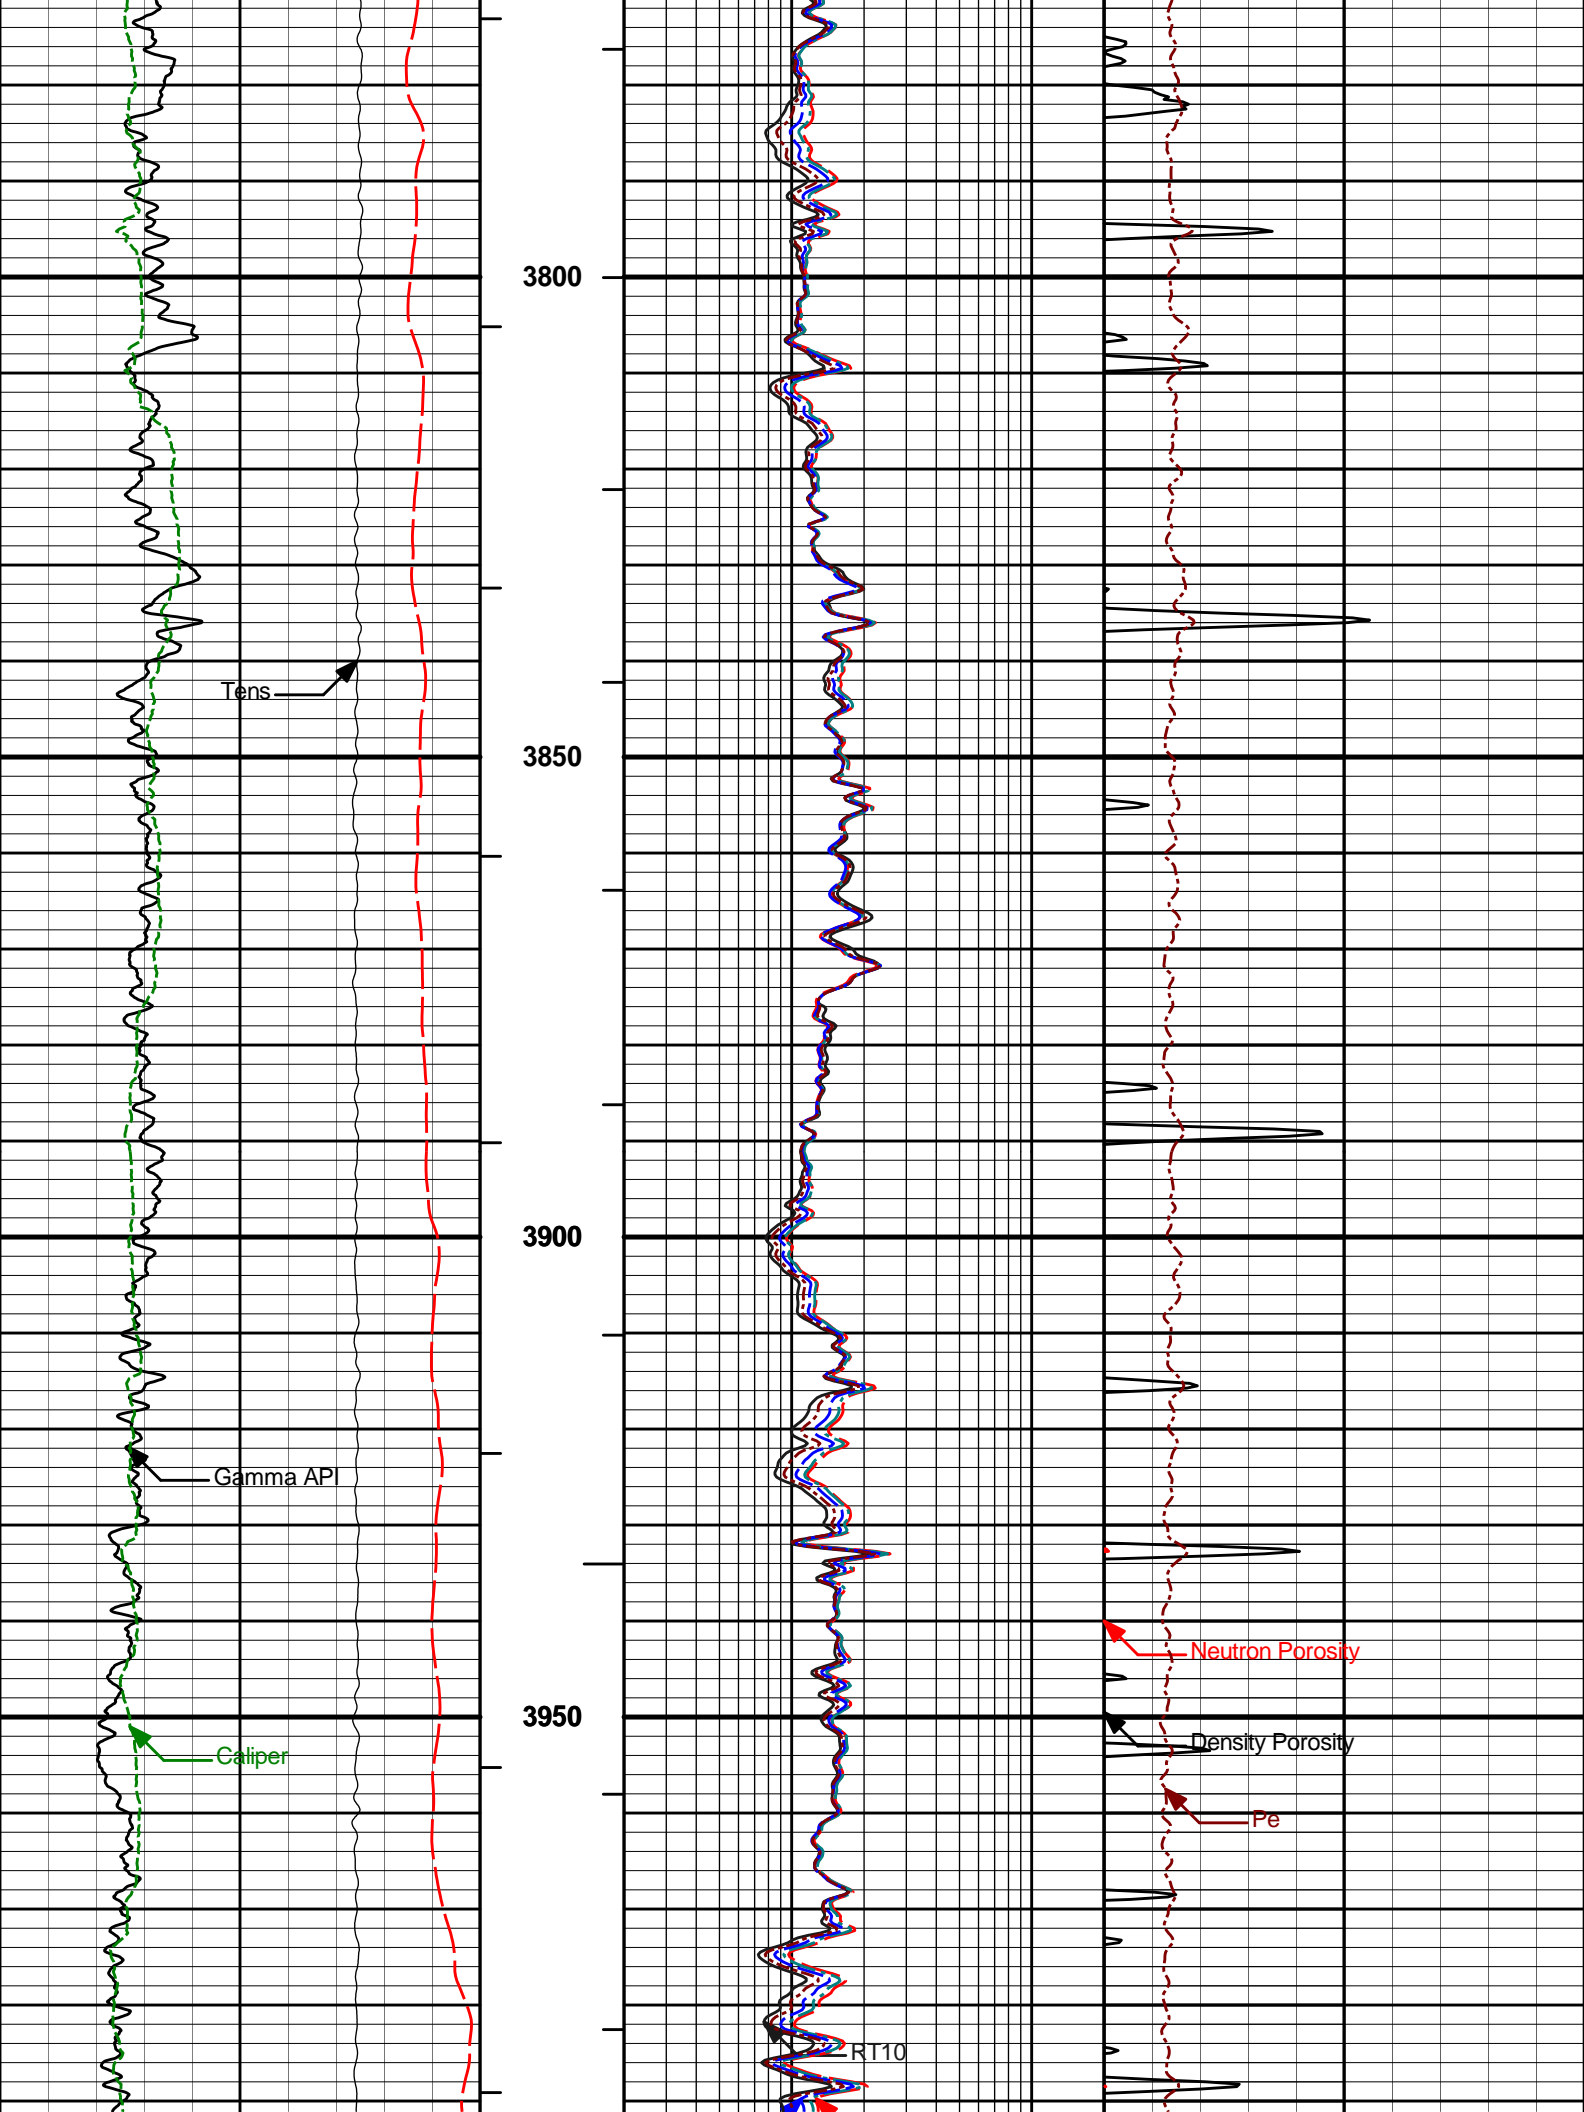


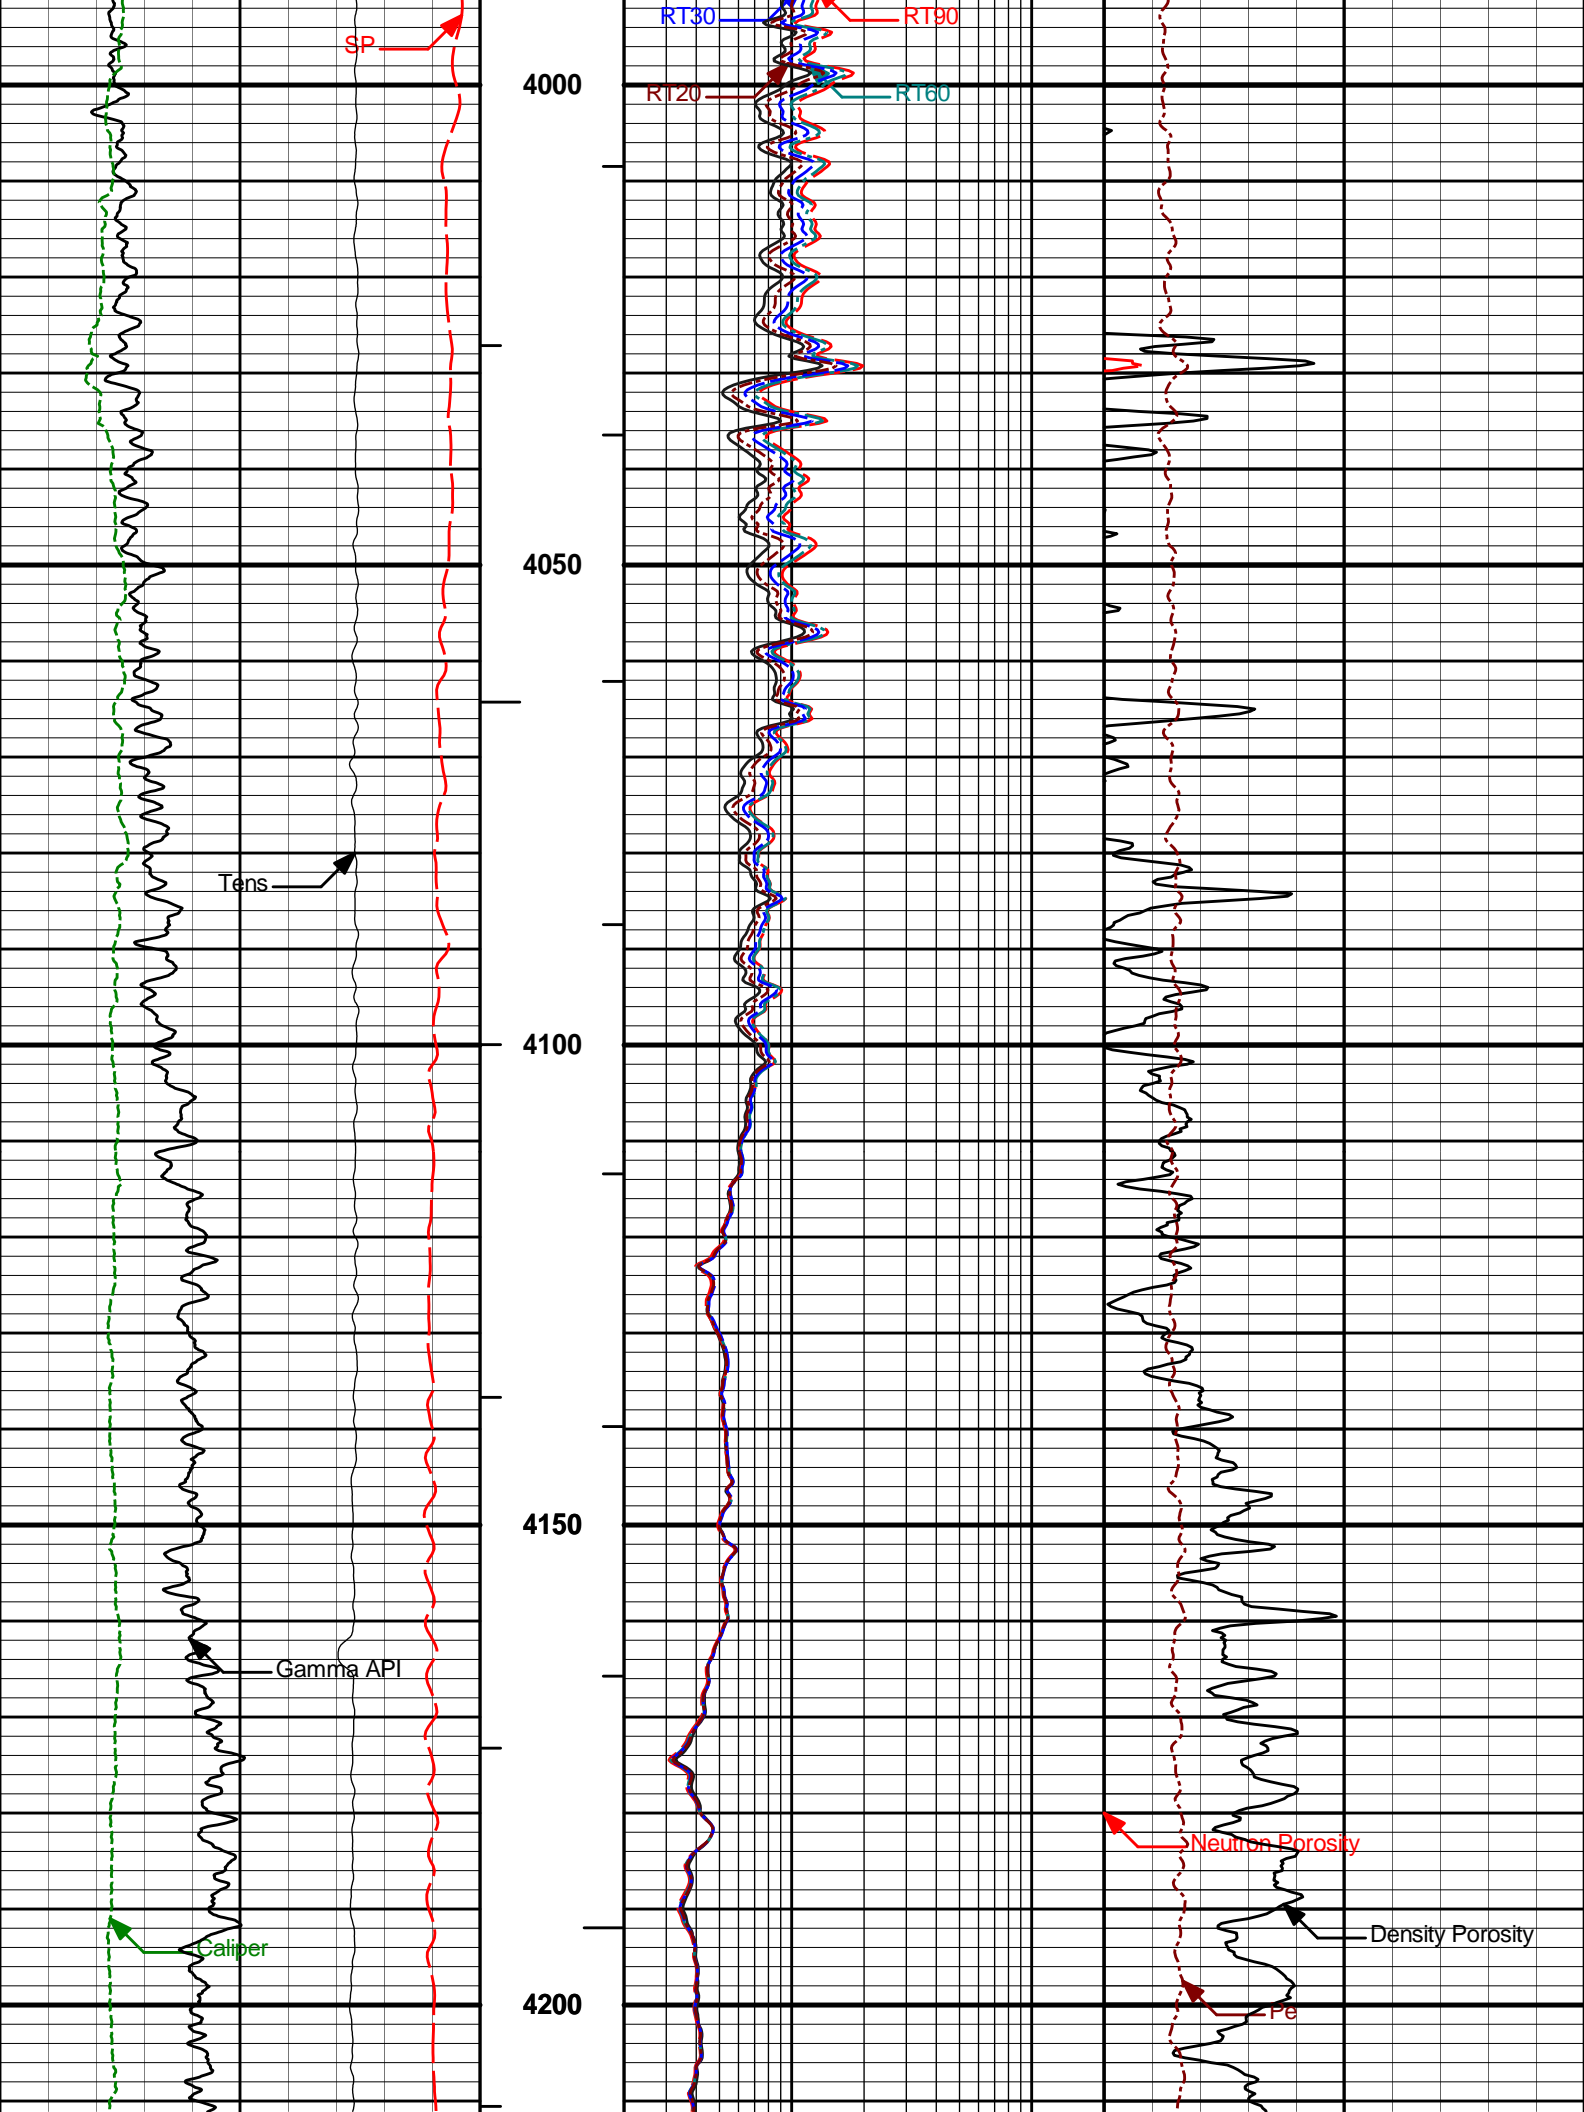


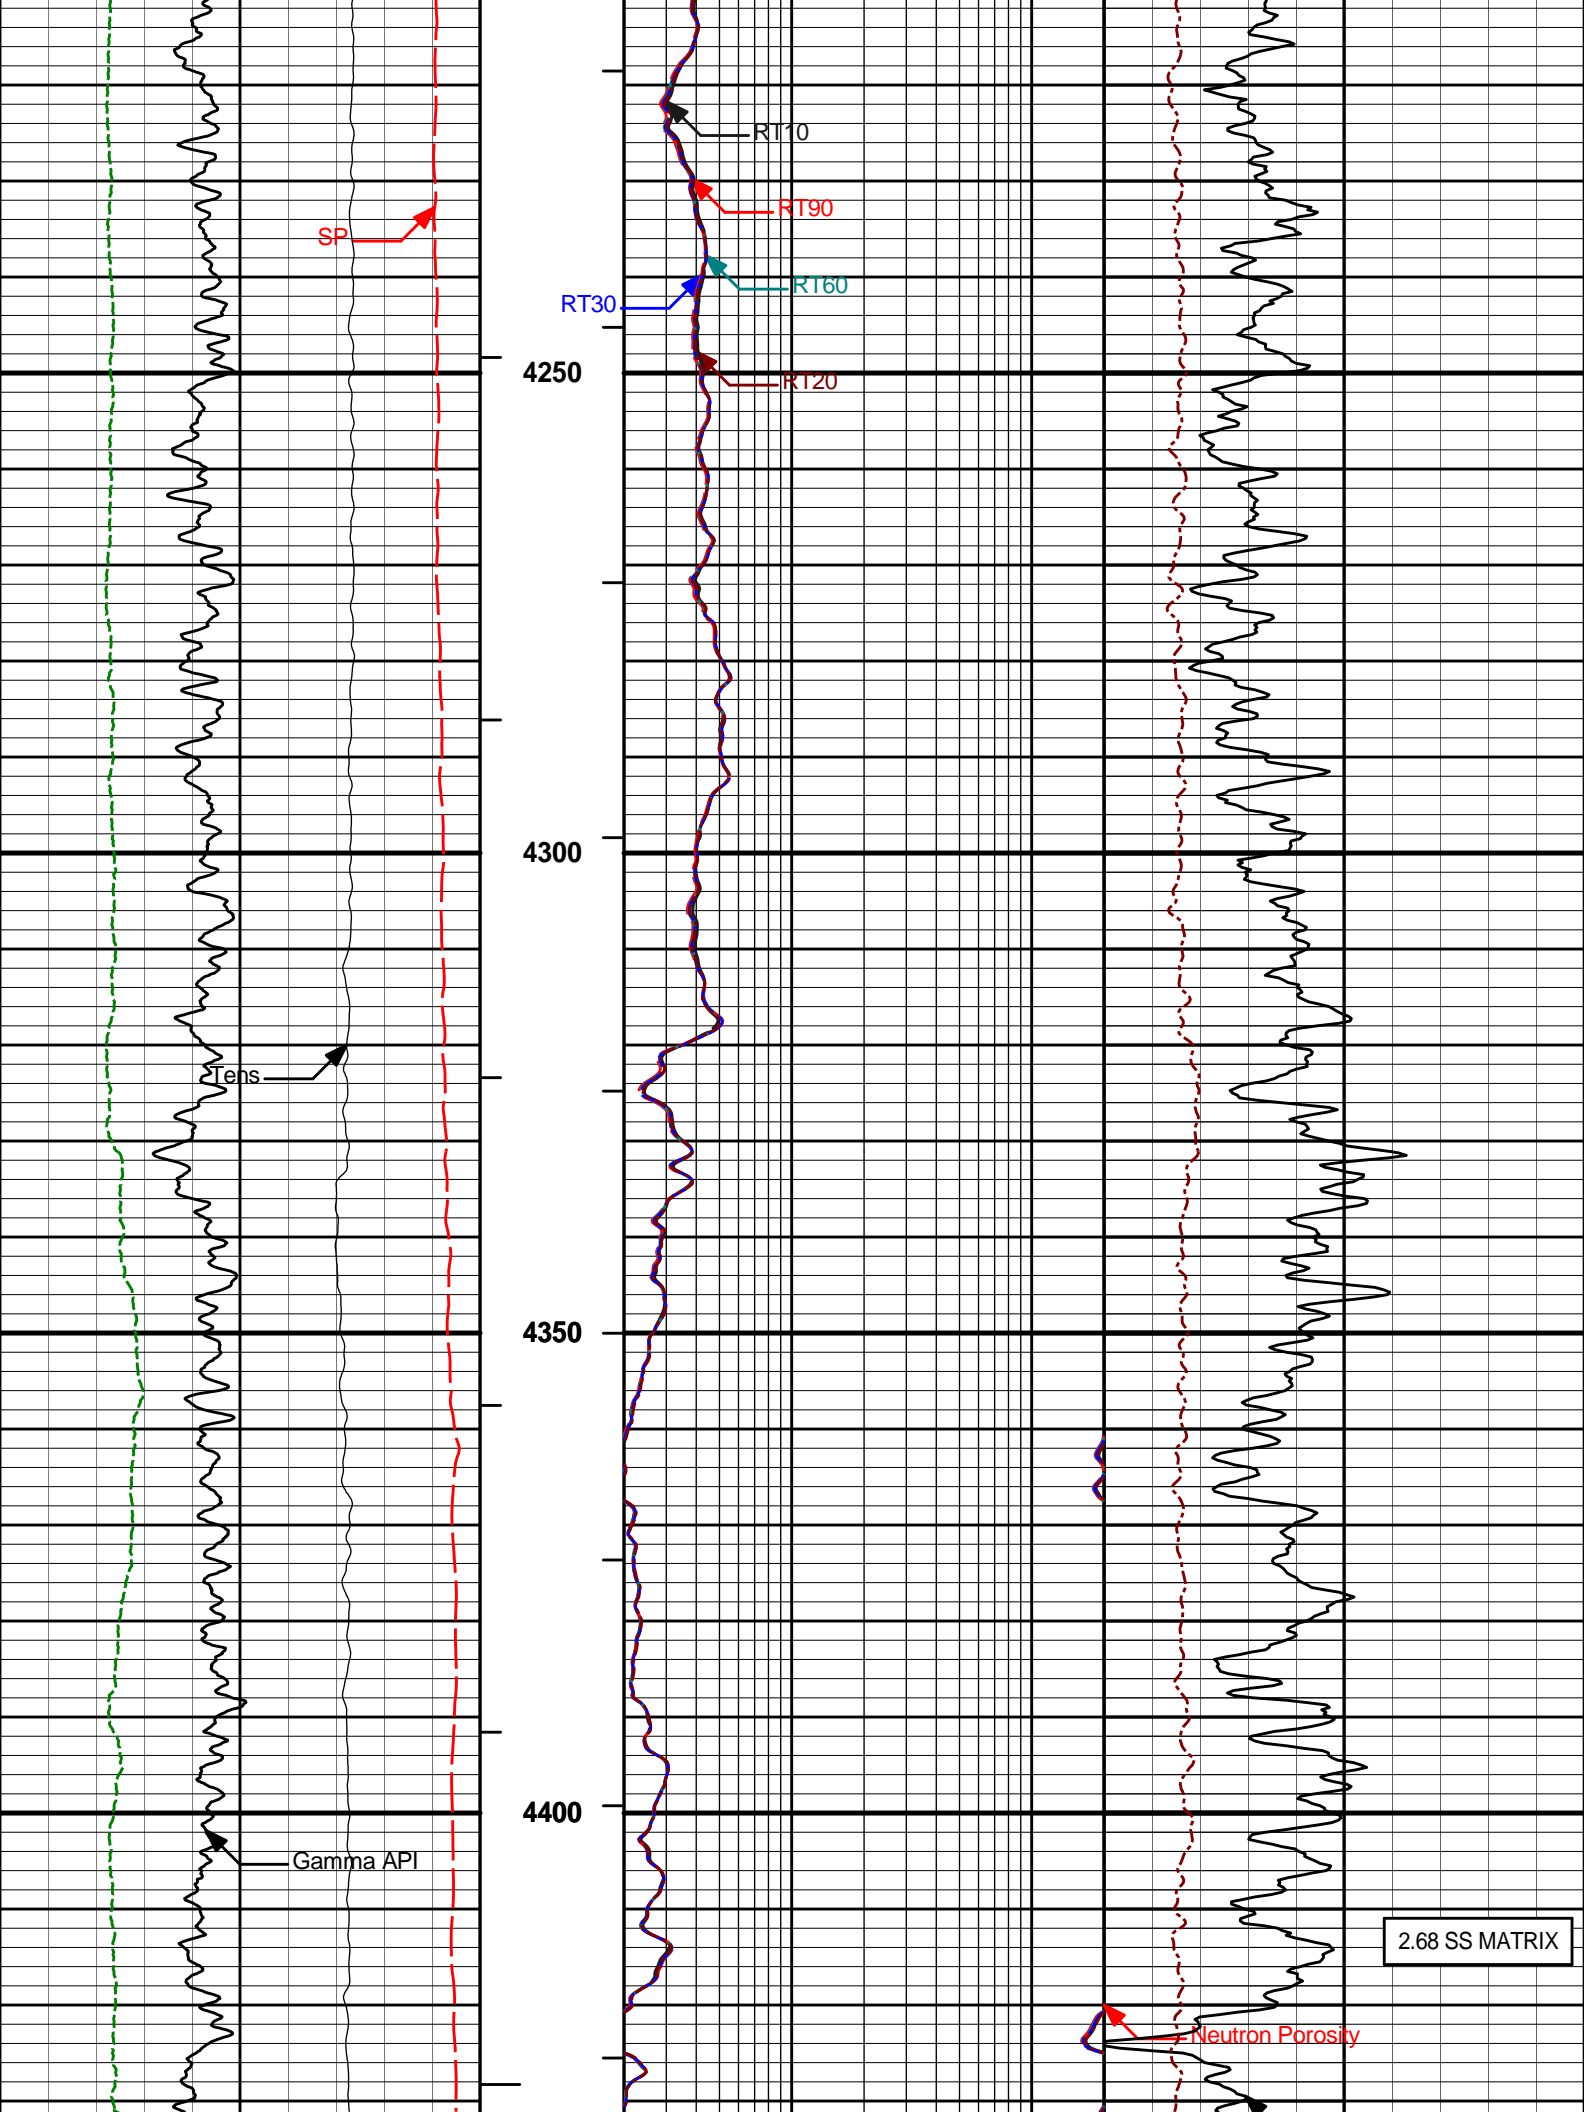


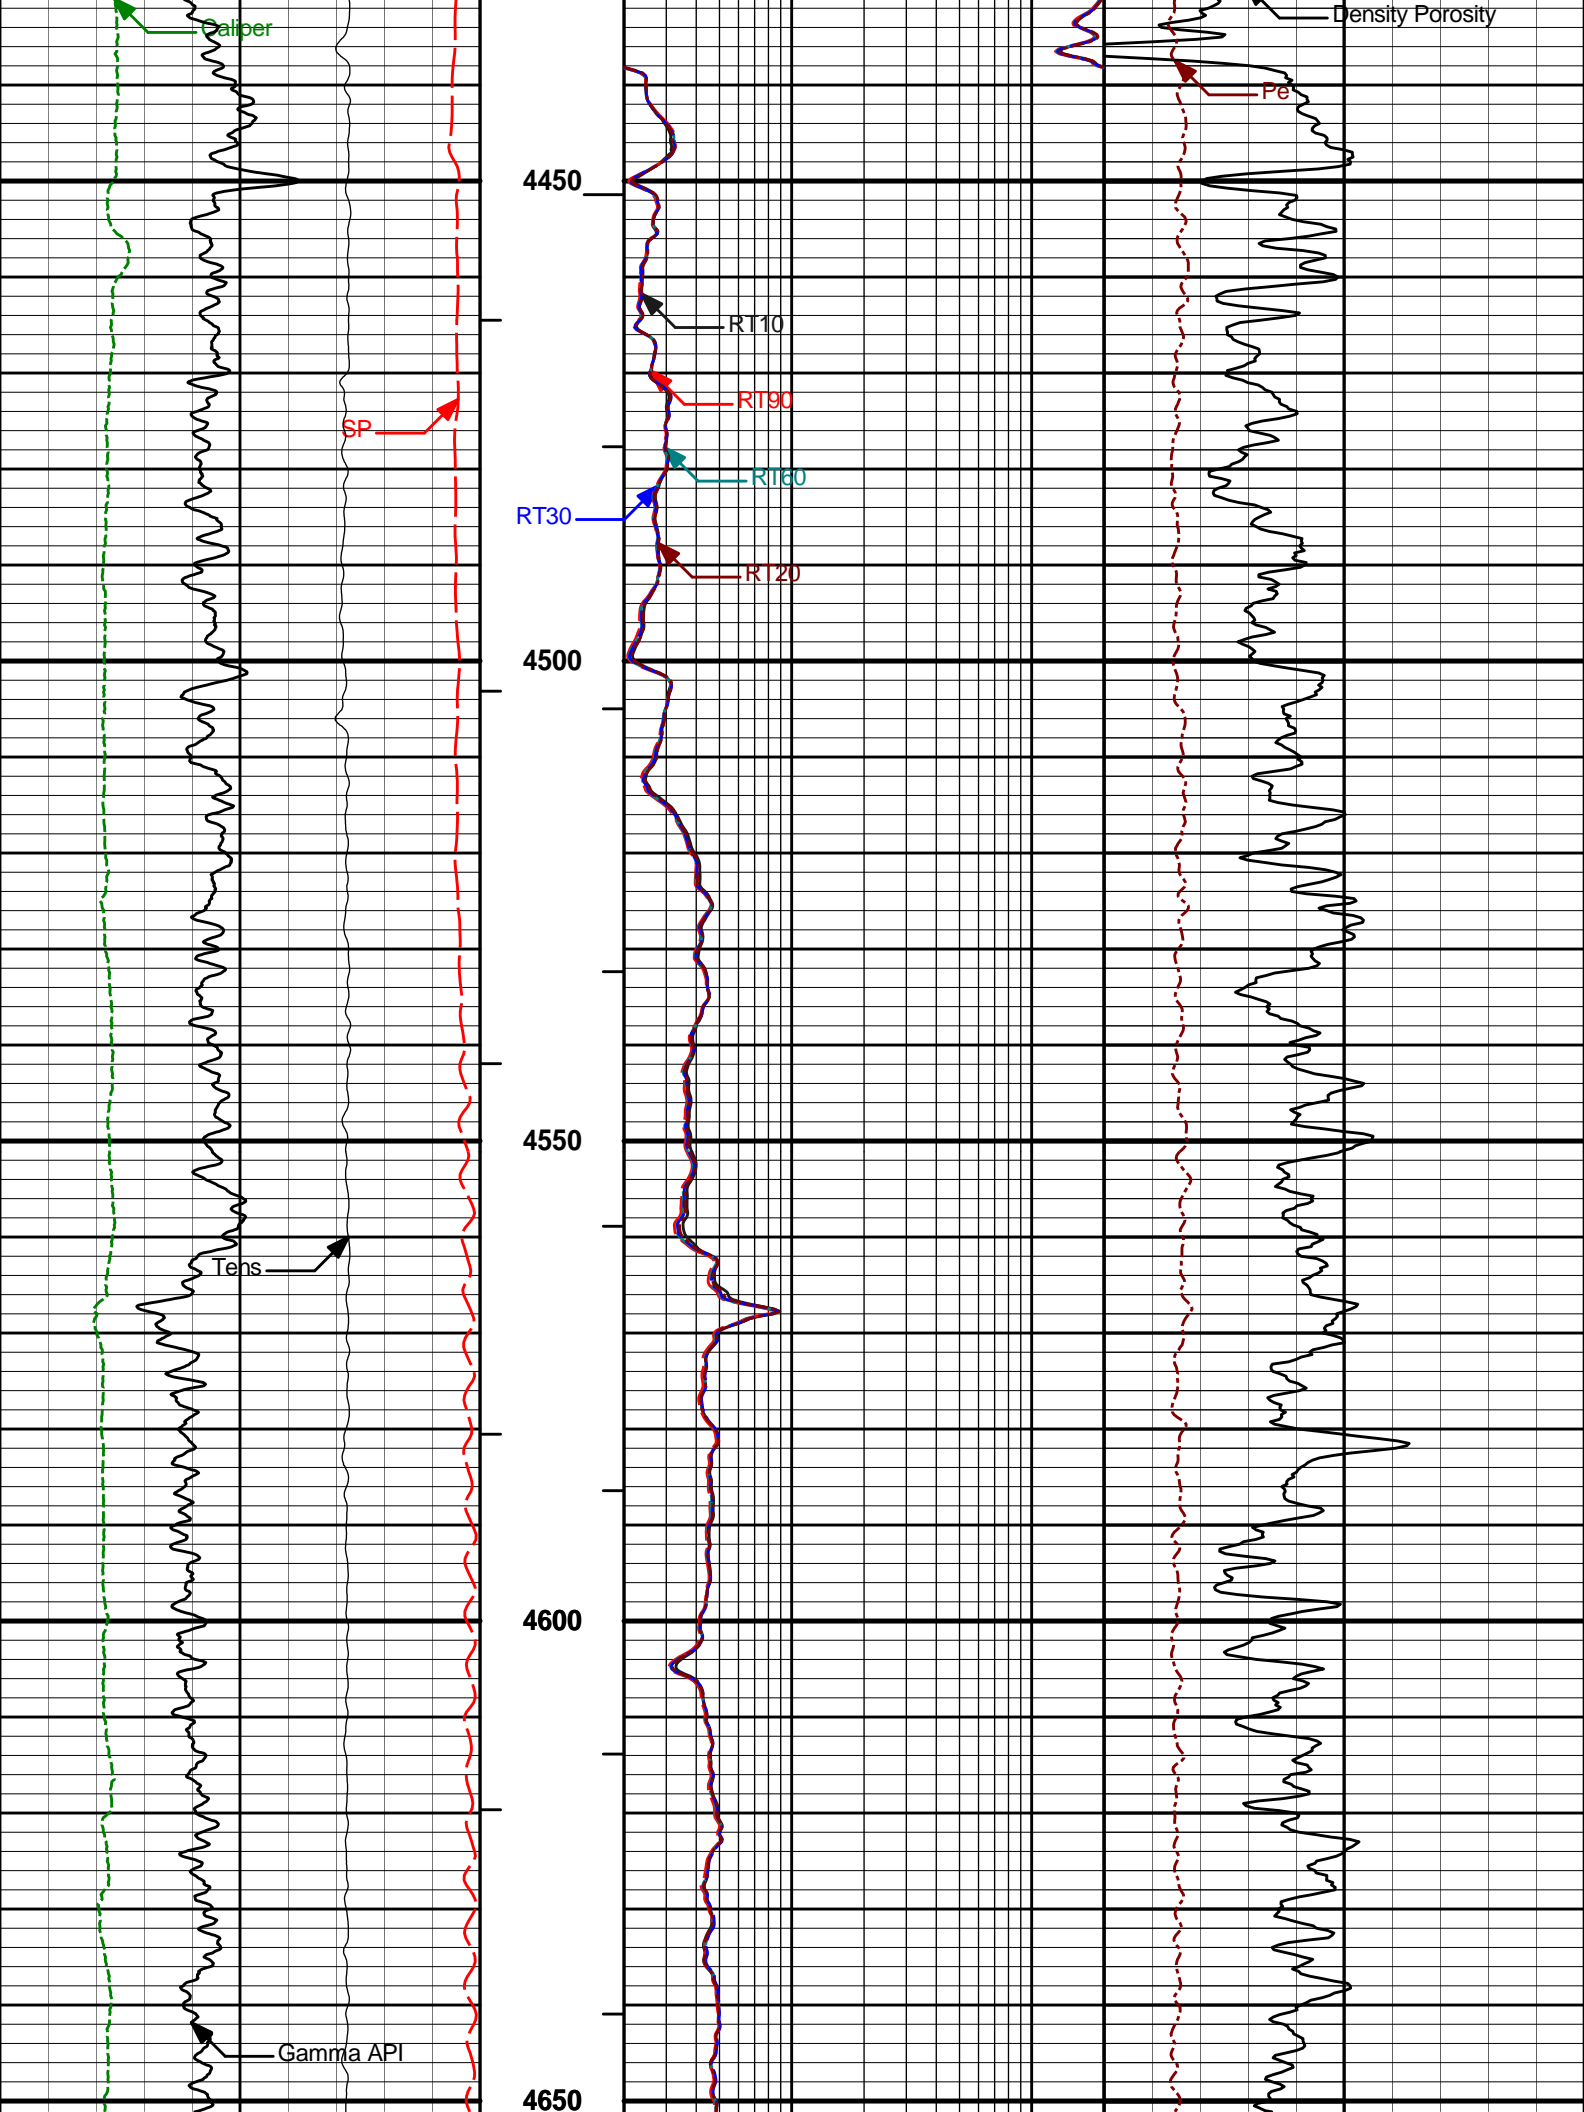





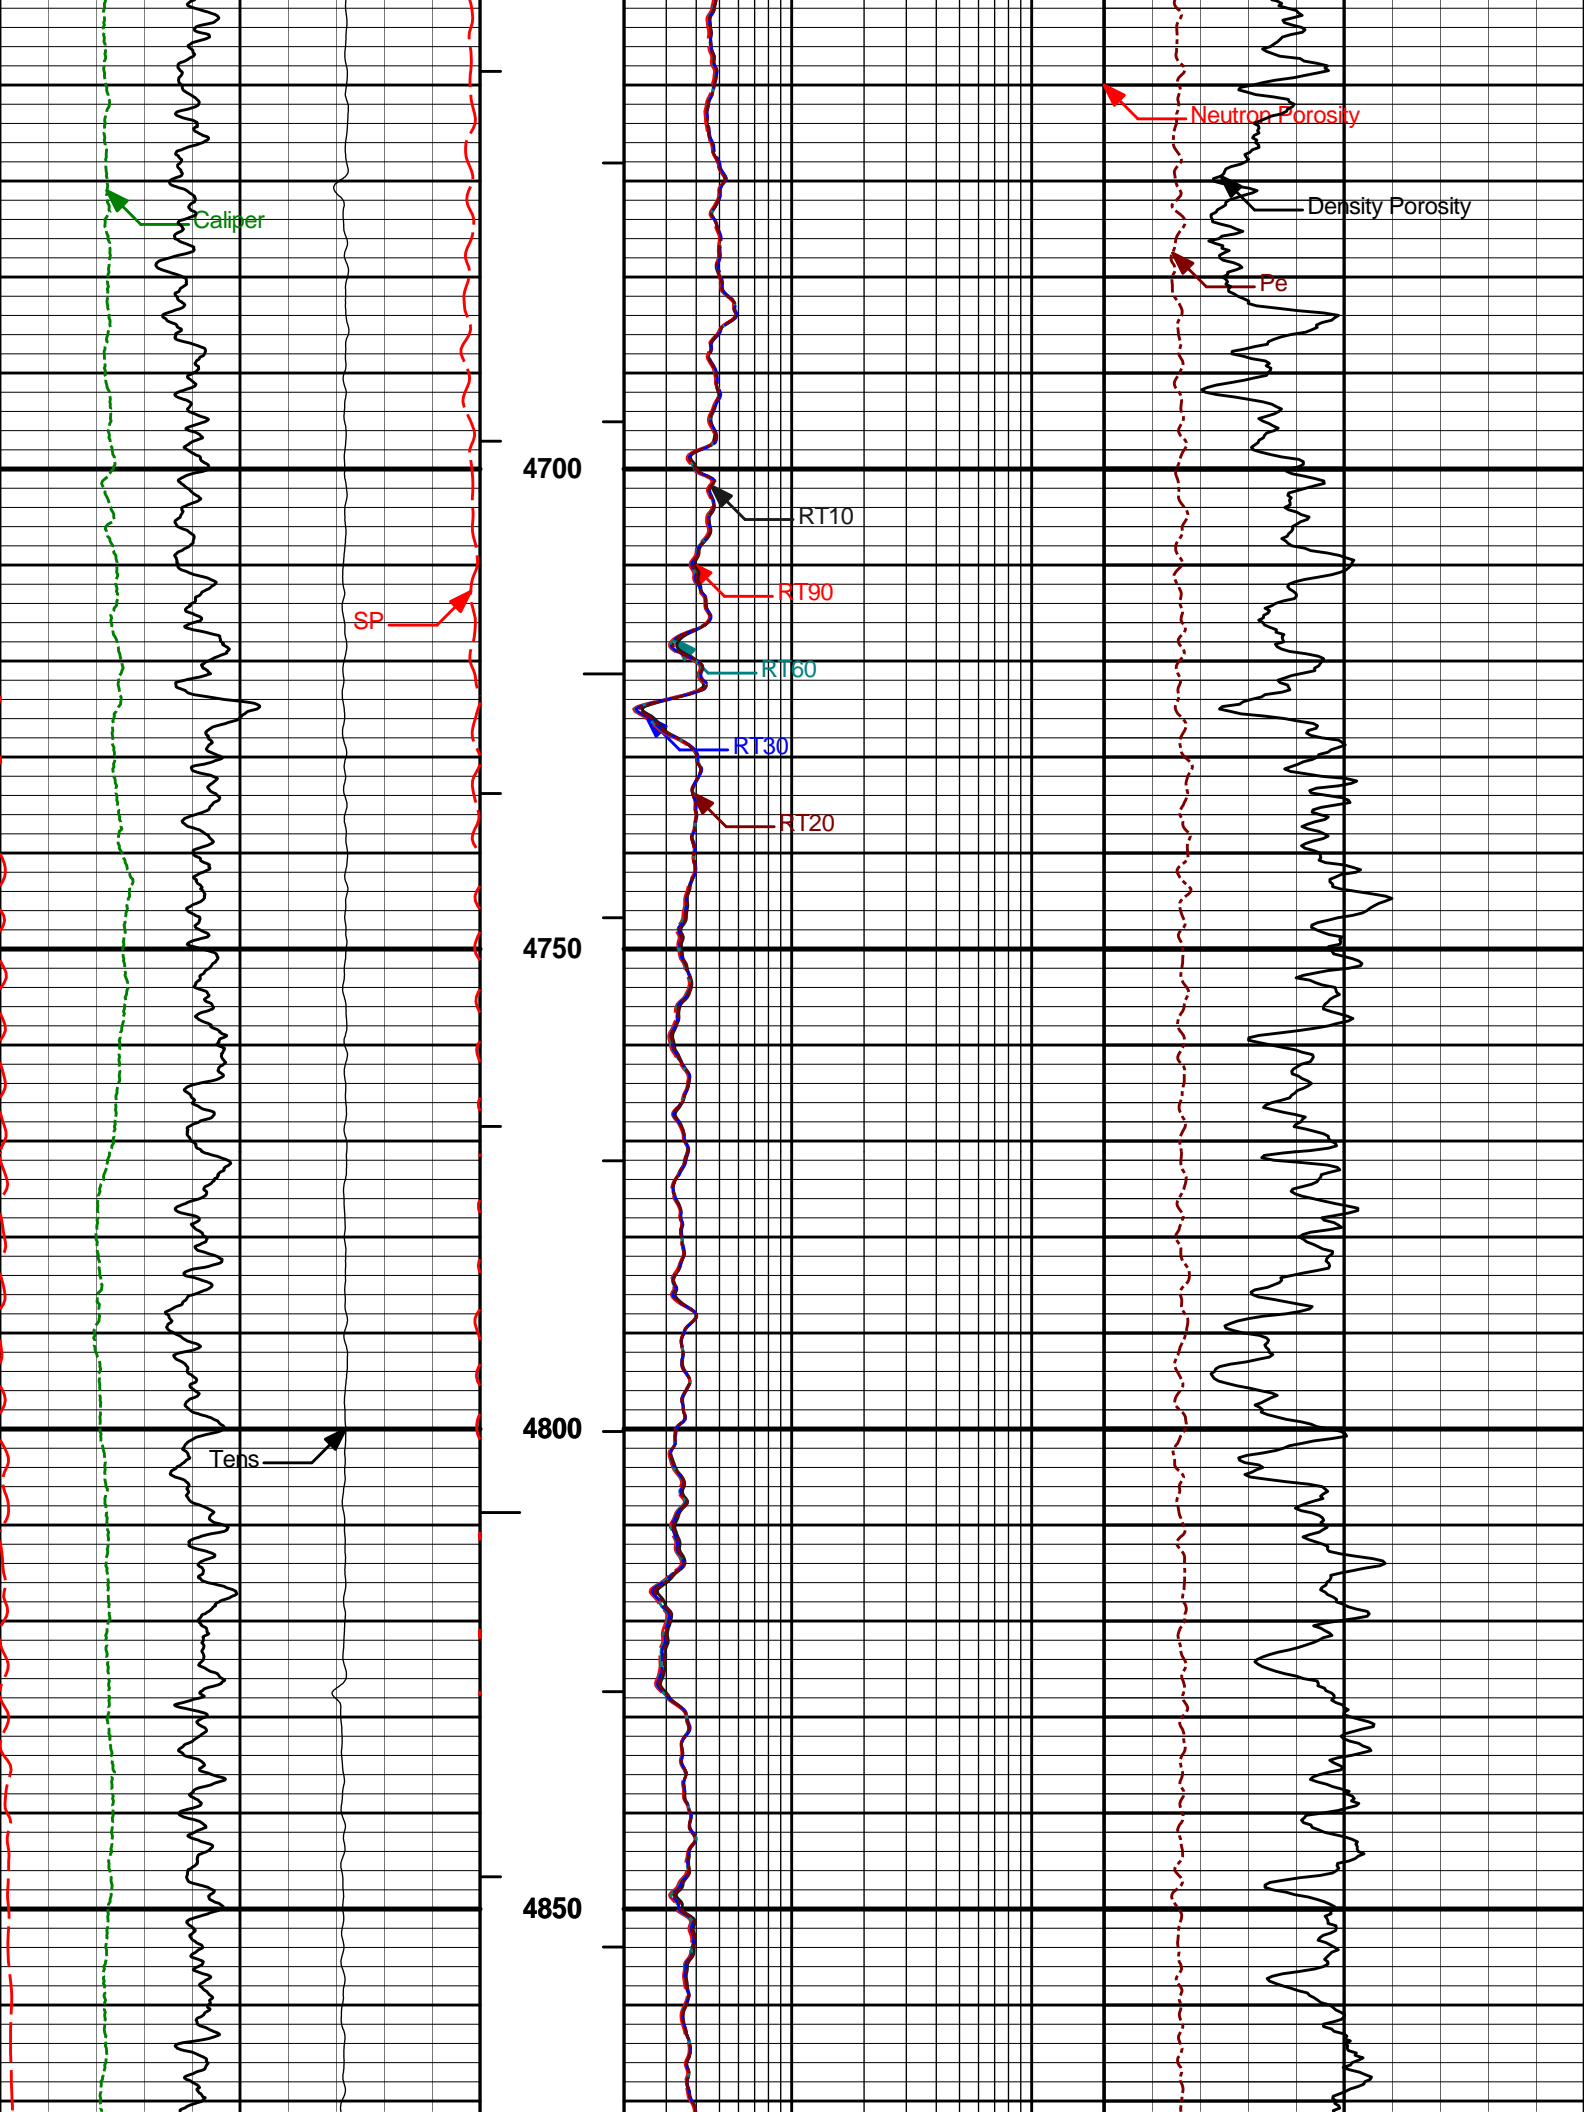


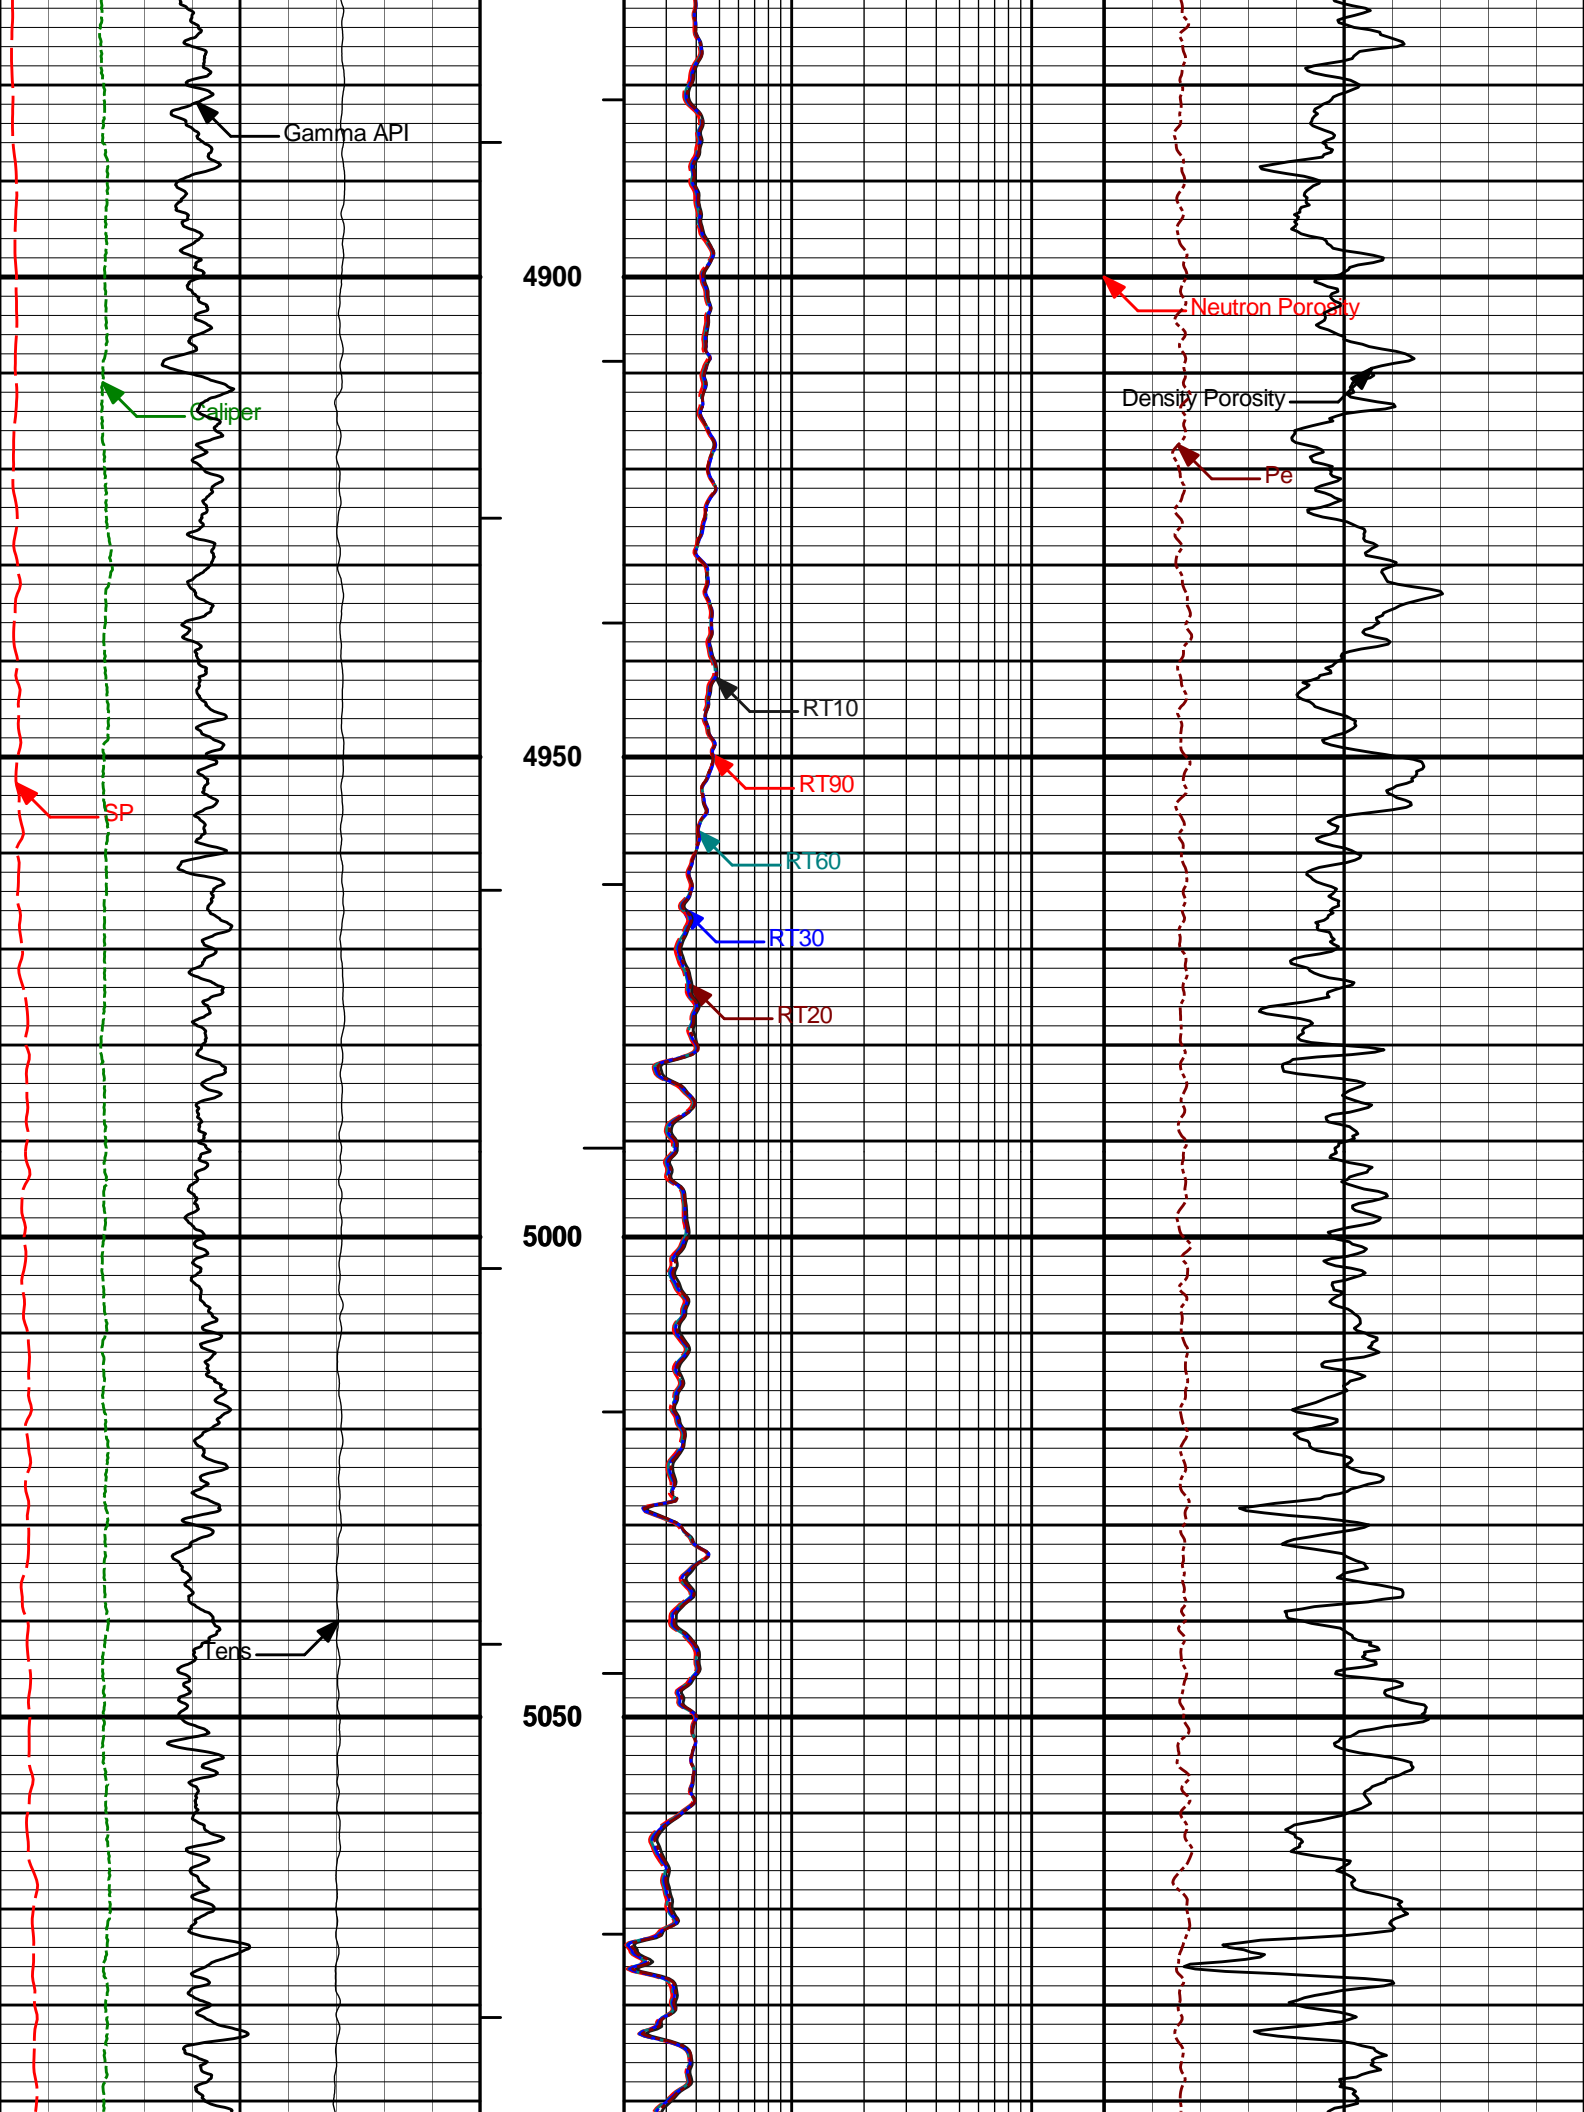


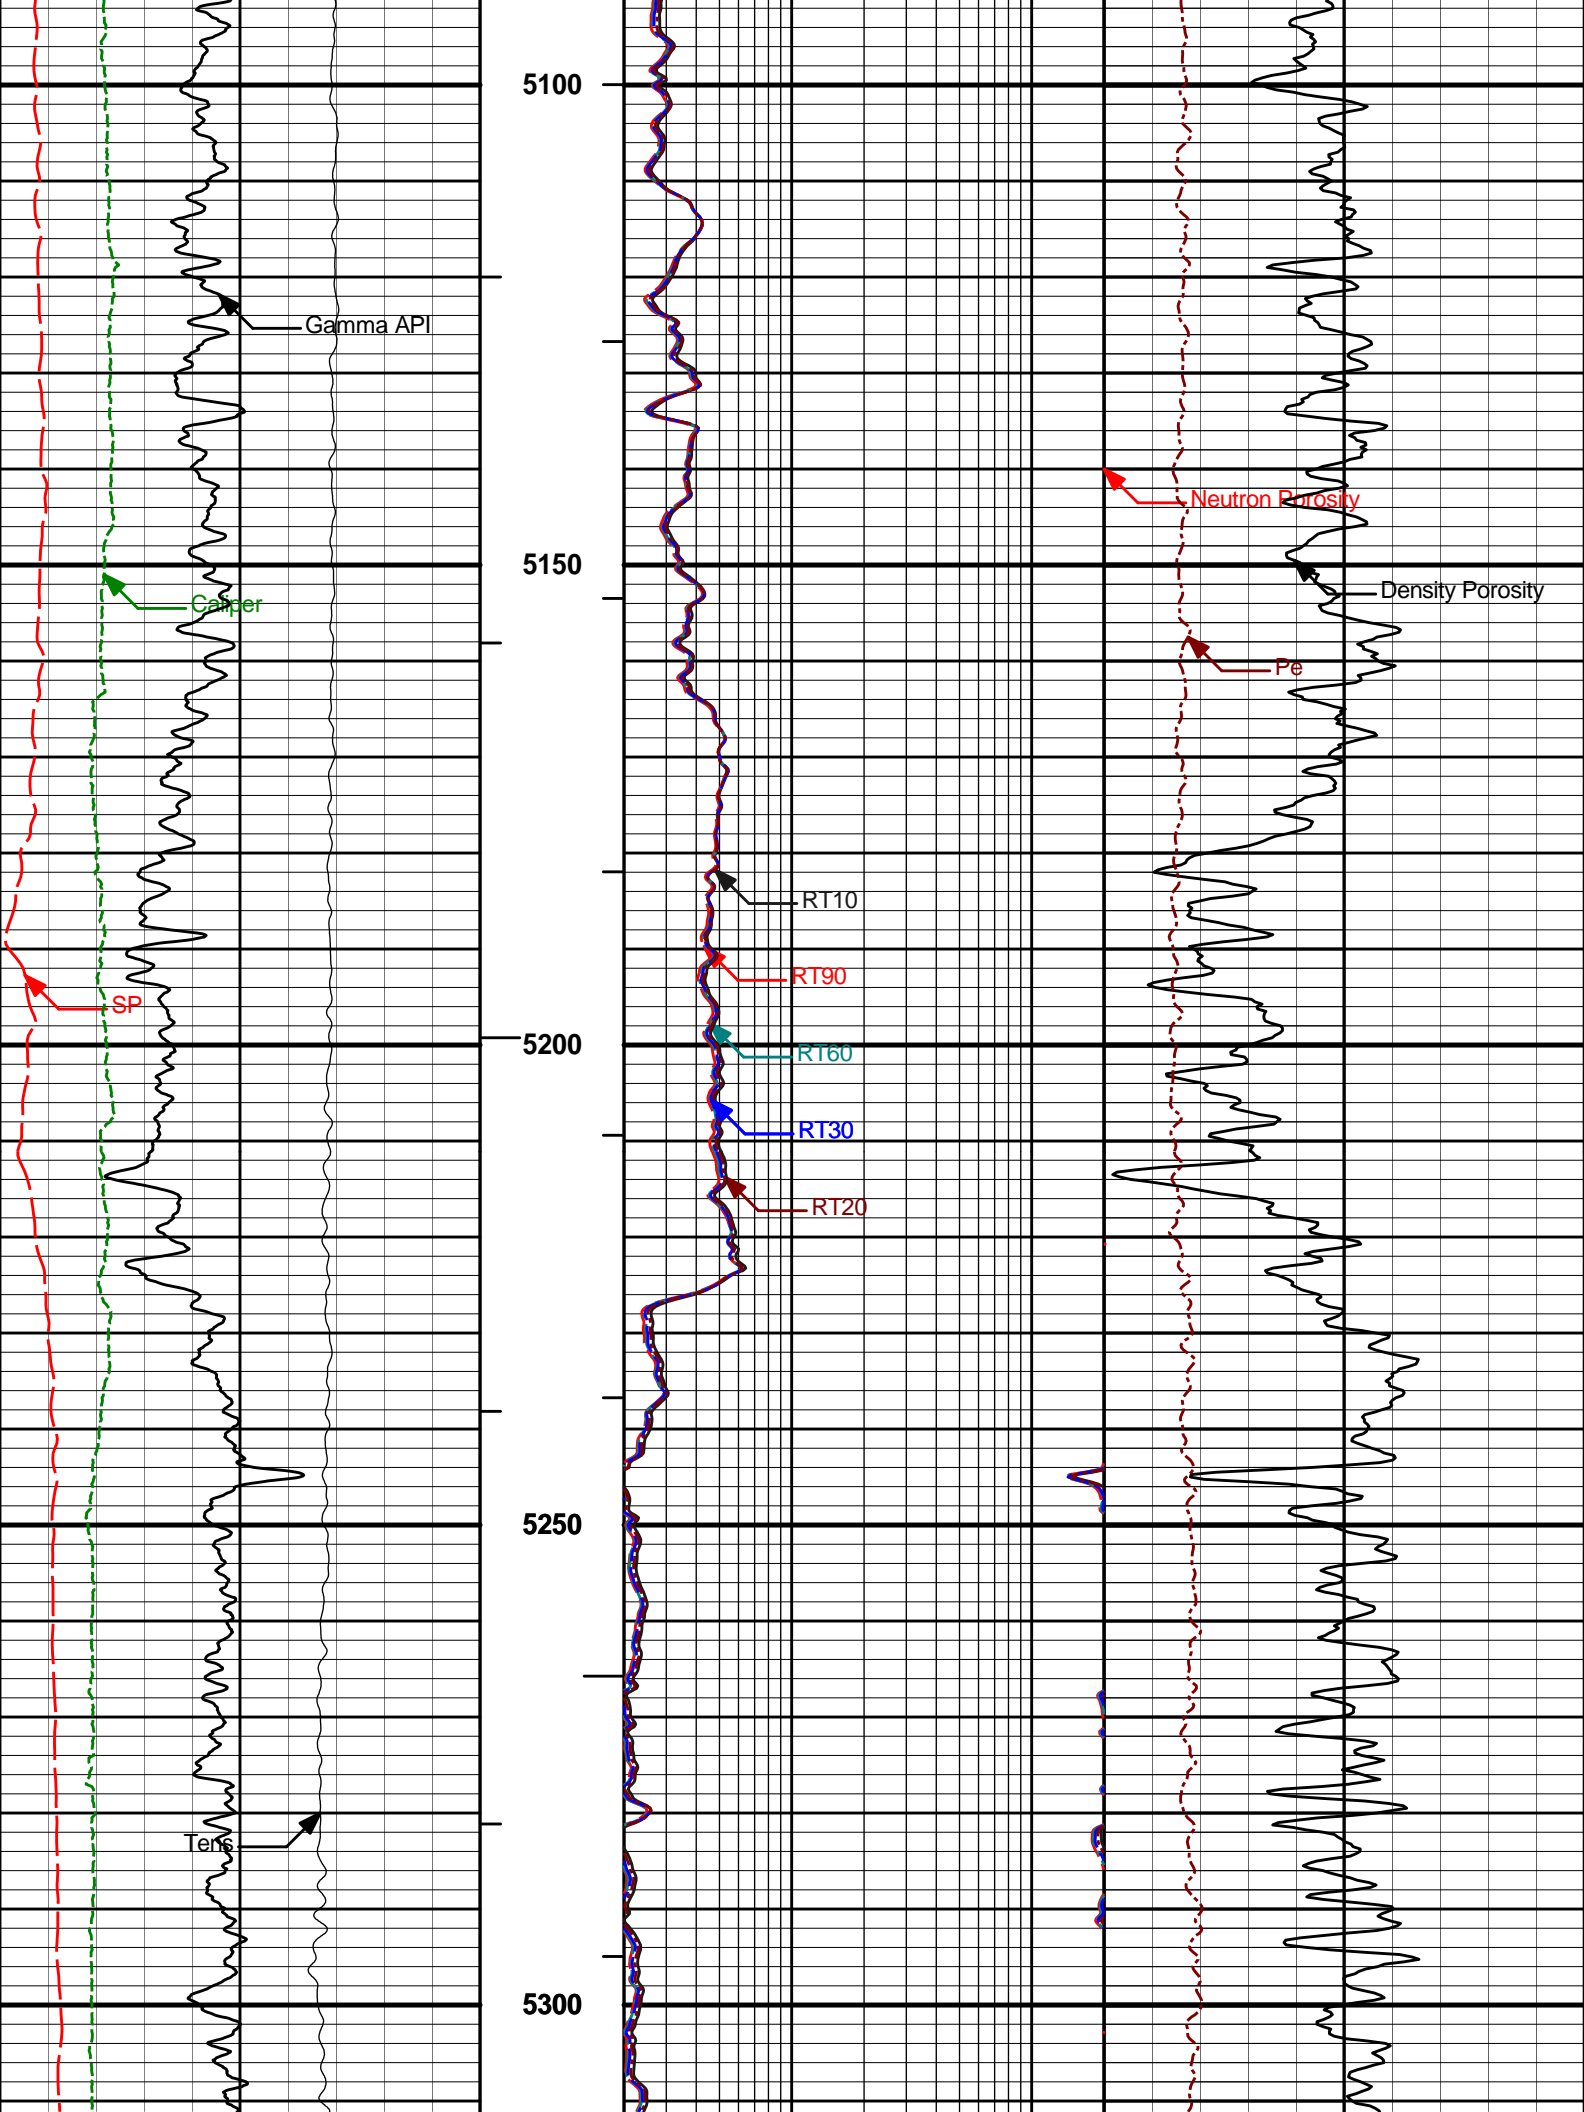


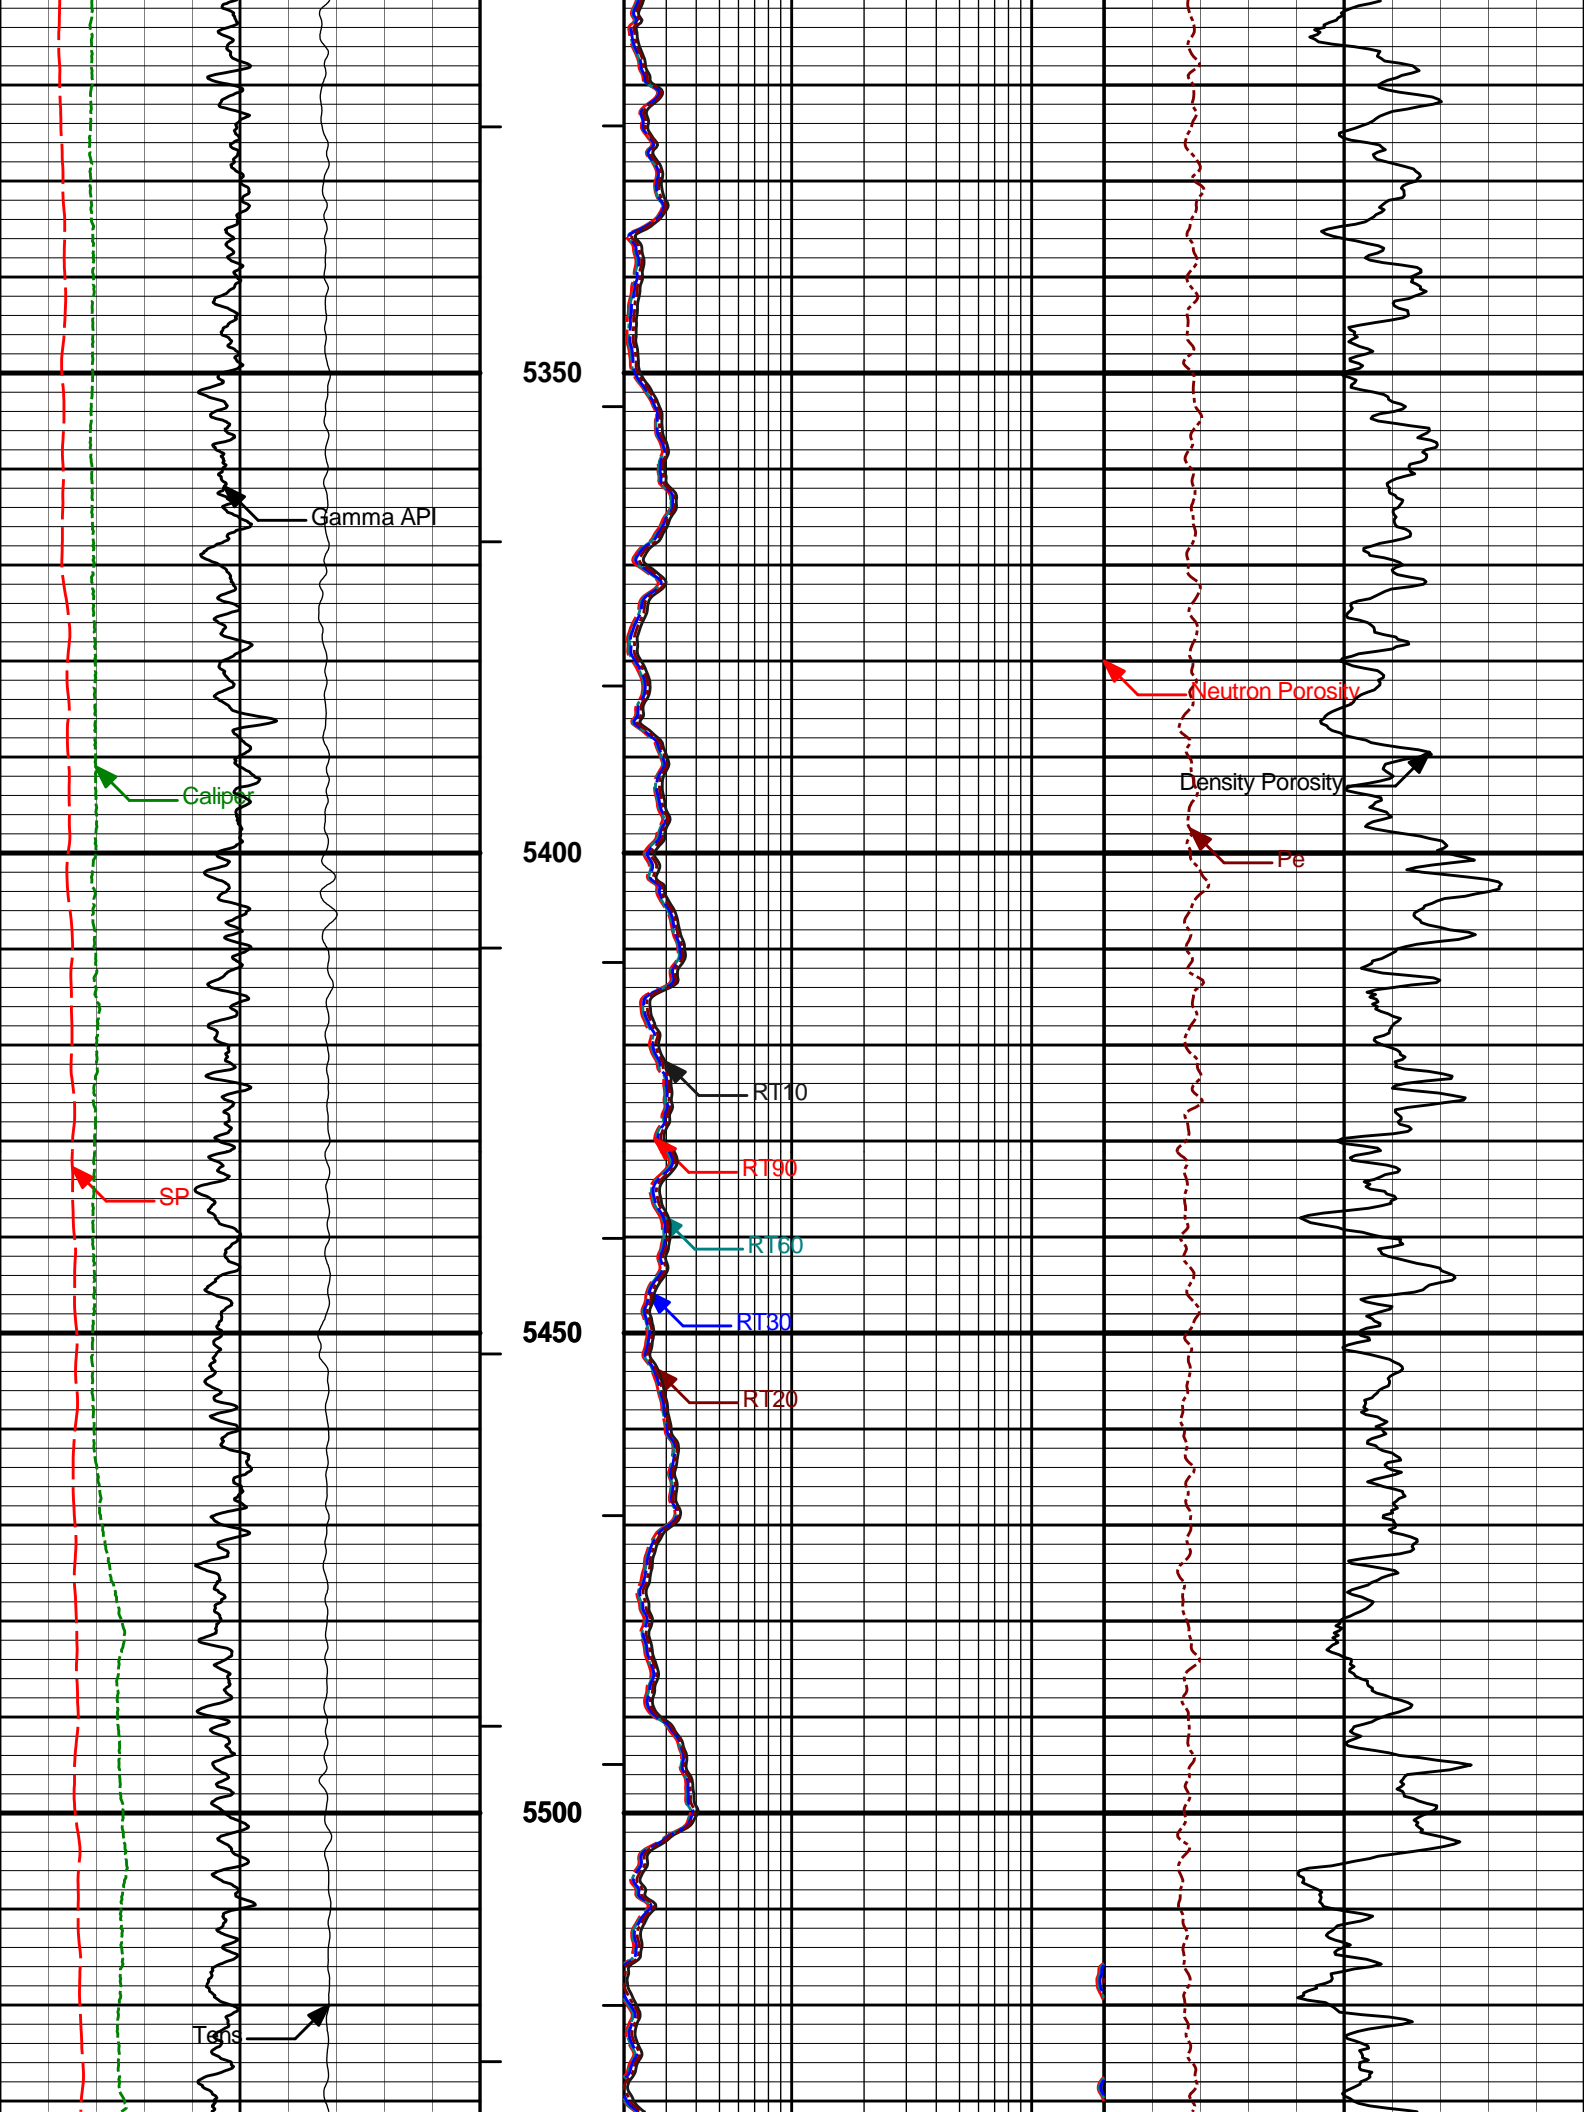

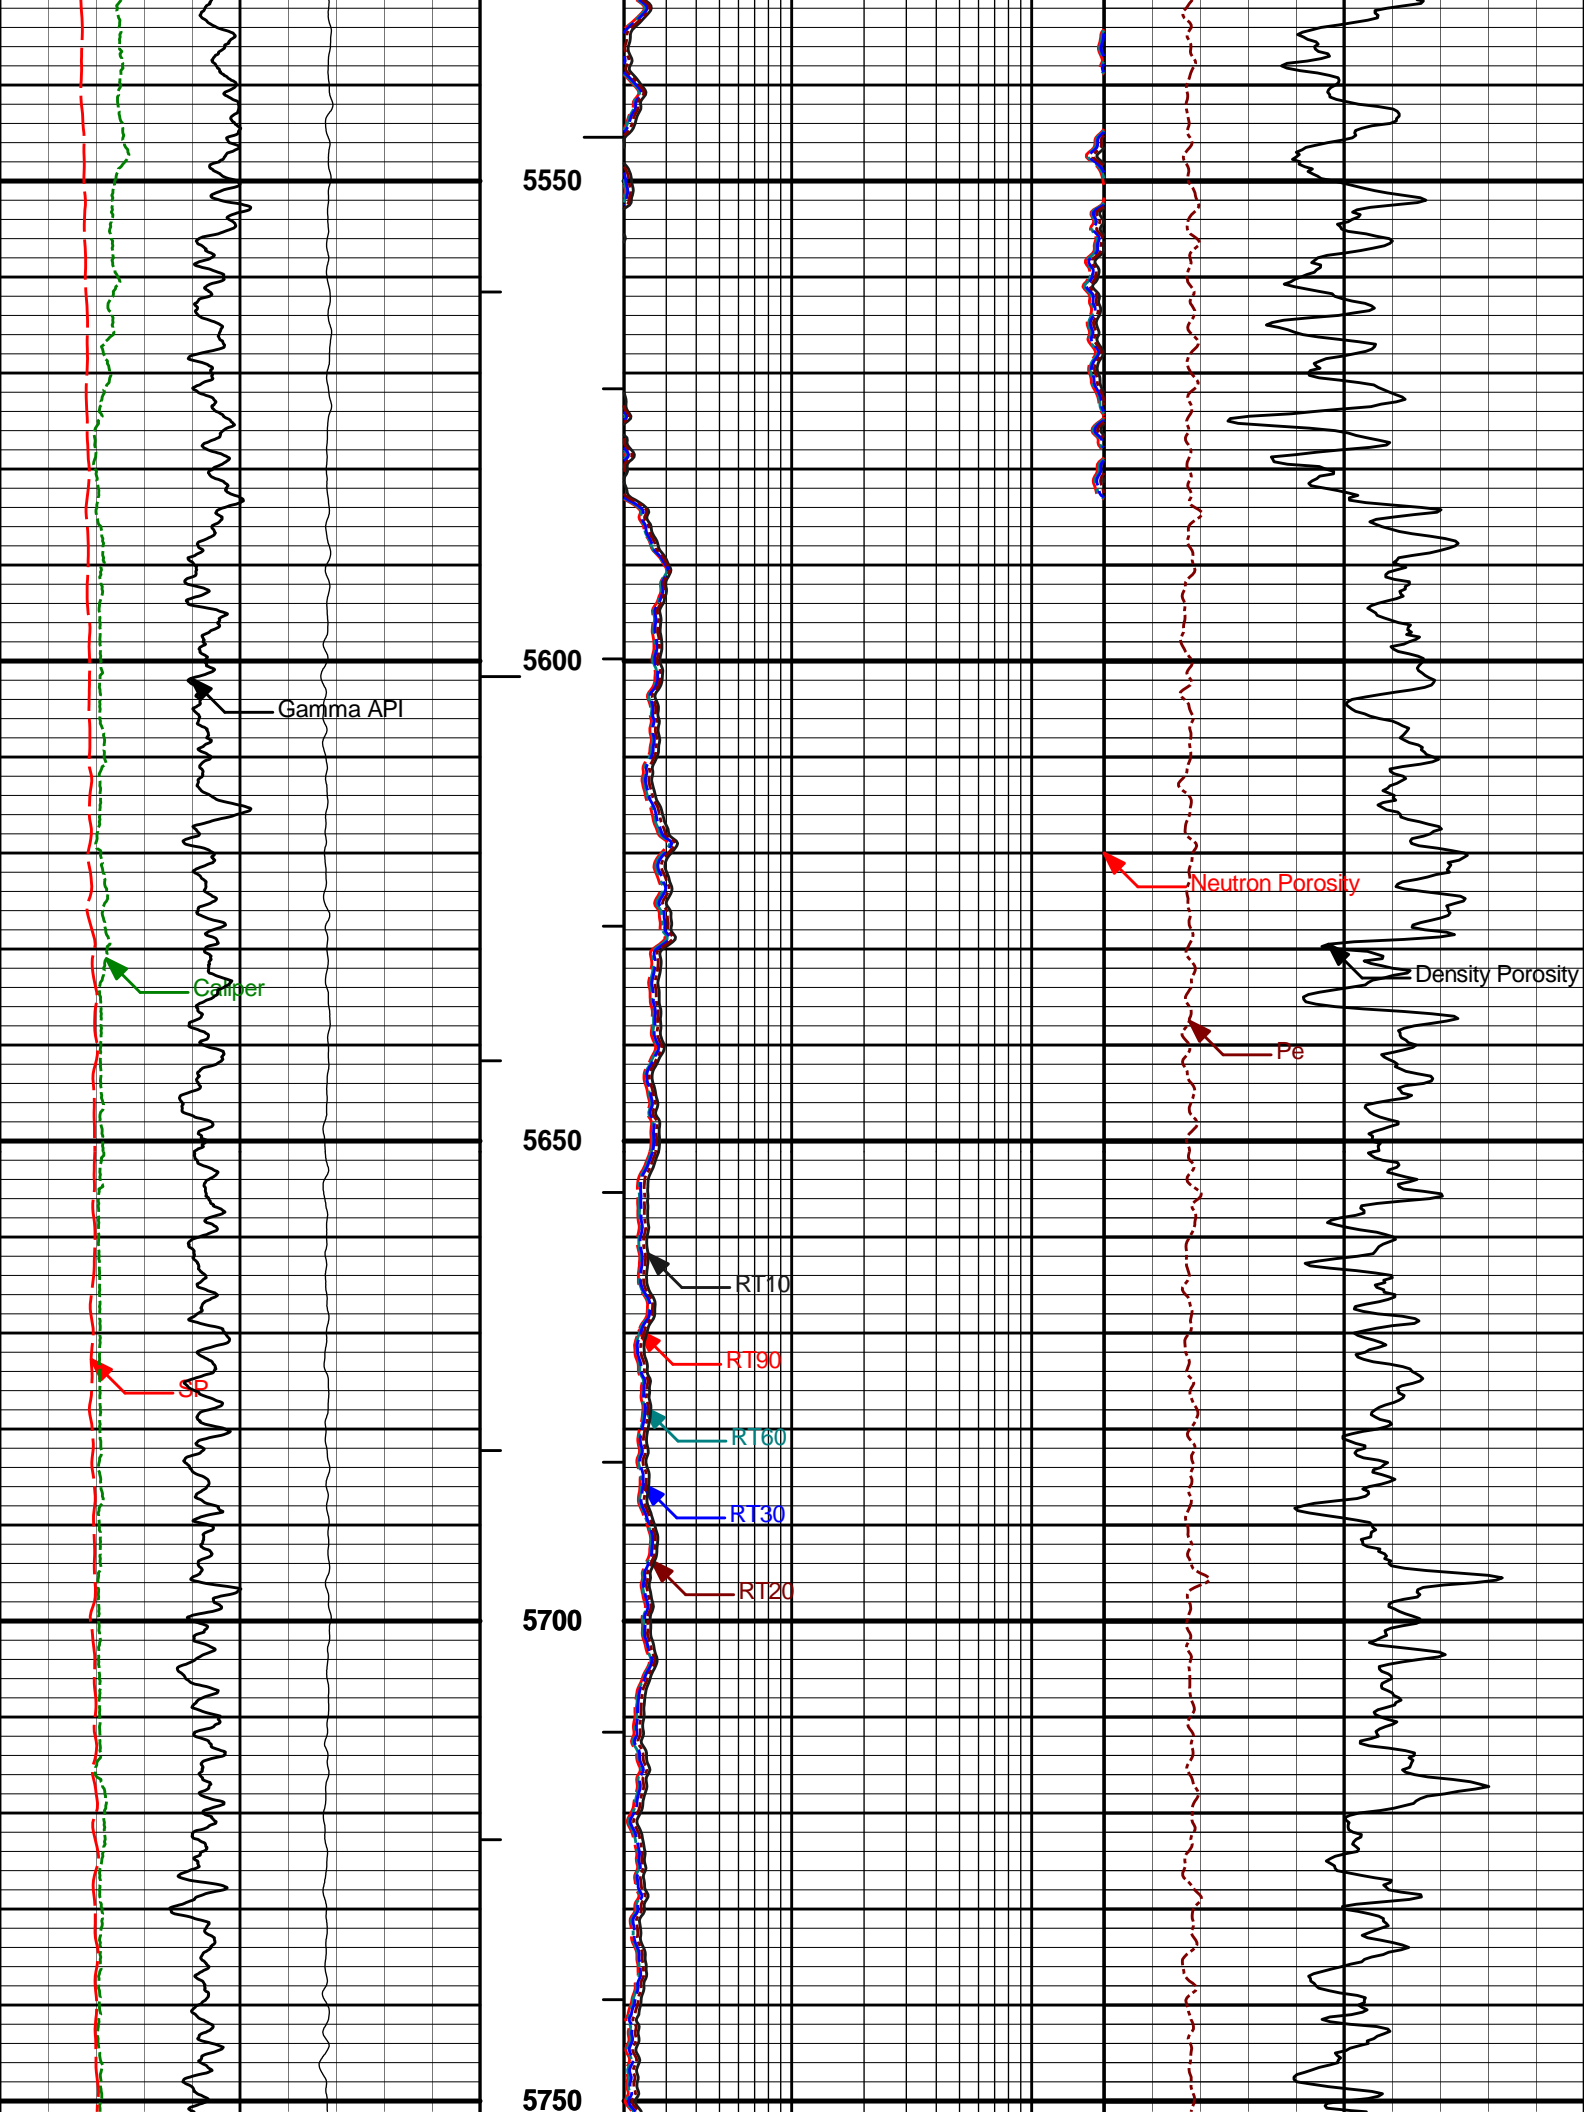


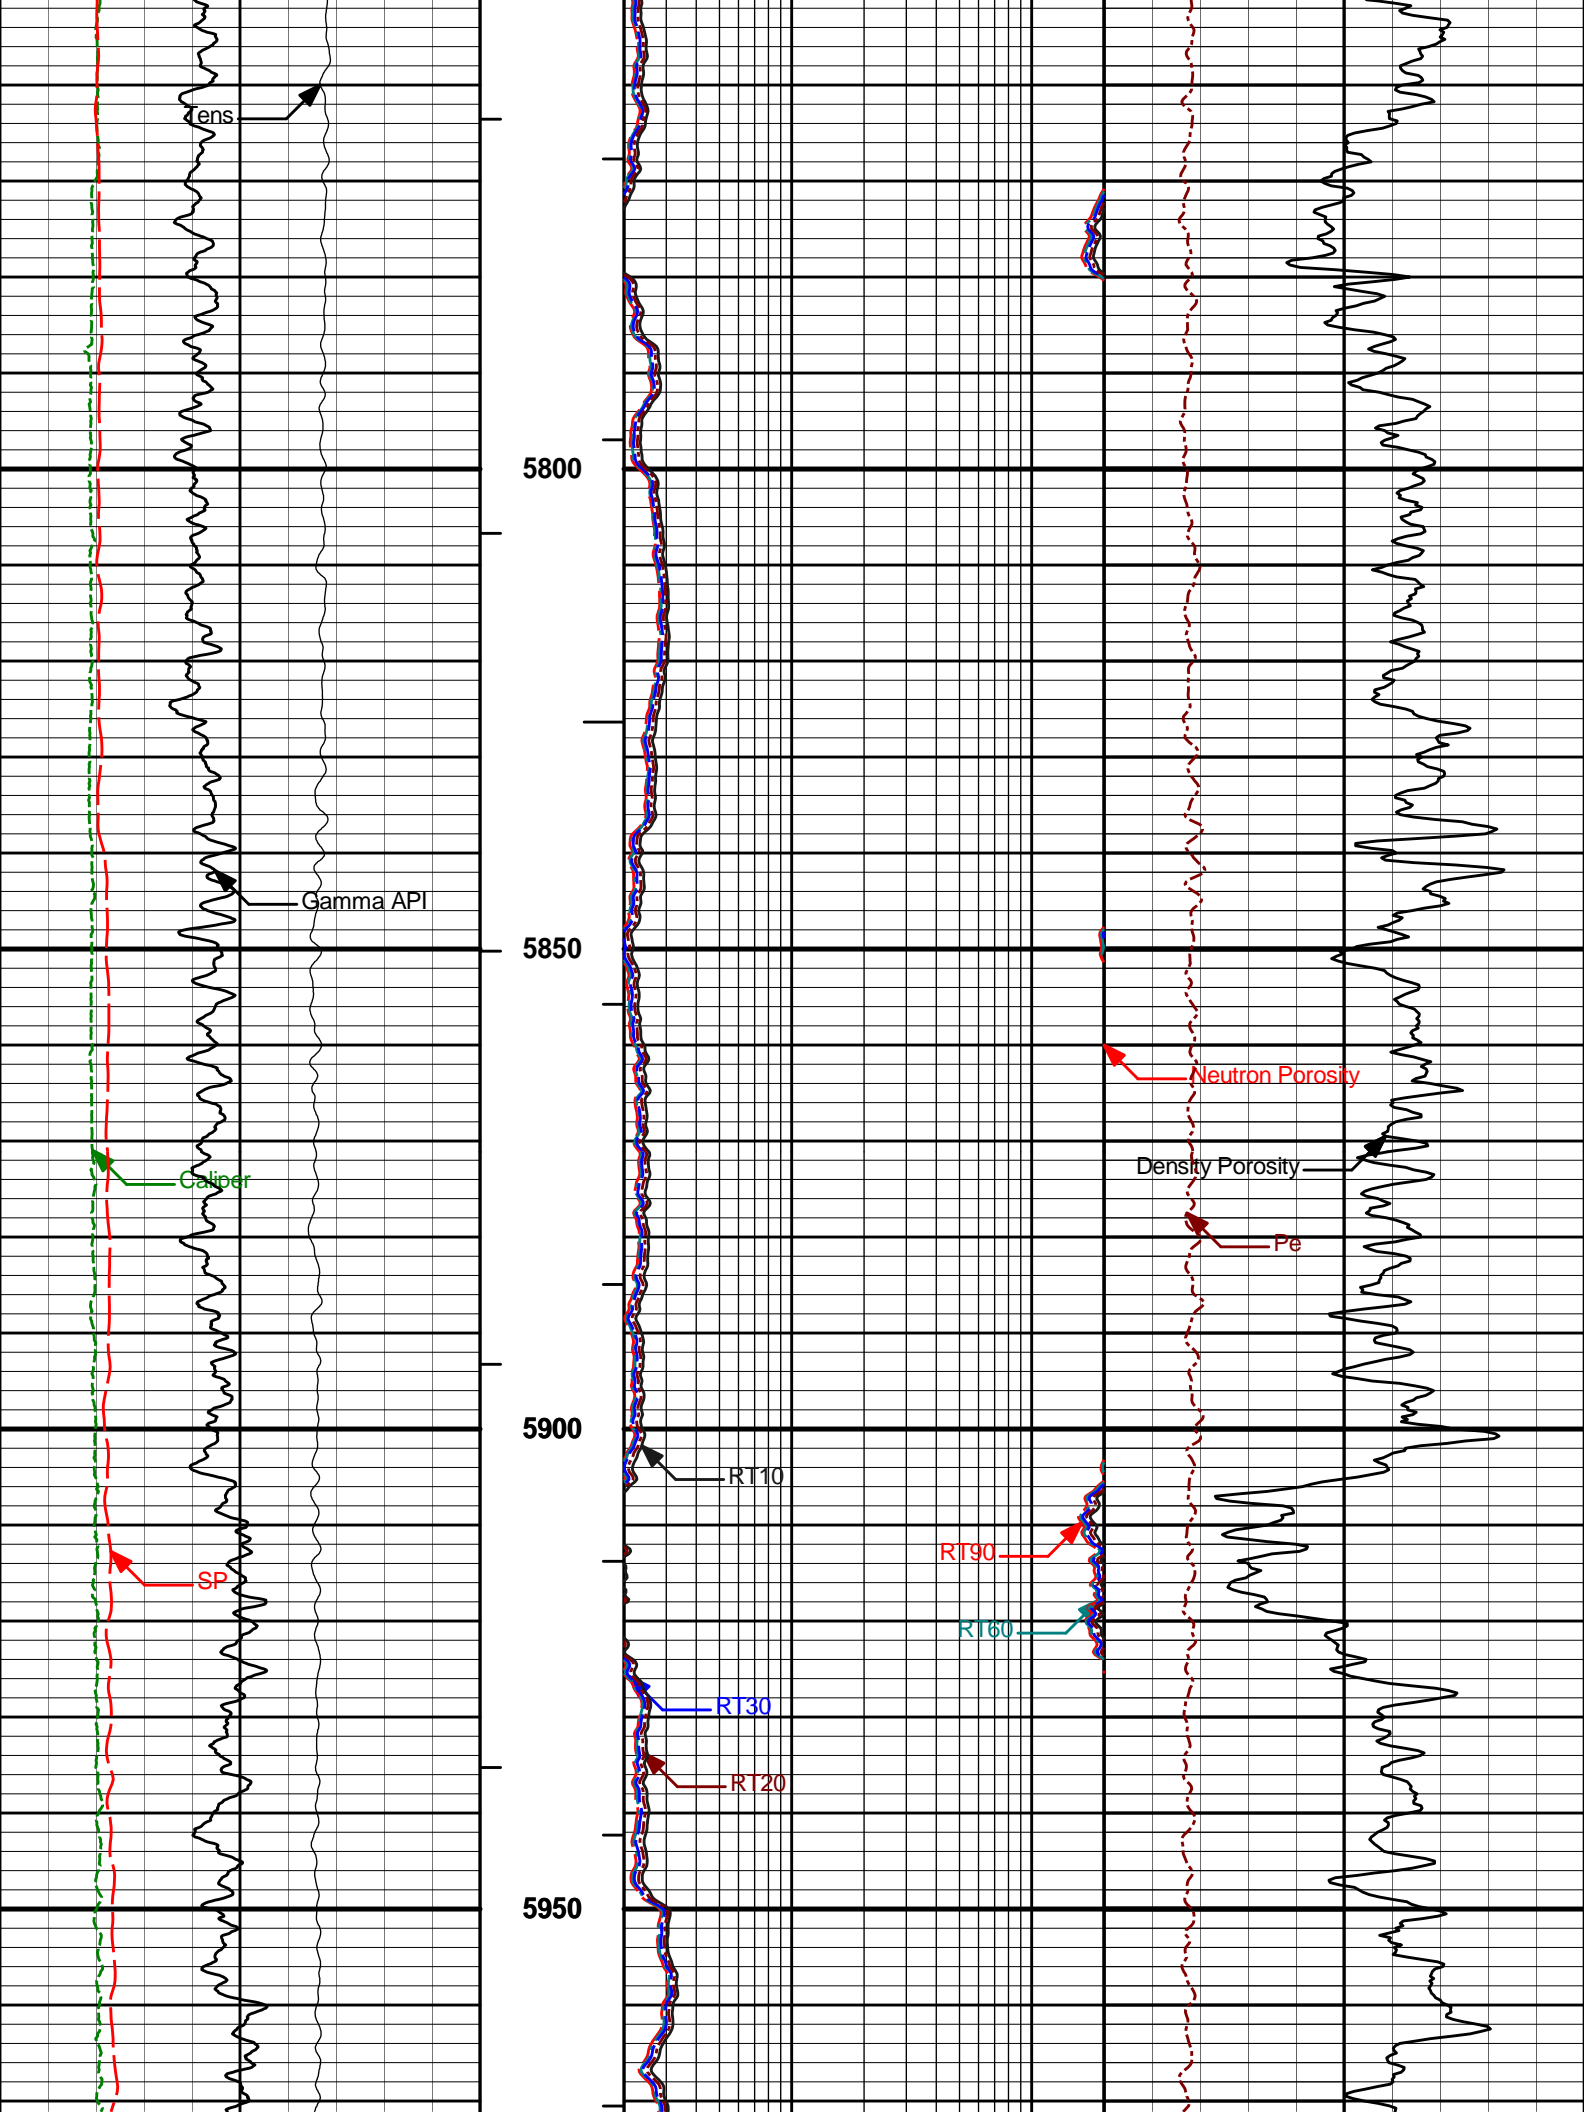


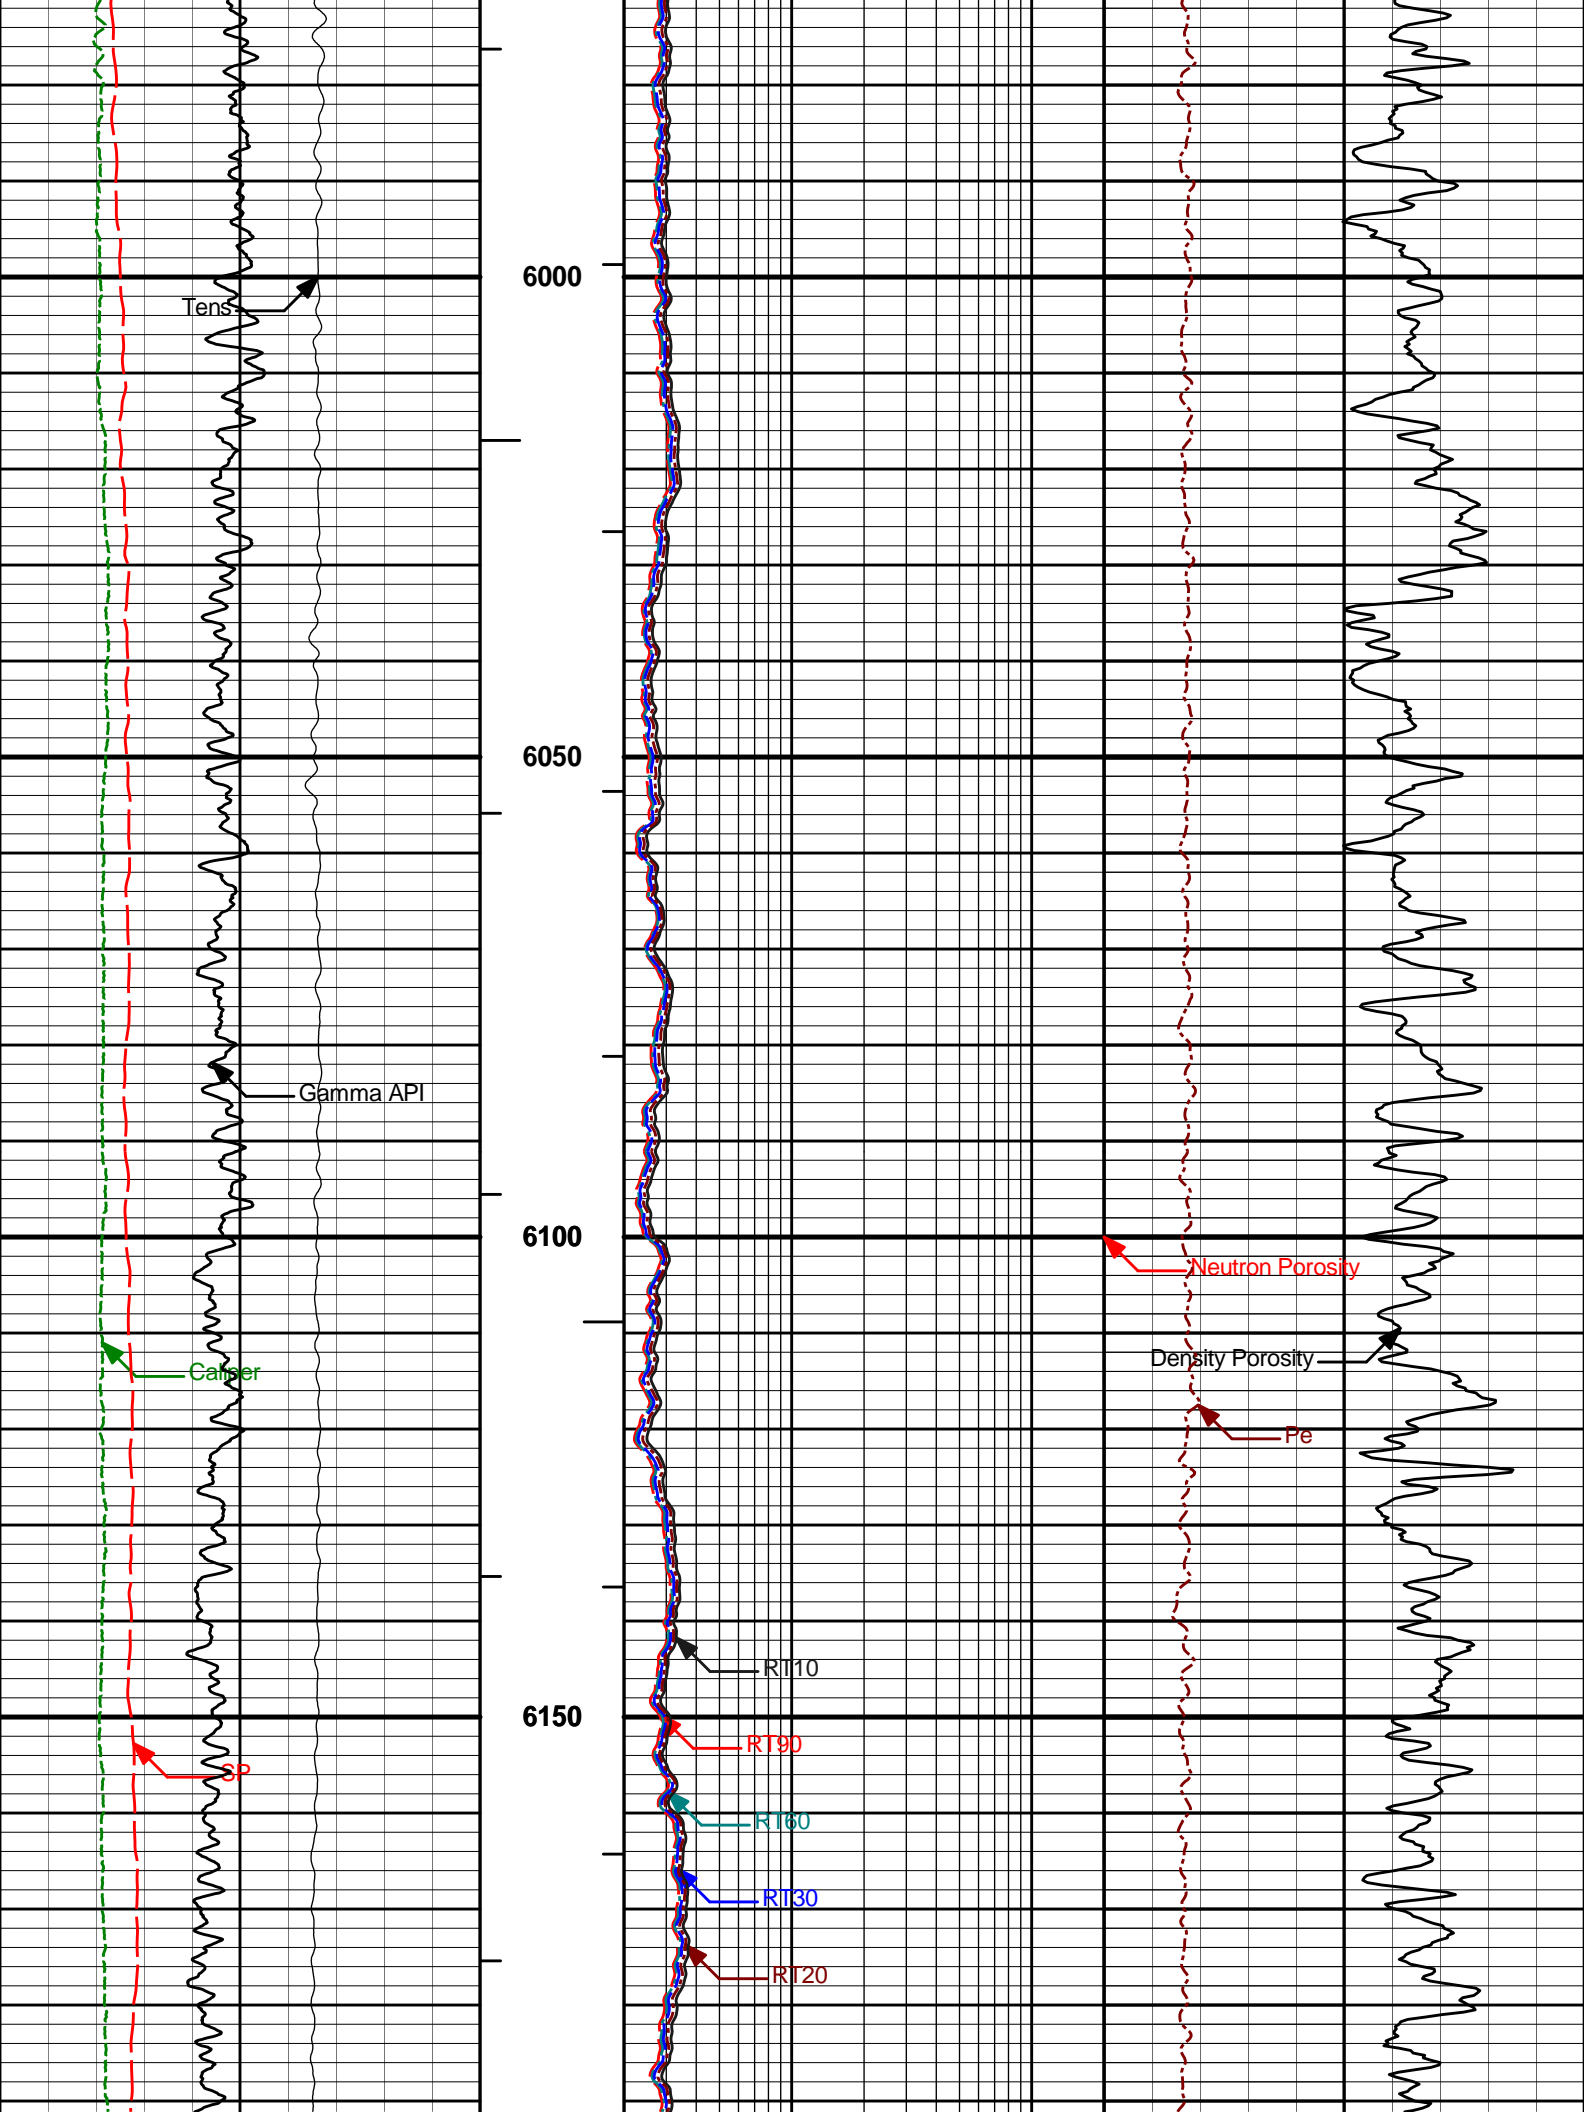


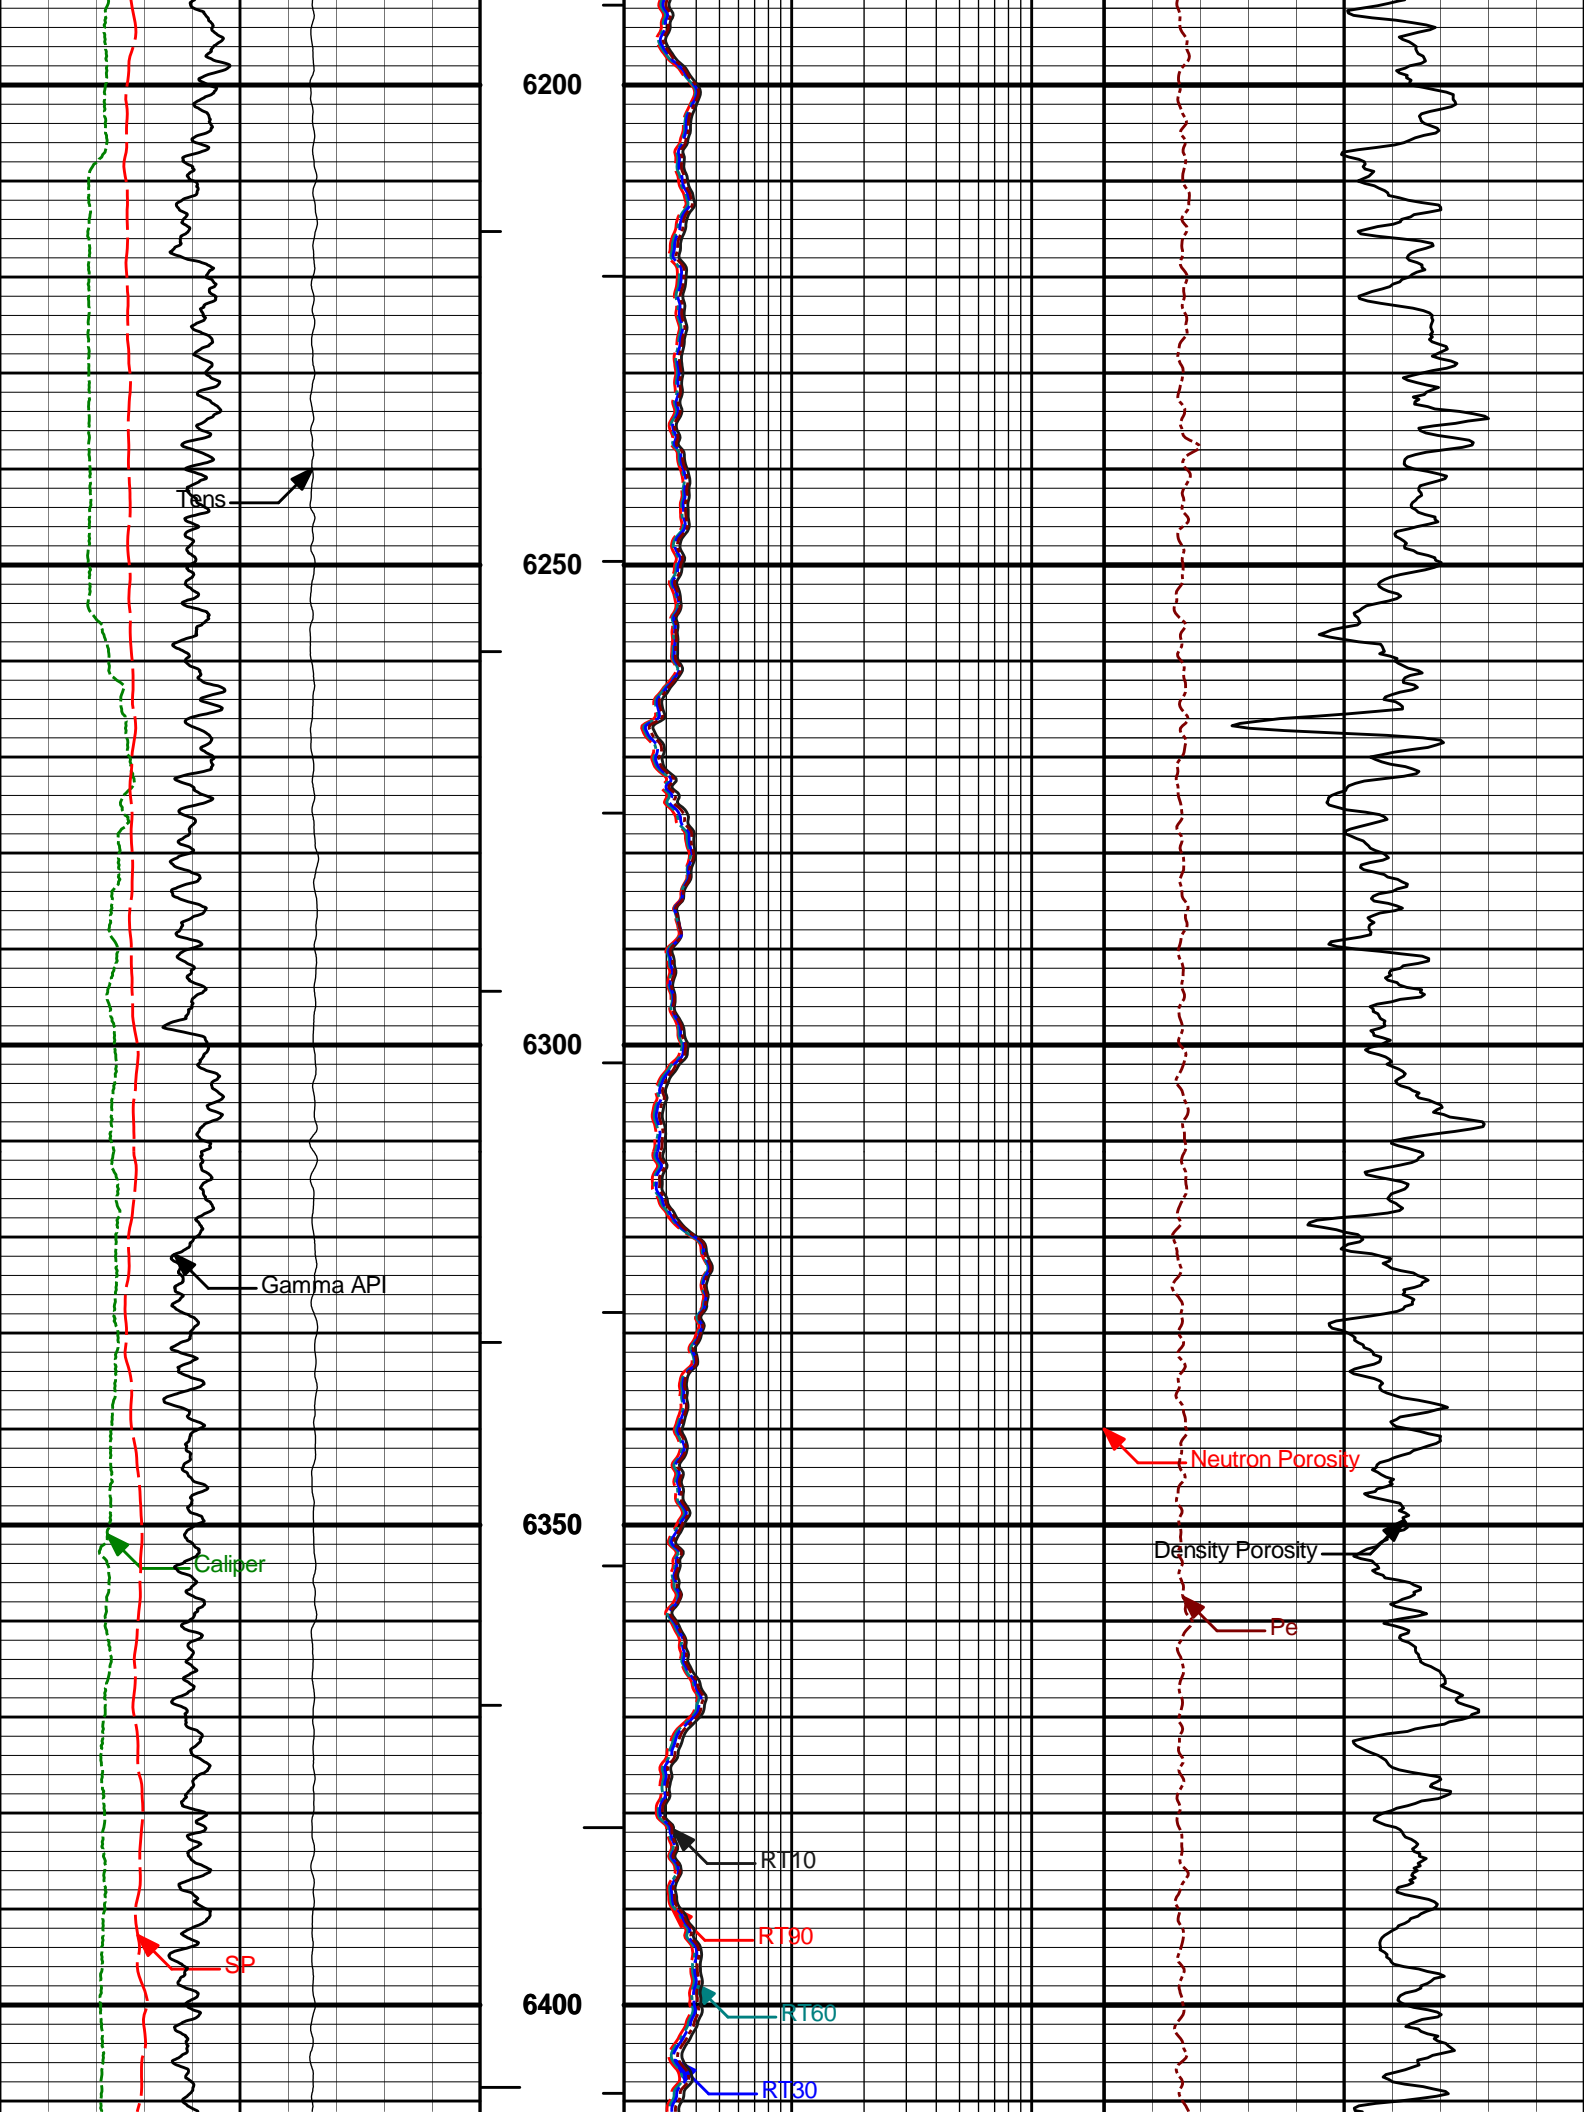





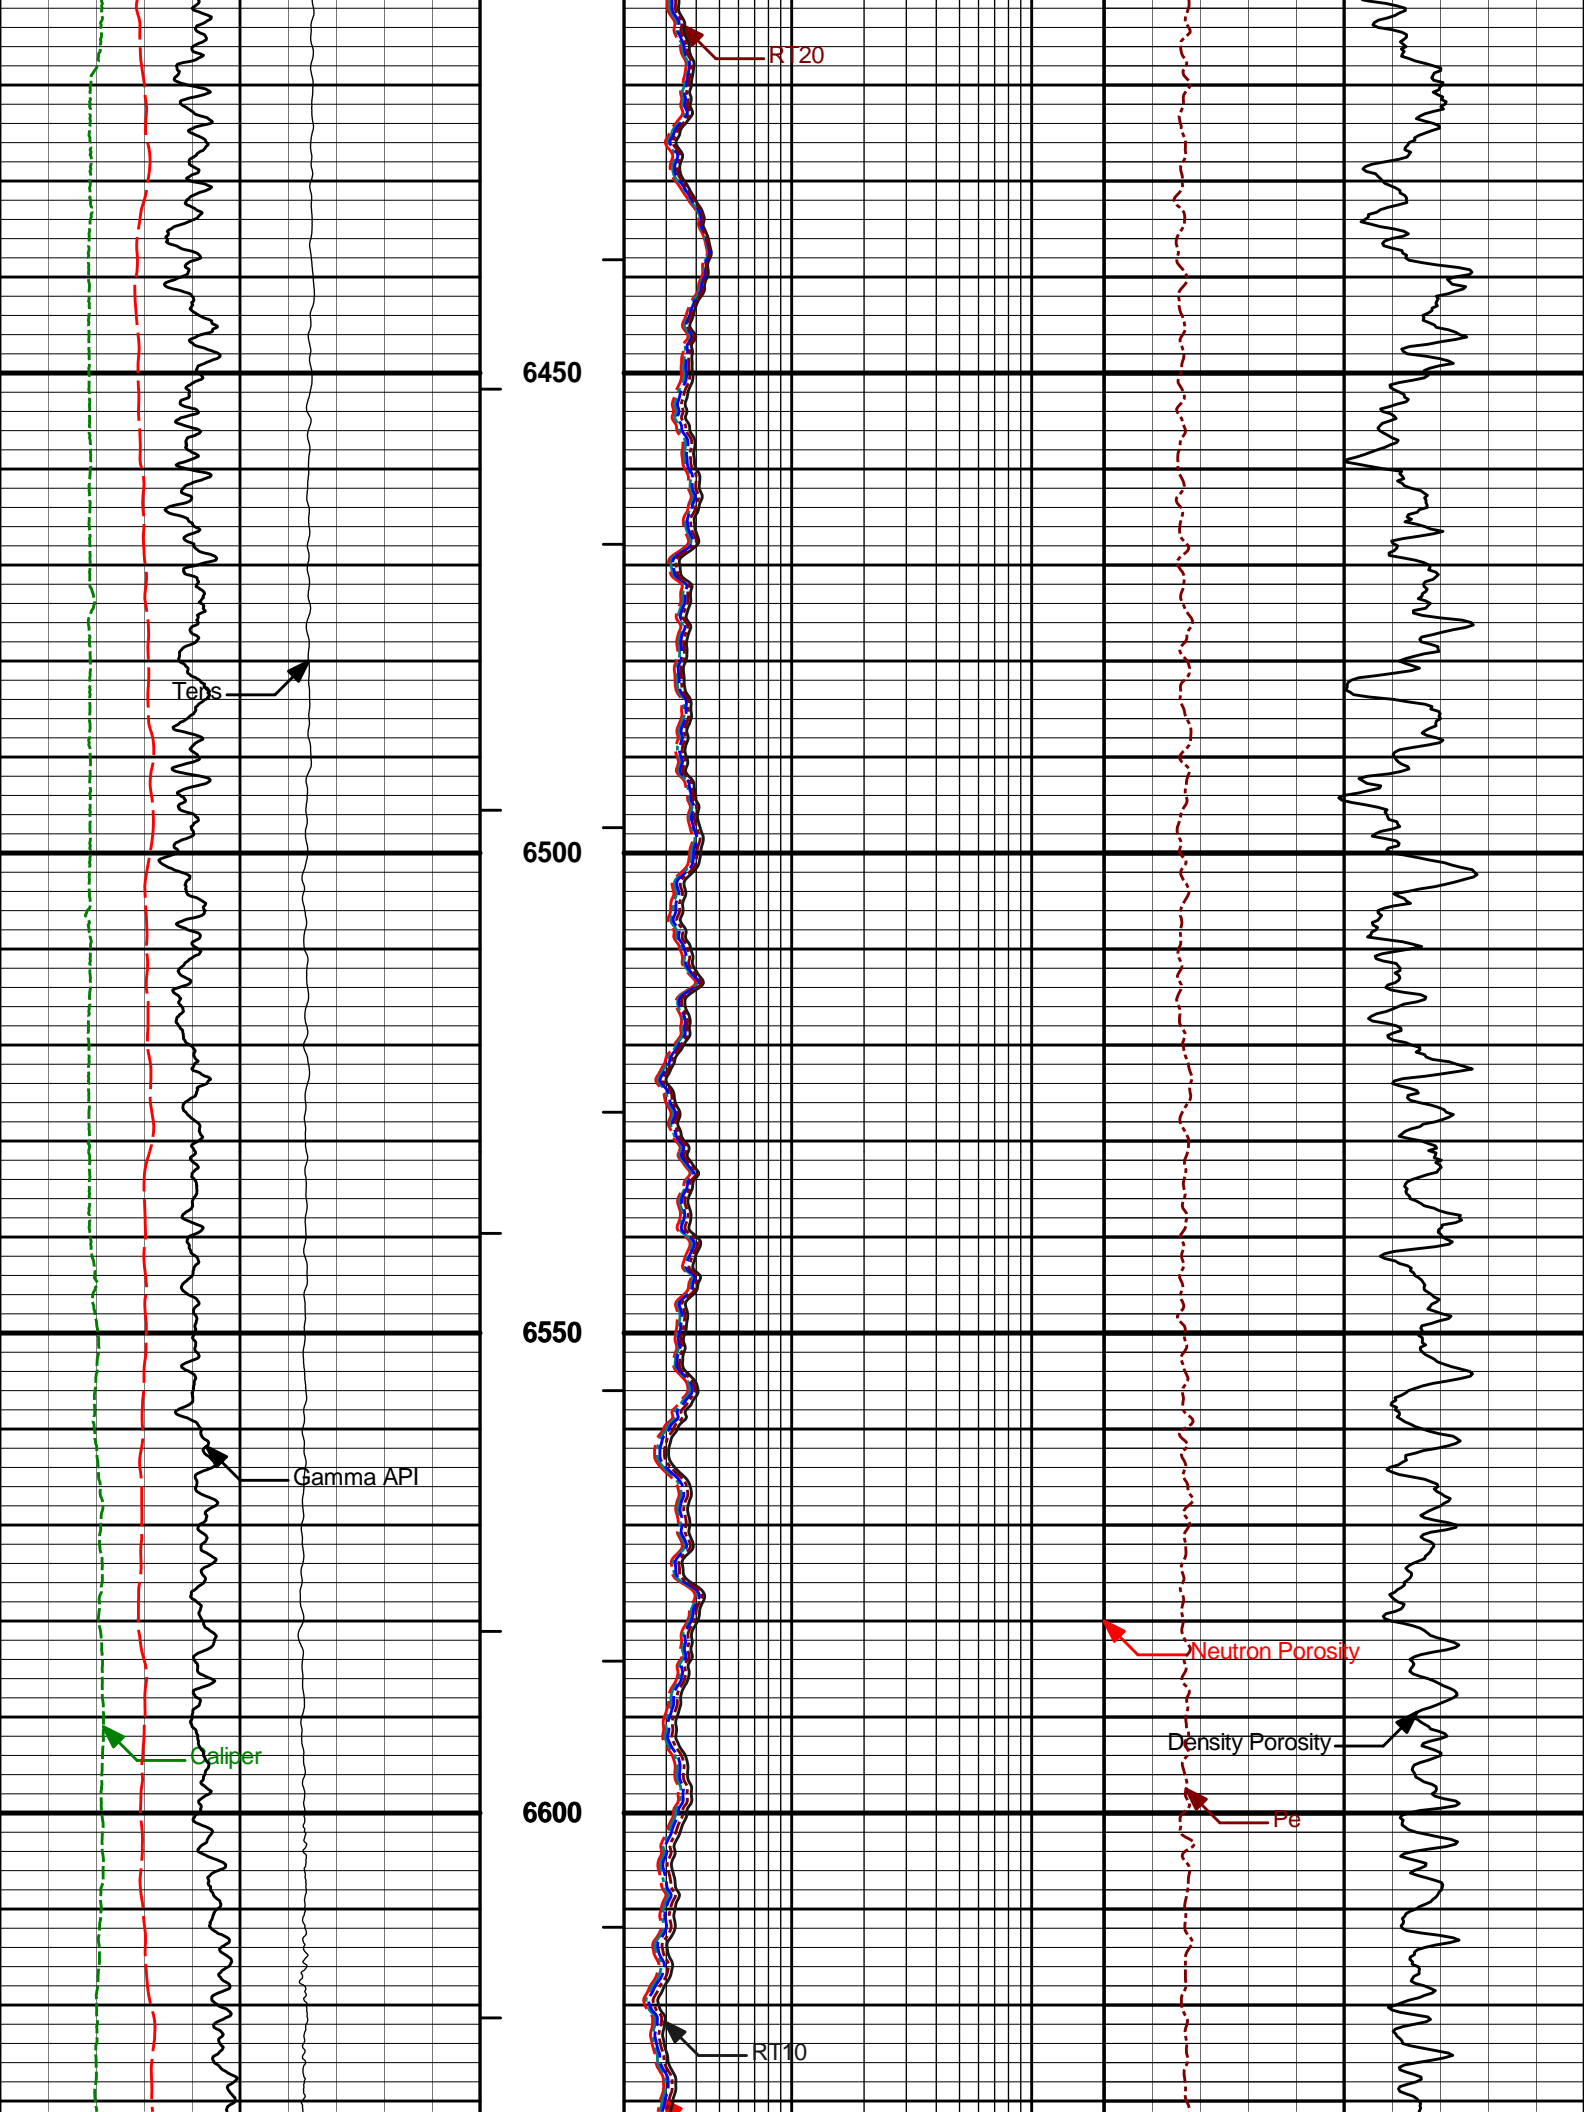


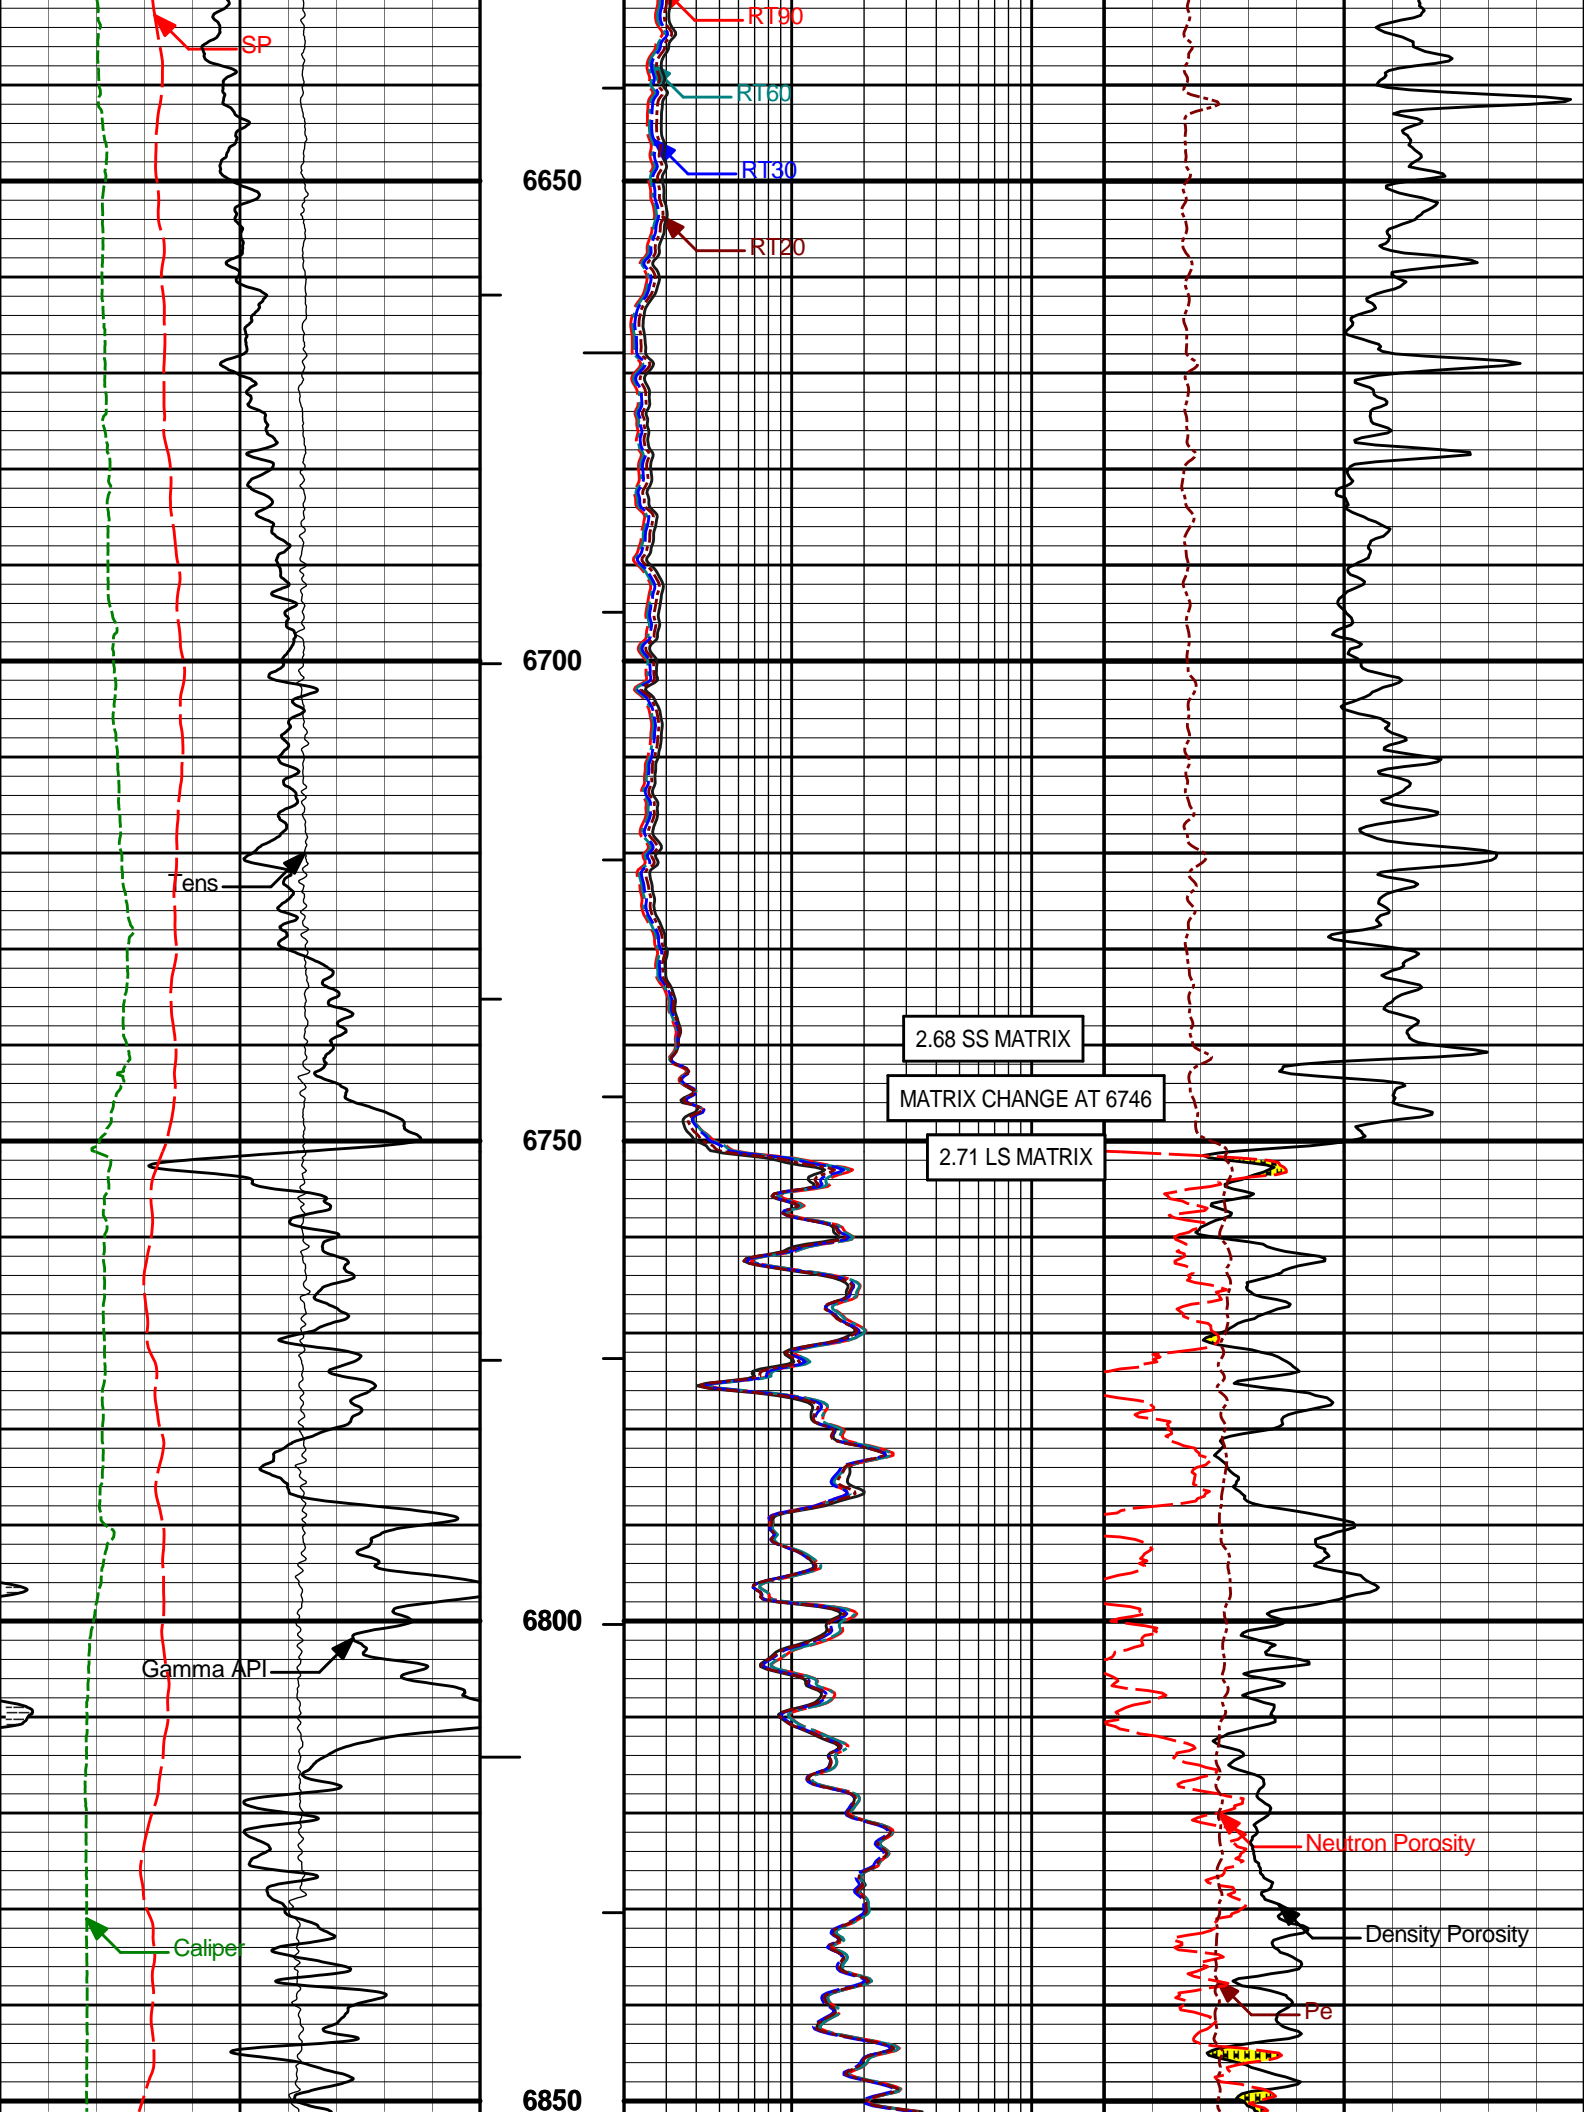


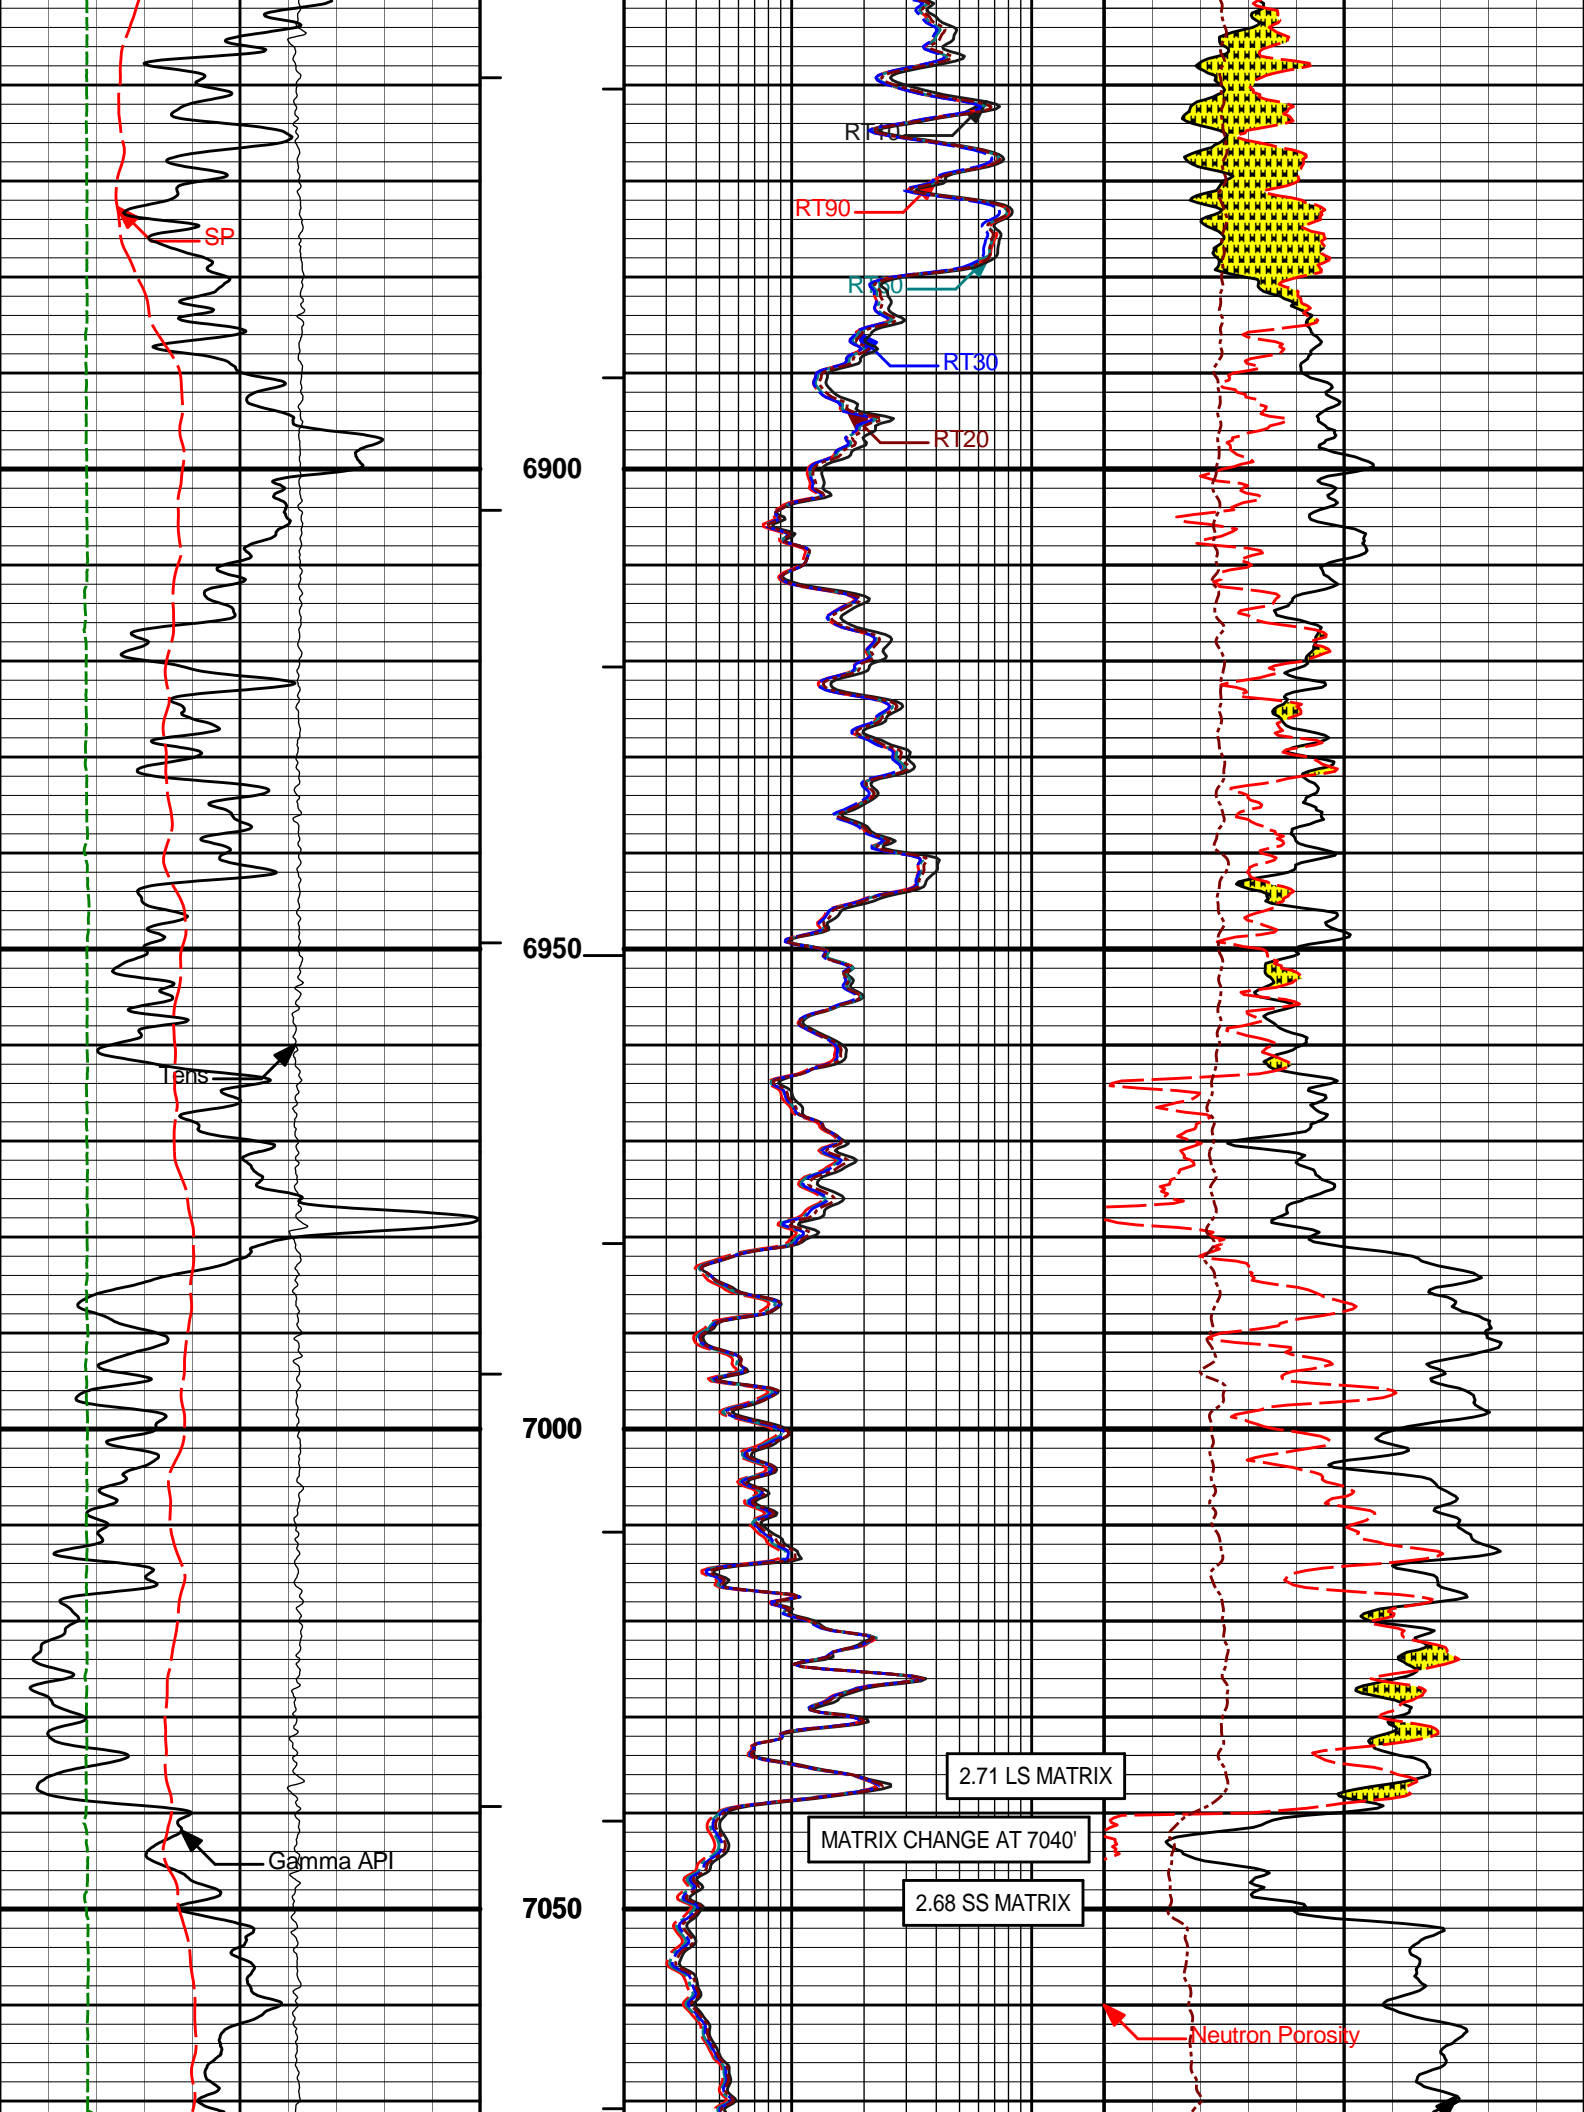

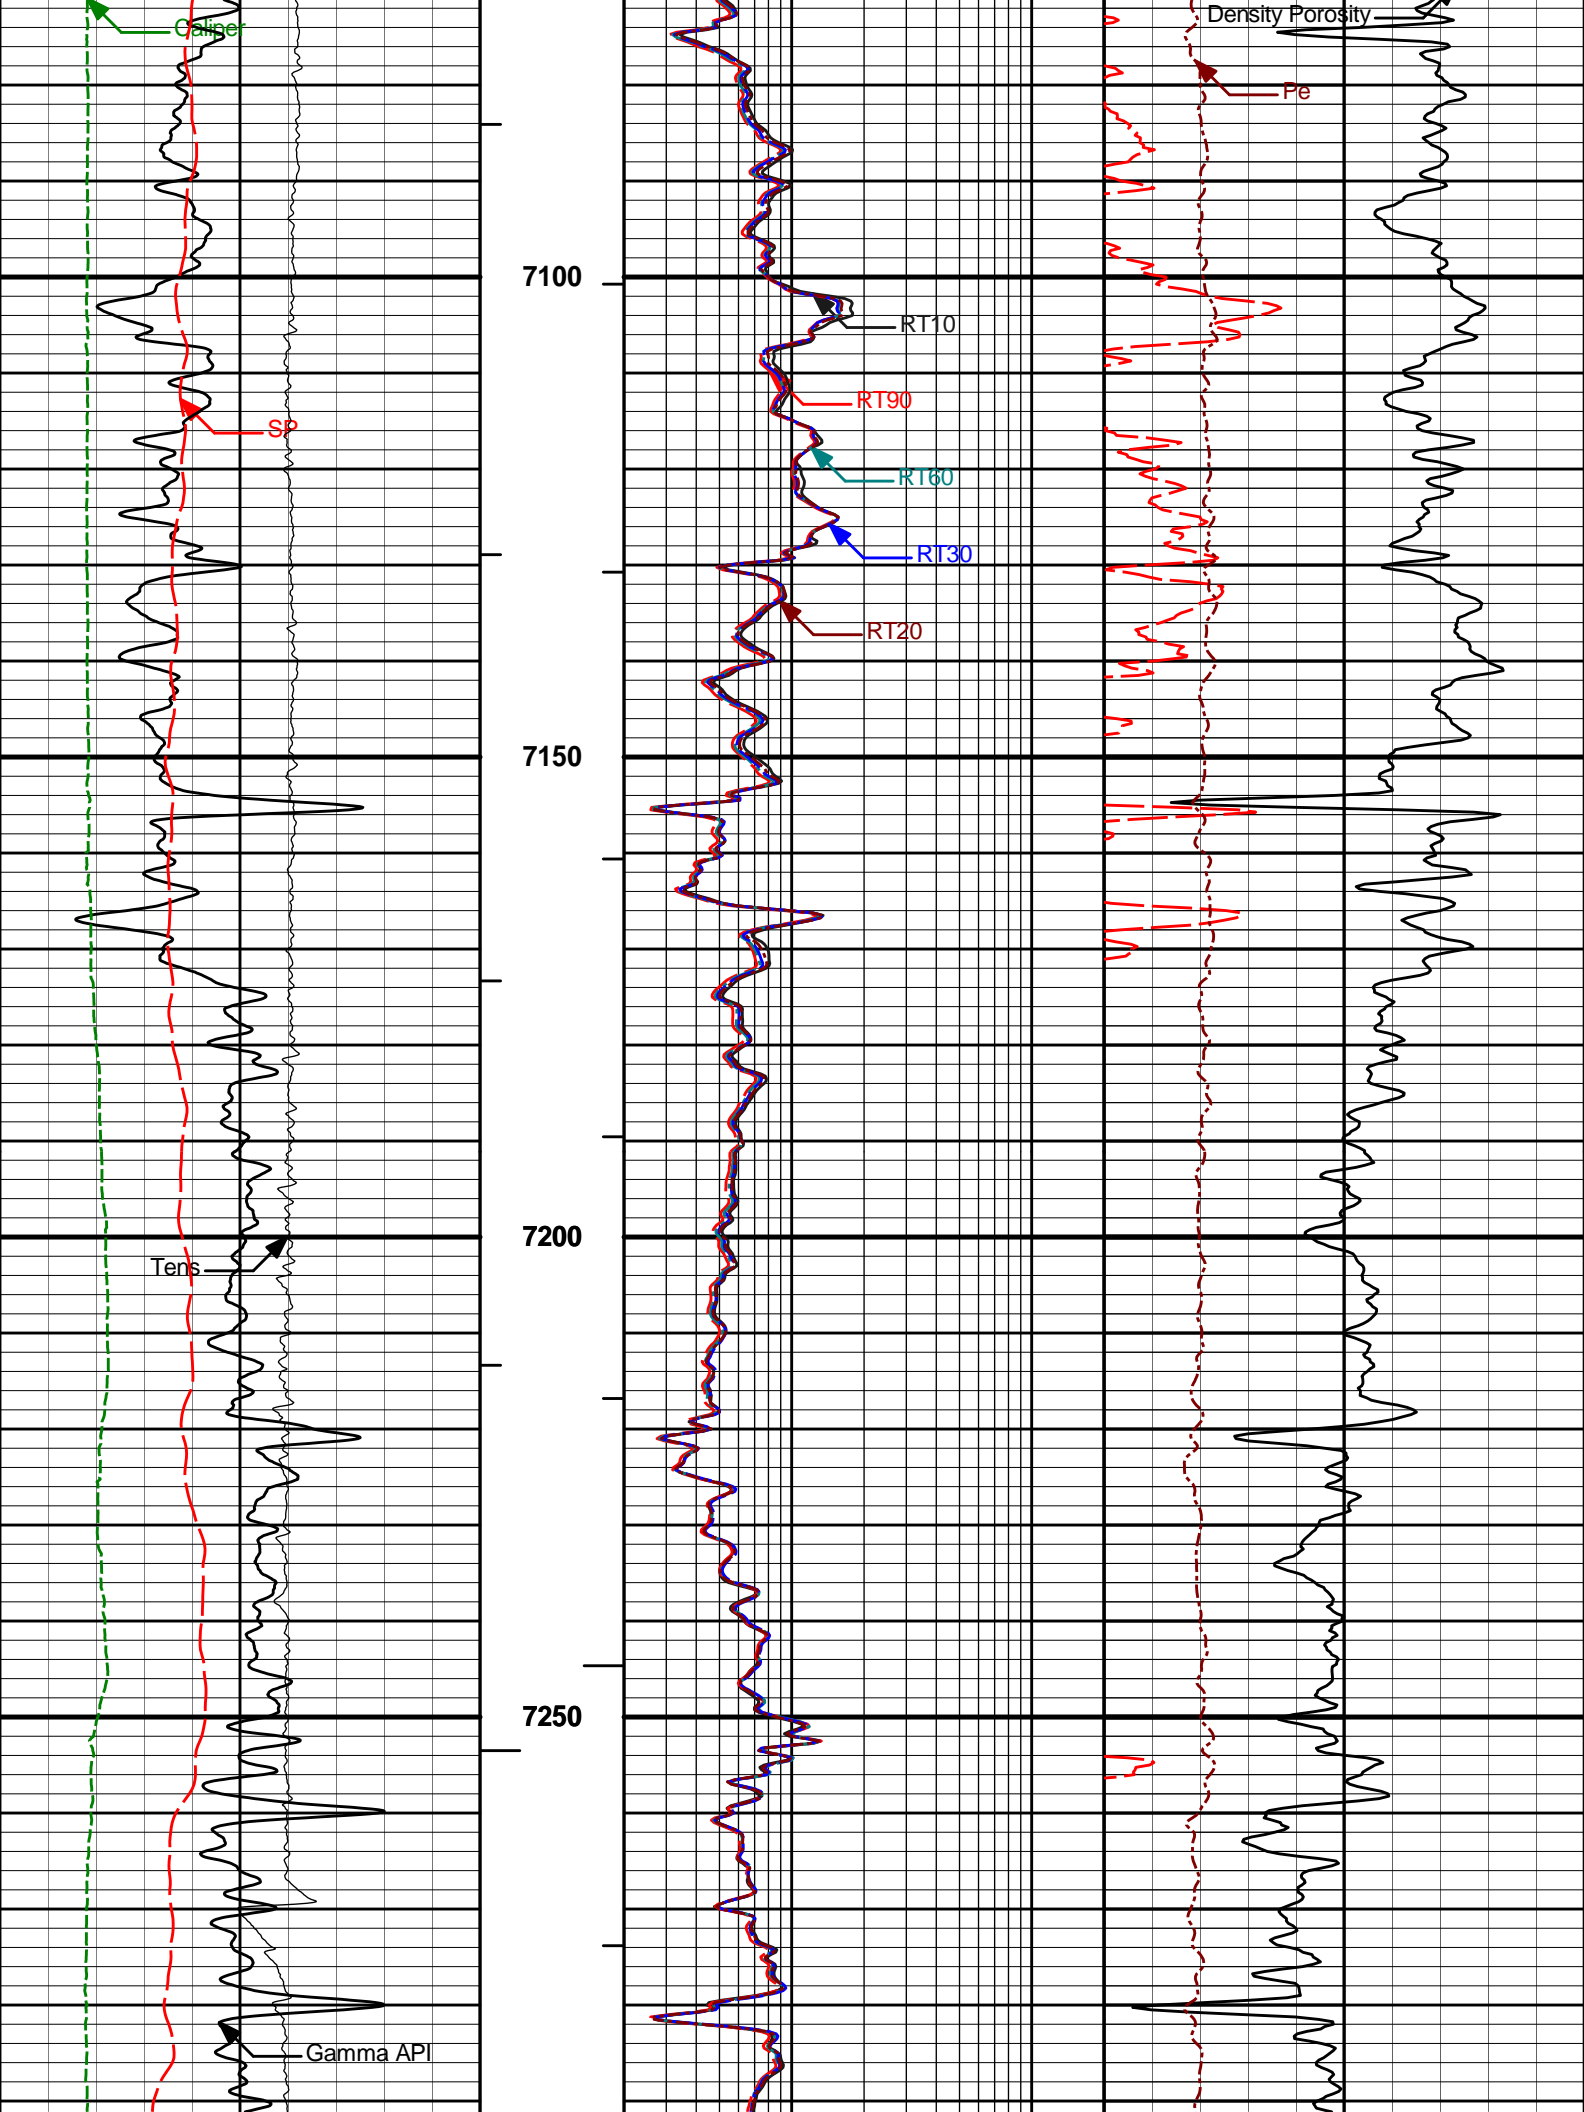


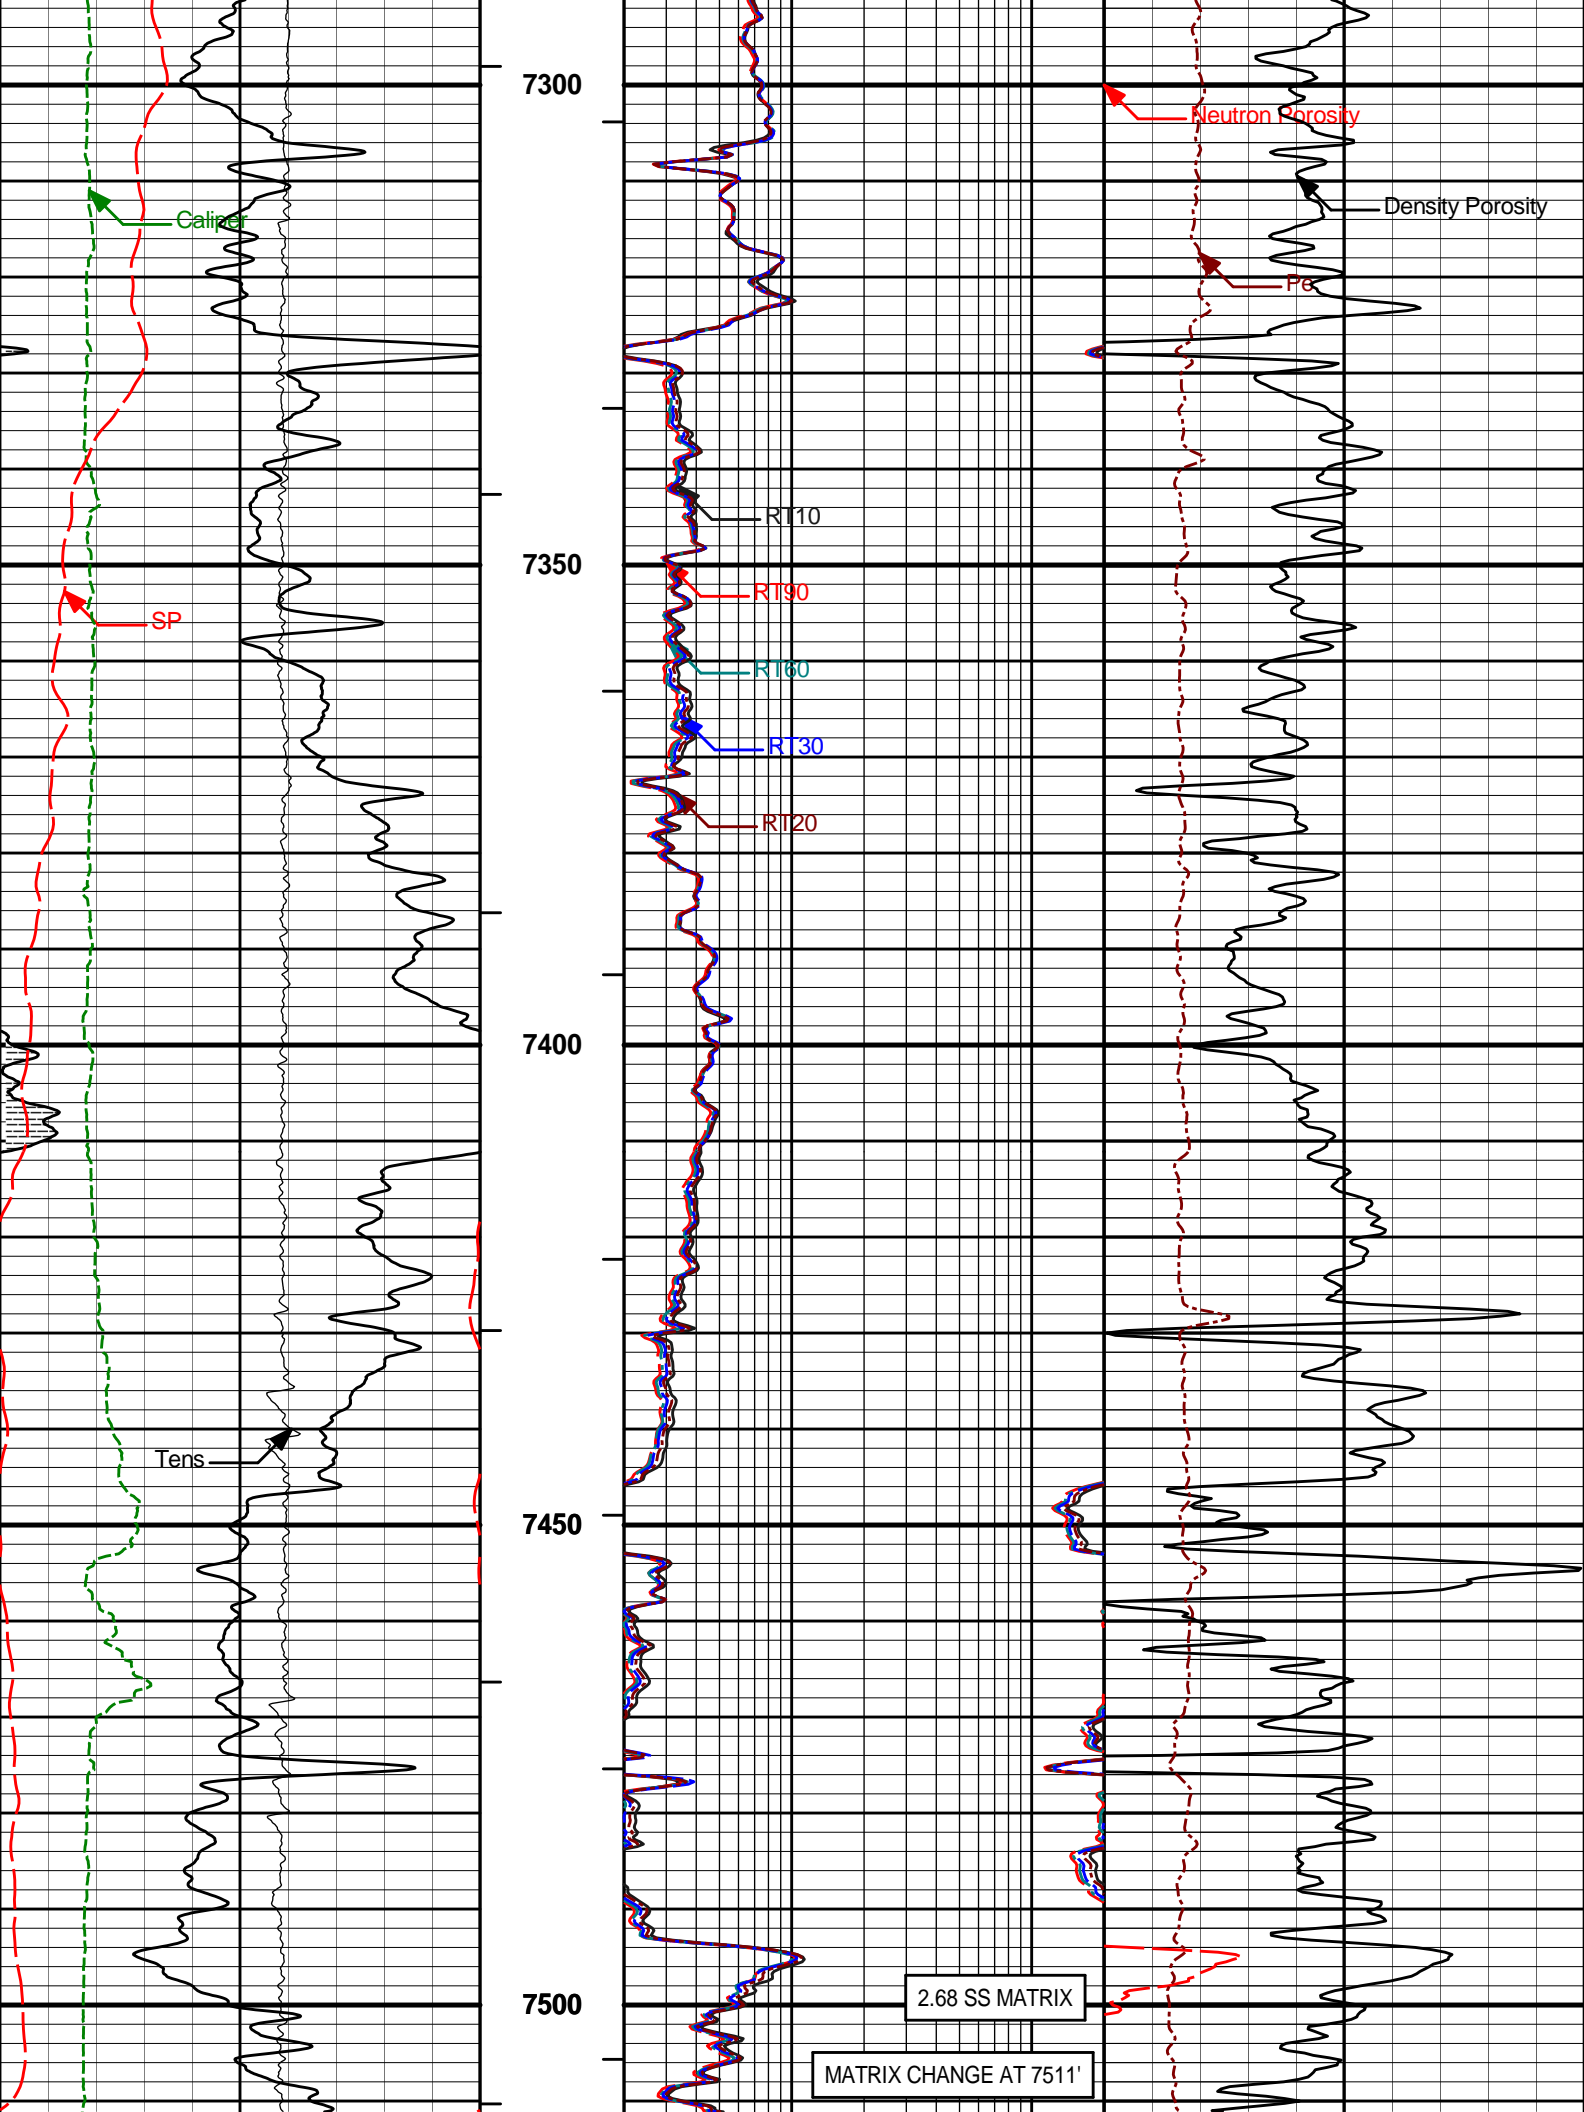

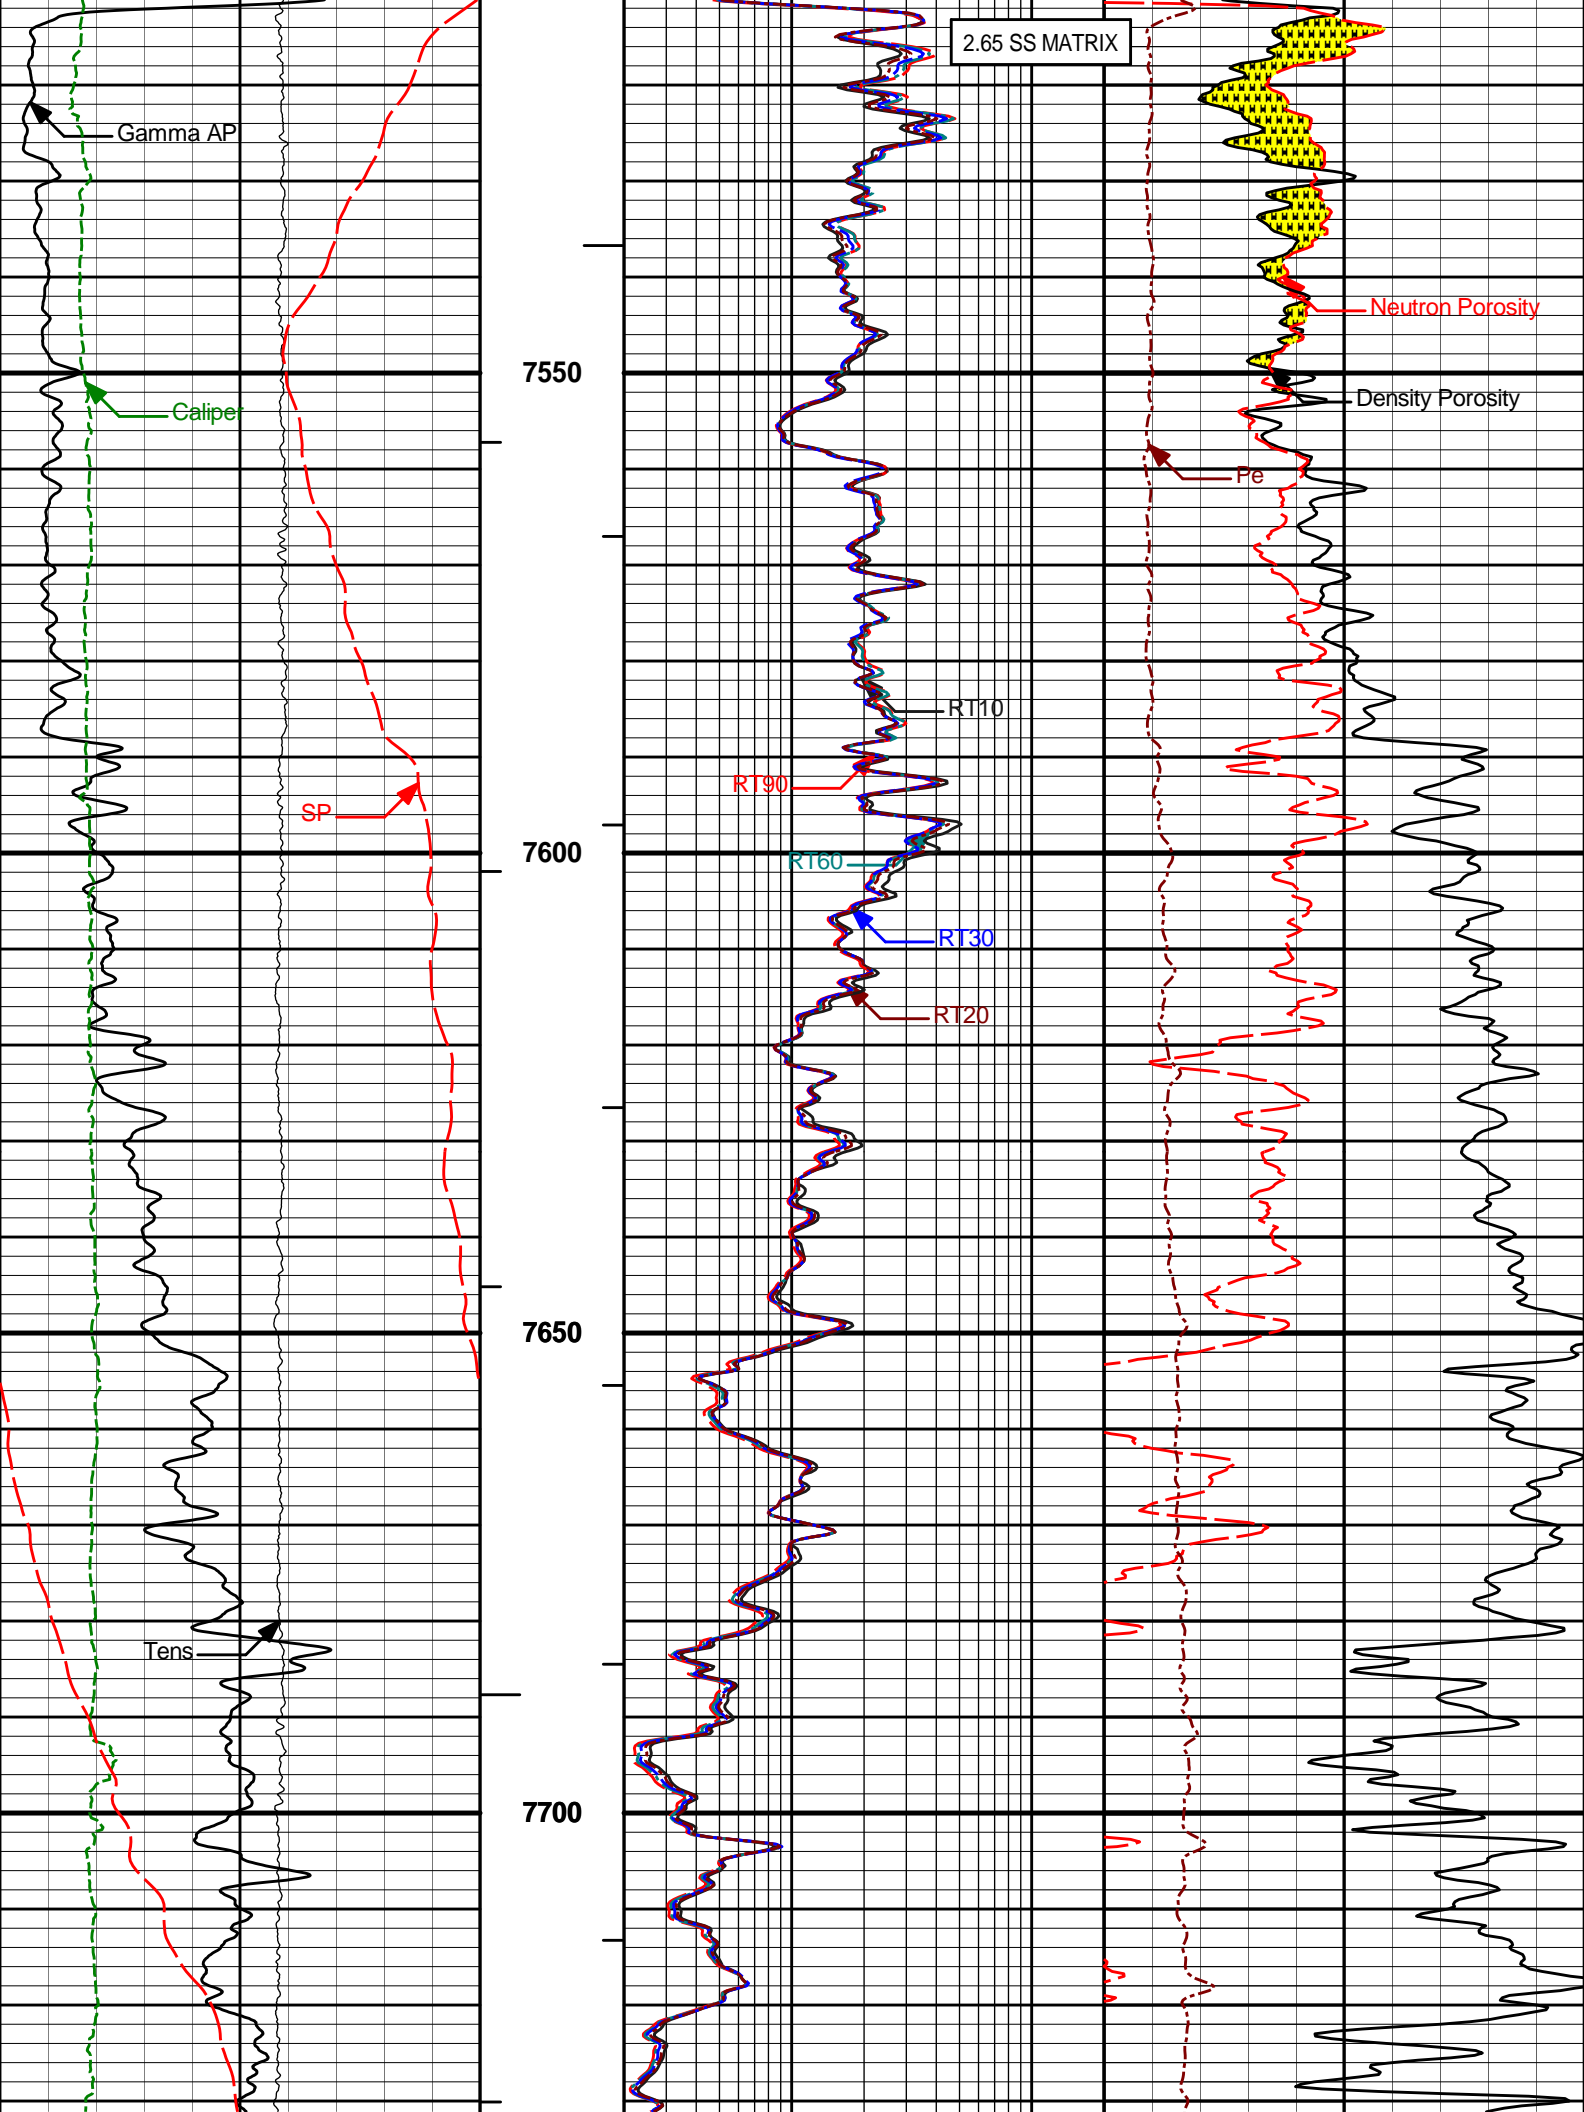


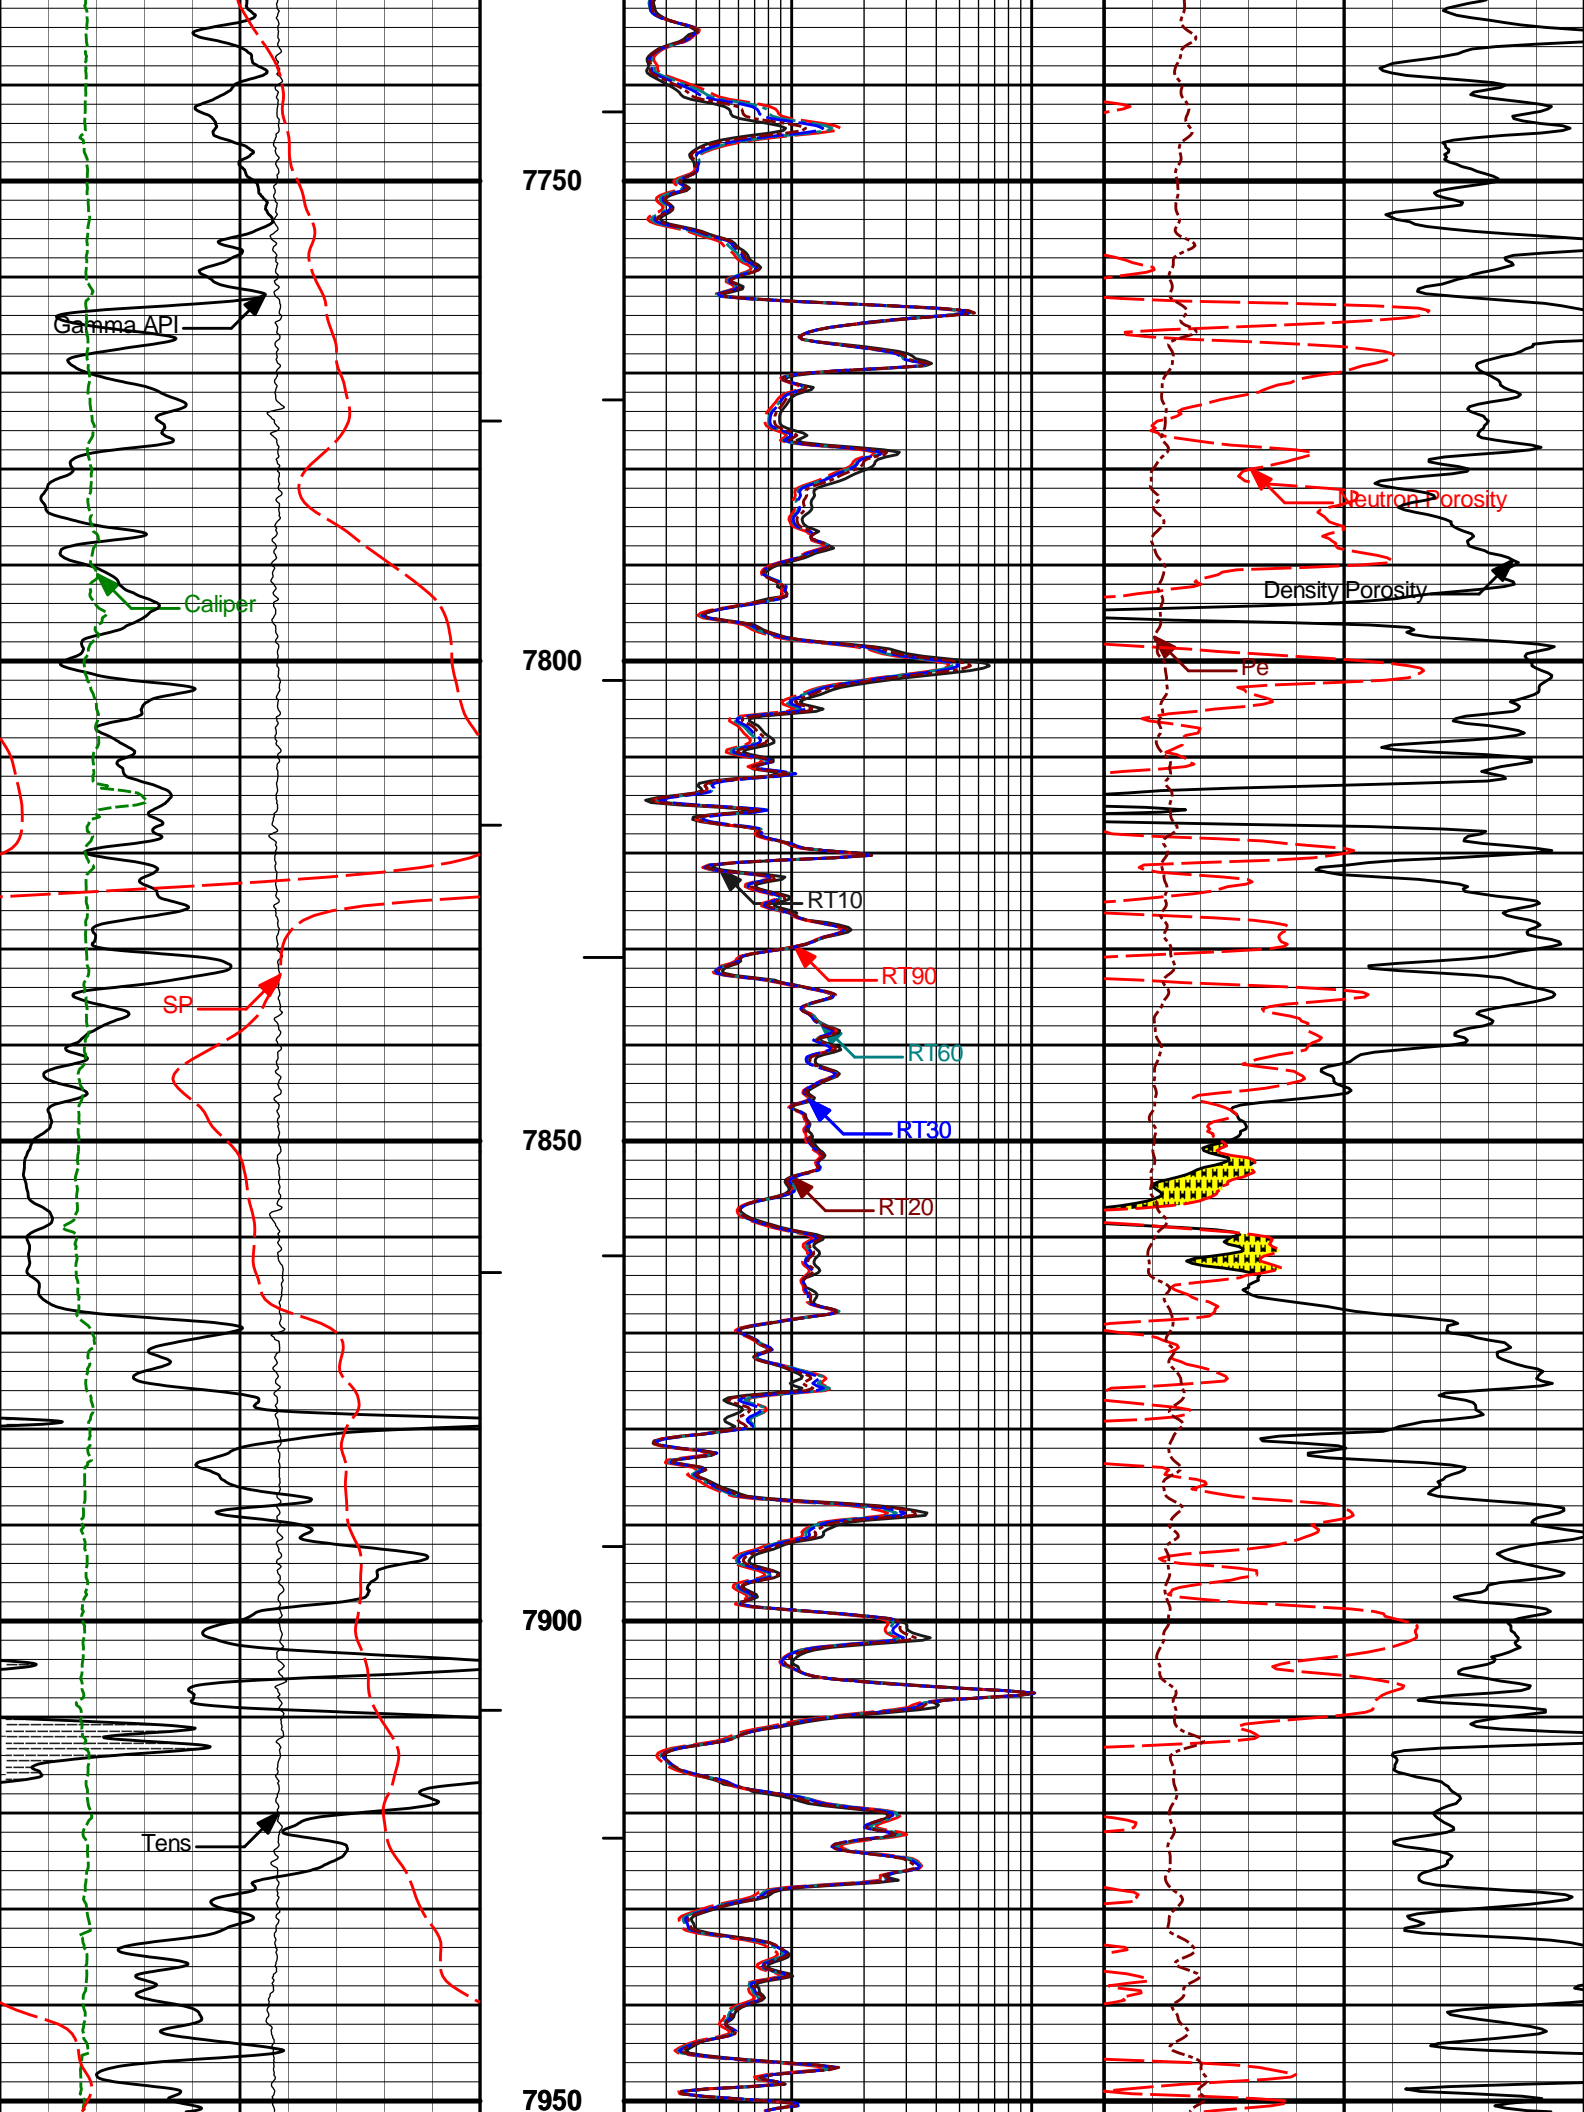





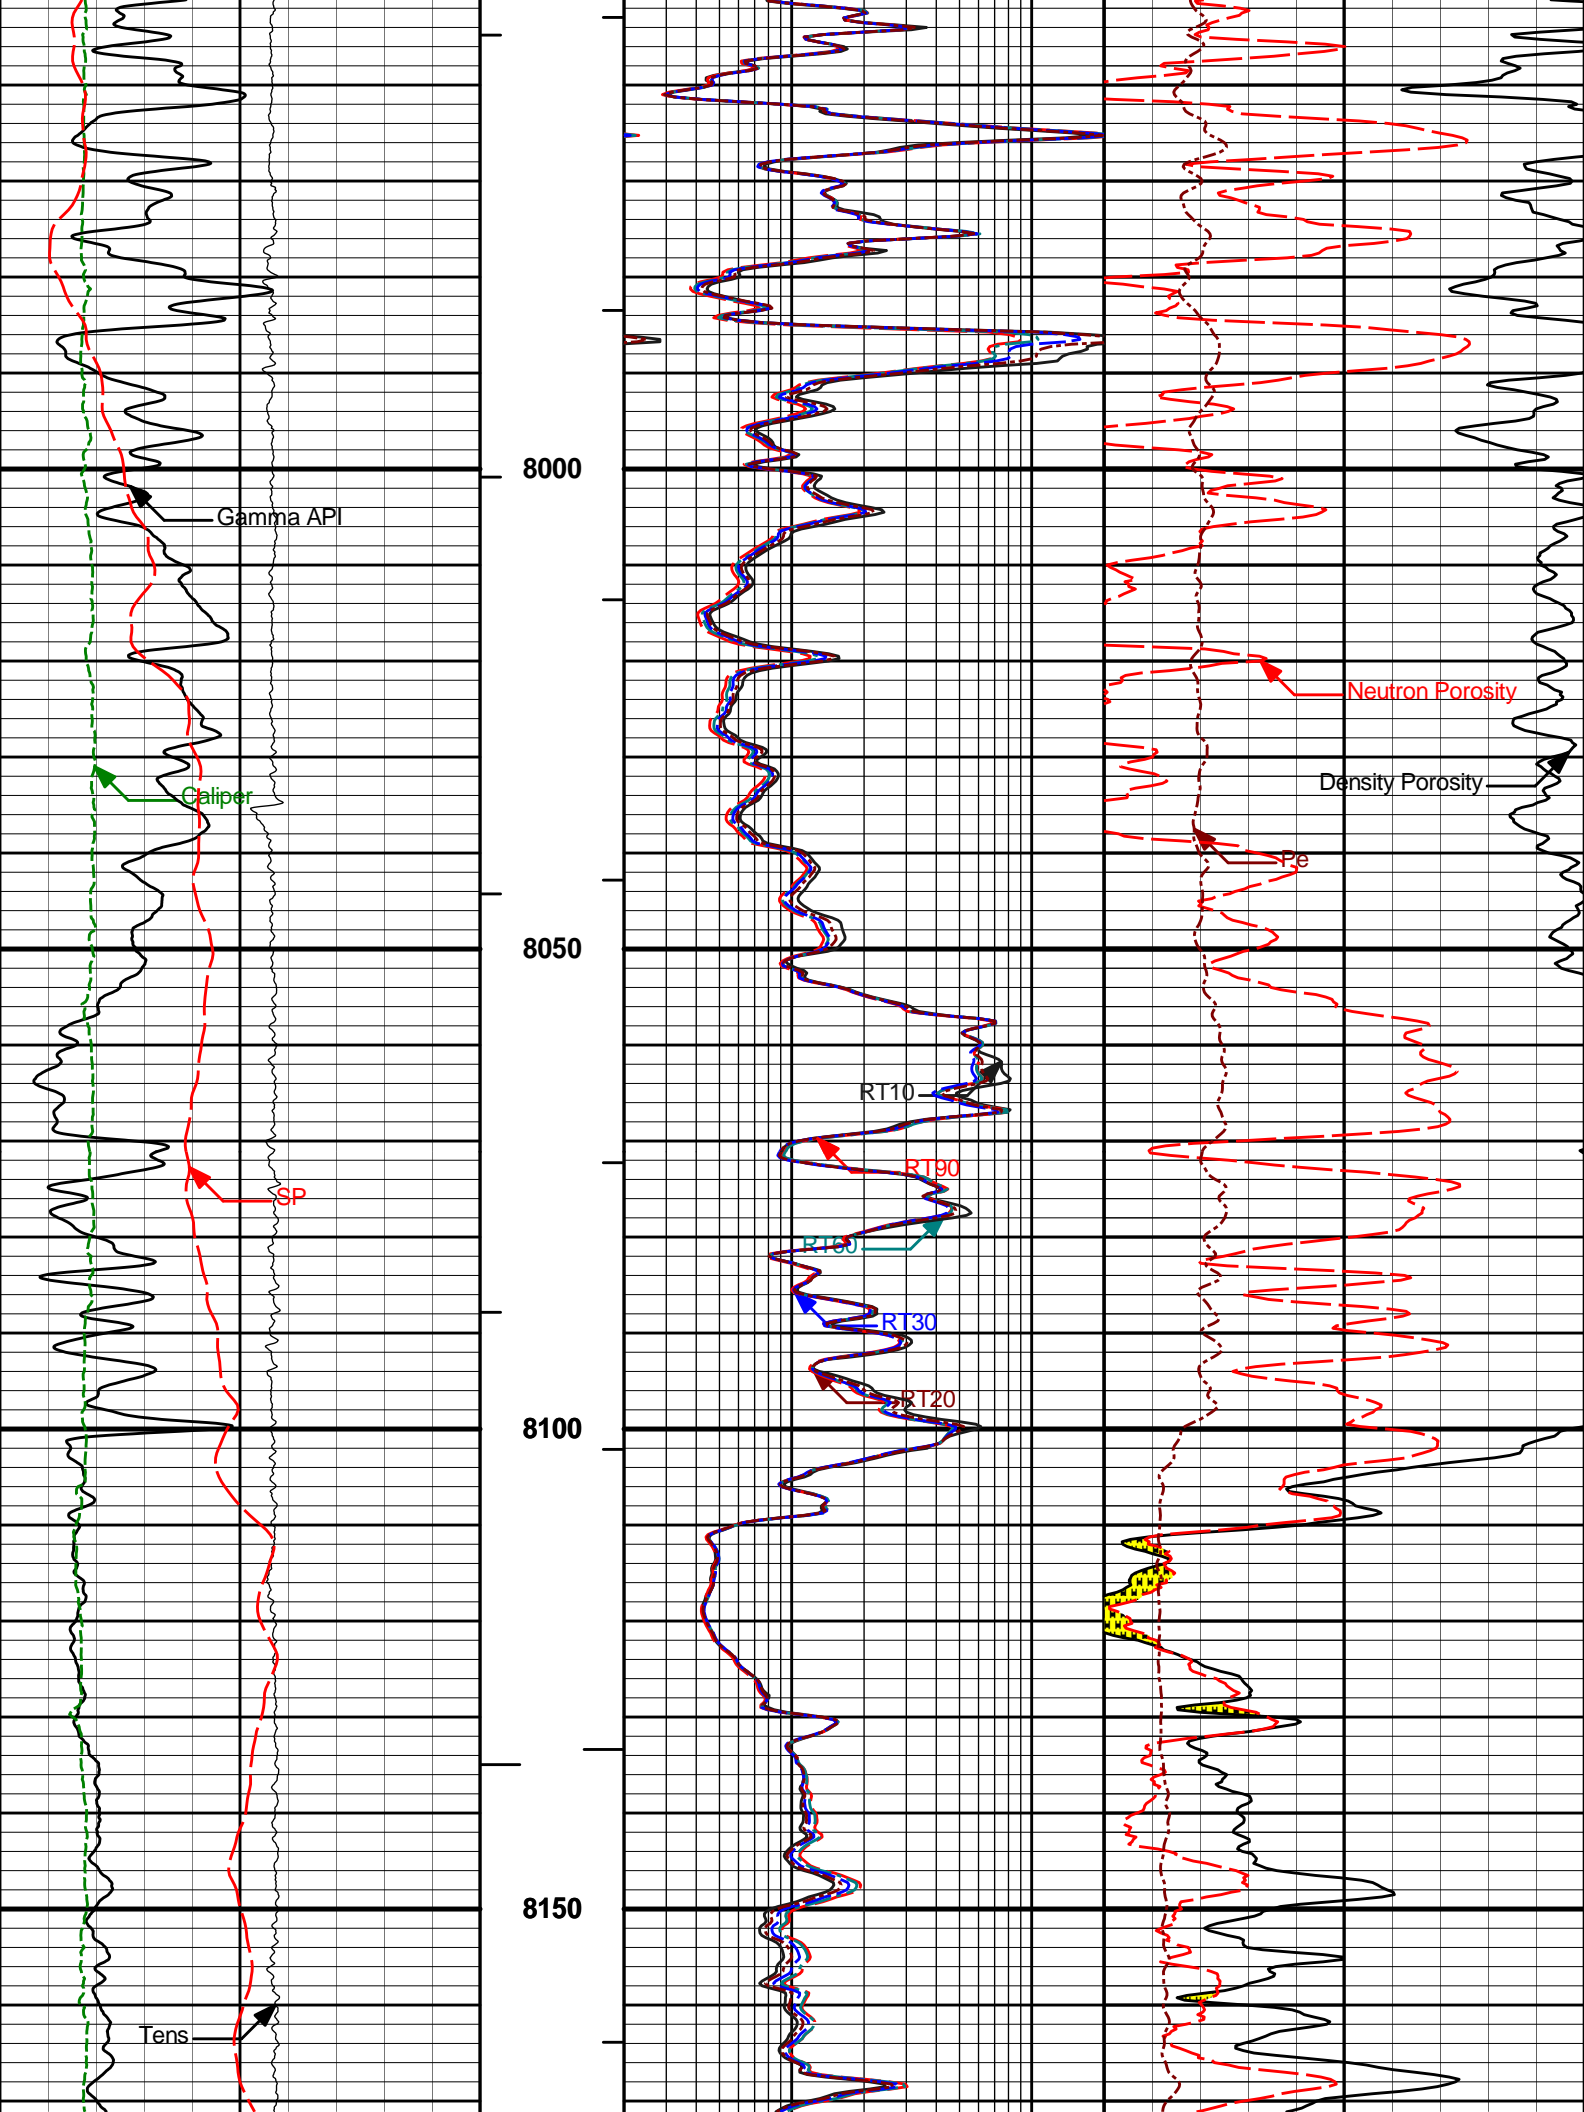



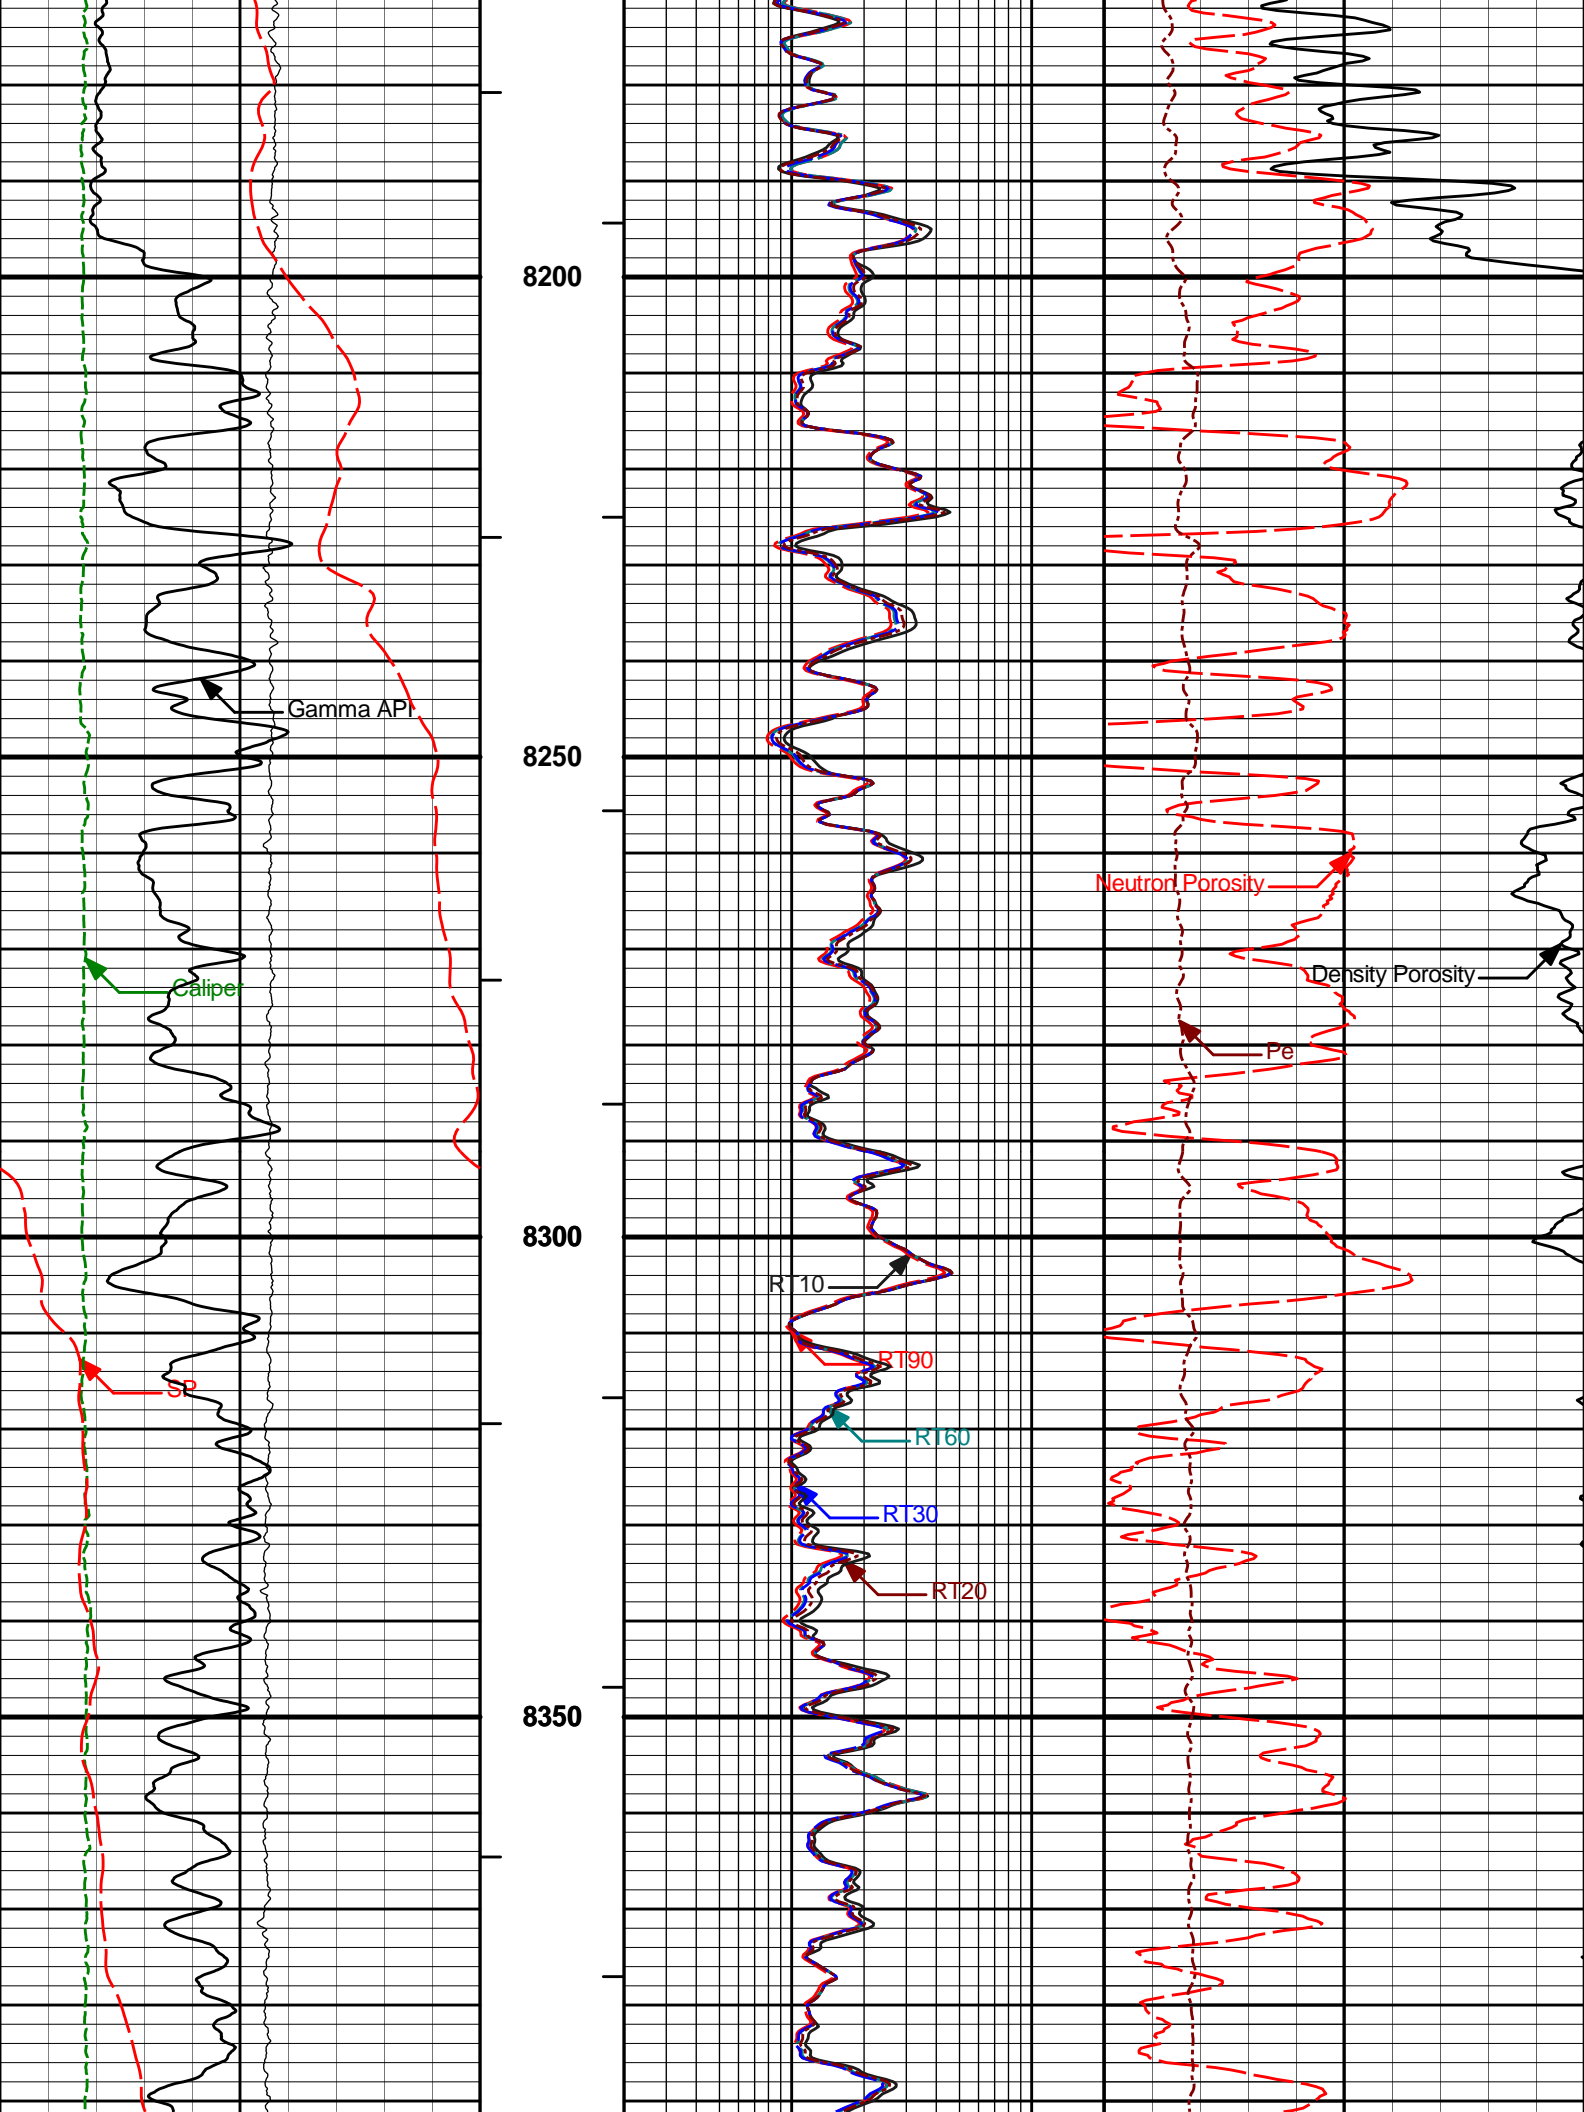

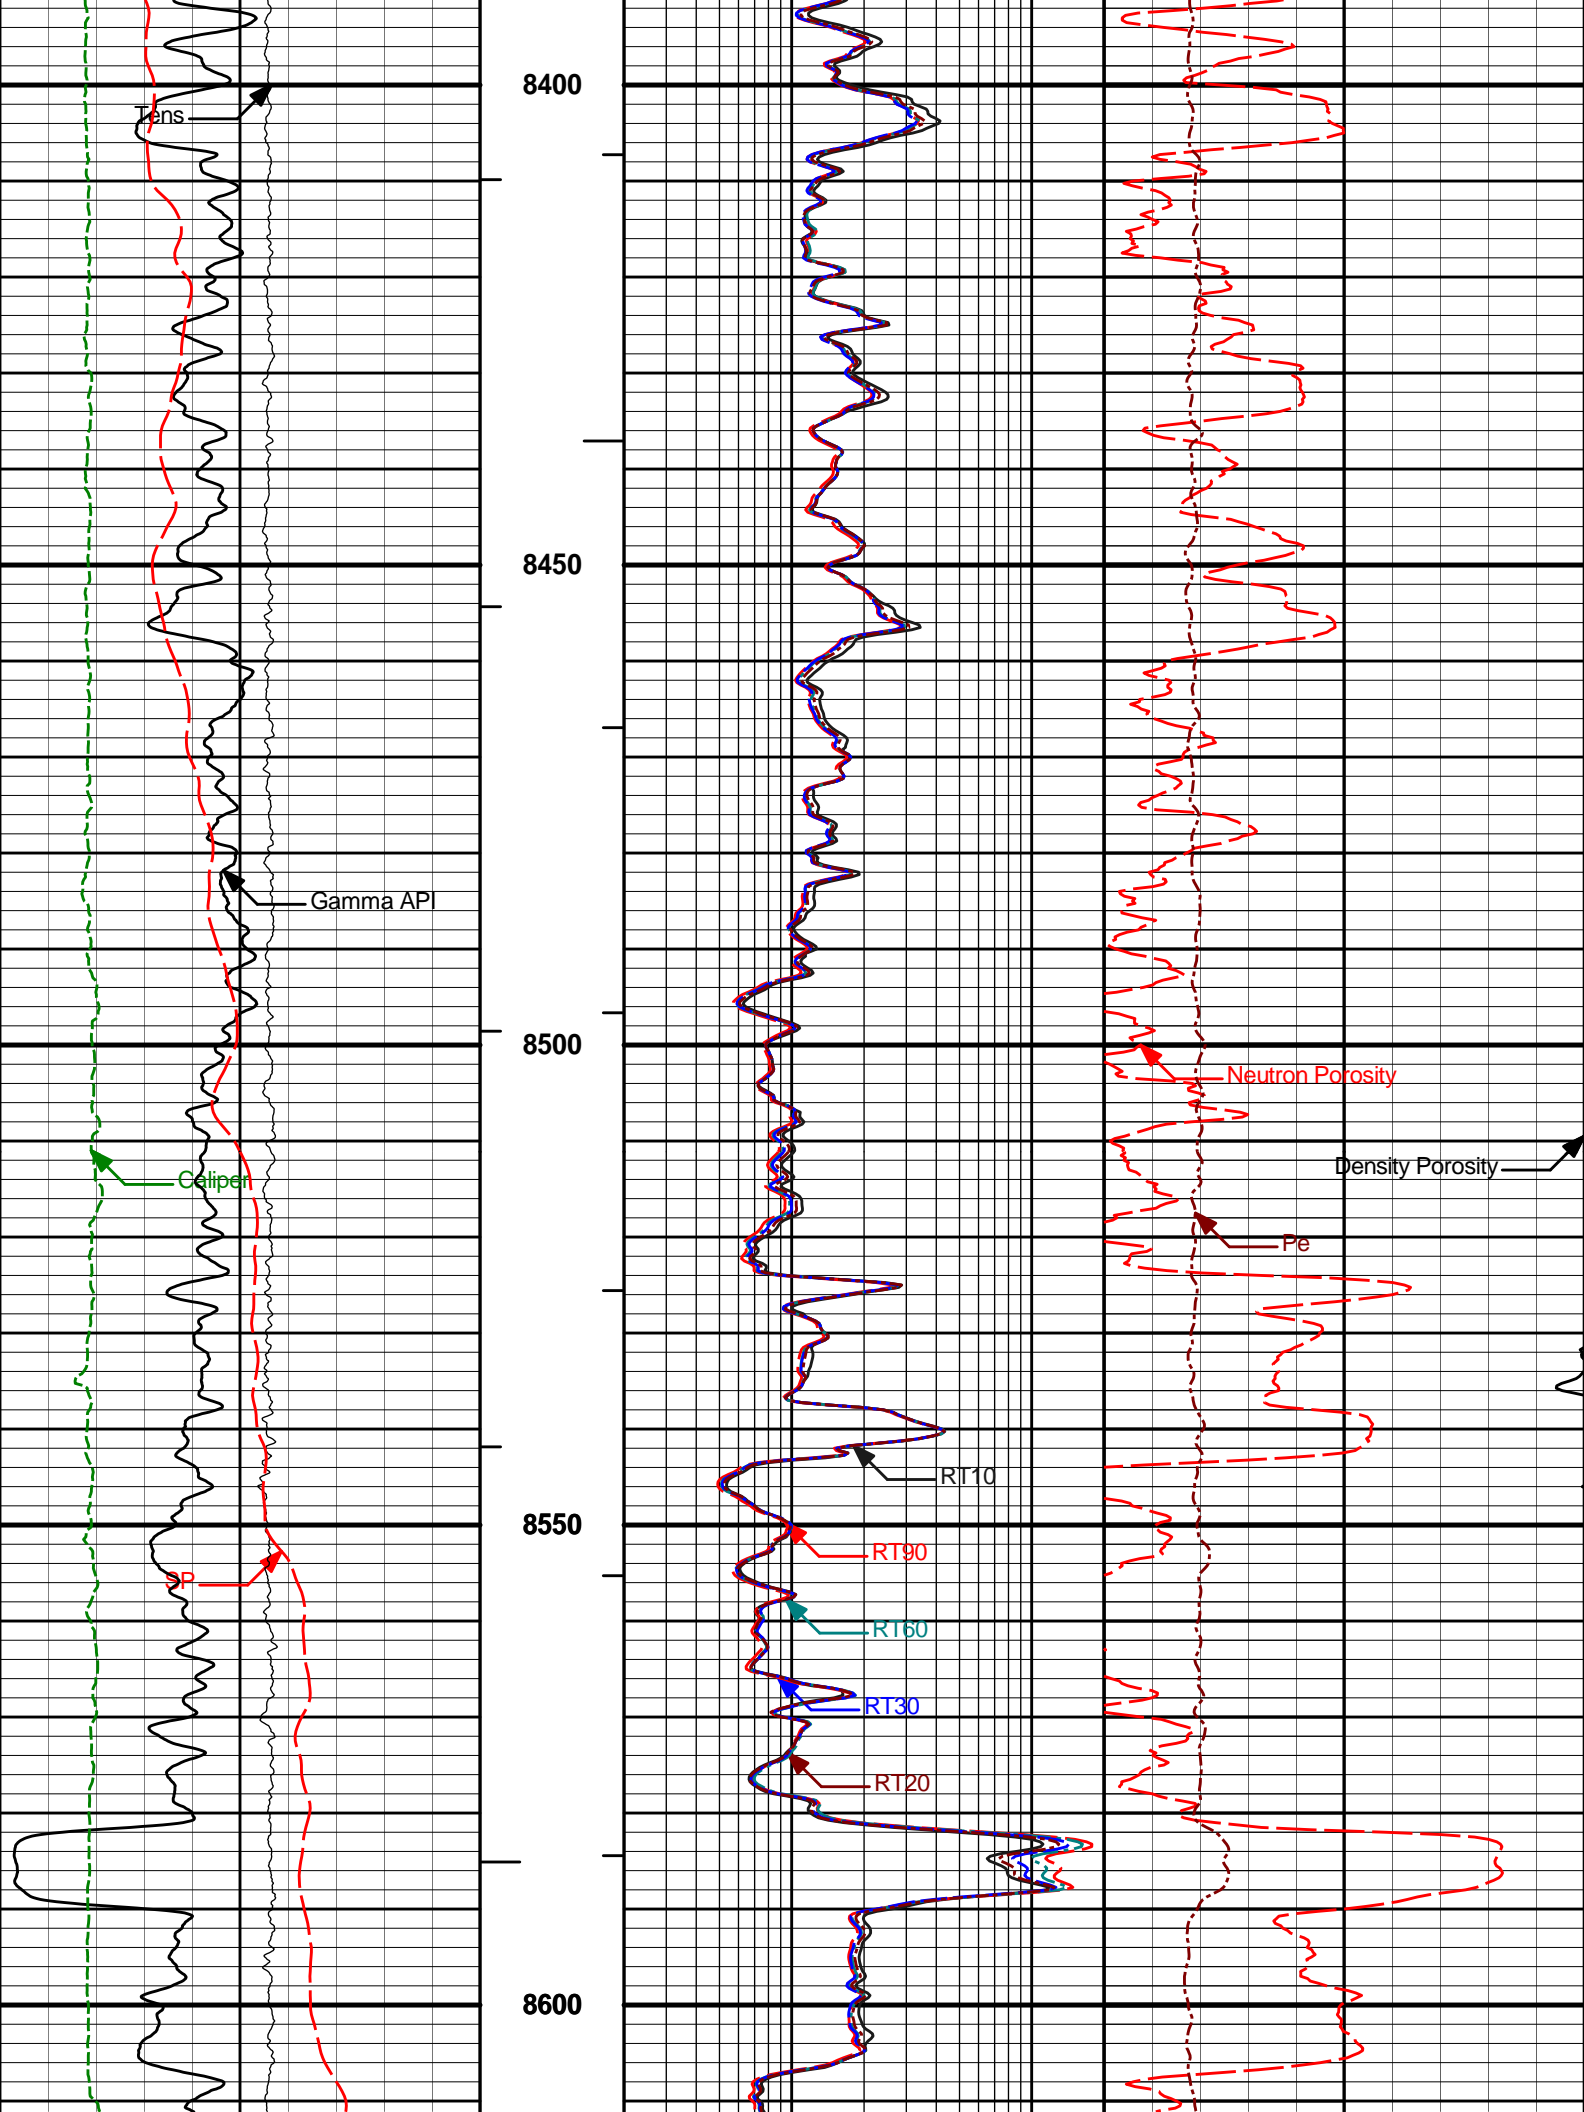

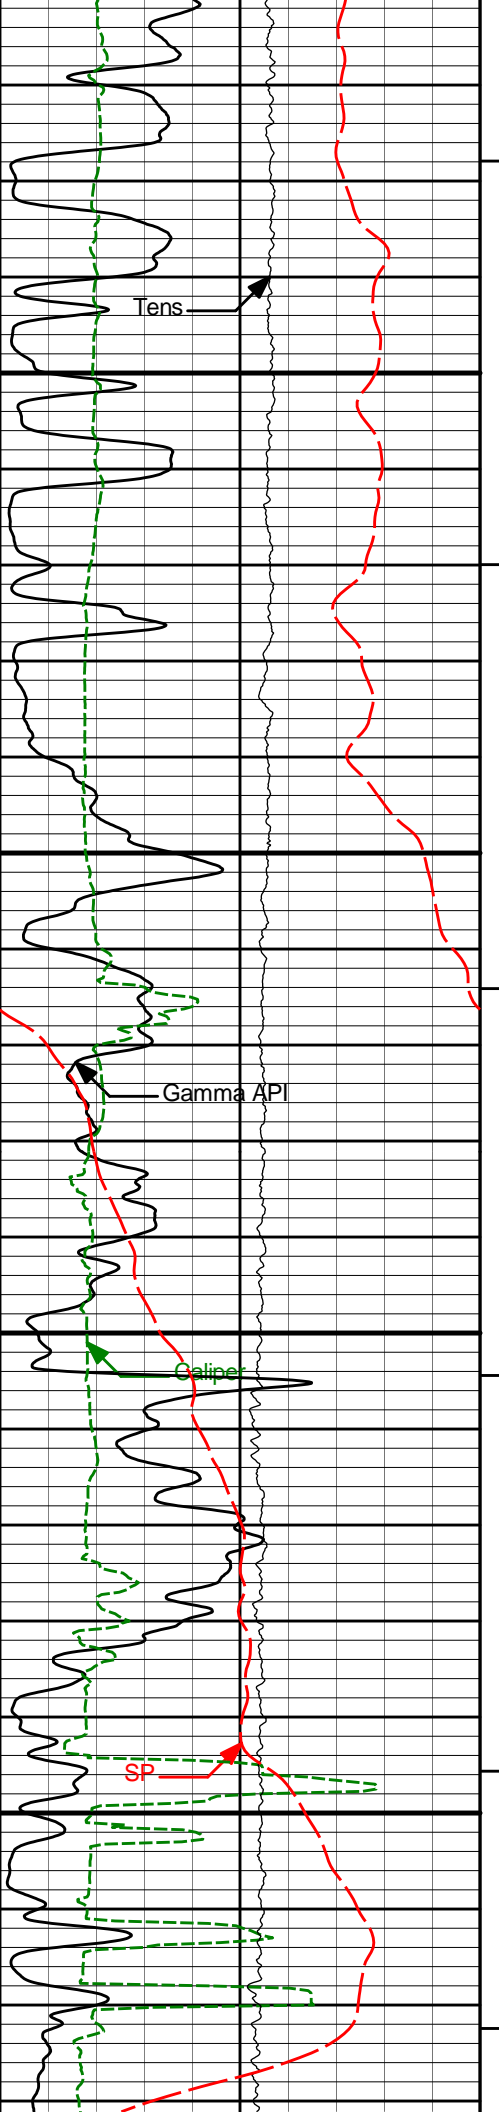



8650


8700


8750


8800

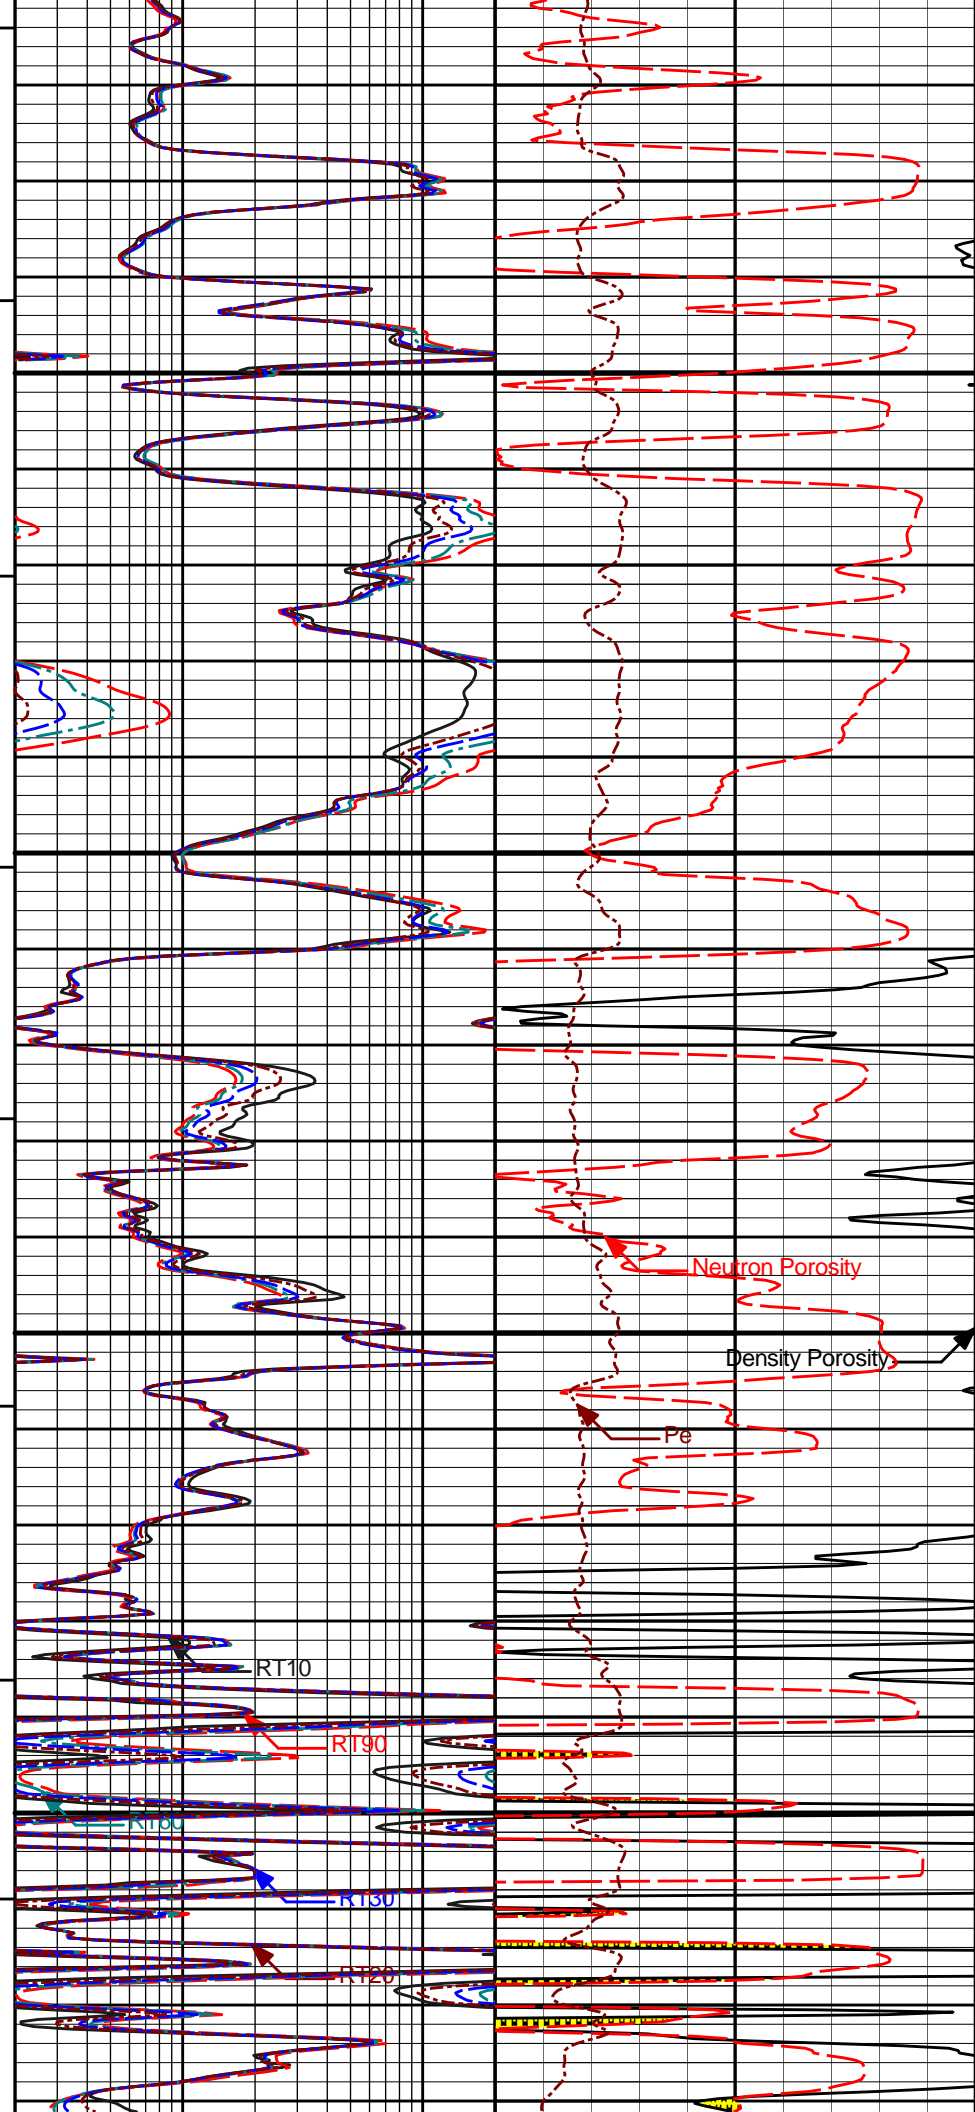

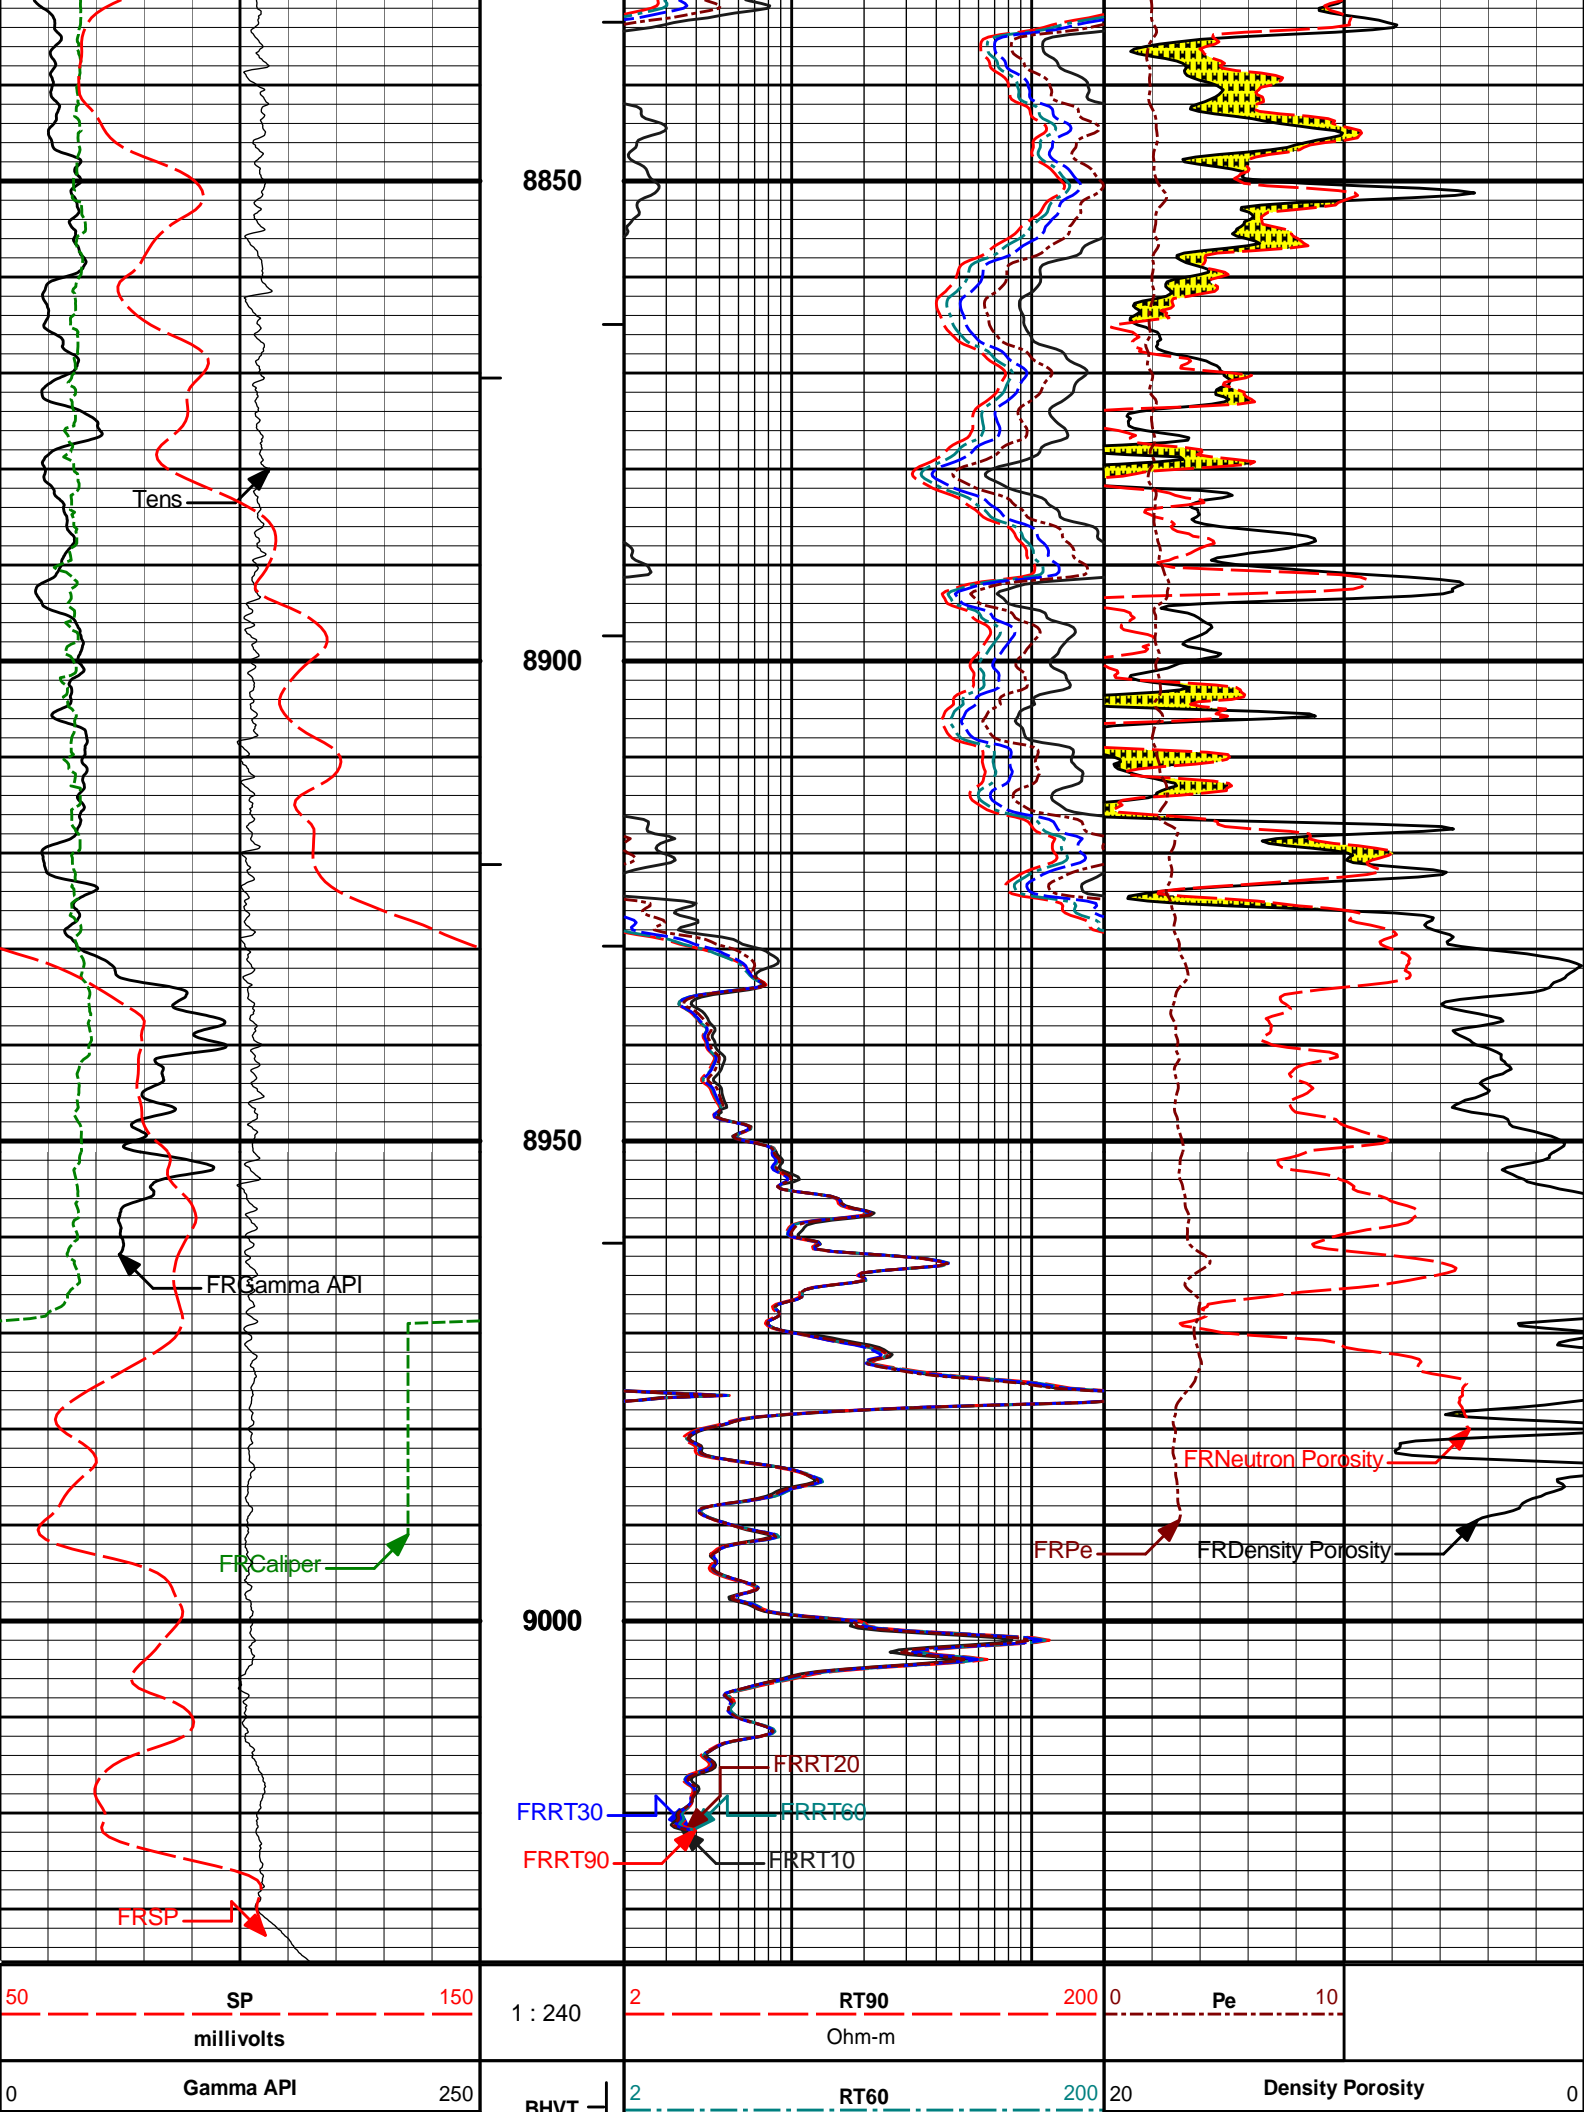

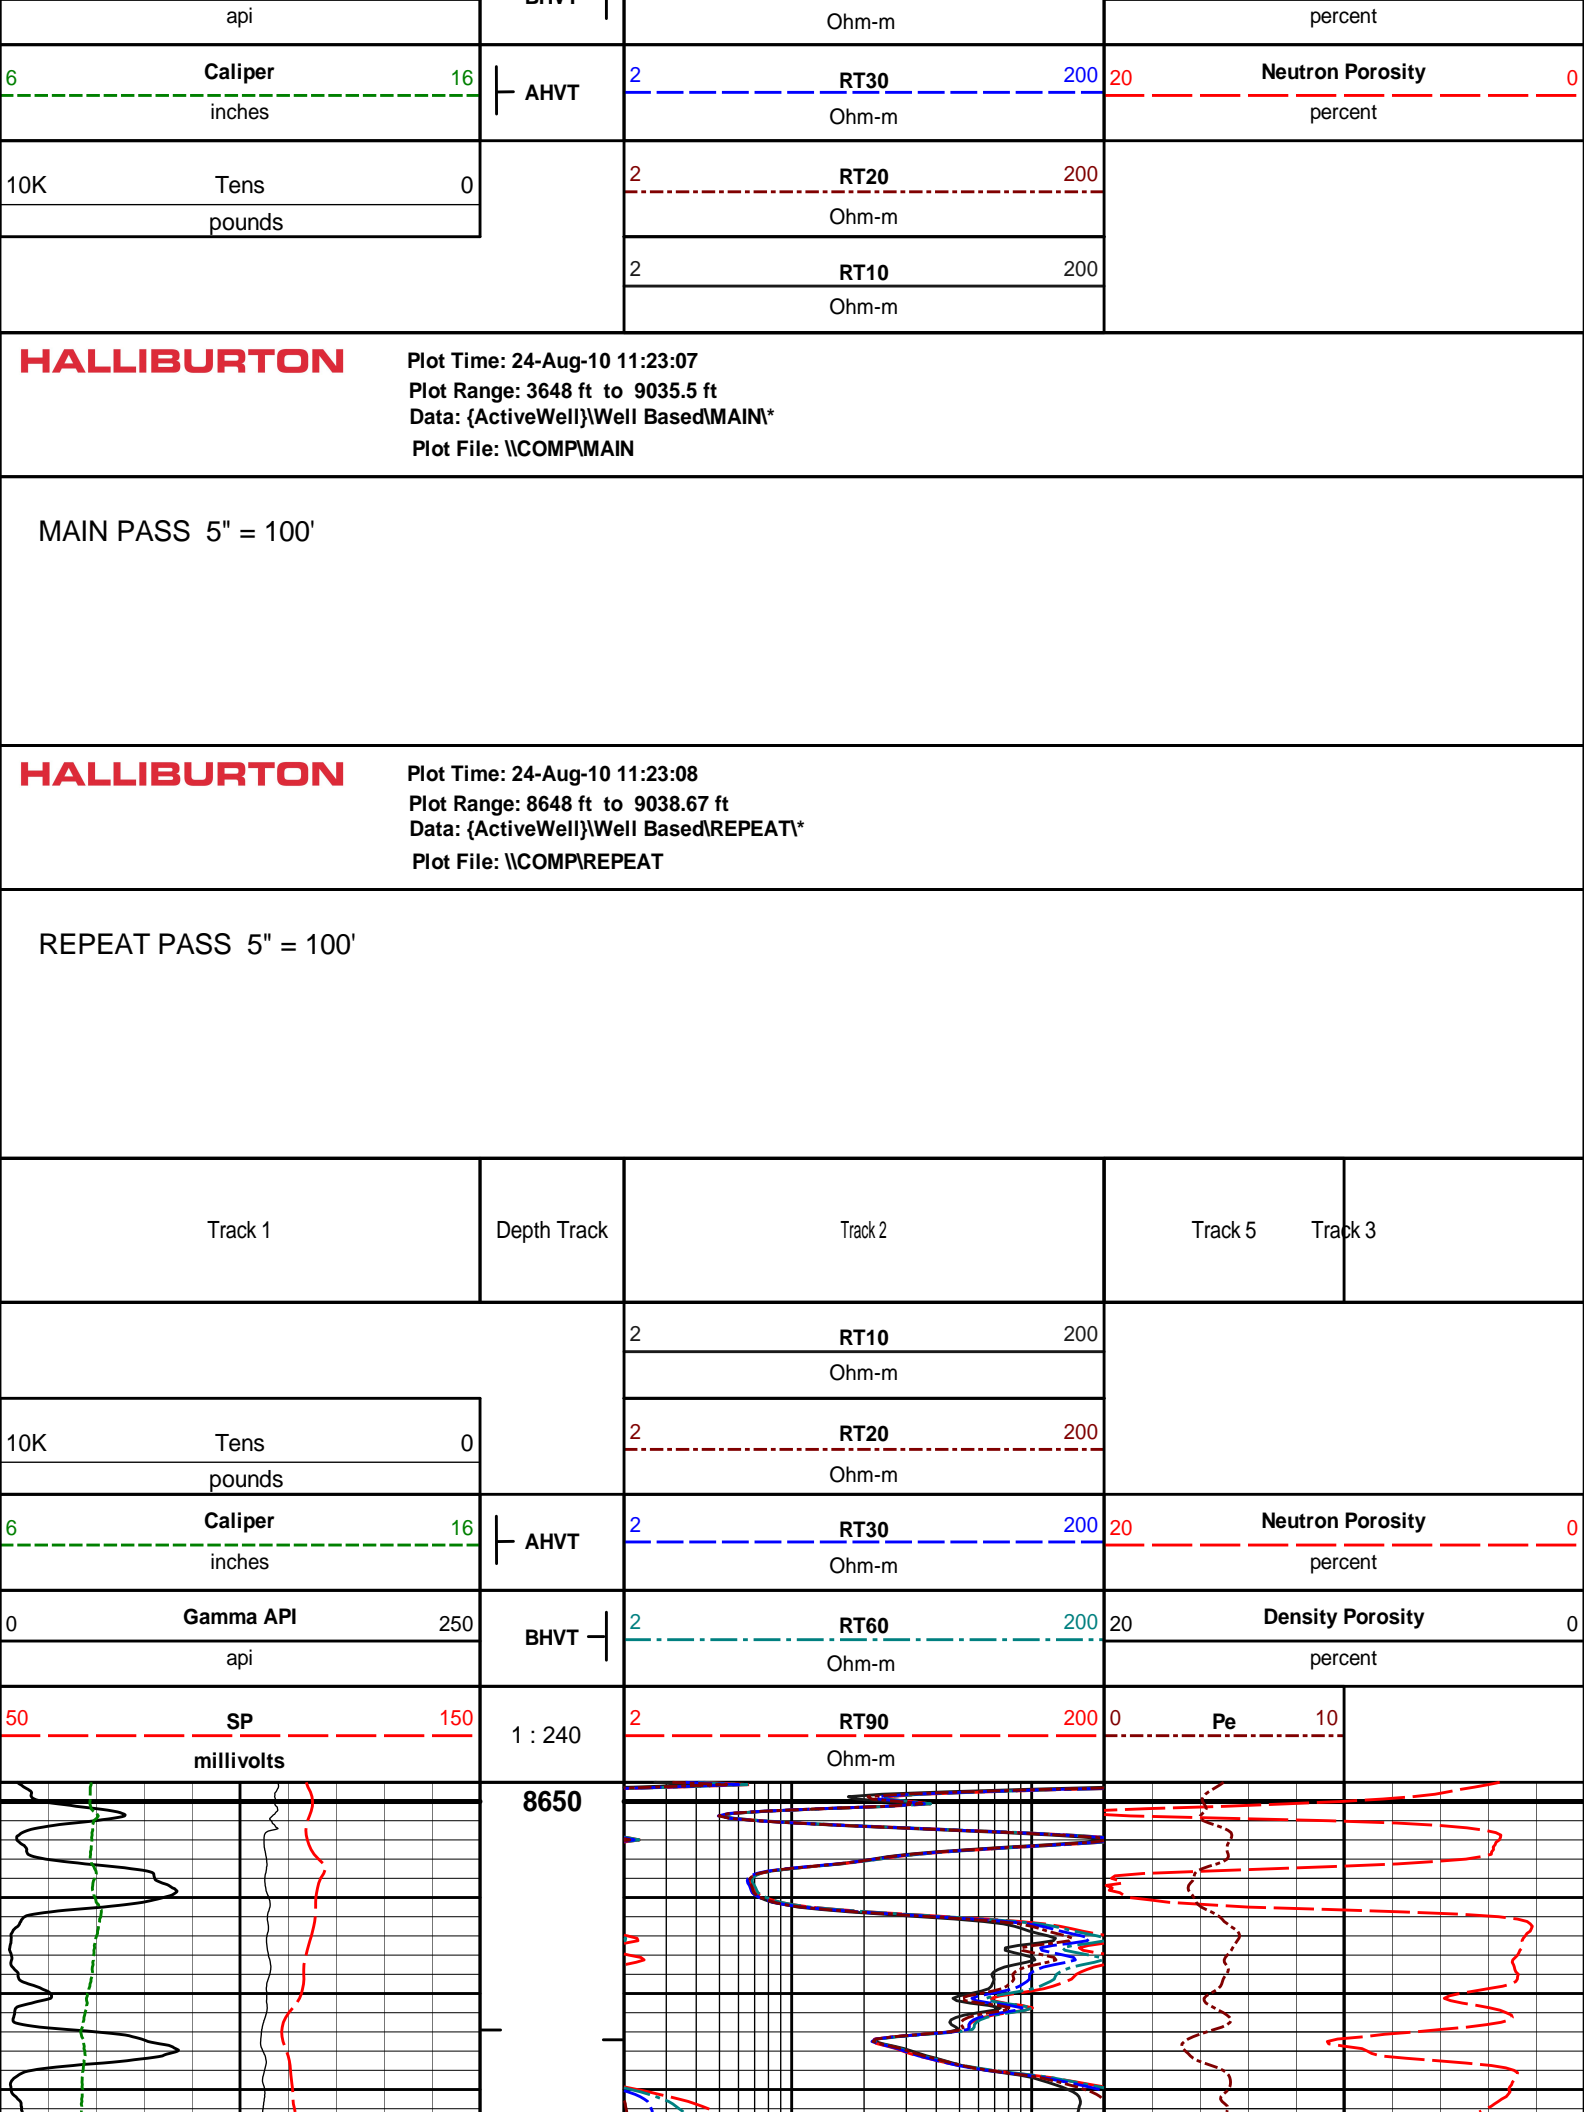

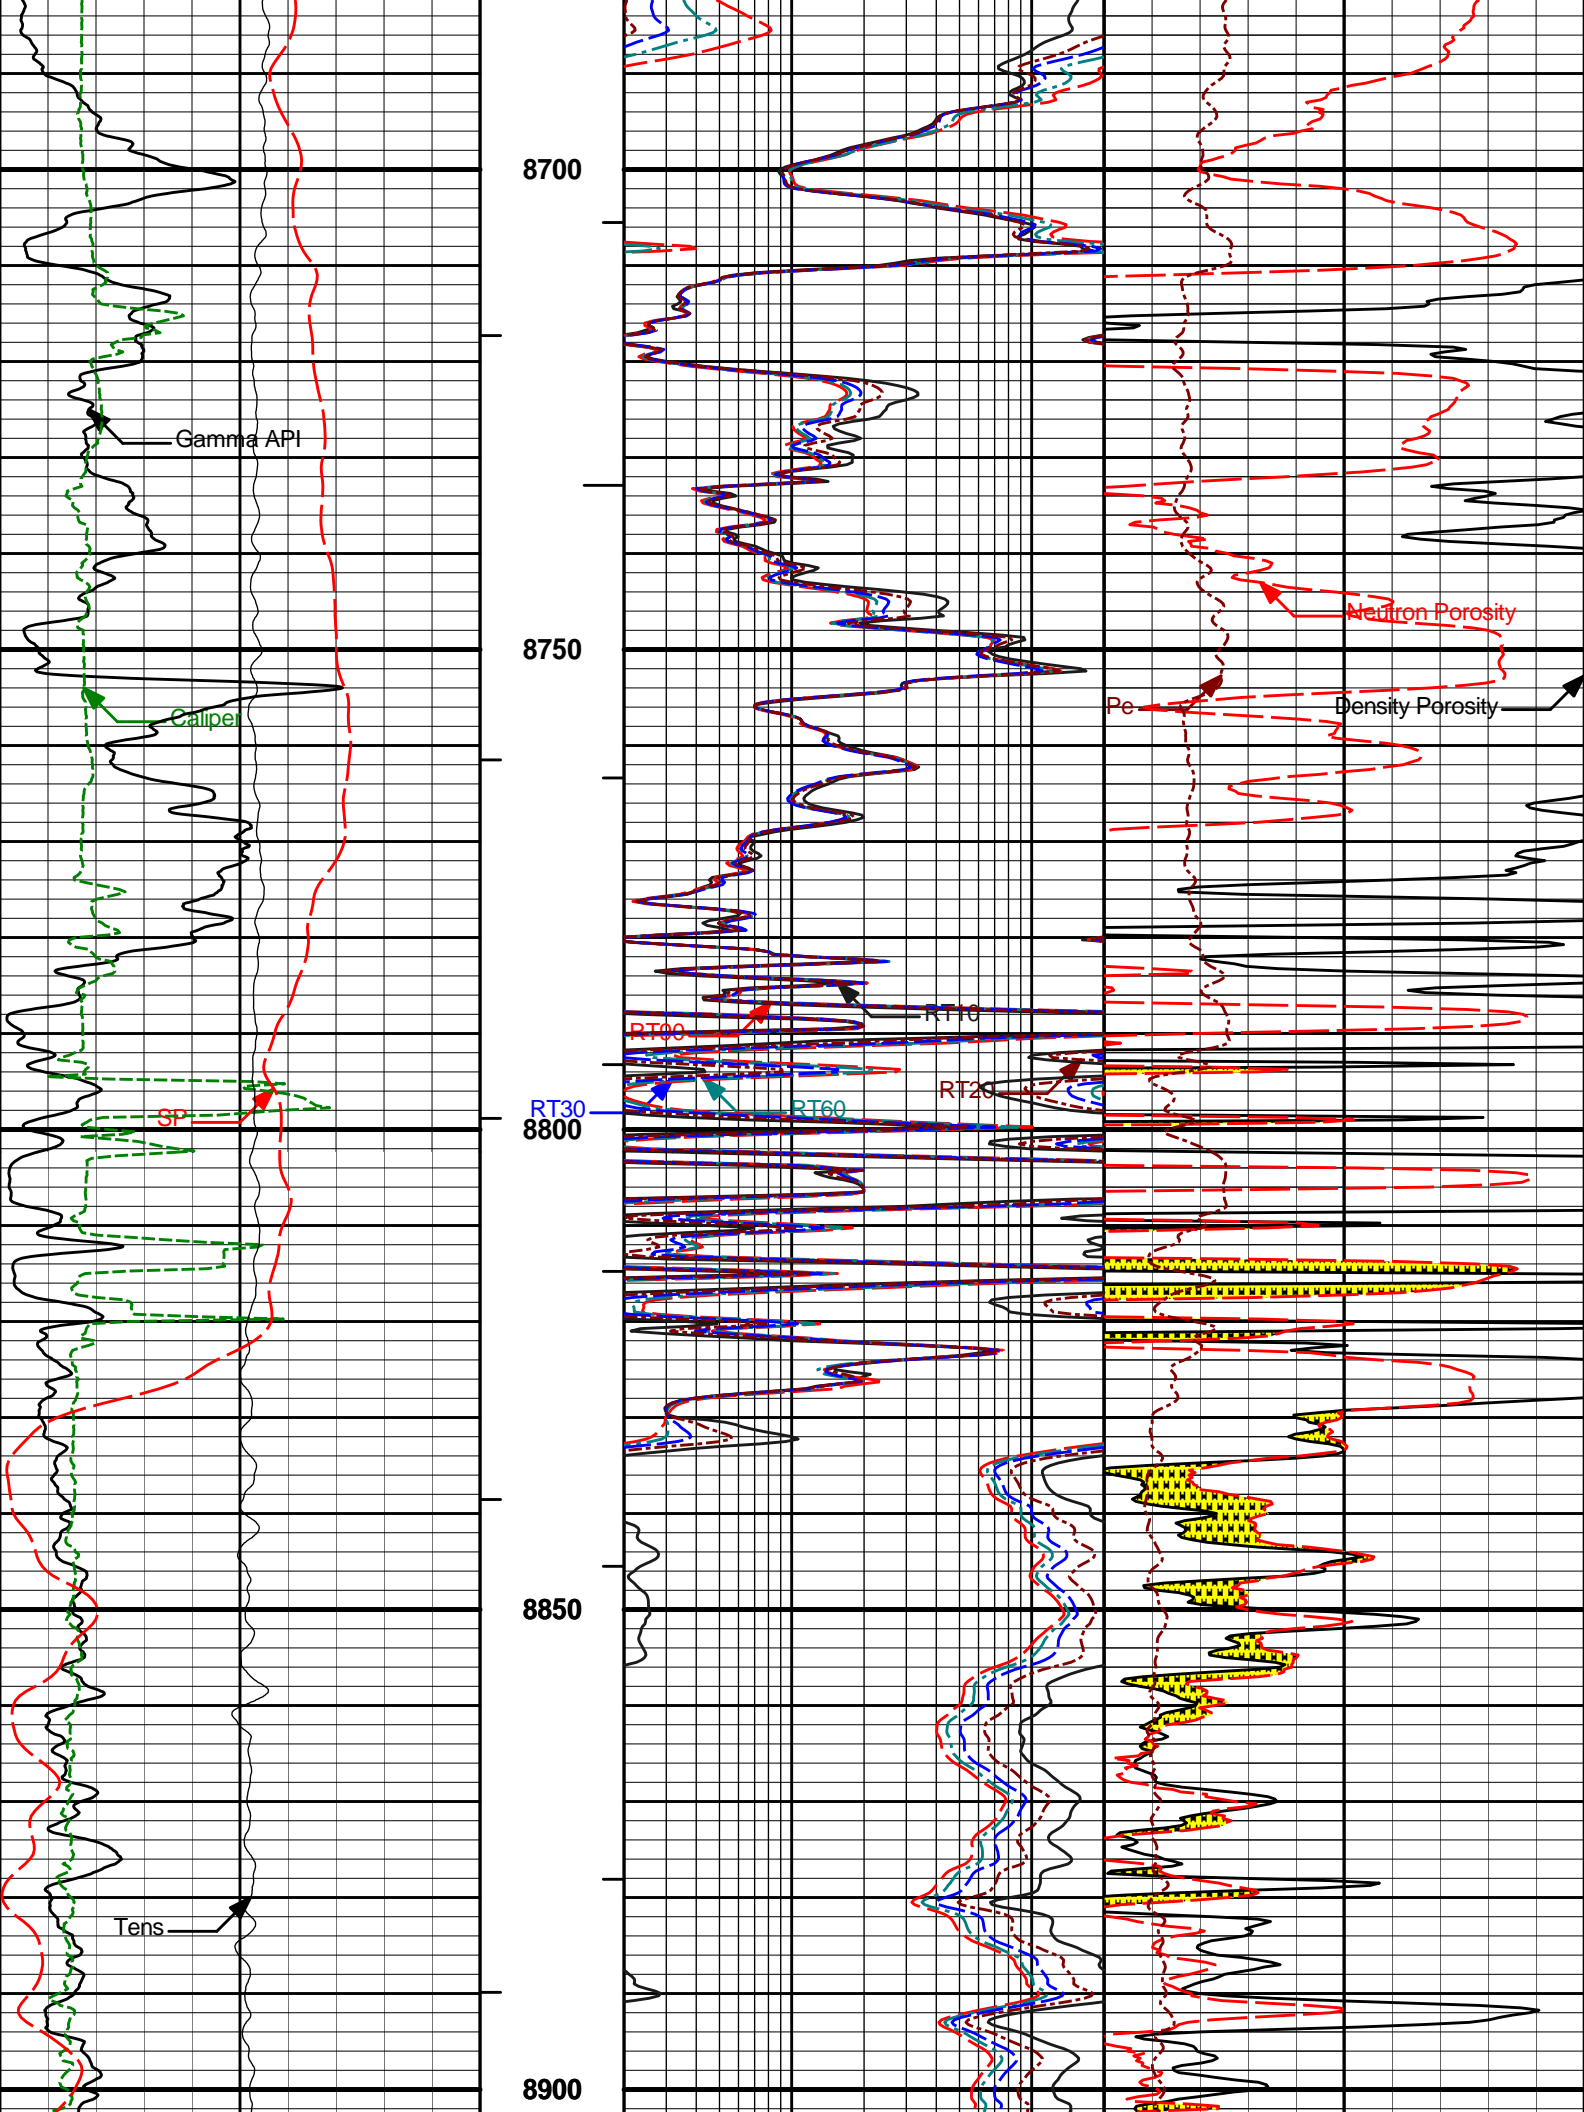

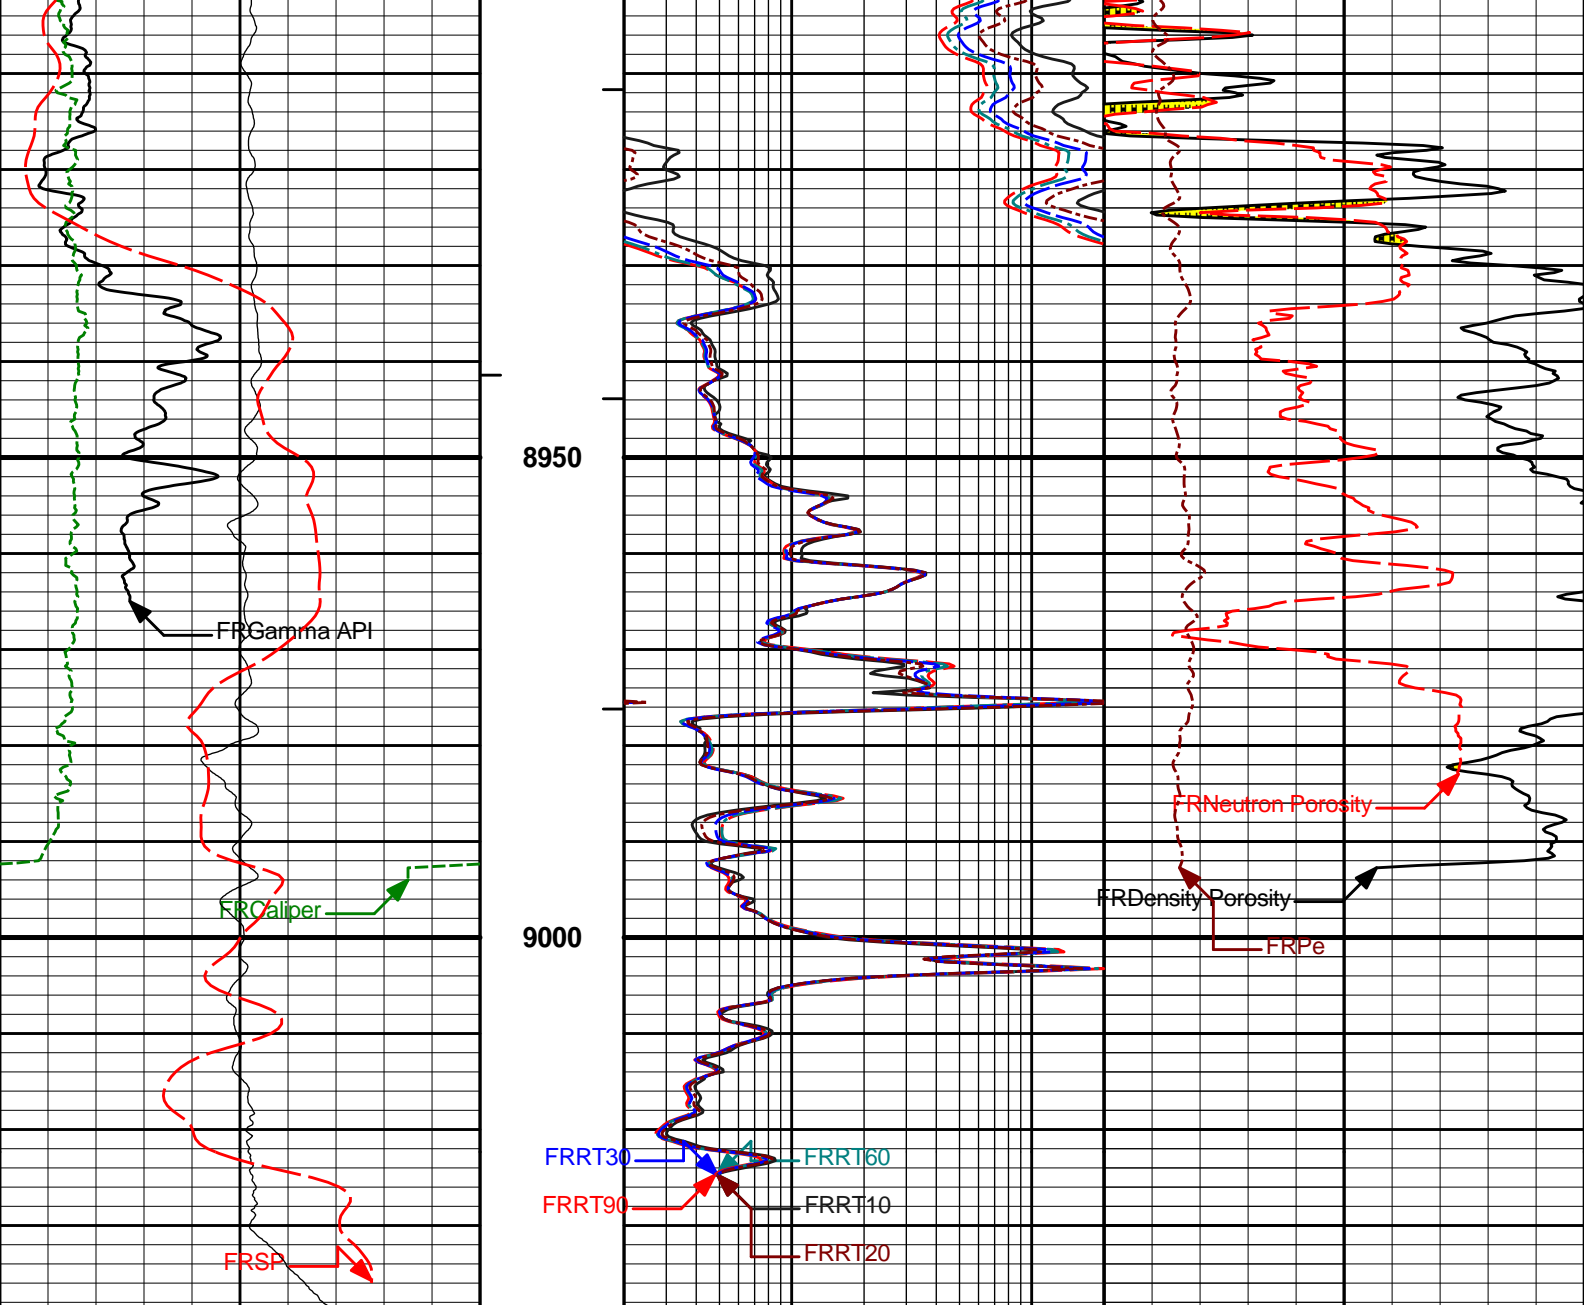

50	SP	150	1 : 240	2	RT90	200	0	Pe	10
	millivolts				Ohm-m				
0	Gamma API	250	BHVT	2	RT60	200	20	Density Porosity	0
	api				Ohm-m			percent	
6	Caliper	16	AHVT	2	RT30	200	20	Neutron Porosity	0
	inches				Ohm-m			percent	
10K	Tens	0		2	RT20	200			
	pounds				Ohm-m				
				2	RT10	200			
					Ohm-m				

**HALLIBURTON**

Plot Time: 24-Aug-10 11:23:13  
 Plot Range: 8648 ft to 9038.67 ft  
 Data: {ActiveWell}\Well Based\REPEAT\*  
 Plot File: \COMP\REPEAT

REPEAT PASS 5" = 100'

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11277436

Reference Calibration Date: 01-Aug-10 11:19:52

Engineer: C. BLUE

Calibration Date: 16-Aug-10 14:41:01

Software Version: WL INSITE R3.0.7 (Build 3)

Calibration Version: 1

Calibrator Source S/N: KW-290  
Calibrator API Reference:230.00 api

Measurement	Measured	Calibrated	Units
Background	72.7	73.8	api
Background + Calibrator	303.3	307.8	api
Calibrator	235.1	234.0	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 11277436

Reference Calibration Date: 16-Aug-10 14:41:01

Engineer: F. LODER

Calibration Date: 24-Aug-10 02:46:24

Software Version: WL INSITE R3.0.4 (Build 6)

Calibration Version: 1

Calibrator Source S/N: KW-290  
Calibrator API Reference:230.00 api

Field Verification	Shop	Field	Units
Background	73.8	73.0	api
Background + Calibrator	307.8	311.3	api
Calibrator	234.0	238.3	api

Shop	Field	Difference	Tolerance
234.0	238.3	-4.3	+/- 9.00

CSNG-FS SHOP CALIBRATION

Tool Name: CSNG - 10965402

Reference Calibration Date: 20-Jul-10 12:11:34

Engineer: C. BLUE

Calibration Date: 16-Aug-10 14:22:25

Software Version: WL INSITE R3.0.7 (Build 3)

Calibration Version: 1

Source SN: KW-290

TITANIUM CASE	Measured	Calibrated	Units
60 KEV Peak Channel #	48.0	48.0	Channel #
239 KEV Peak Channel #	22.7	22.7	Channel #
583 KEV Peak Channel #	51.1	51.2	Channel #
2614 KEV Peak Channel #	209.6	210.5	Channel #
Calibrate Temperature	124.3	101.6	degF

Pass/Fail Summary	Centroid
239 KEV Peak	Passed
583 KEV Peak	Passed
2614 KEV Peak	Passed



	Counts	Units	Measured	Calibrated	Units
Thorium Blanket	1608.4	CPS	321.8	323.3	API
Background	309.0	CPS	60.6	62.1	API

Gamma Ray Gain: 1.01  
Gamma Gain Check: Passed

CSNG-FS FIELD CALIBRATION

Tool Name:	CSNG - 10965402	Reference Calibration Date:	16-Aug-10 14:22:25
Engineer:	F. LODER	Calibration Date:	24-Aug-10 03:15:45
Software Version:	WL INSITE R3.0.4 (Build 6)	Calibration Version:	1
Source SN:			

TITANIUM CASE	Shop	Field	Units
60 KEV Peak Channel #	48.0	48.0	Channel #
239 KEV Peak Channel #	22.7	22.8	Channel #
583 KEV Peak Channel #	51.2	51.4	Channel #
2614 KEV Peak Channel #	210.5	210.9	Channel #
Calibrate Temperature	101.6	103.3	degF

Pass/Fail Summary	Centroid
239 KEV Peak	Passed
583 KEV Peak	Passed
2614 KEV Peak	Passed

Blanket Reference Value: 230.00 API  
Calibrator Value: 261.2 API

	Counts	Units	Measured	Calibrated	Units
Thorium Blanket	1858.9	CPS	323.3	351.2	API
Background	476.1	CPS	62.1	89.9	API

Gamma Ray Gain: 0.95  
Gamma Gain Check: Passed

DUAL SPACED NEUTRON SHOP CALIBRATION

Tool Name:	DSNT - 11301132	Reference Calibration Date:	16-Aug-10 17:25:59
Engineer:	C. BLUE	Calibration Date:	16-Aug-10 17:38:02
Software Version:	WL INSITE R3.0.7 (Build 3)	Calibration Version:	1

Logging Source S/N: CASPER 434  
Tank Serial Number: 11068236  
Reference value assigned to Tank: 53.720  
Snow Block S/N: CASPER IQ  
Calibration Tank Water Temperature: 72 degF  
Min. Tool Housing Outside Diameter: 3.625 in

CALIBRATION CONSTANTS			
Measurement	Prev. Value	New Value	Control Limit On New Value
Gain:	0.988	0.986	0.900 - 1.100

WATER TANK SUMMARY (Horizontal Water Tank)				
Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2228	0.2224	0.0004	+/- 0.0020
Calibrated Ratio:	10.13	10.11	0.014	+/- 0.050

VERIFIER		
Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0803	0.02000 - 0.09000

PASS/FAIL SUMMARY	
Background Check:	Passed
Gain-Range Check:	Passed
Snow-Block Check:	Passed

DUAL SPACED NEUTRON FIELD CALIBRATION			
Tool Name:	DSNT - 11301132	Reference Calibration Date:	16-Aug-10 17:38:02
Engineer:	F. LODER	Calibration Date:	24-Aug-10 02:54:37
Software Version:	WL INSITE R3.0.4 (Build 6)	Calibration Version:	1

Logging Source S/N: CASPER 434  
Snow Block S/N: CASPER IQ

NEUTRON FIELD-CHECK SUMMARY				
	Shop	Field	Difference	Control Limit On Change
Snow-Block Porosity (decp):	0.0803	0.0796	-0.0007	+/- 0.0150

PASS/FAIL SUMMARY	
Block Change Check:	Passed
Snow Block Stat Check:	Passed
Temperature Check:	Passed

SPECTRAL DENSITY SHOP CALIBRATION			
Tool Name:	SDLT - I132M275	Reference Calibration Date:	20-Jul-10 15:11:00
Engineer:	C. BLUE	Calibration Date:	17-Aug-10 13:55:48
Software Version:	WL INSITE R3.0.4 (Build 6)	Calibration Version:	1

Logging Source S/N: 2770GW  
Aluminum Block S/N: BRIGHTON\_AL                      Density: 2.600g/cc                      Pe: 3.100  
Magnesium Block S/N: BRIGHTON\_MG                      Density: 1.680g/cc                      Pe: 2.594

DENSITY CALIBRATION SUMMARY			
Measurement	Previous Value	New Value	Control Limit
Near Bar Gain	1.0642	1.0833	0.90 - 1.10
Near Dens Gain	1.0244	1.0516	0.90 - 1.10
Near Peak Gain	1.0404	1.0754	0.90 - 1.10
Near Lith Gain	1.0149	1.0475	0.90 - 1.10
Far Bar Gain	1.0194	1.0230	0.90 - 1.10
Far Dens Gain	1.0054	1.0073	0.90 - 1.10
Far Peak Gain	0.9965	1.0021	0.90 - 1.10
Far Lith Gain	0.9661	0.9724	0.90 - 1.10
Near Bar Offset	-0.3458	-0.5266	NONE
Near Dens Offset	0.0006	-0.2427	NONE
Near Peak Offset	-0.1399	-0.4336	NONE

Near Lith Offset	0.0515	-0.2222	NONE
Far Bar Offset	0.0262	-0.0054	NONE
Far Dens Offset	0.1296	0.1174	NONE
Far Peak Offset	0.1721	0.1277	NONE
Far Lith Offset	0.3386	0.2861	NONE
Near Bar Background	956.41	950.28	700 - 1450
Near Dens Background	316.89	315.69	230 - 480
Near Peak Background	137.59	137.20	100 - 210
Near Lith Background	167.00	167.11	125 - 260
Far Bar Background	505.28	503.52	450 - 900
Far Dens Background	199.86	200.75	175 - 345
Far Peak Background	78.21	78.34	70 - 140
Far Lith Background	81.91	81.60	75 - 145

CALIBRATION BLOCK SUMMARY				
Measurement	Current Reading (Previous Coef)	Calibrated (New Coef)	Change	Control Limit On Change
MAGNESIUM				
Density (g/cc)	1.684	1.680	-0.004	+/- 0.015
Pe	2.614	2.593	-0.021	+/- 0.150
ALUMINUM				
Density (g/cc)	2.602	2.600	-0.002	+/- 0.01500
Pe	3.091	3.099	0.008	+/- 0.150

TOOL SUMMARY				
Measurement	Near Detector		Far Detector	
	Value	Control Limits	Value	Control Limits
QUALITY				
Background	-0.0007	+/- 0.0110	-0.0008	+/- 0.0140
Magnesium Block	0.0003	+/- 0.0110	-0.0013	+/- 0.0140
Aluminum Block	-0.0004	+/- 0.0110	-0.0002	+/- 0.0140
Resolution	8.83	6.00 - 11.50	9.83	6.00 - 11.50
Internal Verifier(B+D+P+L)	1570	1200 - 2700	864	800 - 1700

PASS/FAIL SUMMARY	
Background Quality Check:	Passed
Background Range Check:	Passed
Background Resolution Check:	Passed
Background Verification Check:	Passed
Magnesium Quality Check:	Passed
Aluminum Quality Check:	Passed
Gains Check:	Passed
Changes in Calibration Blocks:	Passed

SPECTRAL DENSITY FIELD CHECK

Tool Name:	SDLT - I132M275	Reference Calibration Date:	17-Aug-10 13:55:48
Engineer:	F. LODER	Calibration Date:	24-Aug-10 02:46:40
Software Version:	WL INSITE R3.0.4 (Build 6)	Calibration Version:	1

Pad Temperature: 78.8 degF

DENSITY FIELD CALIBRATION SUMMARY	
-----------------------------------	--

Measurement	Shop	Field	Change	Control Limit +/-
Near (B+D+P+L) cps	1570.289	1566.615	-3.674	15.944
Far (B+D+P+L) cps	864.213	869.111	4.898	16.086
Near Resolution	8.83	8.85	0.020	0.50
Far Resolution	9.83	9.91	0.080	1.00

PASS/FAIL SUMMARY	
Bkg Quality Check:	Passed
Bkg Resolution Check:	Passed
Bkg Verification Check:	Passed

### DENSITY CALIPER SHOP CALIBRATION

Tool Name:	SDLT - I132M275	Reference Calibration Date:	28-Jul-10 22:10:07
Engineer:	C. BLUE	Calibration Date:	17-Aug-10 14:25:08
Software Version:	WL INSITE R3.0.4 (Build 6)	Calibration Version:	1

CALIBRATION COEFFICIENTS			
Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-2333.87	-2445.21	-7000.00 - -1000.00
Pad Gain	0.0003958	0.0003994	0.000200 - 0.000600
Arm Offset	-1329.91	-733.76	-5000.00 - 3000.00
Arm Gain	0.0005358	0.0004833	0.000300 - 0.000700
Arm Power	-0.000006602	-0.000003351	-0.000010 - 0.000010

The ring diameter is computed from: DIAMETER = PAD EXTENSION + ARM EXTENSION + TOOL DIAMETER

Tool Diameter: 4.50 in

CALIBRATION RINGS				
Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	2.03	2.00	-0.03	+/- 0.20
Medium Ring (in)	3.76	3.75	-0.01	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.43	6.50	0.07	+/- 0.20
Medium Ring (in)	8.30	8.25	-0.05	+/- 0.20
Large Ring (in)	15.00	15.00	0.00	+/- 0.20

PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed

PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed

### BCAS FIELD CASING CHECK

Tool Name:	BSAT - 1105780	Calibration Date:	24-Aug-10 06:59:50
Engineer:	F. LODER		
Software Version:	WL INSITE R3.0.4 (Build 6)	Calibration Version:	1


Pre-Log Check	Check Depth	Shop	Field	Difference	Tolerance	Units
Delta-T Compensated	593.70	57000000.00	56.02	56,999,943.9800	1.00	uspf

### ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION

Tool Name:	ACRt - 90199477-E2817-S4353	Reference Calibration Date:	04-Jun-10 17:05:07
Engineer:	C. BLUE	Calibration Date:	13-Aug-10 20:06:47



Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
					85.01 ft	
RWCH-A094 135.00 lbs		Ø 3.625 in →		← Load Cell @ 81.33 ft ← BH Temperature @ 80.76 ft	6.25 ft	78.76 ft
GTET-11277436 165.00 lbs		Ø 3.625 in →		← GammaRay @ 72.70 ft	8.52 ft	70.24 ft
CSNG-10965402 114.00 lbs		Ø 3.625 in →		← CSNG @ 64.61 ft	8.17 ft	62.07 ft
DSNT-11301132 174.00 lbs	DSN Decentralizer- 10860047 6.60 lbs	Ø 3.625 in* → Ø 3.625 in →		← DSN Far @ 55.14 ft ← DSN Near @ 54.39 ft	9.69 ft	52.39 ft
SDLT-1132M275 360.00 lbs		Ø 4.500 in → Ø 4.750 in →		SDL Microlog @ 44.57 ft SDL Caliper @ 44.39 ft SDL @ 44.38 ft	10.81 ft	41.57 ft
Flex Joint - Pressure Comp- FLEX-BLACK 140.00 lbs		Ø 3.625 in →			5.97 ft	35.60 ft
Centralizer 29-CENT-2 12.00 lbs		Ø 4.000 in* →				

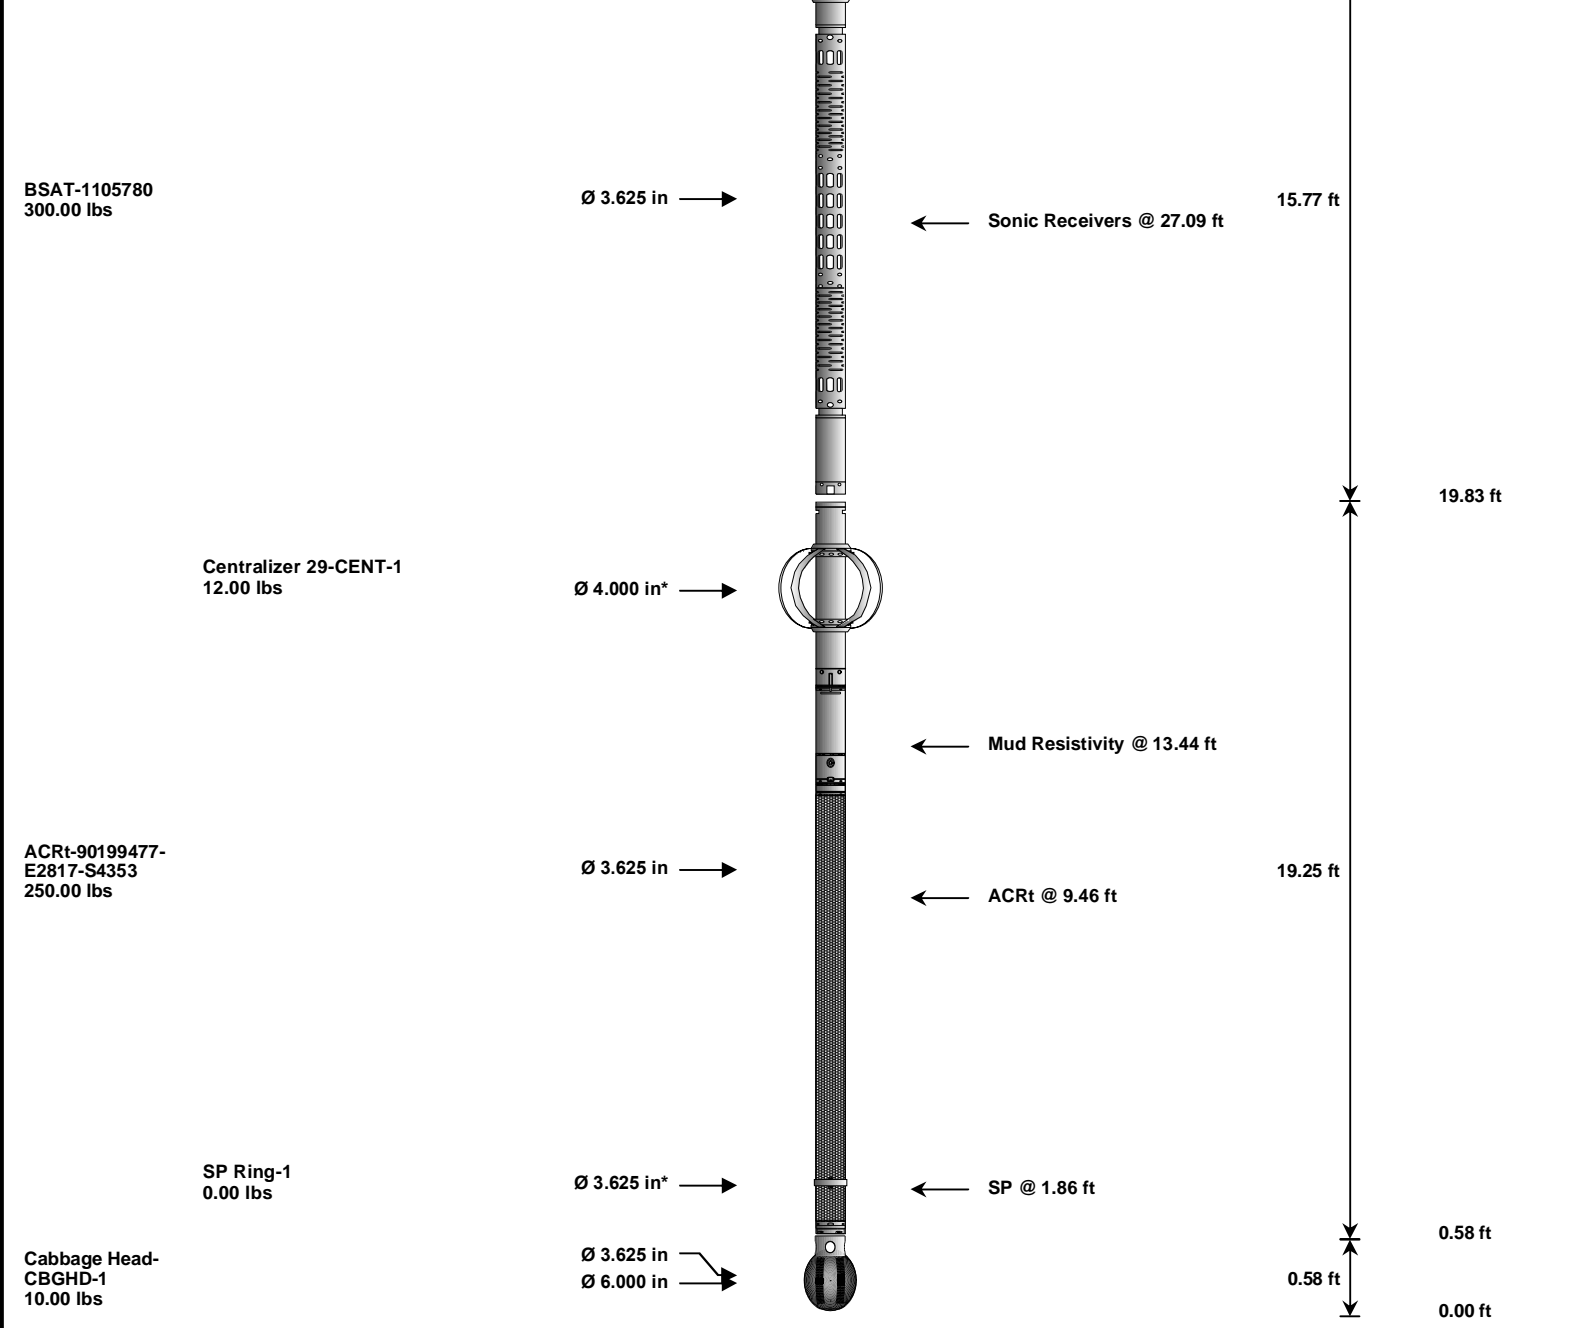

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
RWCH	Releasable Wireline Cable Head	A094	135.00	6.25	78.76	300.00
GTET	Gamma Telemetry Tool	11277436	165.00	8.52	70.24	60.00
CSNG	Compensated Spectral Natural Gamma	10965402	114.00	8.17	62.07	15.00
DSNT	Dual Spaced Neutron	11301132	174.00	9.69	52.39	60.00
DCNT	DSN Decentralizer	10860047	6.60	5.13	* 55.72	300.00
SDLT	Spectral Density Tool	1132M275	360.00	10.81	41.57	60.00
FLEX	Flex Joint - Pressure Compensated	FLEX-BLACK	140.00	5.97	35.60	300.00
BCAS	Borehole Sonic Array Tool	1105780	300.00	15.77	19.83	60.00
OBCEN	Centralizer - 29 in.Overbody	CENT-2	12.00	2.42	* 32.66	300.00
ACRt	Array Compensated True Resistivity	90199477-E2817-S4353	250.00	19.25	0.58	300.00
SP	SP Ring	1	0.00	0.25	* 1.86	300.00
OBCEN	Centralizer - 29 in.Overbody	CENT-1	12.00	2.42	* 16.29	300.00
CBHD	Cabbage Head	CBGHD-1	10.00	0.58	0.00	300.00

<b>Total</b>			<b>1,678.60</b>	<b>85.01</b>		
* Not included in Total Length and Length Accumulation.						
Data: WLCKR_AB01_07P10001 NOBLE_BLACK_BSATIDLE						Date: 24-Aug-10 06:07:51

WELL WALCKER USX AB01-07P

FIELD WATTENBERG

COUNTY	WELD	STATE	CO
--------	------	-------	----

# HALLIBURTON

# DUAL SPACED NEUTRON SPECTRAL DENSITY ARRAY COMPENSATED TRUE RESISTIVITY LOG