

P&A Procedure for the Douglas Creek Unit #9

36-2S-102W Rio Blanco, Colo.

7 5/8" @ 24# at 68' TOC at Surface

5 1/2" 14# @ 1,550' TOC unknown

4 3/4" Open Hole to 2,050'

Tubing: 1.9" at 1,916'

Perfs: Open Hole

Prior to MIRU – arrange a 2 3/8" work string

MIRU

NDWH, NUBOP

POH and lay down 1.9" tubing

Pickup 2 3/8" work string, and RIH with bit to 1540'

POH

RIH with CICR and set at same depth

Pressure test tubing

Sting out of CICR

Spot 20 sxs on CICR (172' in 5 1/2")

Roll hole with produced water

Pressure test casing, if it fails call for orders

POH

Perforate 50' below base of surface @ 118'

NDBOP

Circulate cement to surface (40 sxs is 184' in 7 5/8" csg)

Cut off the wellhead

Weld a plate with well information

RDMO

All cement is 15.8# class G neat with a 1.15 cuft/sack yield

Well Name: Douglas Creek Unit 9

API #: 05103050980000

Location: Sec. 36-2S-102W

KB: 6,130' (9' AGL)


GL: 6,121'

County/St: Rio Blanco, CO

Created By: M. Bale

Date: 4/9/2012

Current Wellbore

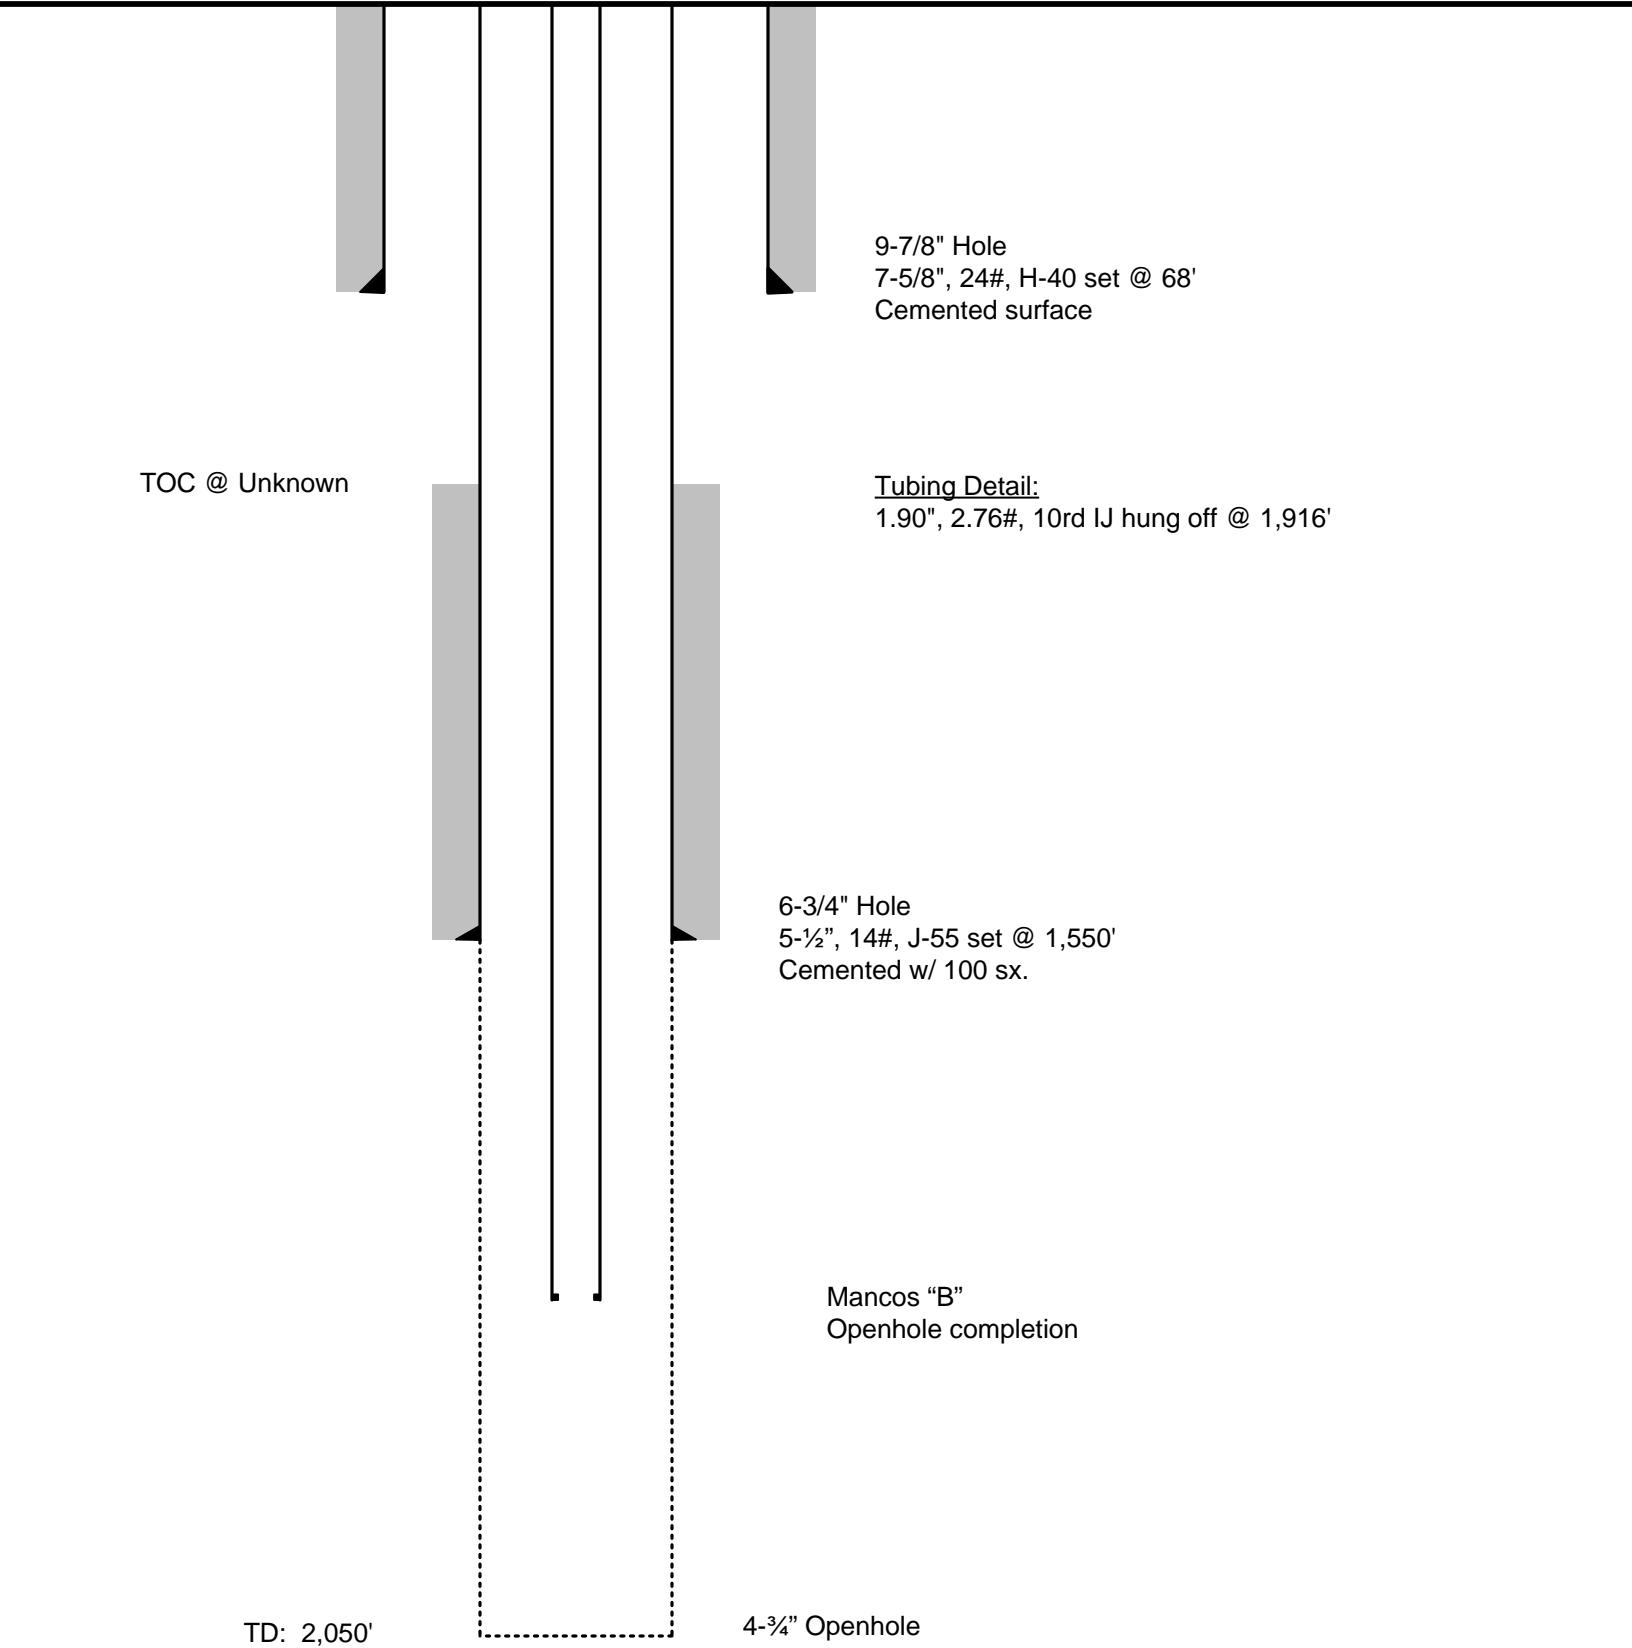

Well Name: Douglas Creek Unit 9

API #: 05103050980000

Location: Sec. 36-2S-102W

KB: 6,130' (9' AGL)

GL: 6,121'

County/St: Rio Blanco, CO

Created By: M. Bale

Date: 4/9/2012

Proposed Wellbore

