

P&A Procedure for the Cathedral Fed 22-2

22-2S-101W Rio Blanco County, Colo

8 5/8" 32# @ 197' TOC at Surface

4 1/2" 10.5# @ 2,507' TOC 1,632' CBL

Tubing: 2 1/16" at 2,385'

Perfs: 2,047'-2,388'

MIRU

NDWH, NUBOP

POH and lay down 2 1/6" tubing

Run gauge ring to 2,000' on wireline

Set CIBP on wireline at 2,000' and dump 35' of cement

(Adjust CIBP depth to avoid a collar if necessary)

Load hole and pressure test casing, if it fails call for orders

Perforate 50' below base of surface @ 247'

Establish circulation

NDBOP

Circulate cement to surface (50 sxs is 260' in 8 5/8")

Cut off the wellhead

Add cement if necessary

Weld a plate with well information, RDMO

All cement is 15.8# class G neat with a 1.15 cuft/sack yield

Well Name: Cathedral Fed 22-2

API #: 05103077940000

Location: Sec. 22-2S-101W

KB: 5,929' (9' AGL)


GL: 5,920'

County/St: Rio Blanco, CO

Created By: T. Gallagher

Date: 8/6/2012

Current Wellbore

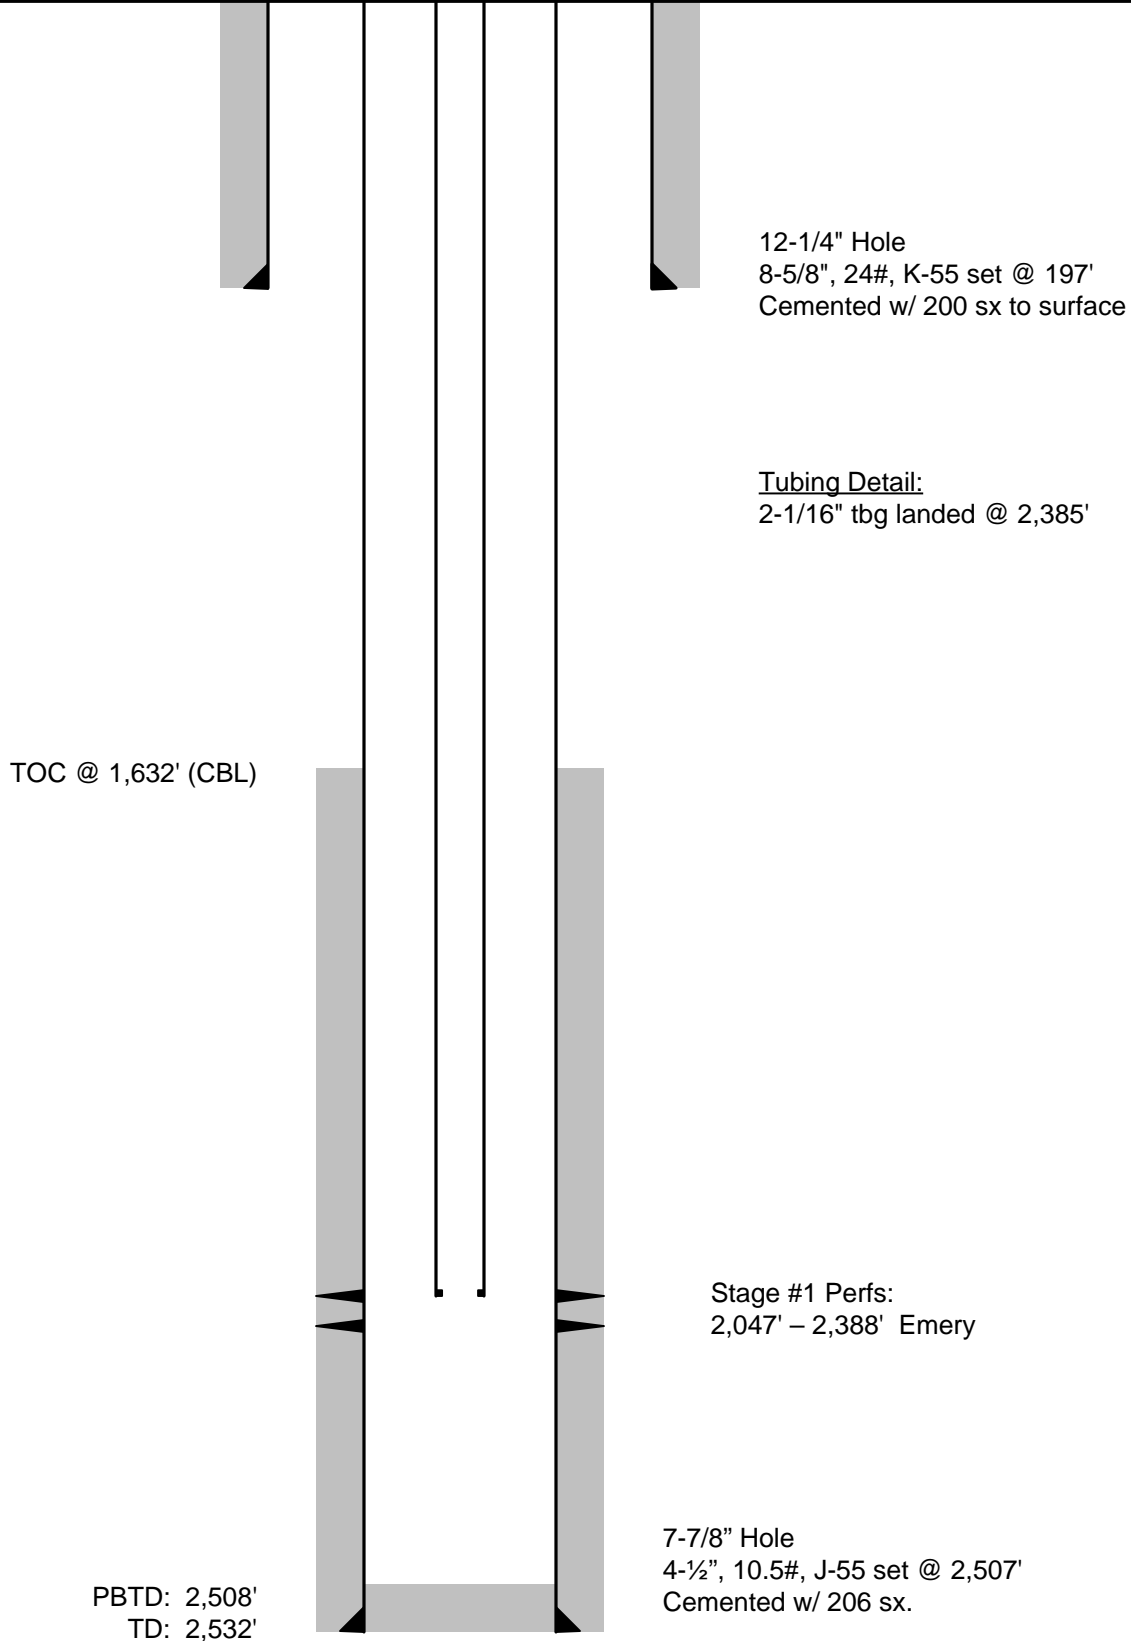

Well Name: Cathedral Fed 22-2

API #: 05103077940000

Location: Sec. 22-2S-101W

KB: 5,929' (9' AGL)

GL: 5,920'

County/St: Rio Blanco, CO

Created By: T. Gallagher

Date: 8/6/2012

Proposed Wellbore

