

NOBLE ENERGY INC.
 STATE A 36-99HZ
 NWNW 36-6N-64W
 300' FNL & 540' FWL
 Weld County, Colorado
 Wattenberg
 CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 10/23/2012

API: 05-123-32261
 COGCC #


GL Elev: 4629
 KB Elev: 4653

Spud Date: 10/30/2010

Surface Casing :
 9 5/8" 36# @668.3'
 Cement: 292 sx
 TOC: Surface

Intermediate Casing:
 7" 26# @7165.1'
 Cement: 1080'-7175' (600 sx)

Production Liner:
 4 1/2" 11.6# 6028.9' - 12140'
 Cement: 0
 TD: 12/5/2010

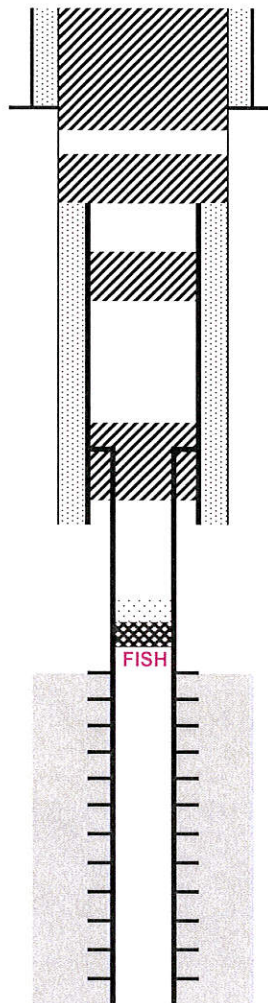

Cut surface casing off 6'-8' below surface.

Pump approx 350 sx shoe plug @ 770'
 Will bring cement to surface.

Cut and pull csg @ 1000'. Pump 100 sx plug (900'-1100')

Plug 40 sx @ 2500'

Balanced Plug from 5928' - 6128' (approx 50 sx)

CIBP @ 7200' w/ 25 sx balance plug on top
 FISH @ approx. 7303' - 7338'

Niobrara Interval 7513' - 11928'

TD: 12140