



Weatherford

CALIPER LOG

COMPANY

EAST CHEYENNE GAS STORAGE LLC

WELL
ECGS No 6-19D WPD003-1FIELD
PEETZ WESTPROVINCE/COUNTY
LOGANCOUNTRY/STATE
USA/COLORADOLOCATION
SESE 653' FSL AND 716' FEL

SEC

TWP
6
11NRGE
52WOther Services
MAI

MPD/MDN

CMI

API Number
05-075-09409

Permit Number

Permanent Datum GL, Elevation 4553 feet

Log Measured From KB

Drilling Measured From KB

Date
28-OCT-2012Run Number
ONE

Depth Driller

5285.00

feet

Depth Logger

5288.00

feet

First Reading

5232.00

feet

Last Reading

1216.00

feet

Casing Driller

1220.00

feet

Casing Logger

1216.00

feet

Bit Size

8.750

inches

Hole Fluid Type

WBM

Density / Viscosity

9.90 lb/USg

52.00 CP

PH / Fluid Loss

7.50

7.50 ml/30Min

Sample Source

FLOWLINE

Rm @ Measured Temp

3.33 @ 62.7

ohm-m

Rmf @ Measured Temp

2.664 @ 62.7

ohm-m

Rmc @ Measured Temp

3.996 @ 62.7

ohm-m

Source Rmf / Rmc

CALC

CALC

Rm @ BHT

1.401 @153.0

ohm-m

Time Since Circulation

4 HOURS

Max Recorded Temp

153.00

deg F

Equipment Name

COMPACT

Equipment / Base

13144

RK SPR

Recorded By

T. BENICH

J. PAULSON

L. CARRASCO

J. ASHBY

L. CARRASCO

BOREHOLE RECORD

Last Edited: 28-OCT-2012 21:23

Bit Size
inches

8.750

Depth From
feet

1216.00

Depth To
feet

5288.00

CASING RECORD

Type

Size
inches

9.625

Depth From
feet

0.00

Shoe Depth
feet

1216.00

Weight
pounds/ft

36.00

REMARKS

SOFTWARE VERSION 13.03.7779

TOOLS RUN: SHA, MCG, MDN, MPD, MIS-D, SKJ, MIS-E, SKJ, SHA, MIM, MIE, SKJ, MFE, MAI RUN IN COMBINATION.

HARDWARE:

MPD: 8" PROFILE PLATE USED.

MAI: TWO 1 INCH STANDOFFS USED.

MDN: DUAL BOWSPRING USED.

MIM: ONE NONMETALIC CENTRALIZING BASKET USED.

MIE: ONE 1 INCH STANDOFF USED

2.65 G/CC DENSITY MATRIX USED TO CALCULATE POROSITY FROM TD TO BOTTOM OF FORT HAYES FORMATION(5288FT TO 4700FT).

2.71 G/CC DENSITY MATRIX USED TO CALCULATE POROSITY IN FORT HAYES AND NIOBRARA FORMATION (4700 FT TO 4200 FT).

TIGHT PULLS, BOREHOLE SIZE AND RUGOSITY WILL AFFECT REPEATABILITY AND DATA QUALITY.

IMAGER PAD 3 APPEARED TO HAVE COMMS PROBLEMS FROM 5170 FT TO 4890 FT.

PAD 6 APPEARS TO HAVE BAD BUTTONS.

CALIPERS WERE CLOSED AND REOPENED AT 4795 TO TRY TO REMOVE MUDCAKE

ALL INTERVALS LOGGED AND SCALED PER CUSTOMER'S REQUEST.

LAT/ LONG: 40.95080 N / 103.21282 W

TOTAL HOLE VOLUME FROM TD TO SURFACE CASING =1800 CUBIC FEET

ANNULAR VOLUME WITH 7 INCH PRODUCTION CASING FROM TD TO SURFACE CASING = 730 CUBIC FEET

TOTAL VOLUME FROM TD TO 4200 FT =440 CUBIC FEET


ANNULAR VOLUME WITH 7 INCH PRODUCTION CASING FROM TD TO 4200 FT = 160 CUBIC FEET


SERVICE ORDER: 3531933



OPERATOR: B. PECK



RIG: CADE 22



All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

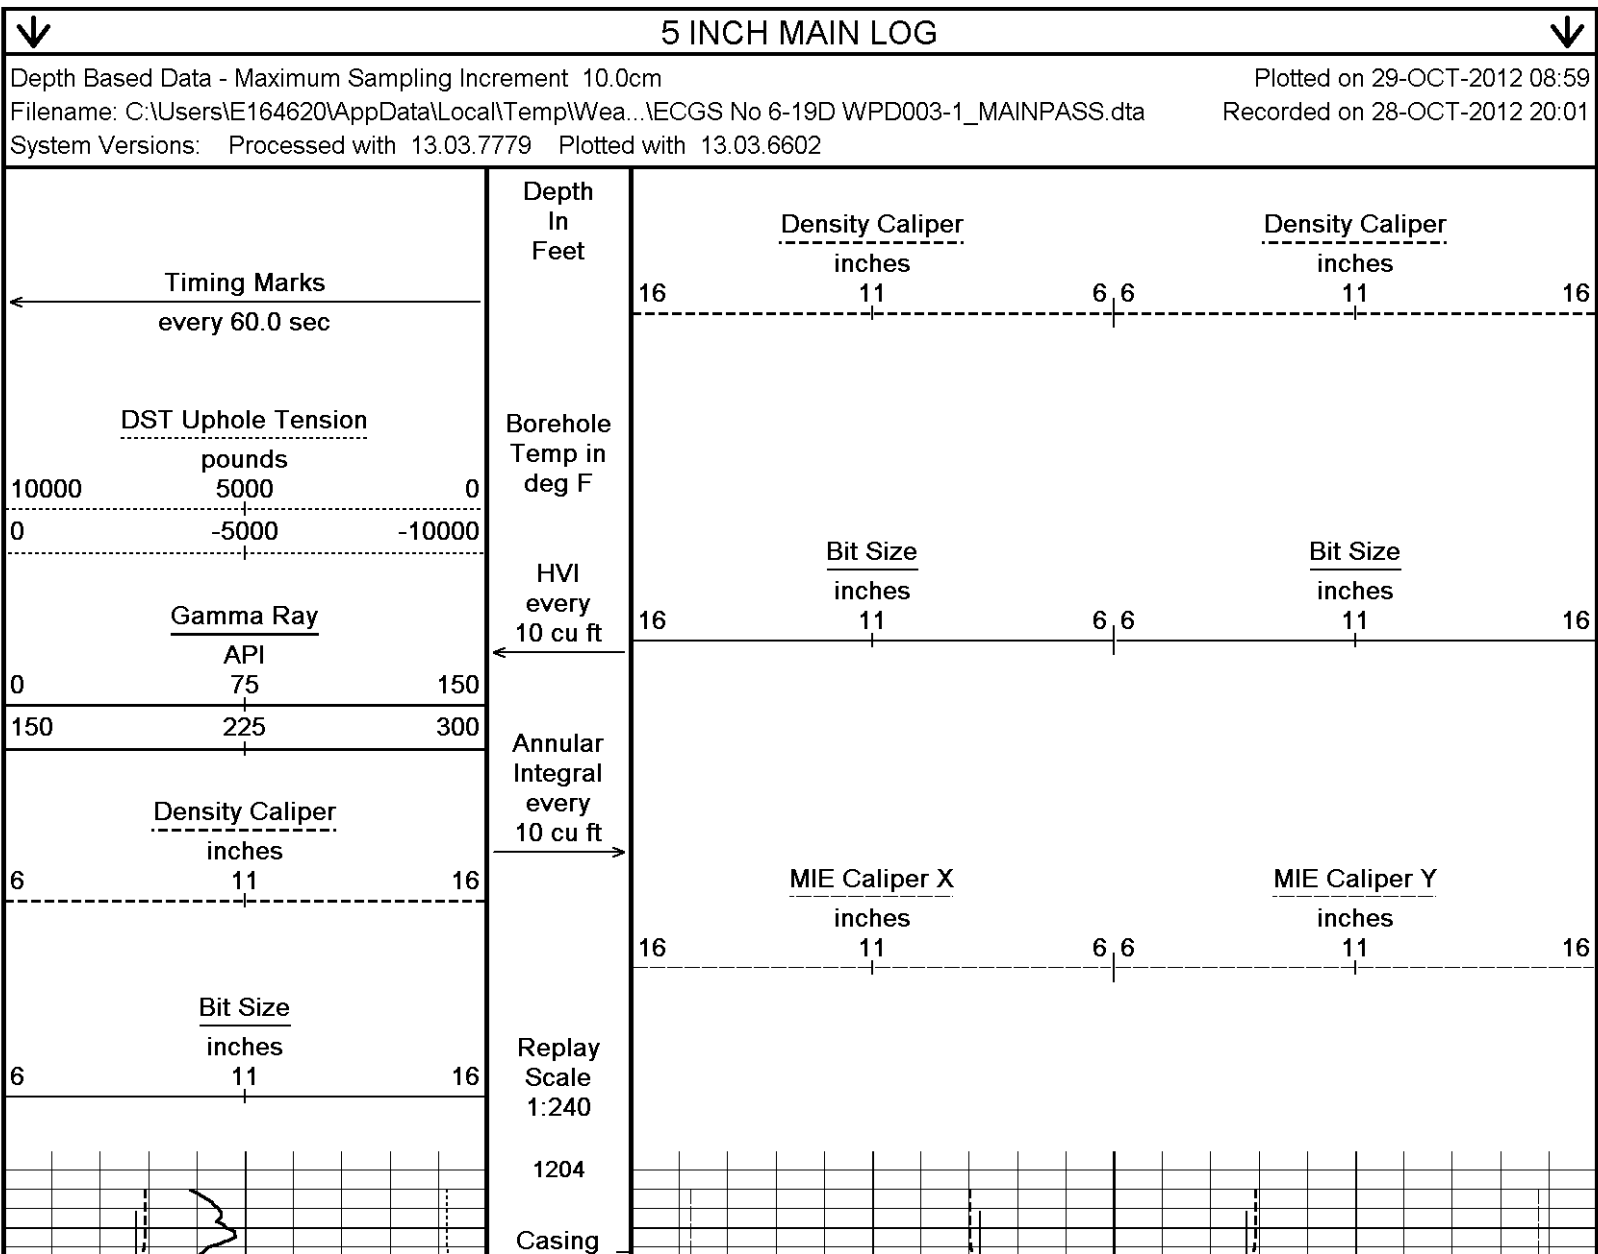


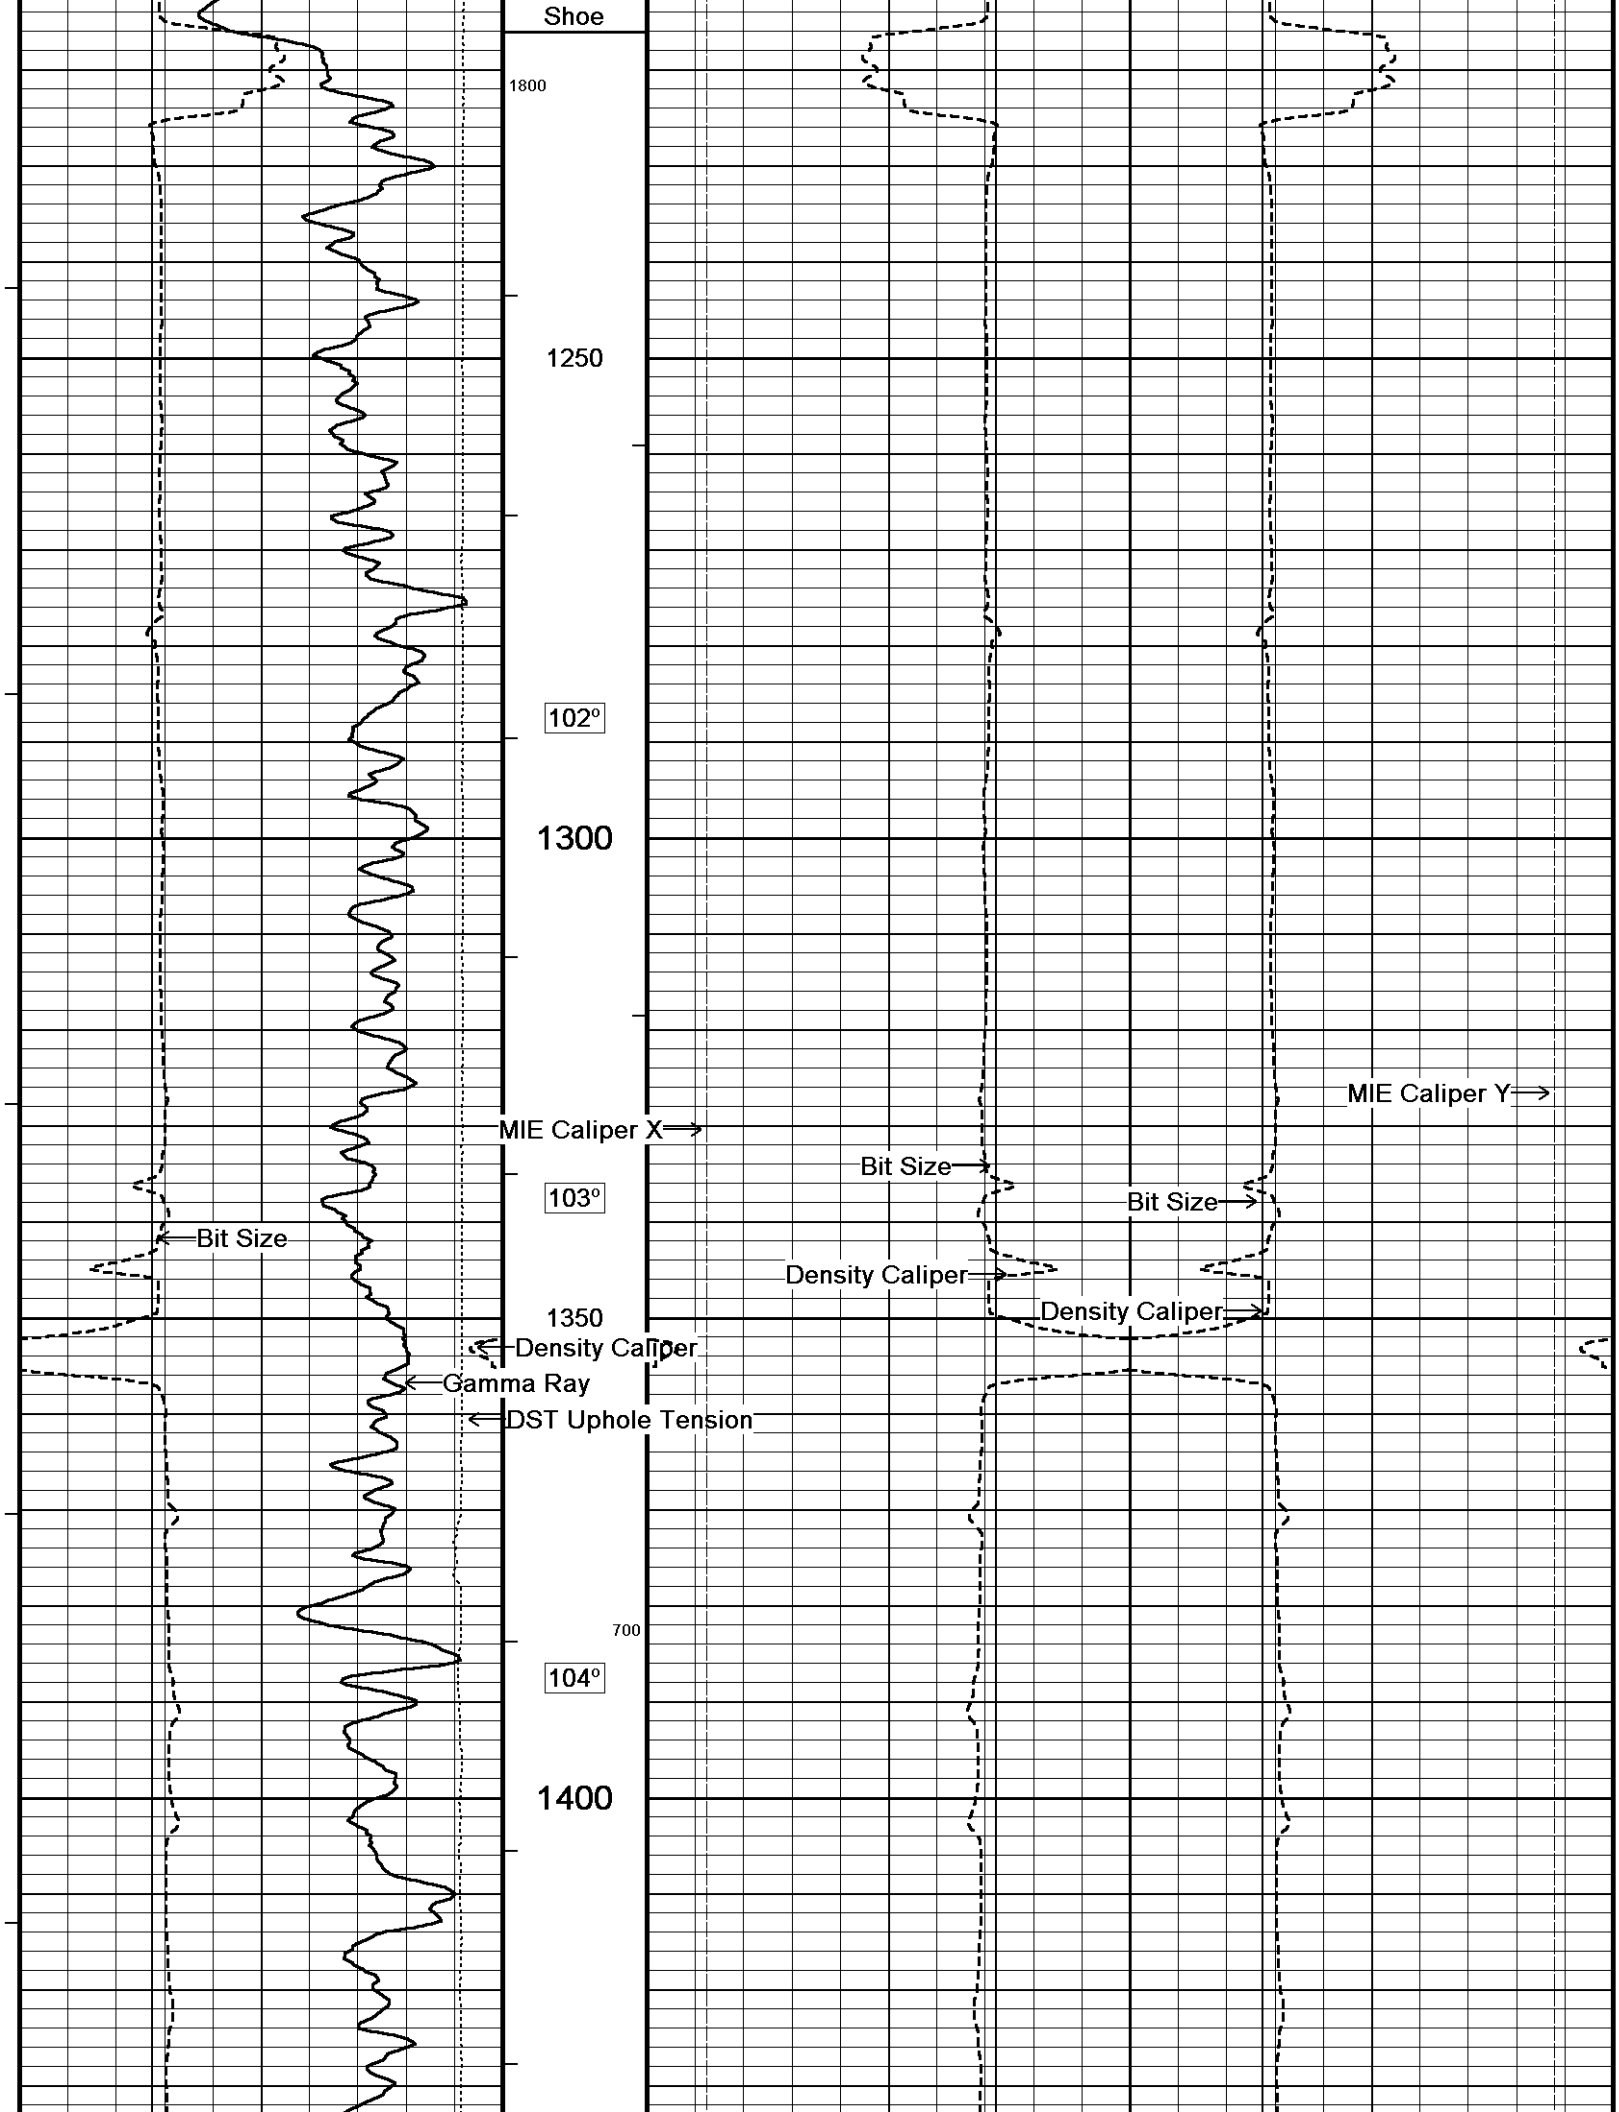


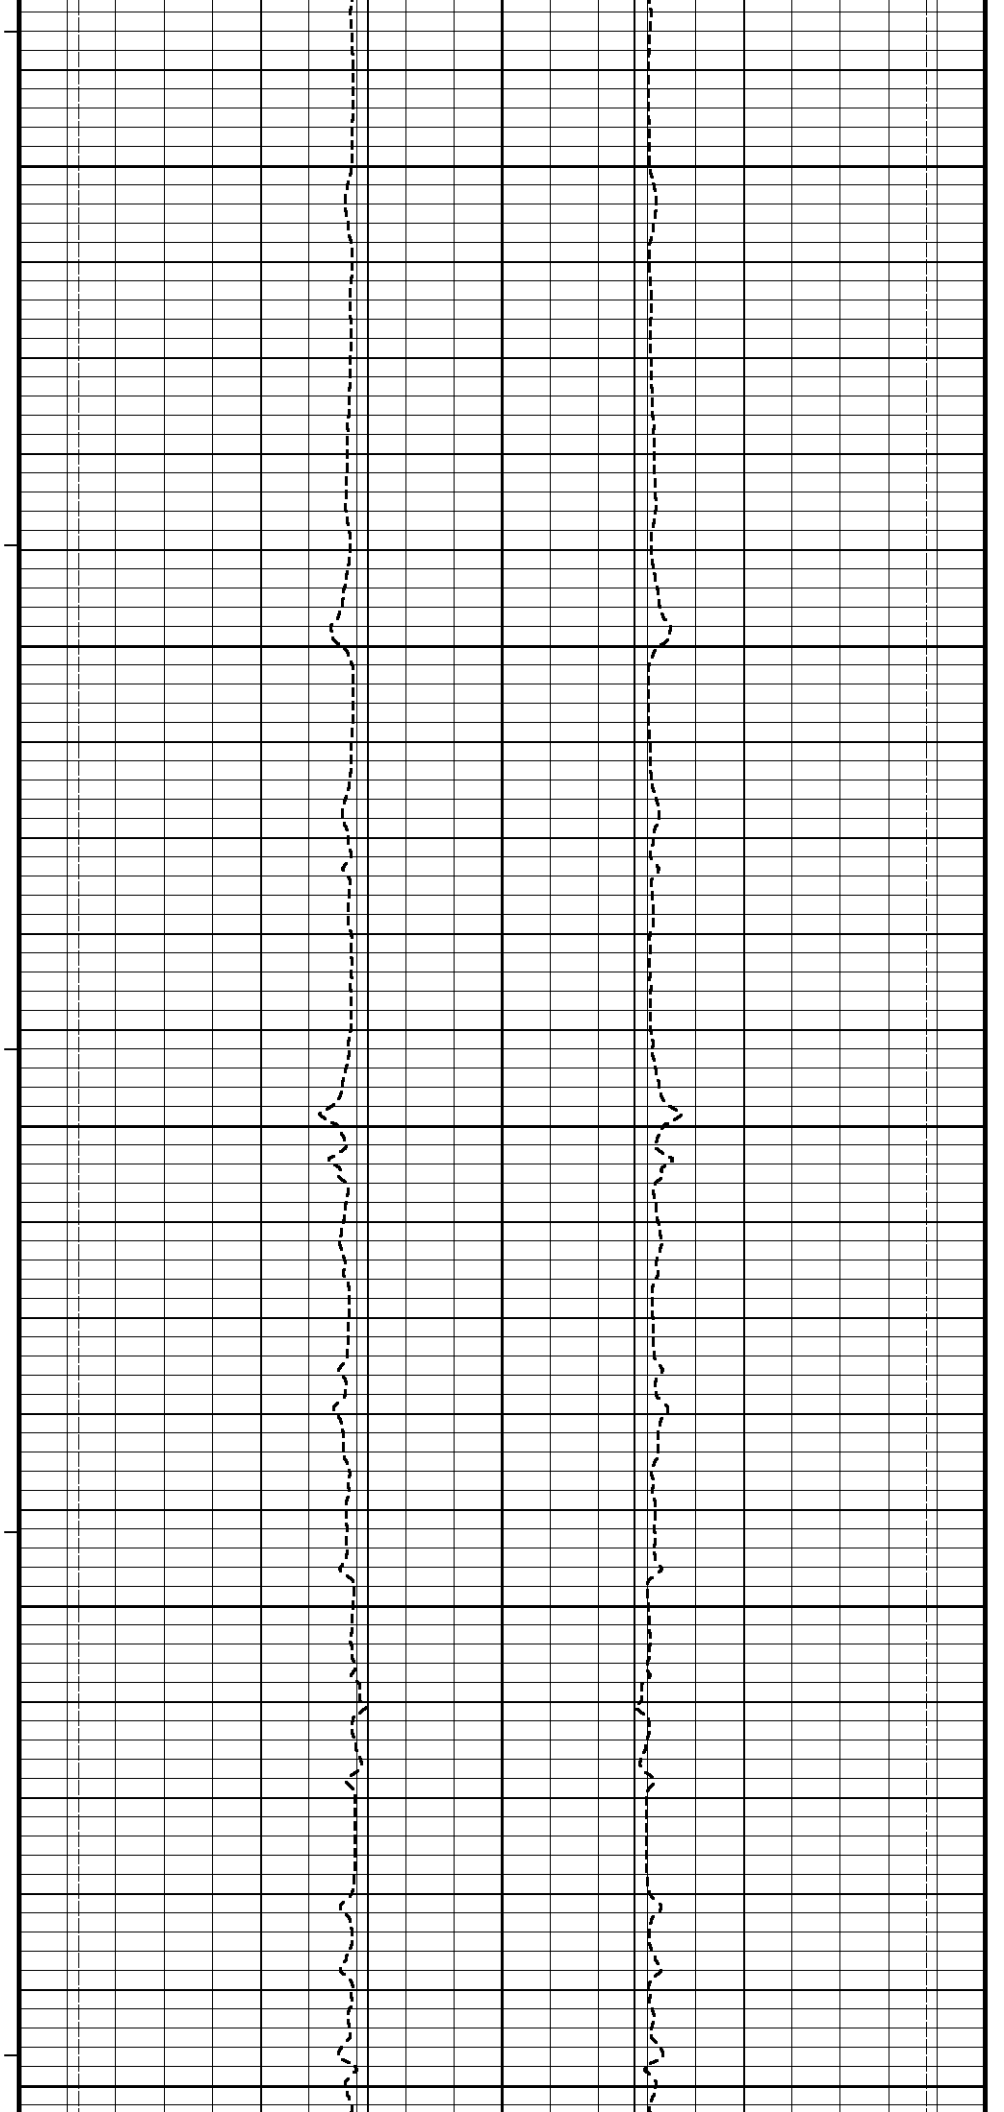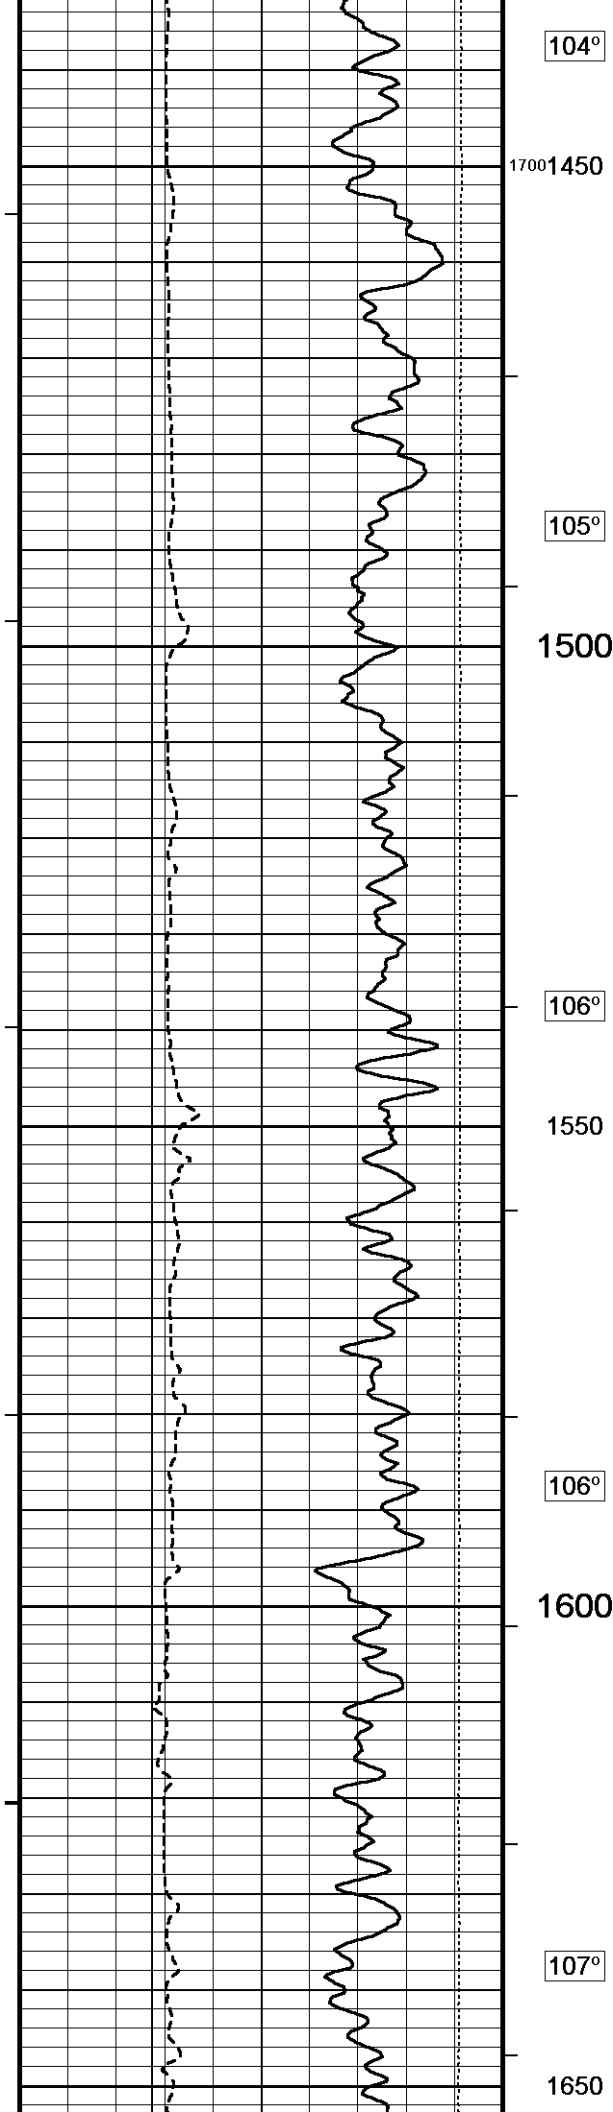


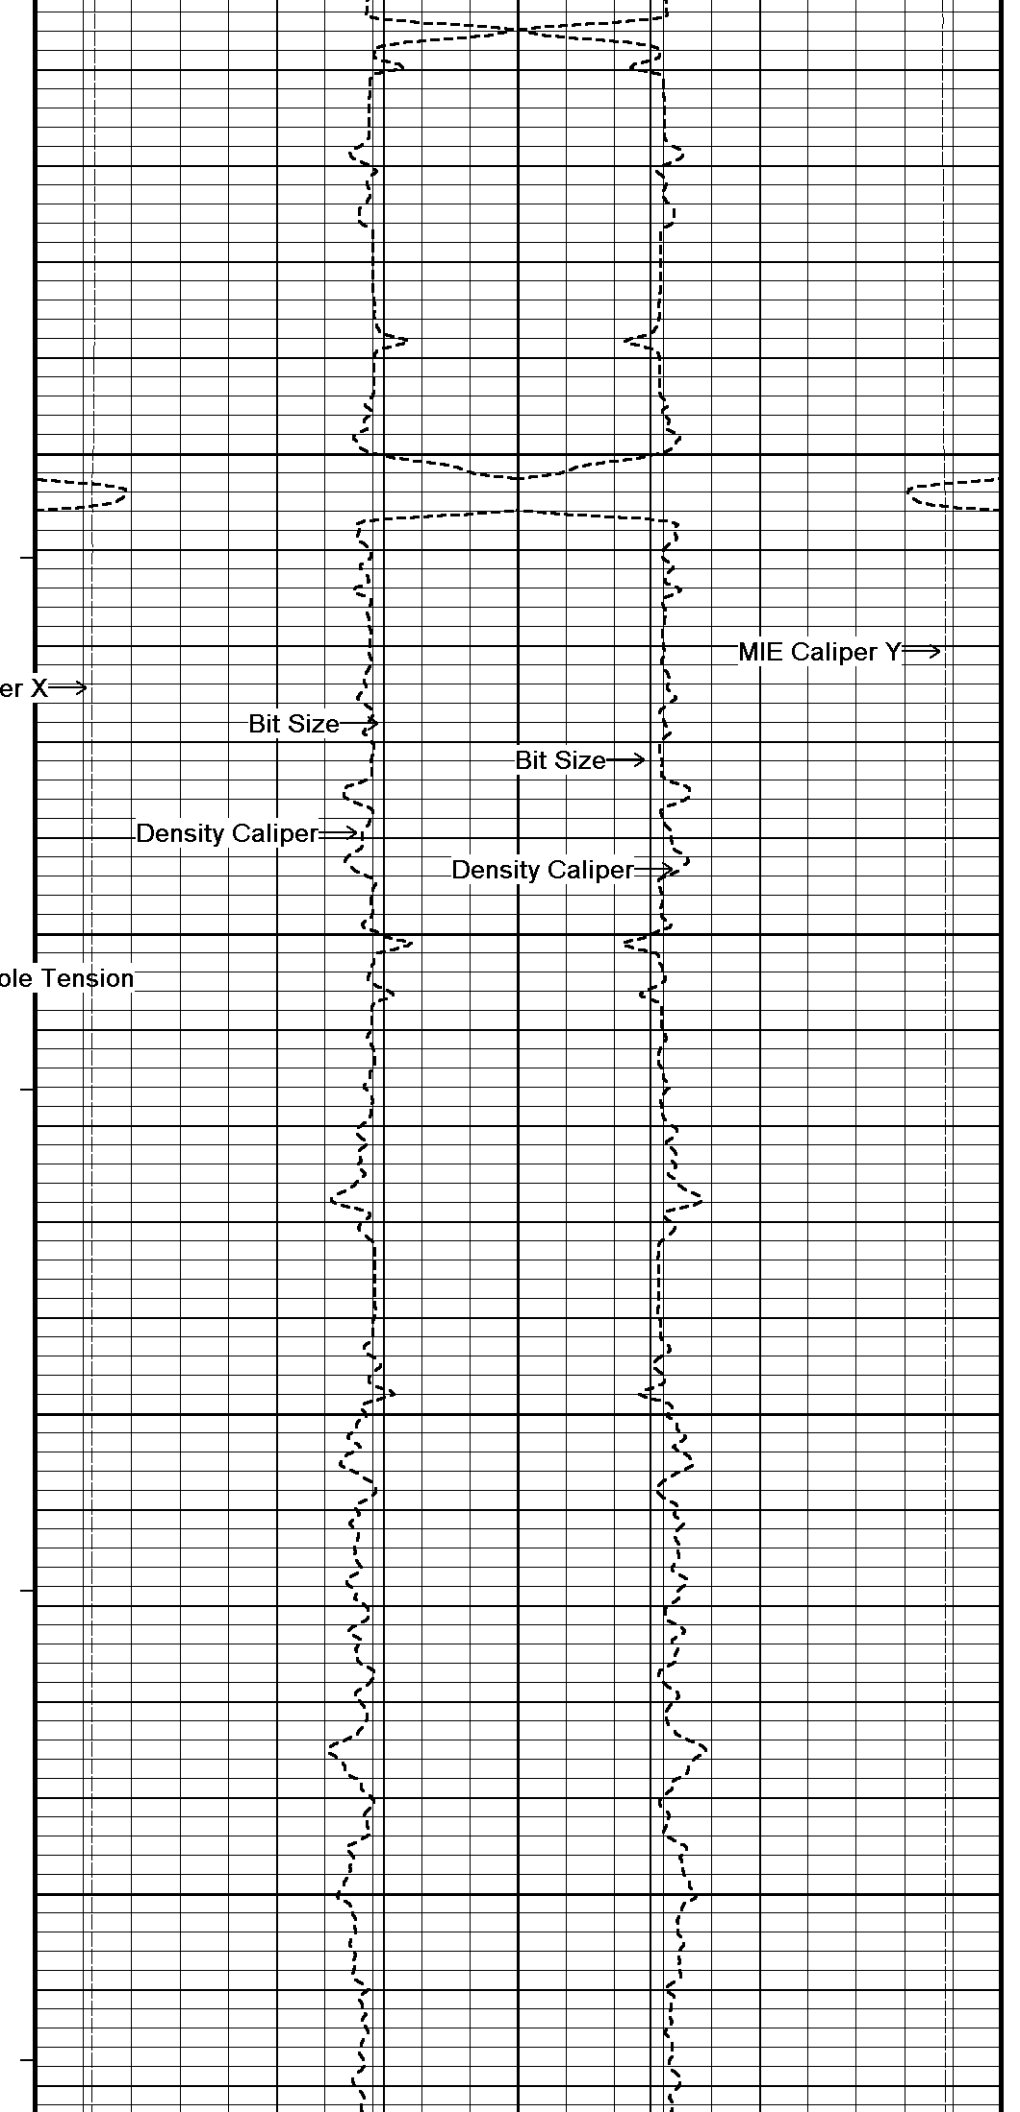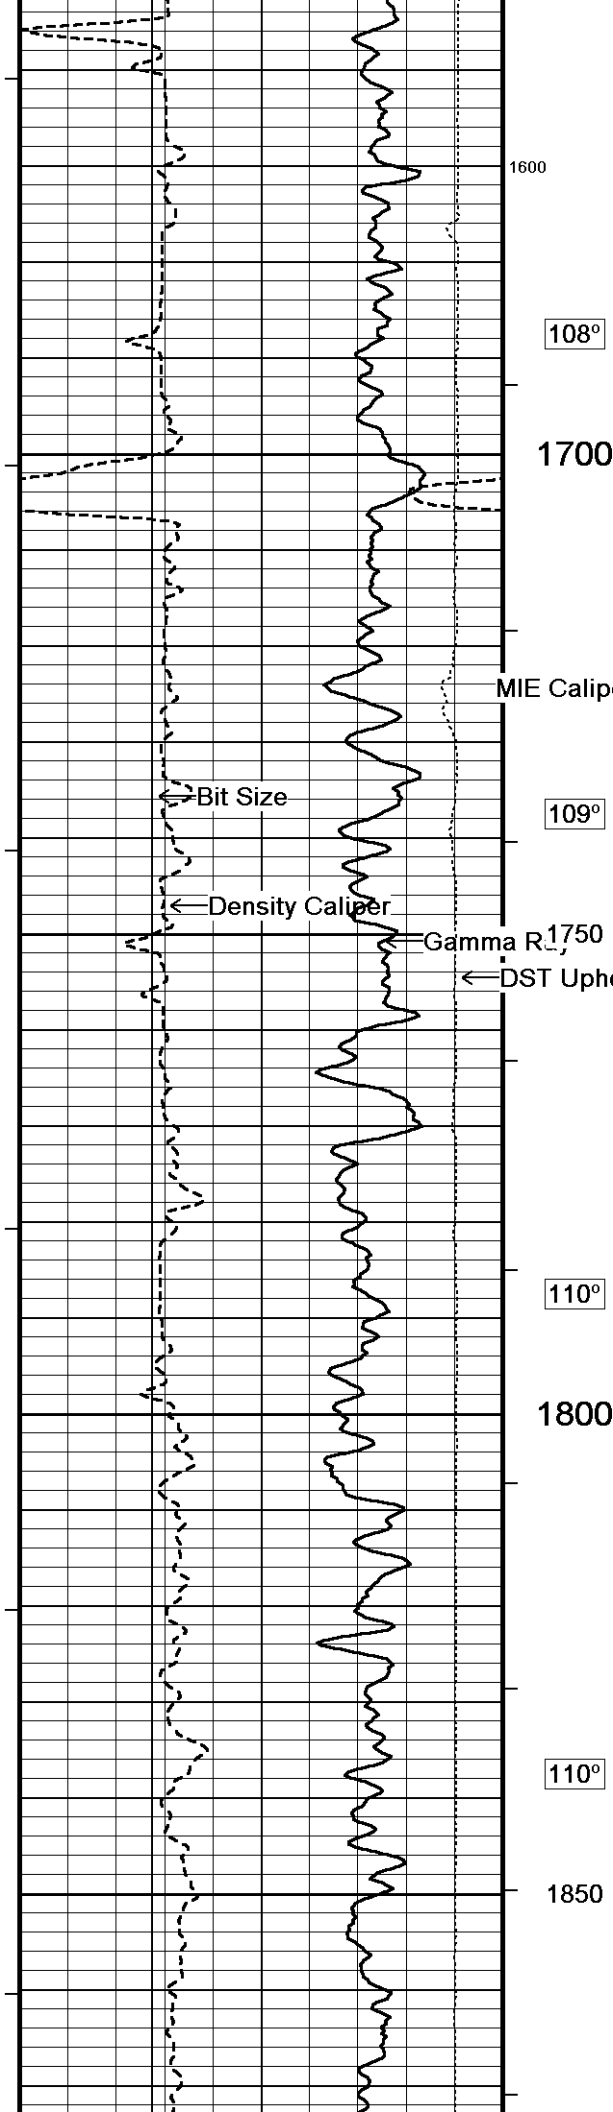


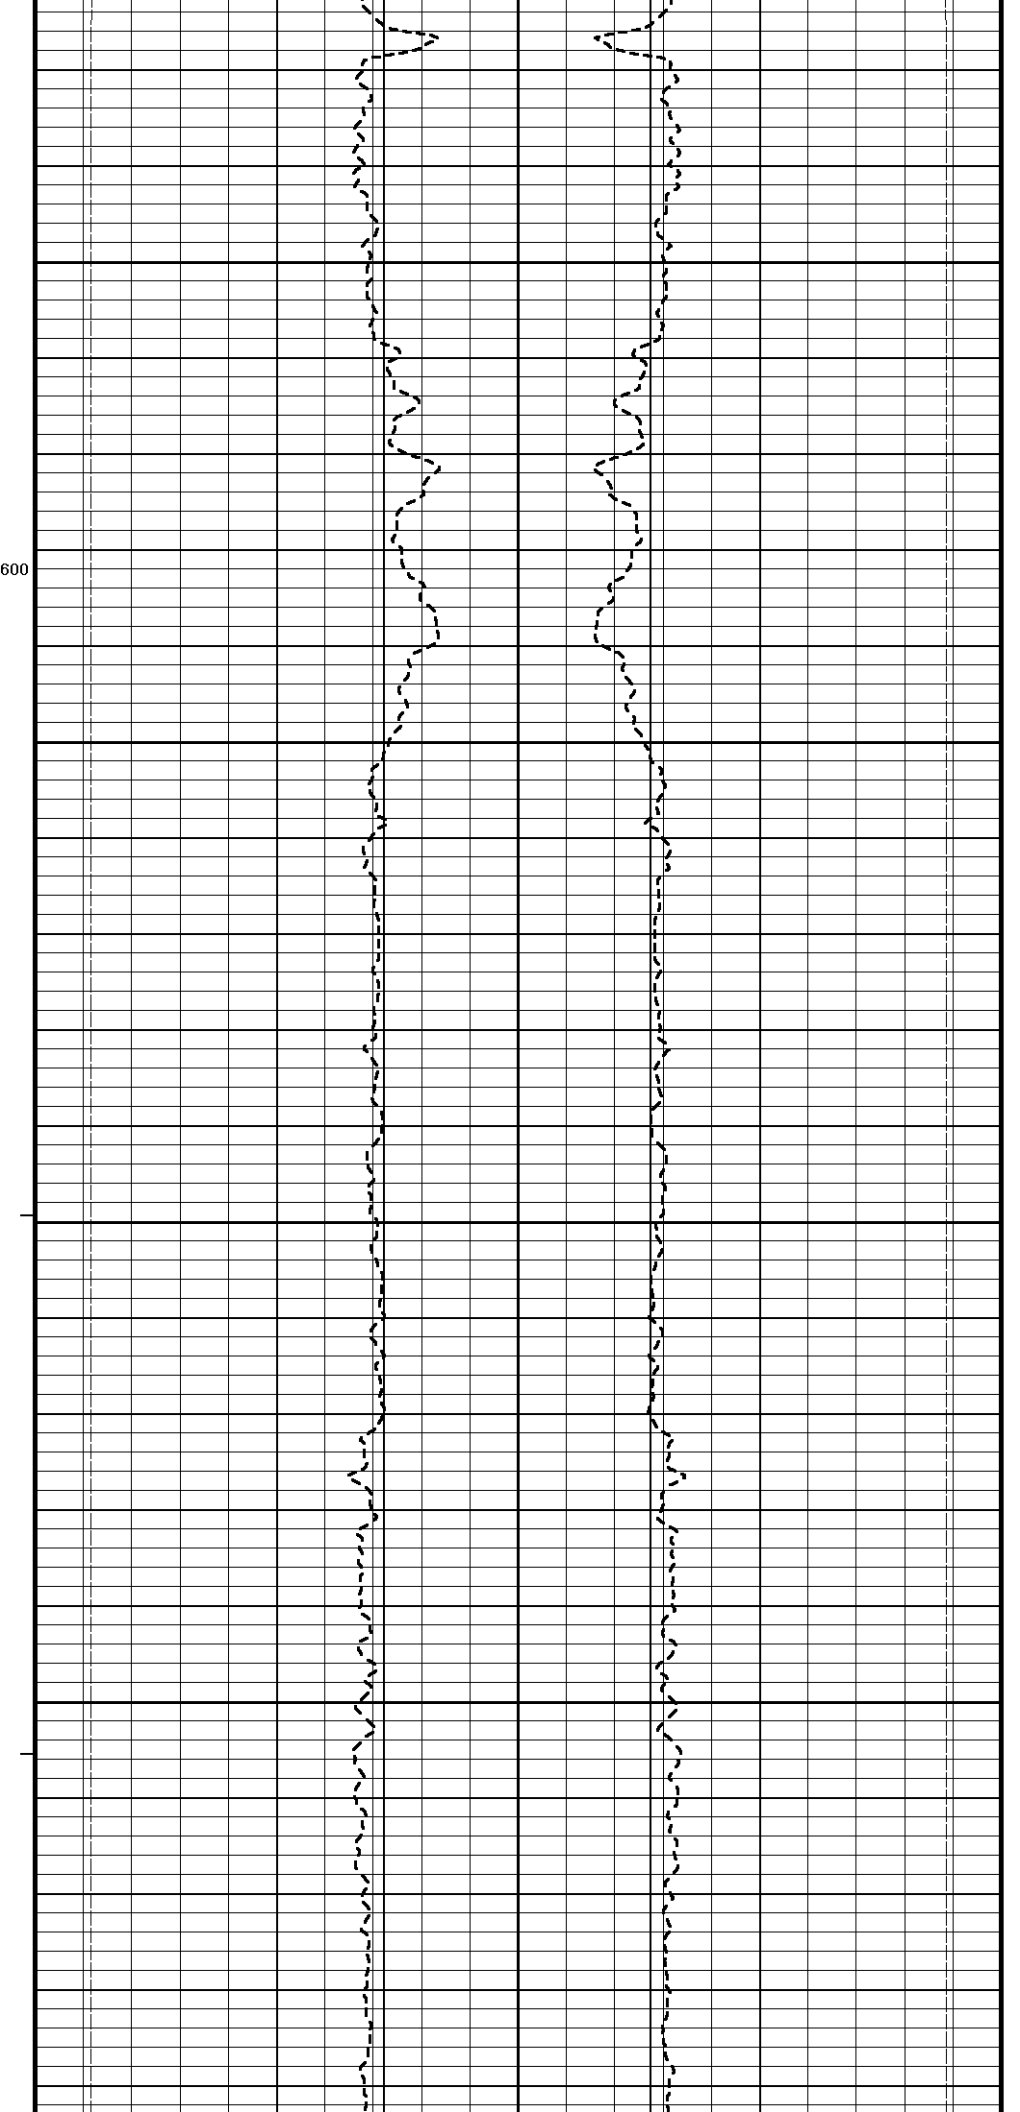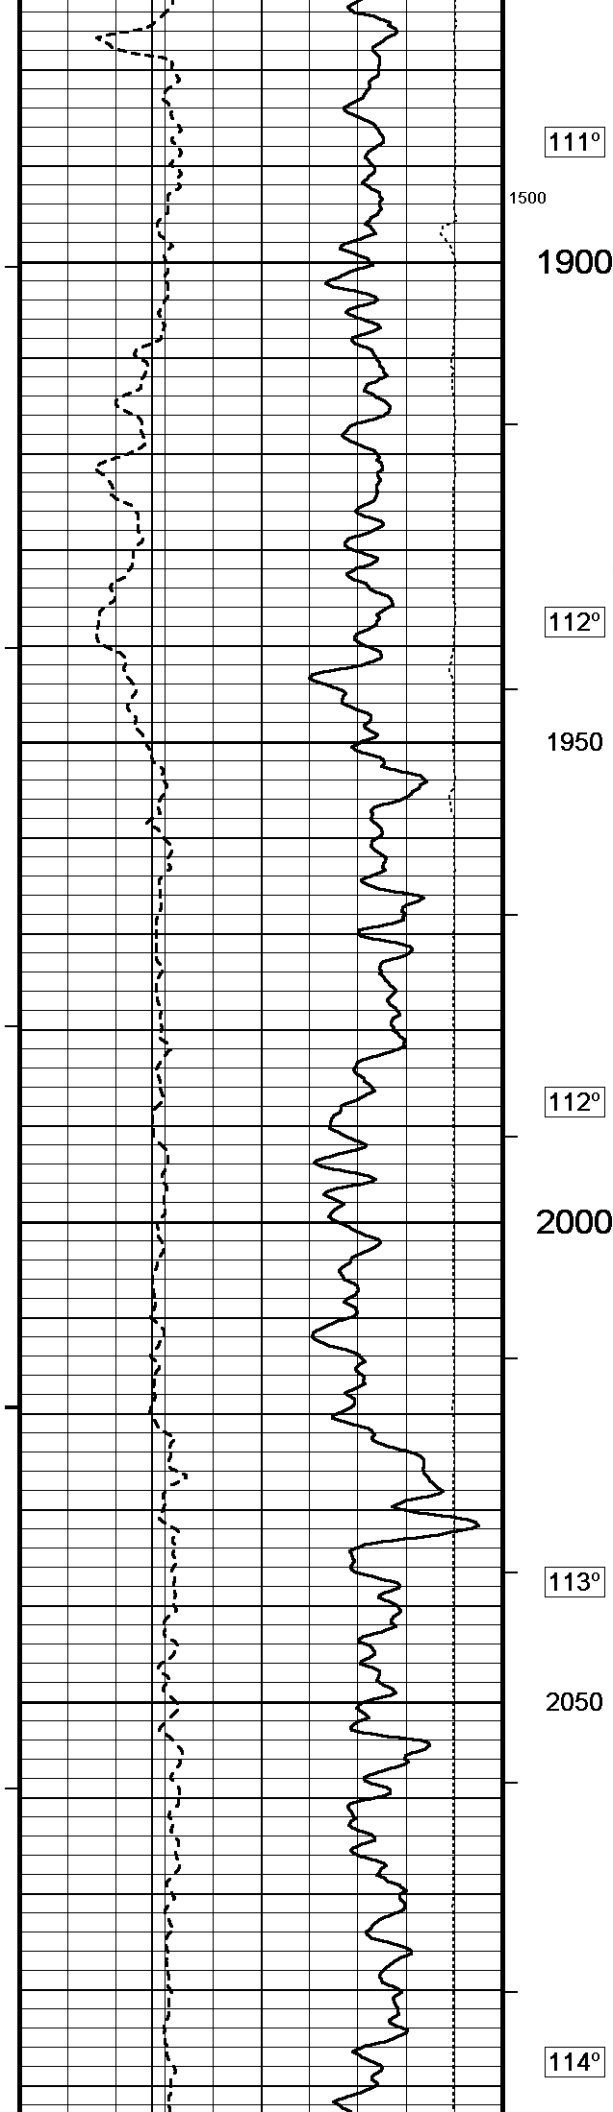


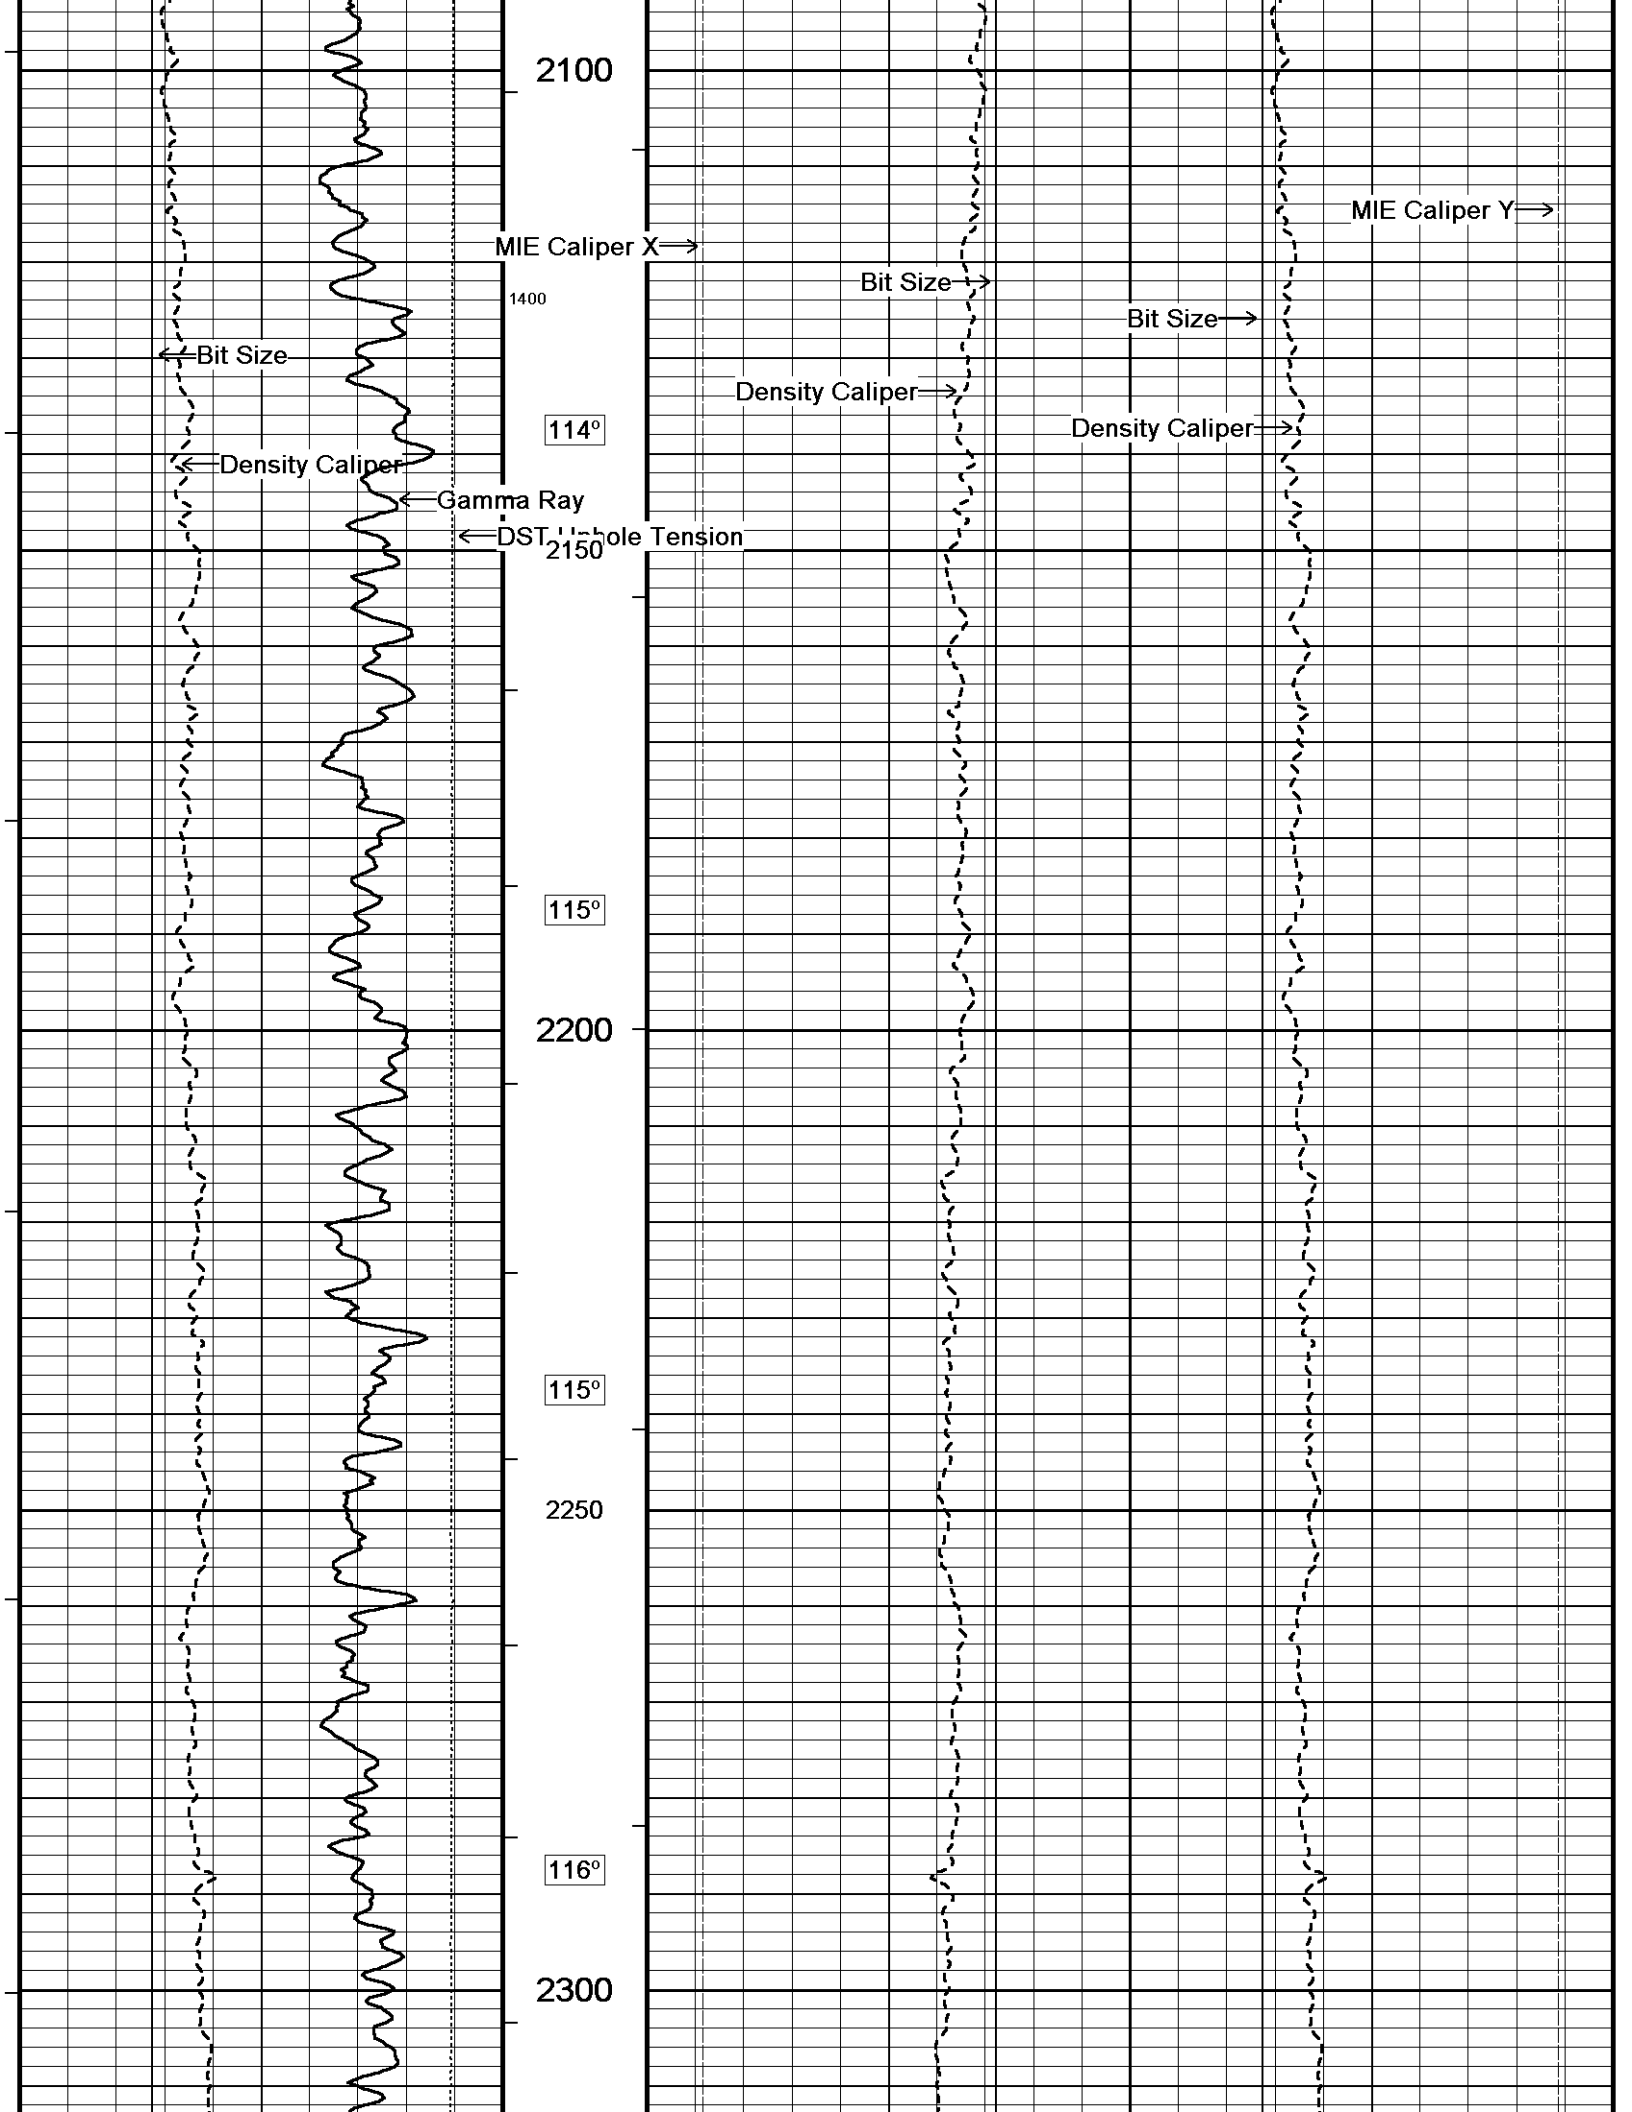



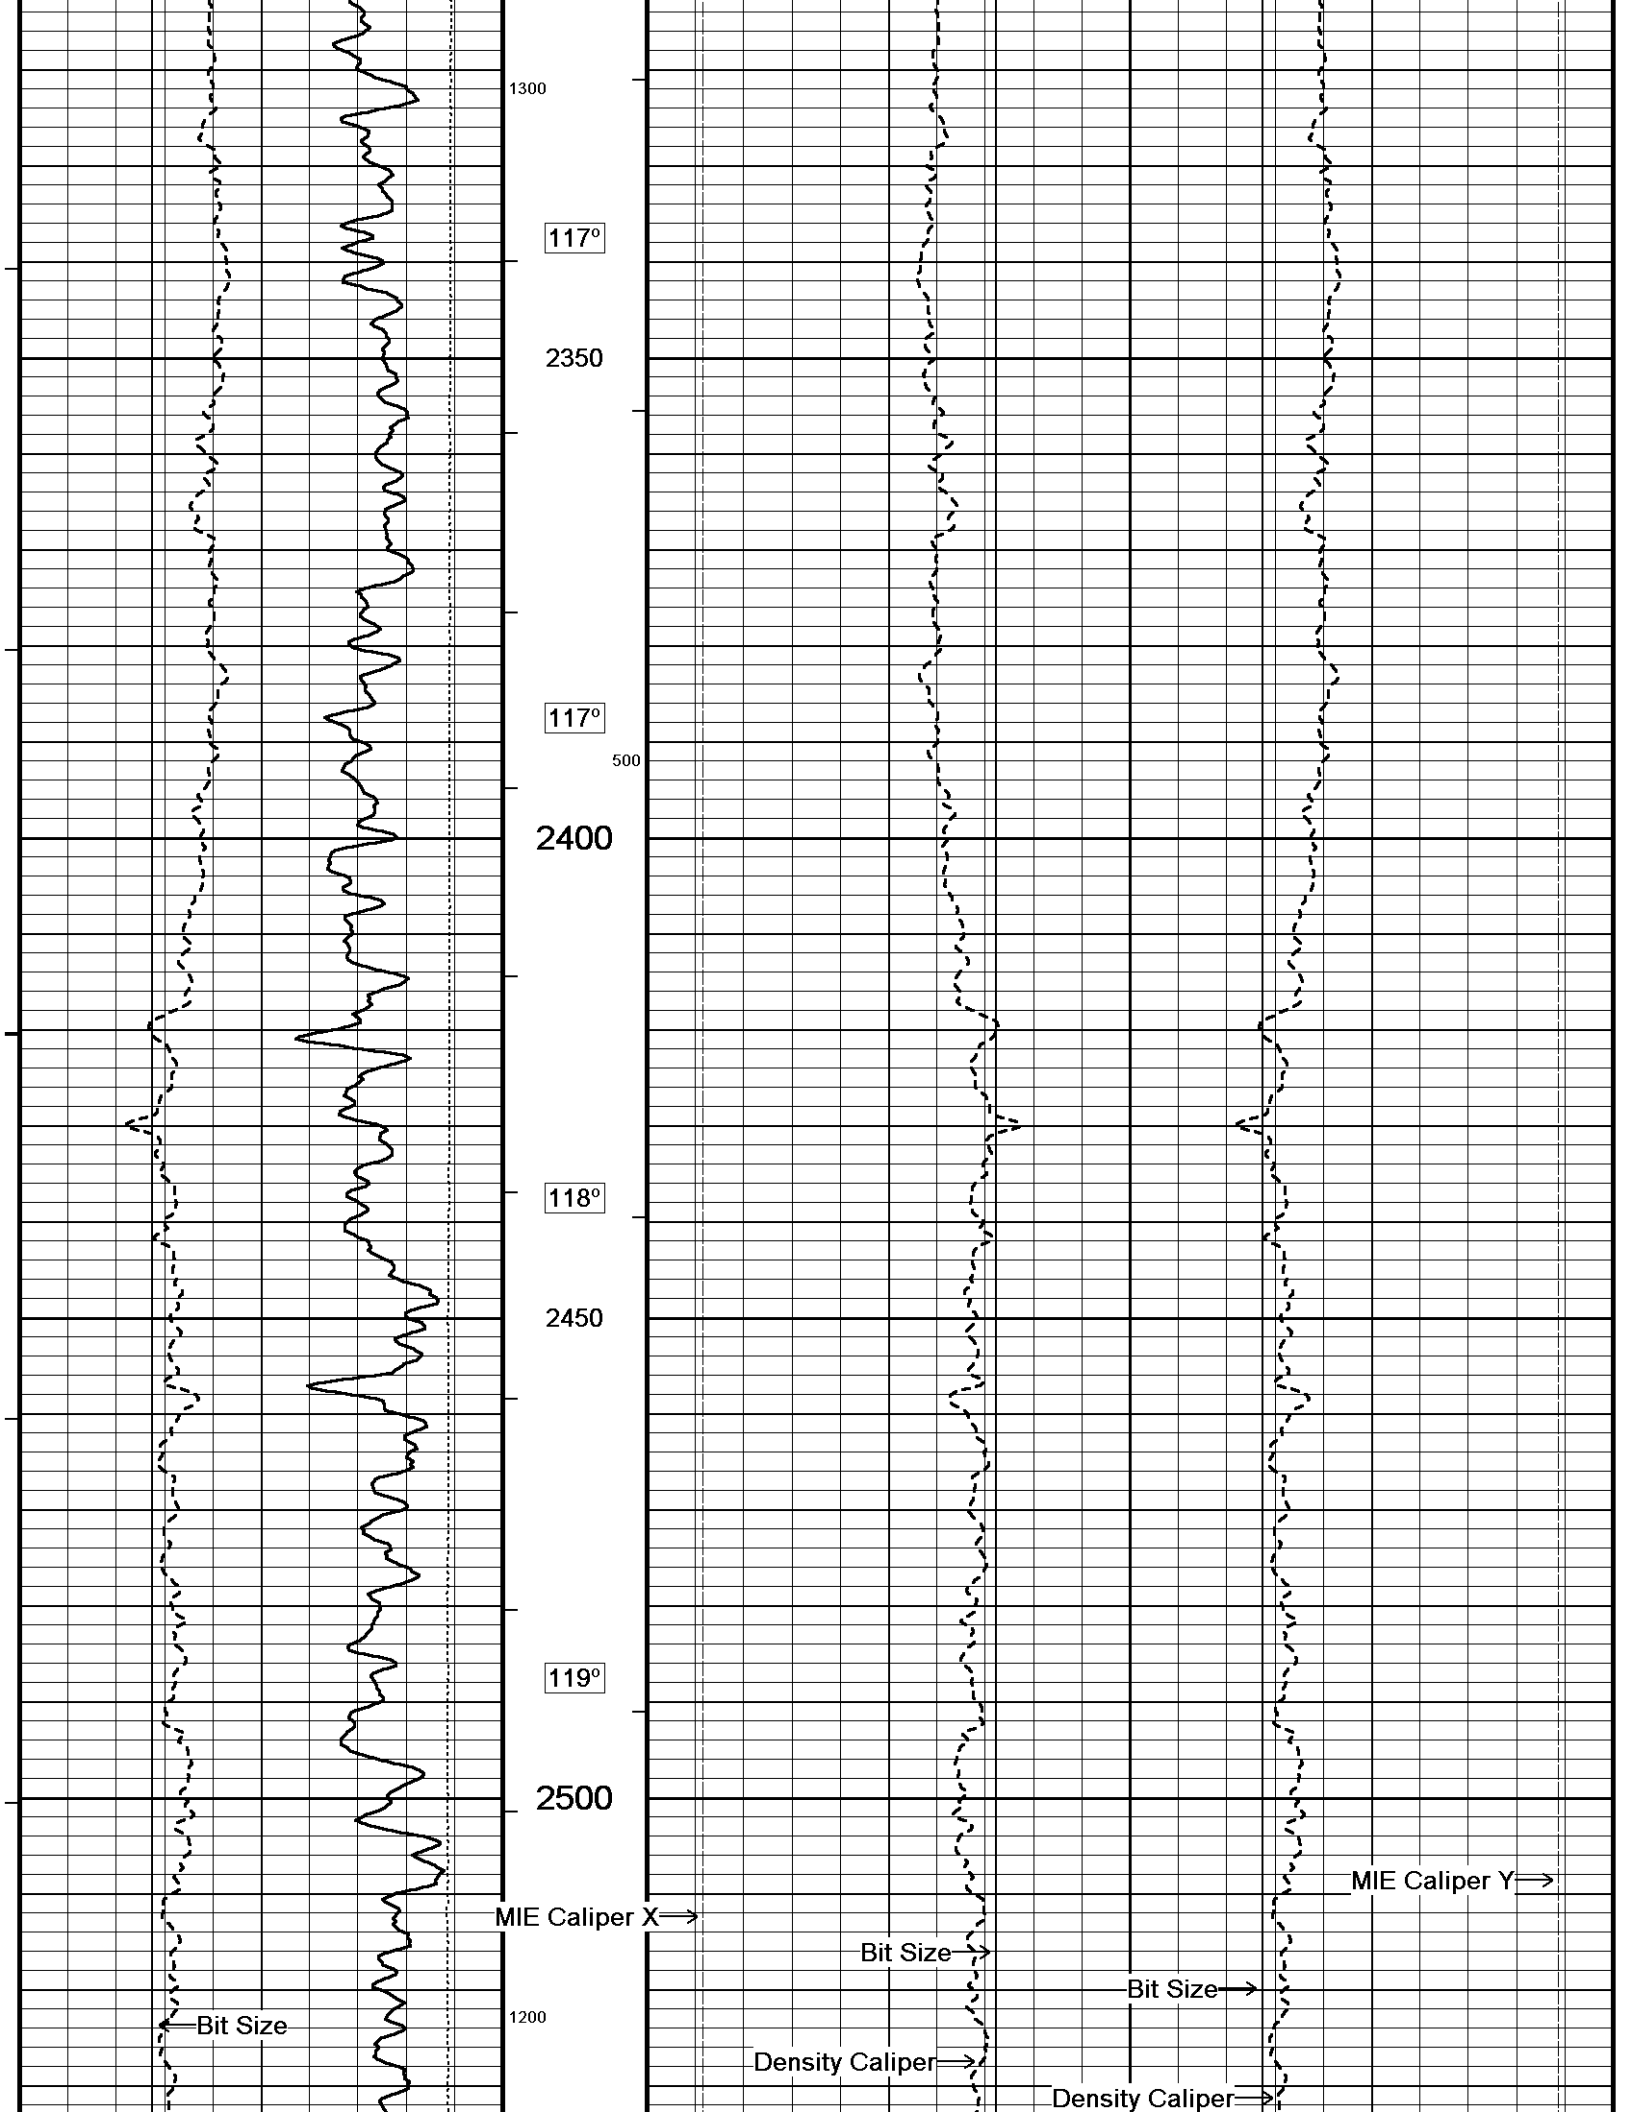


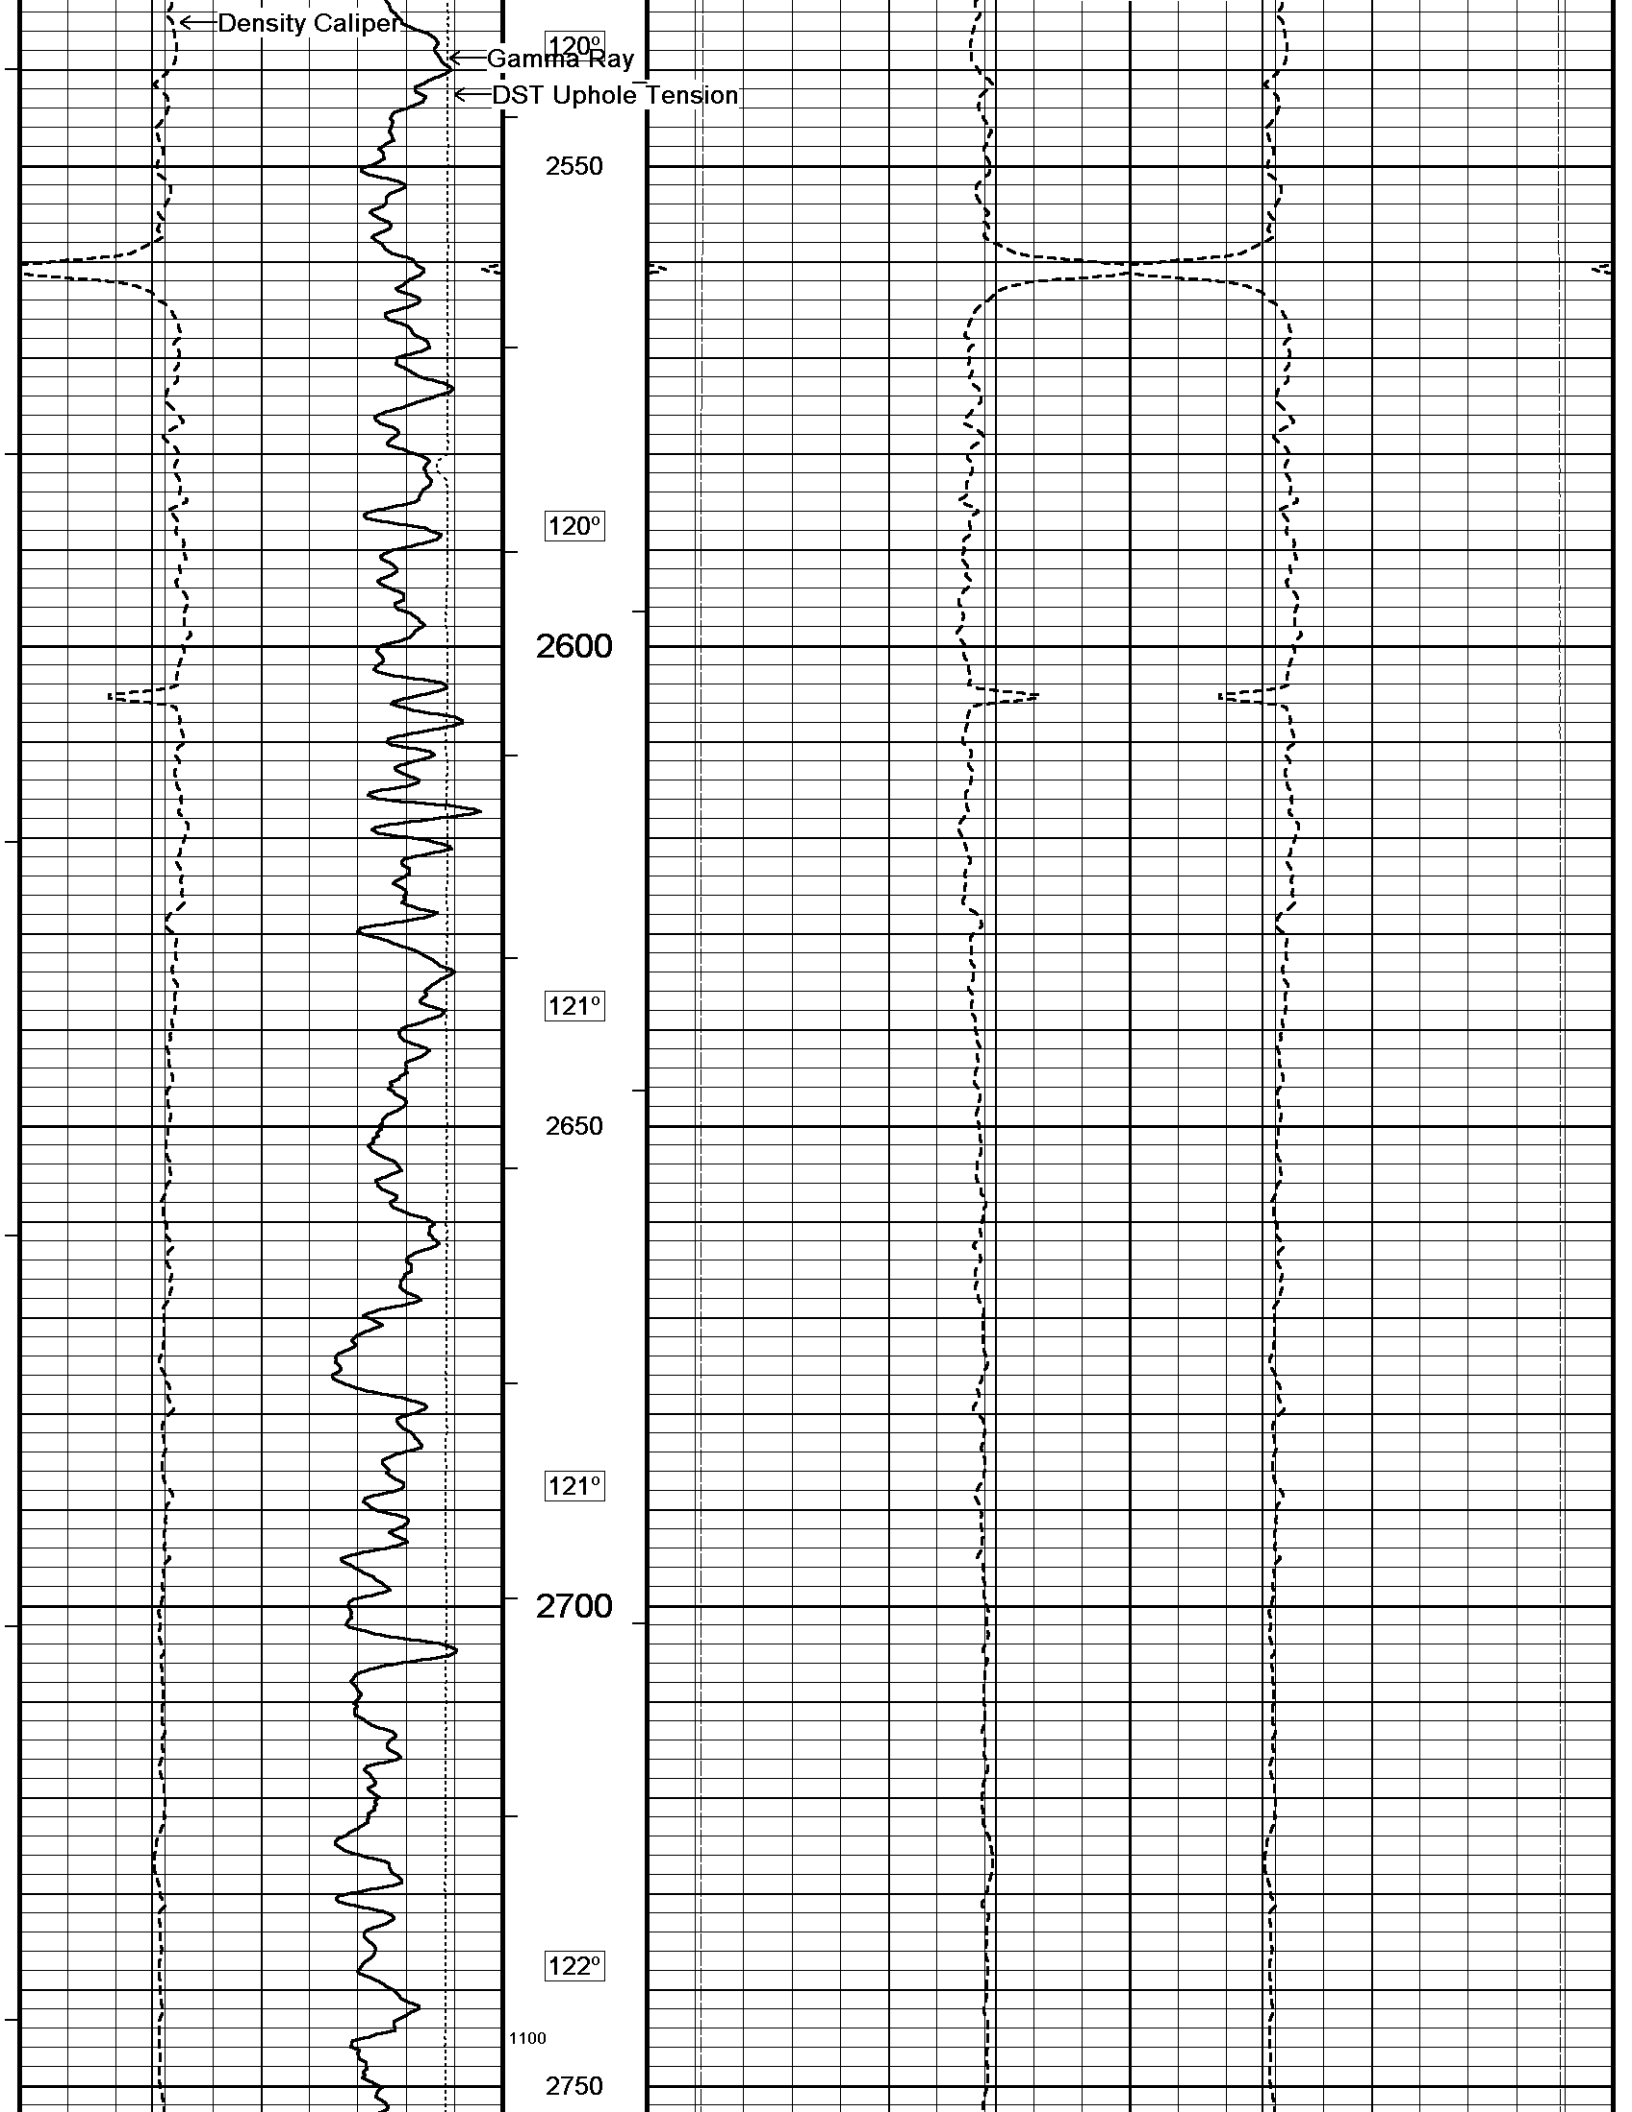


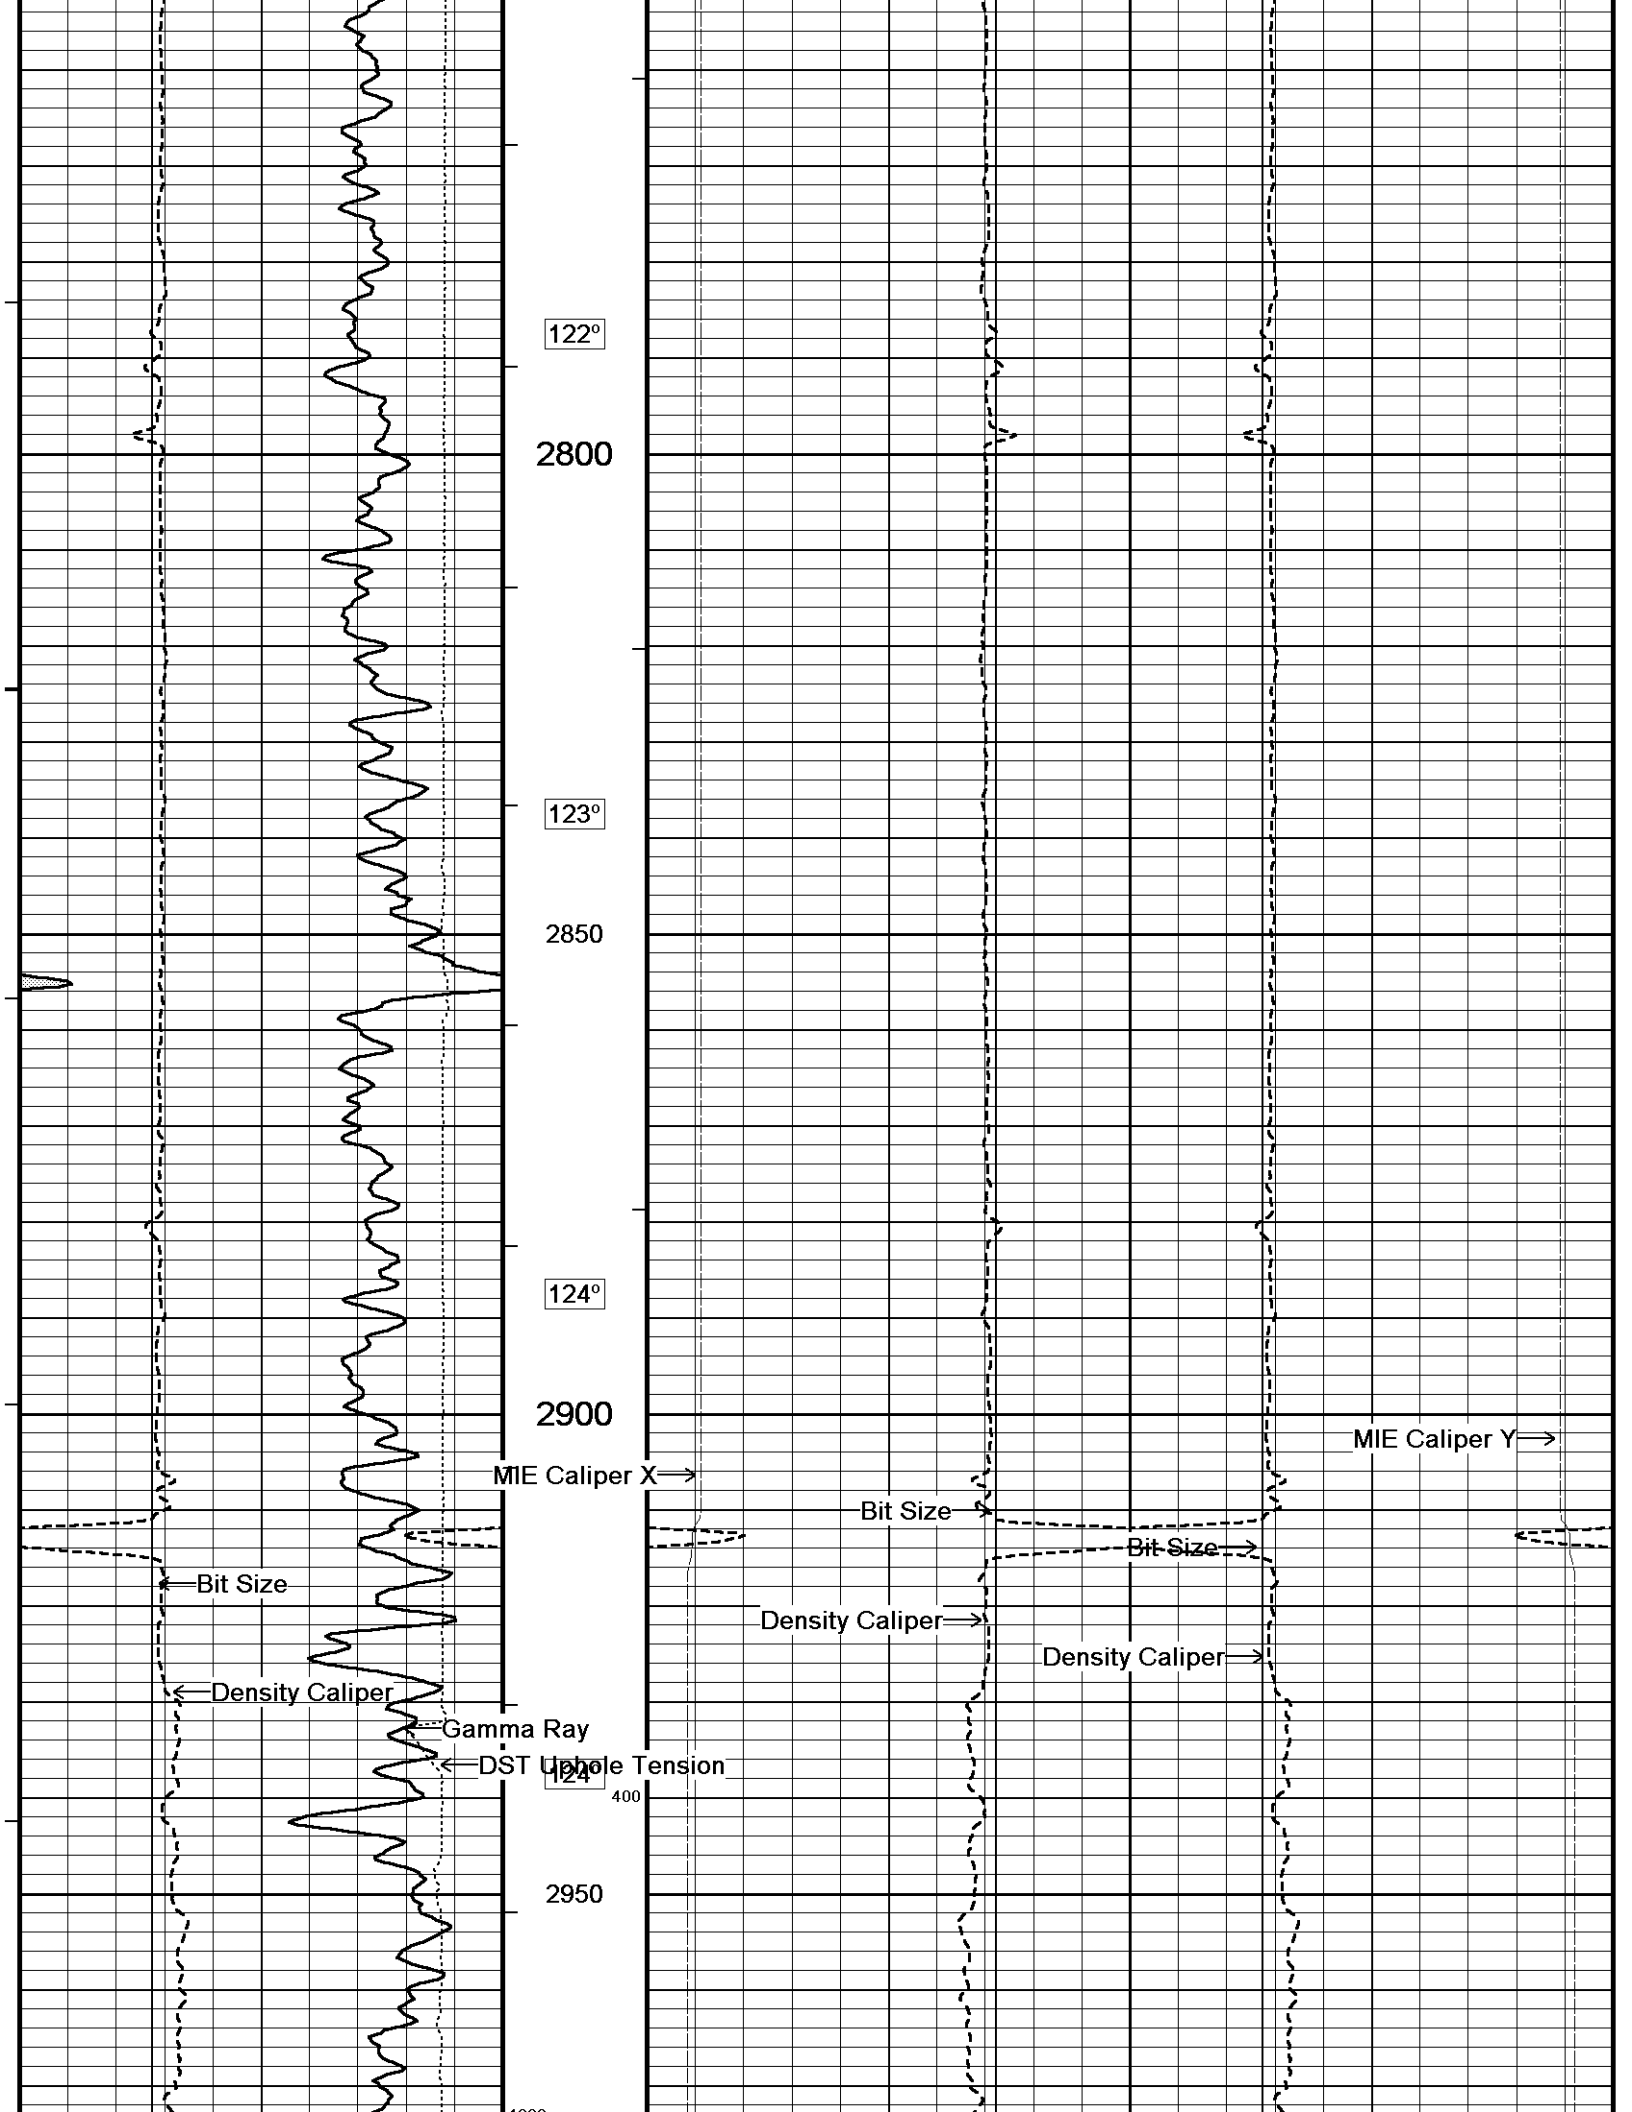



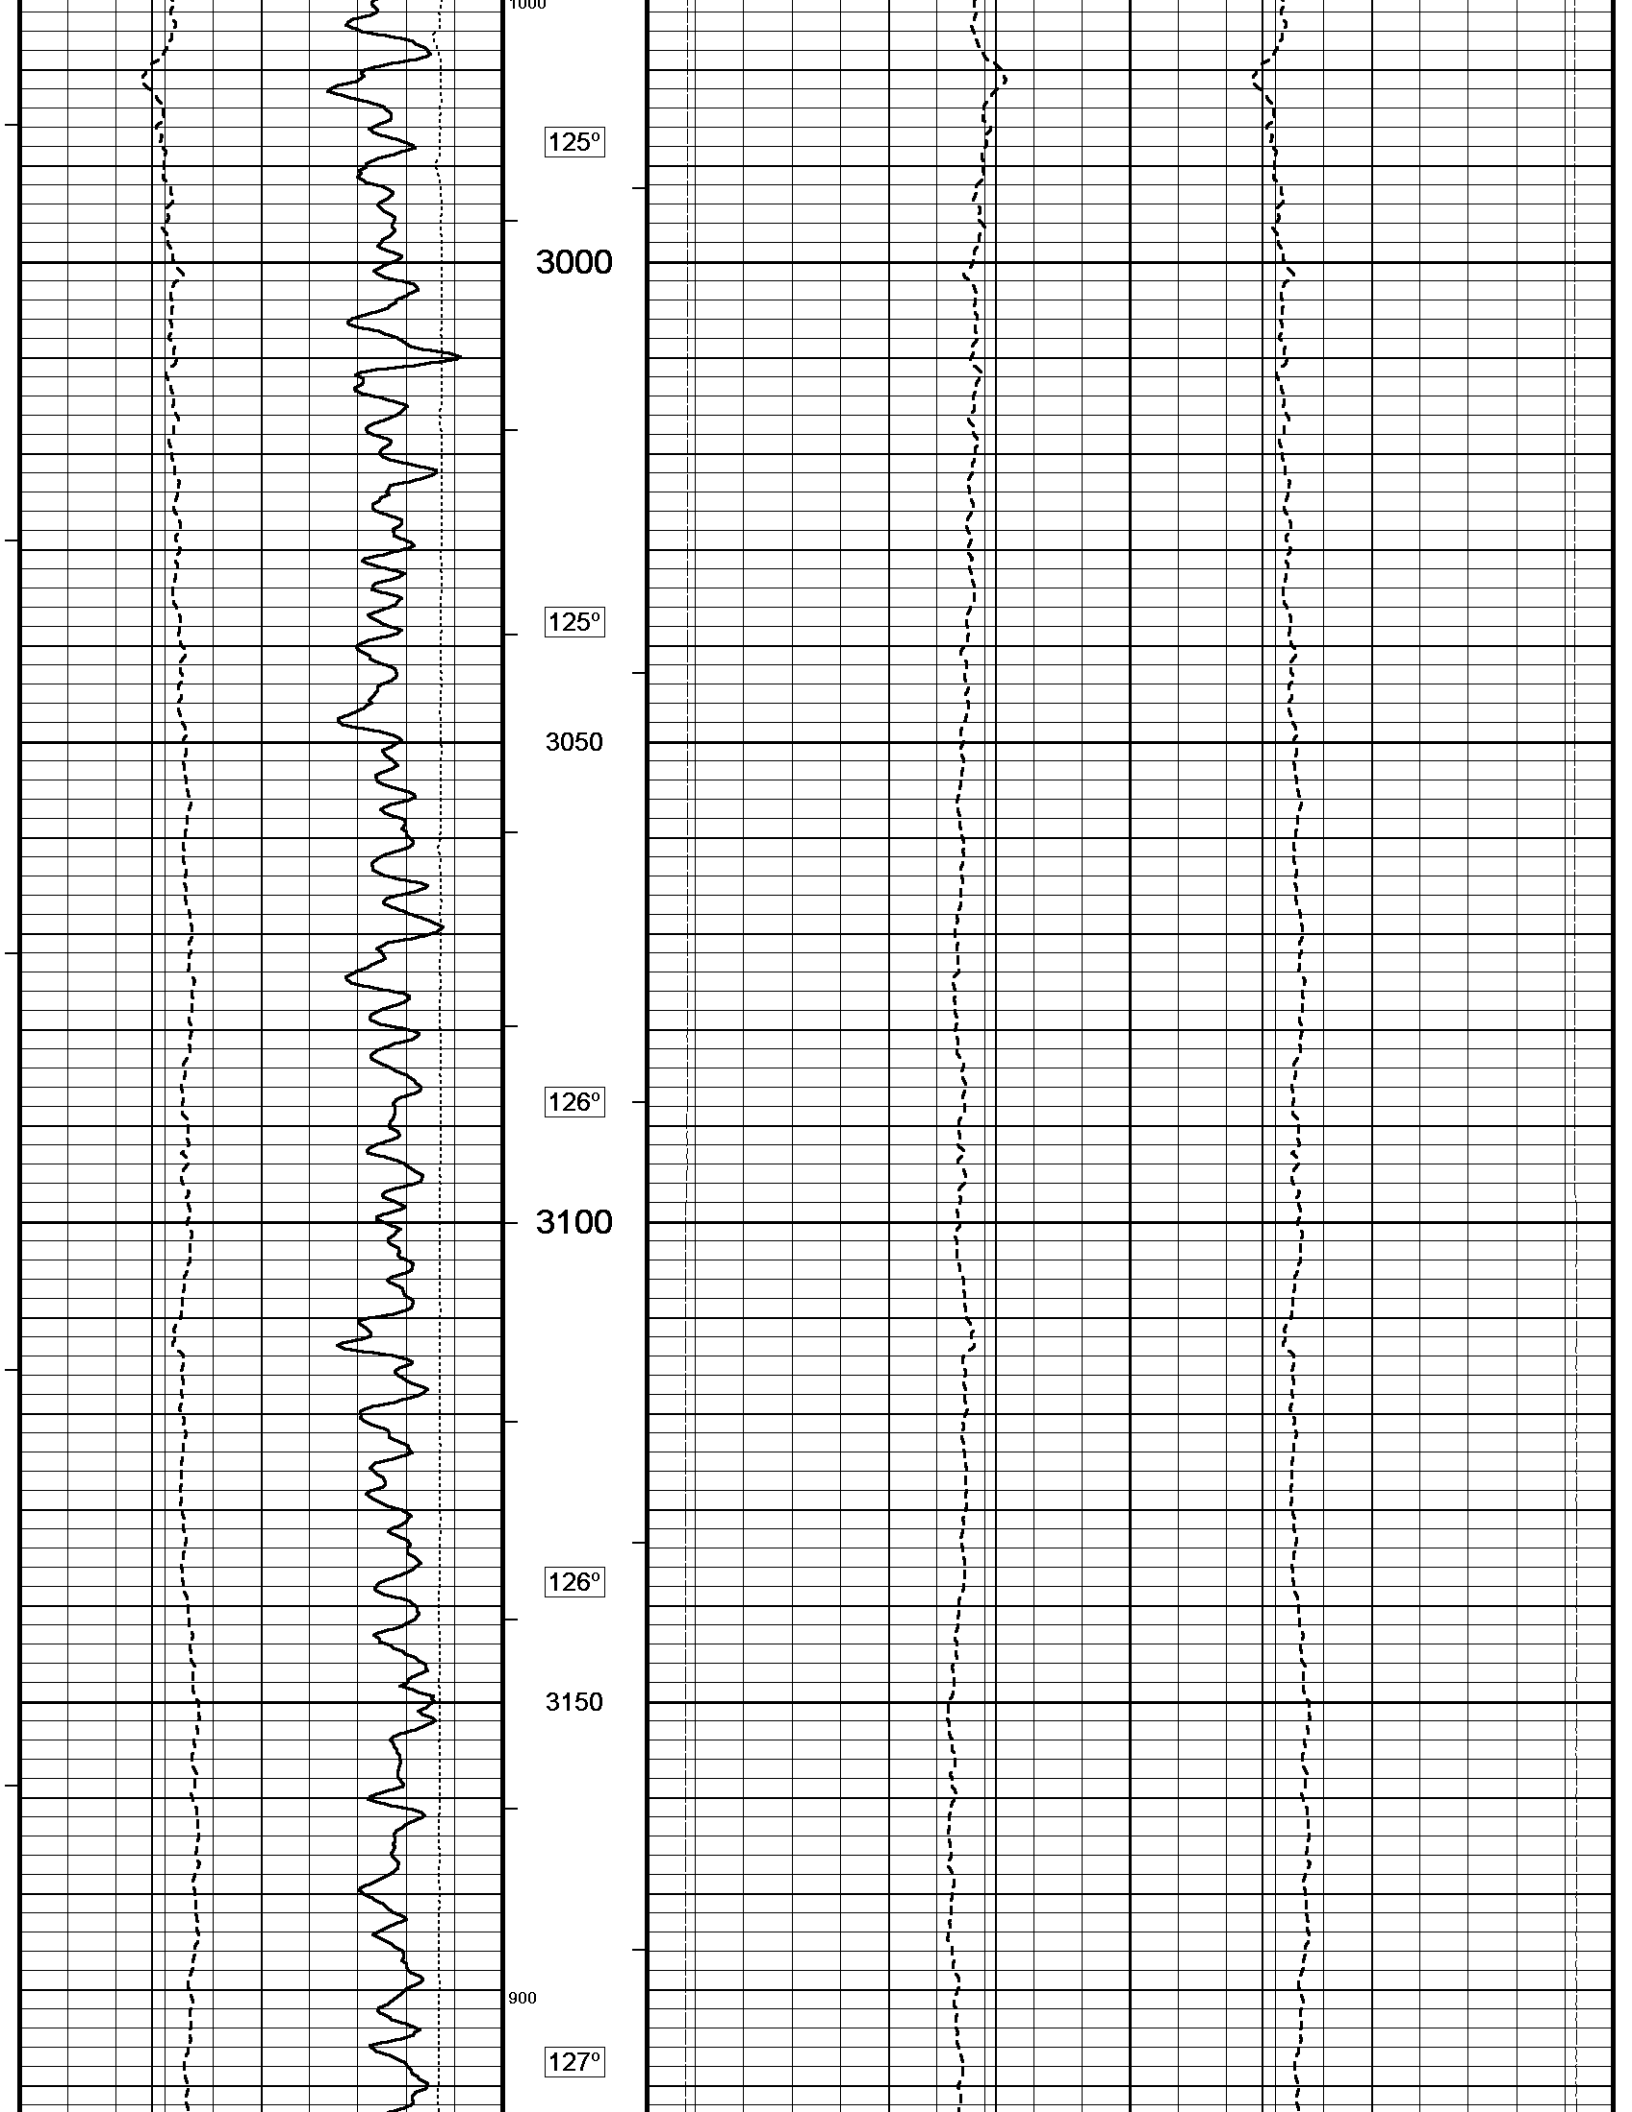



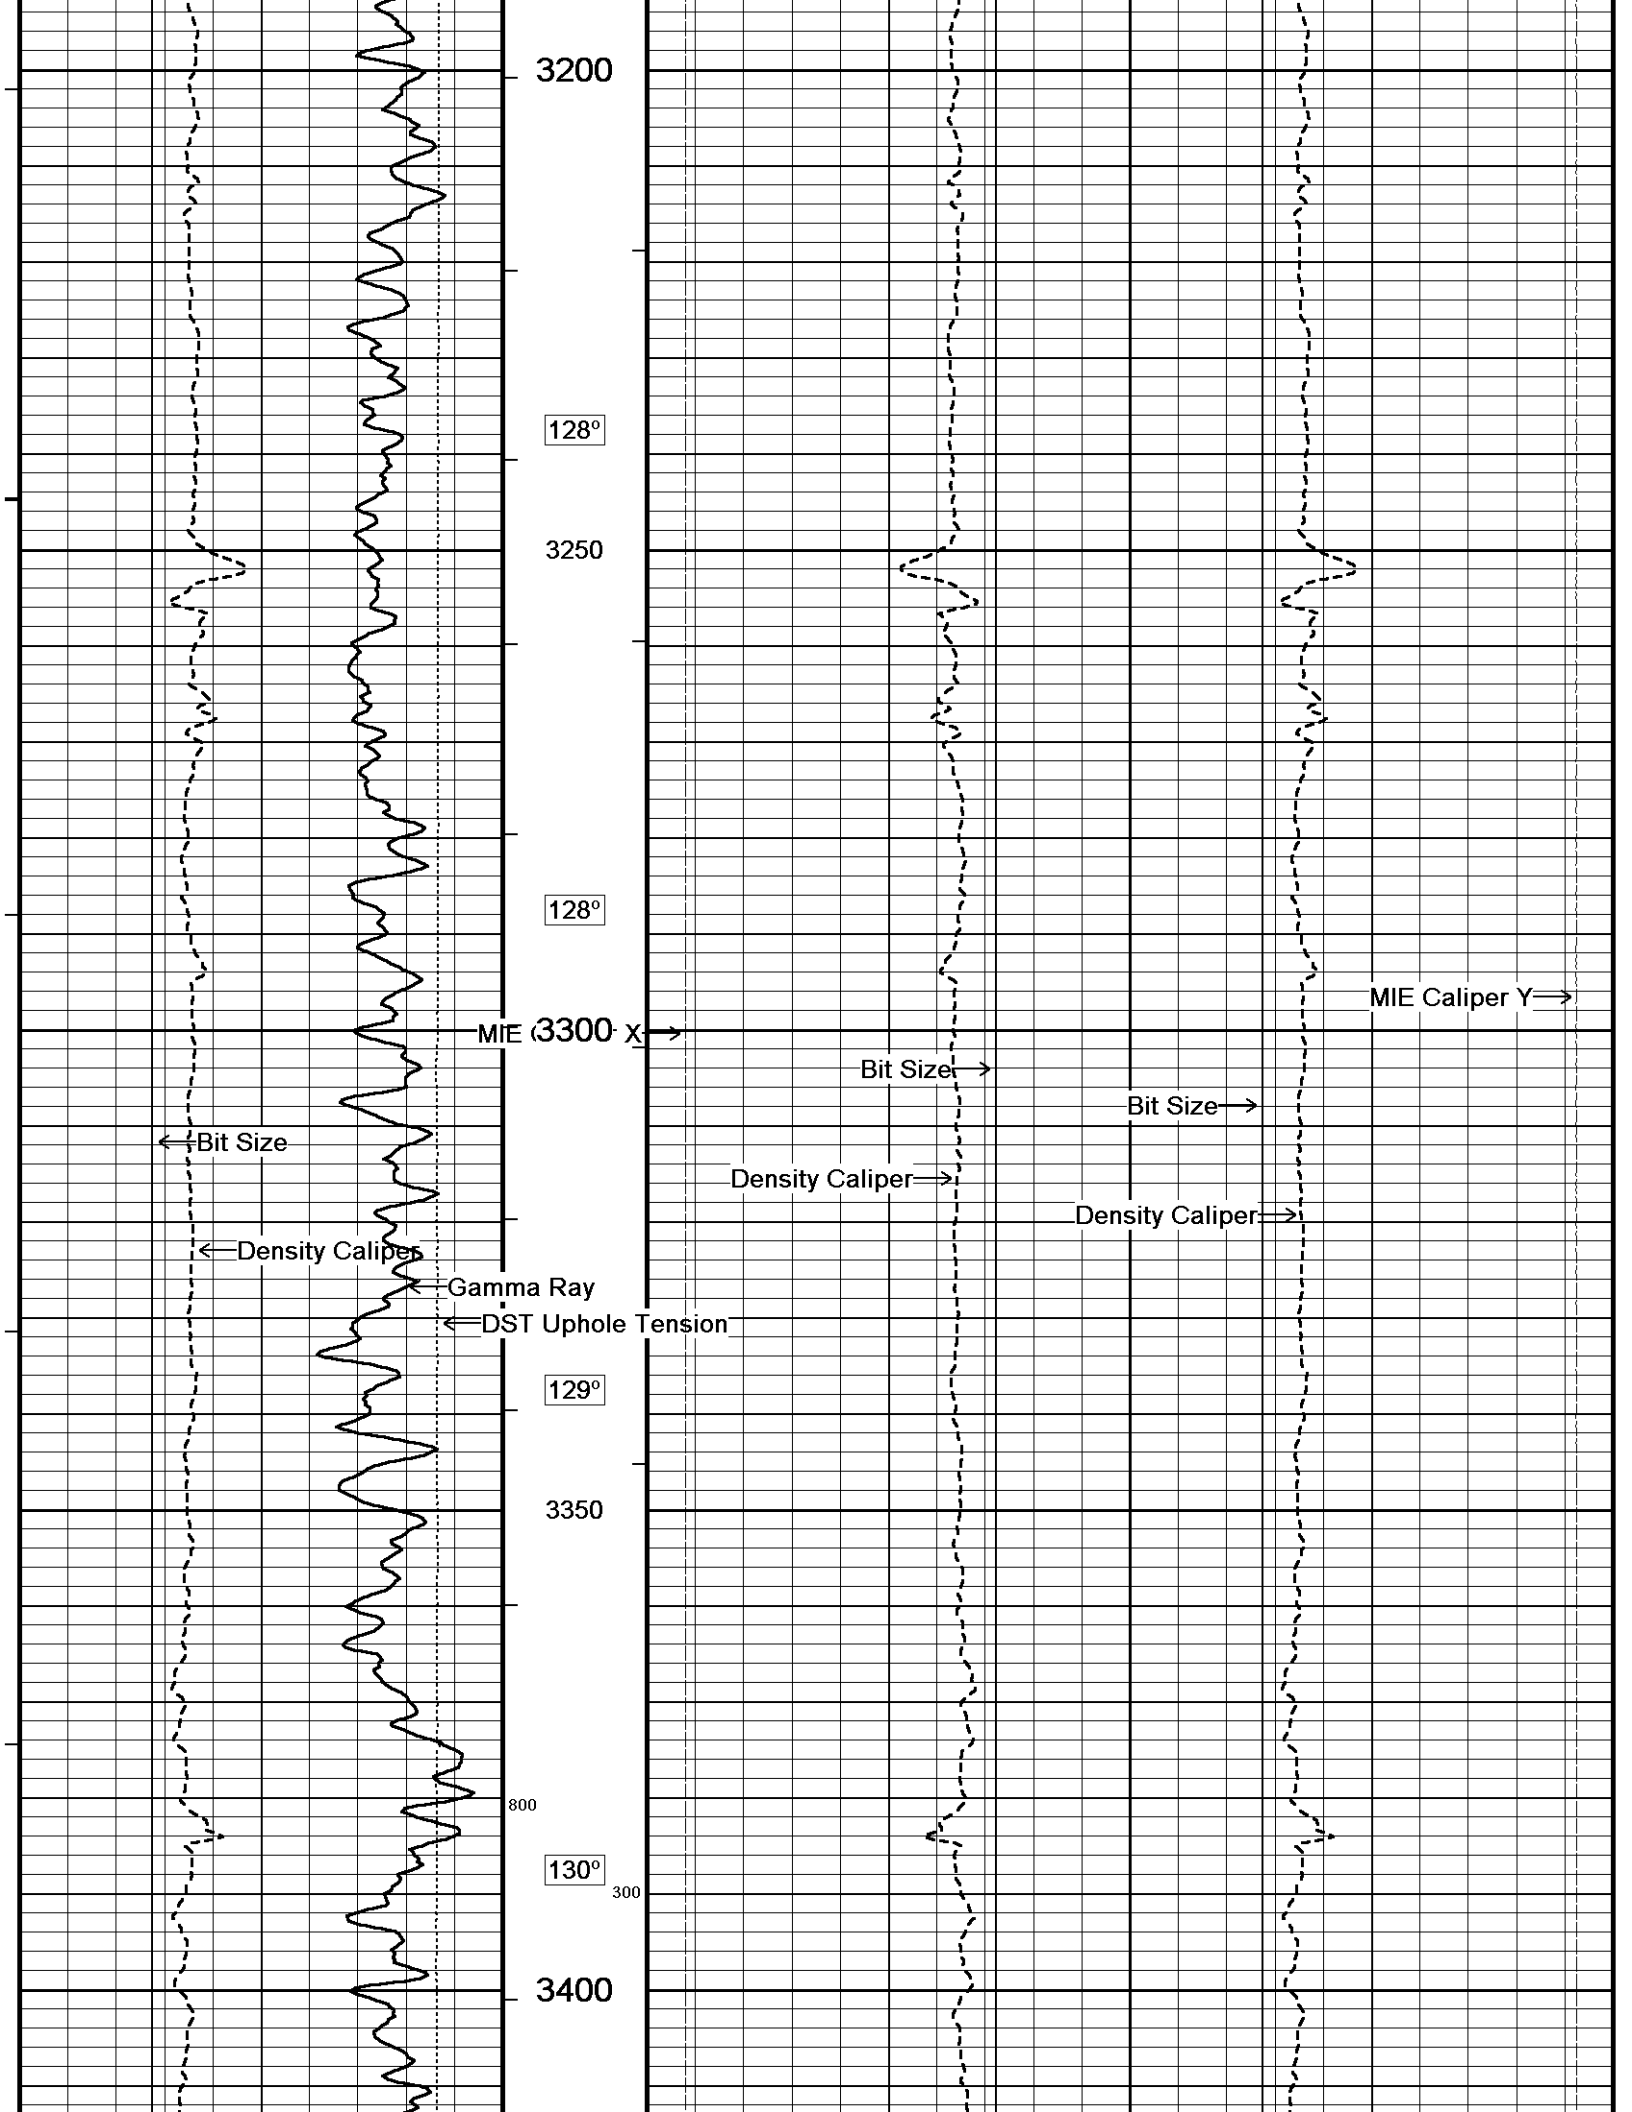


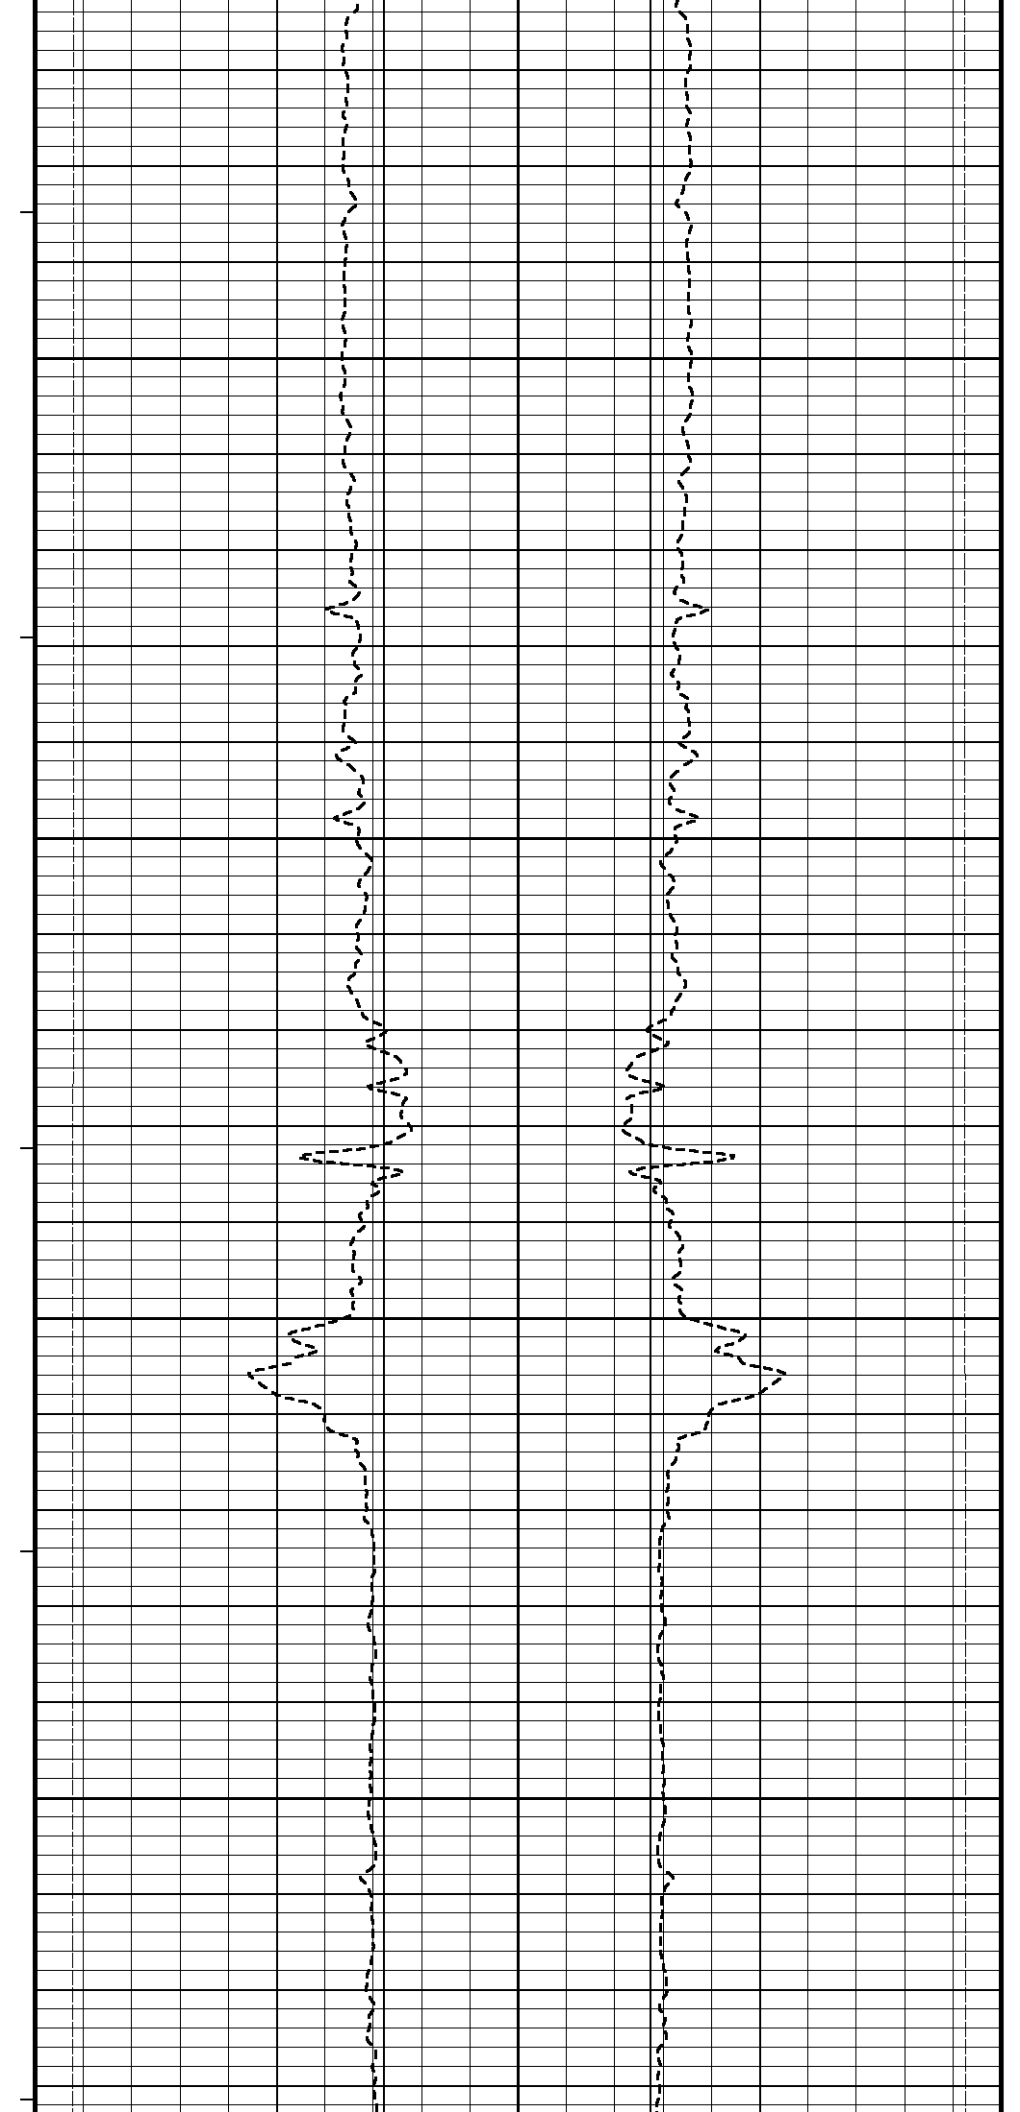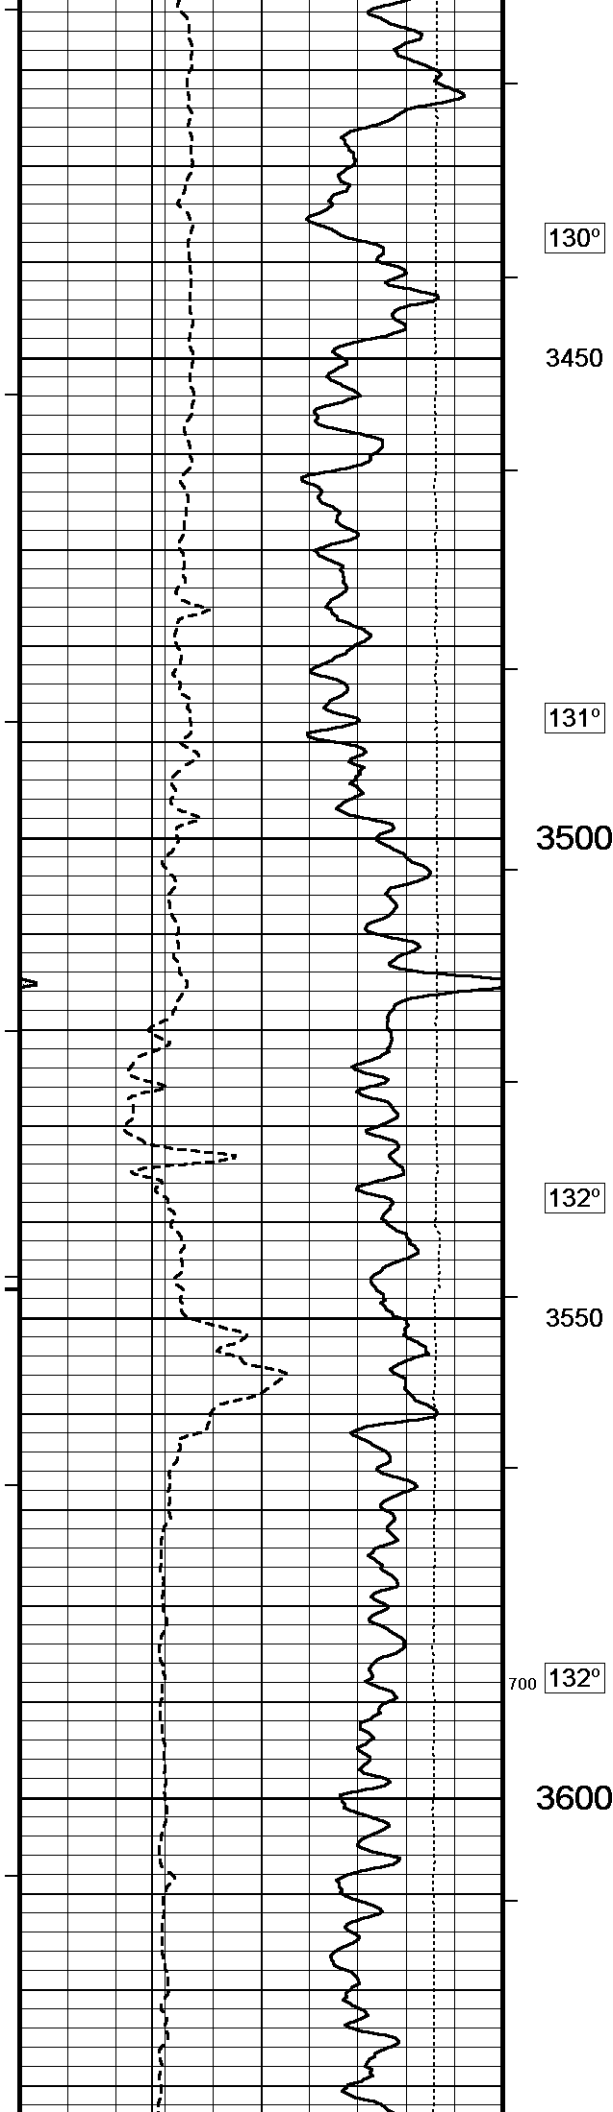



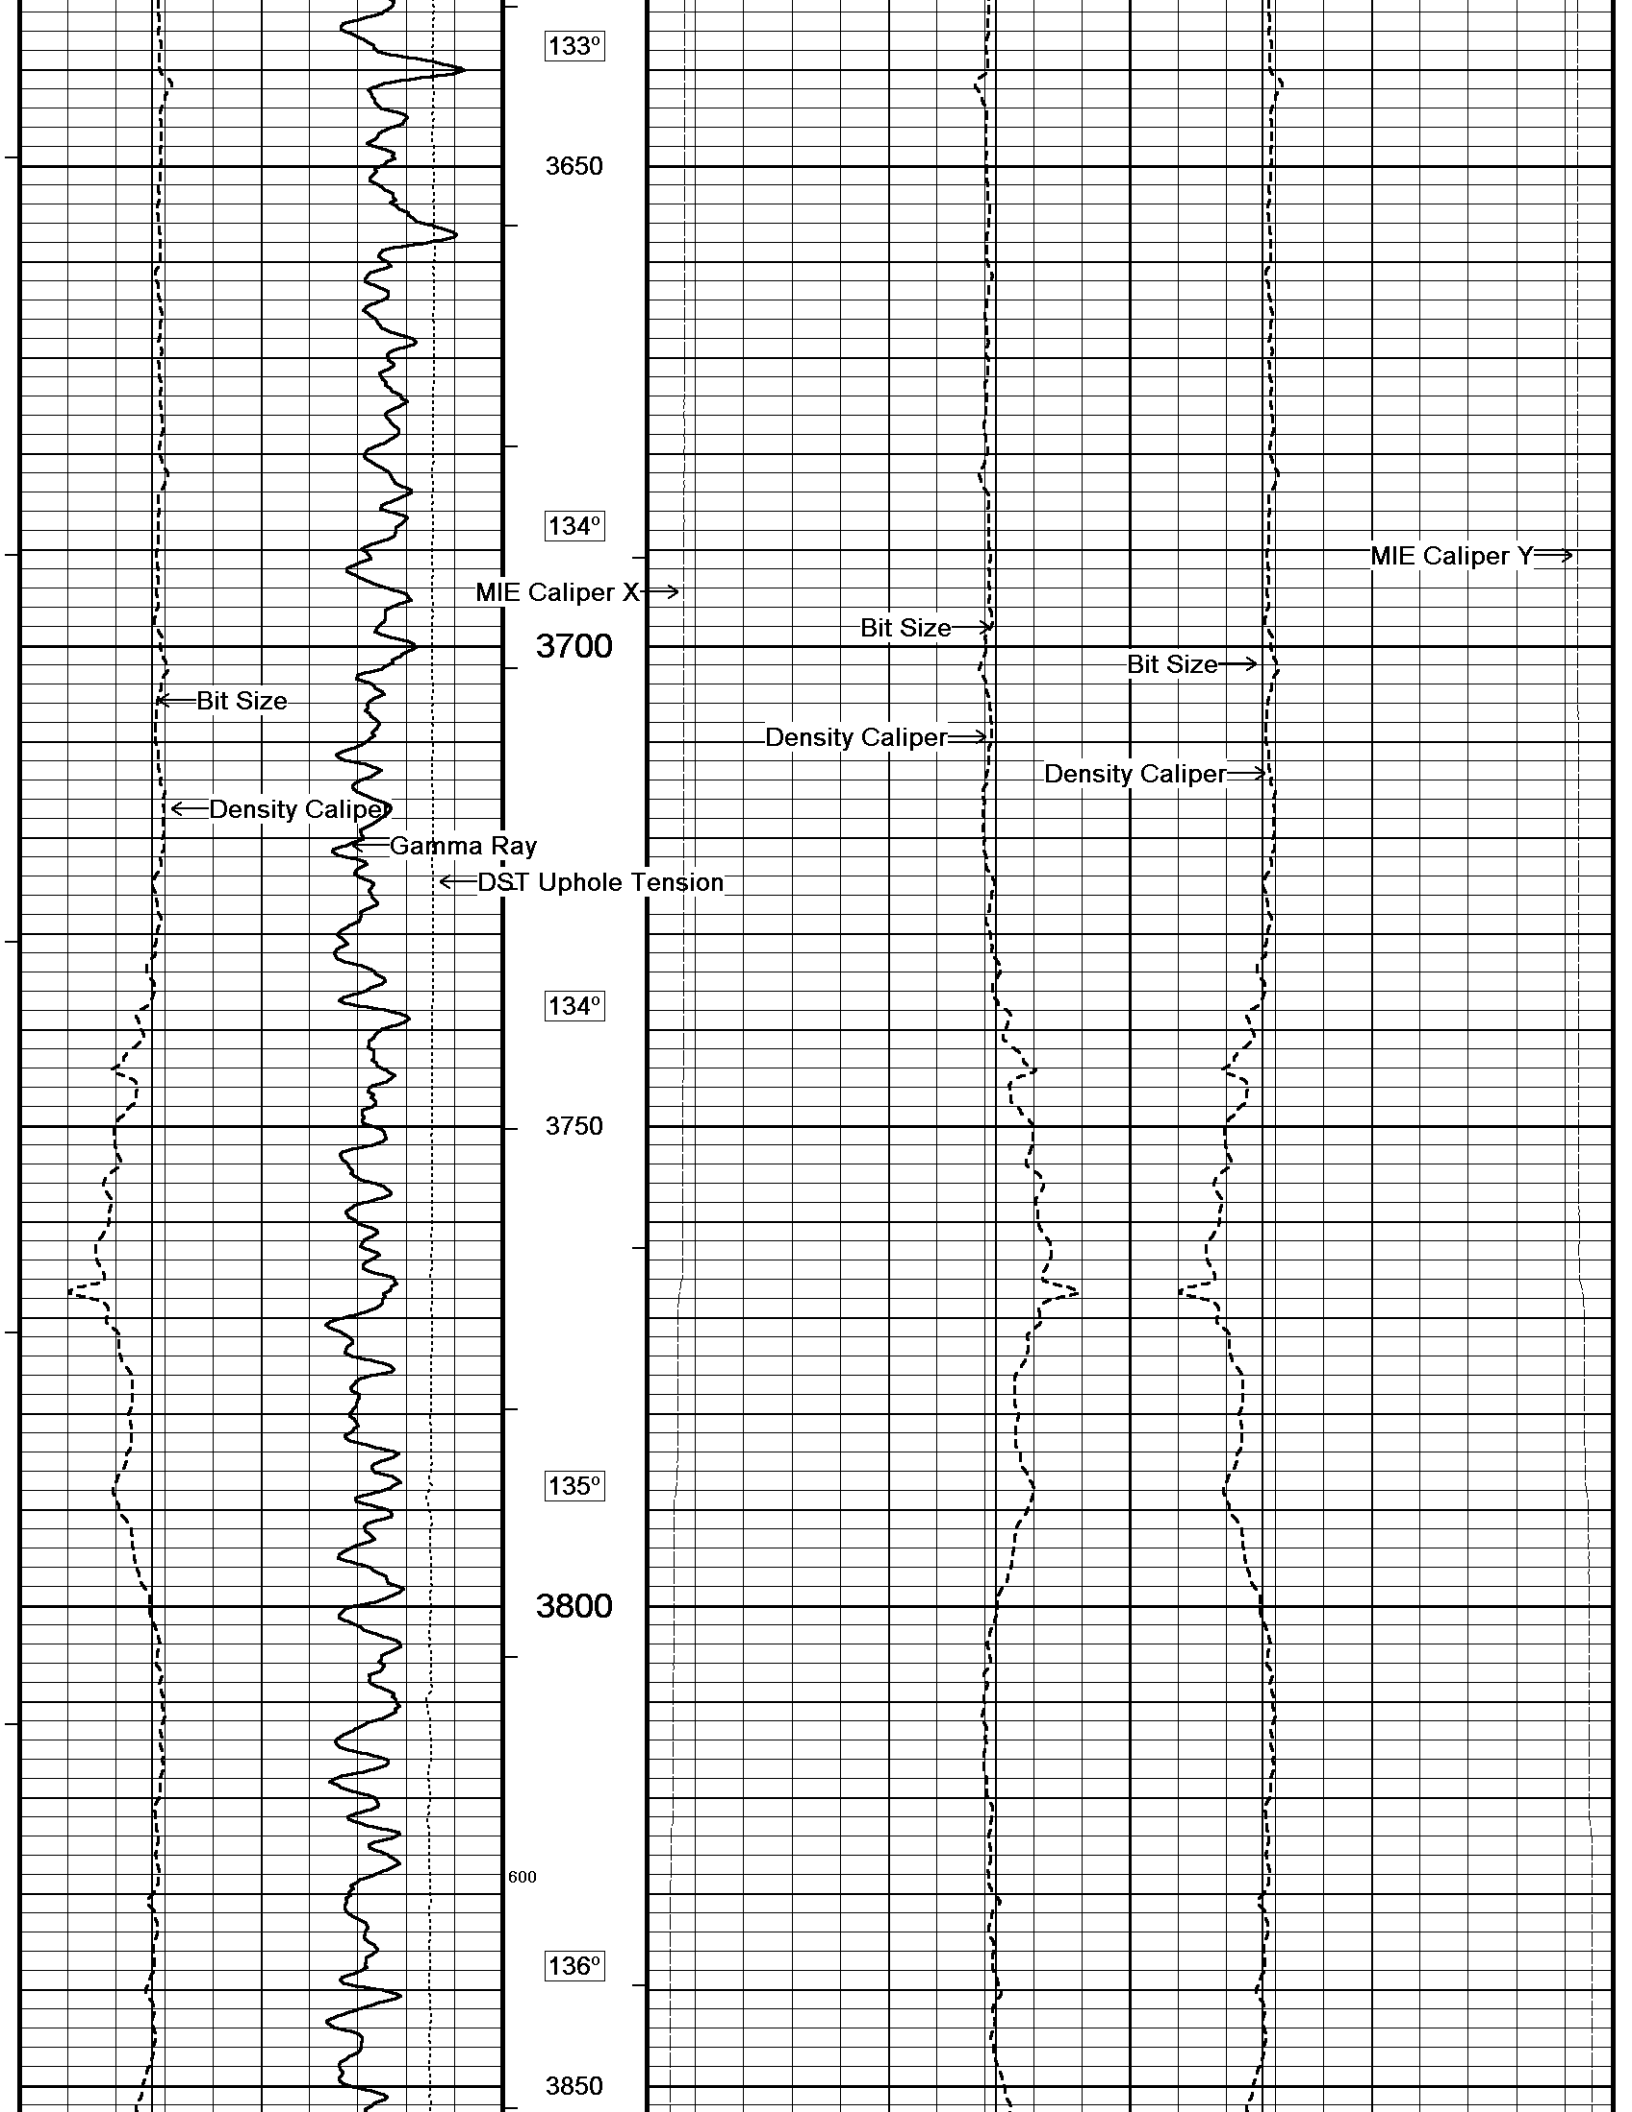



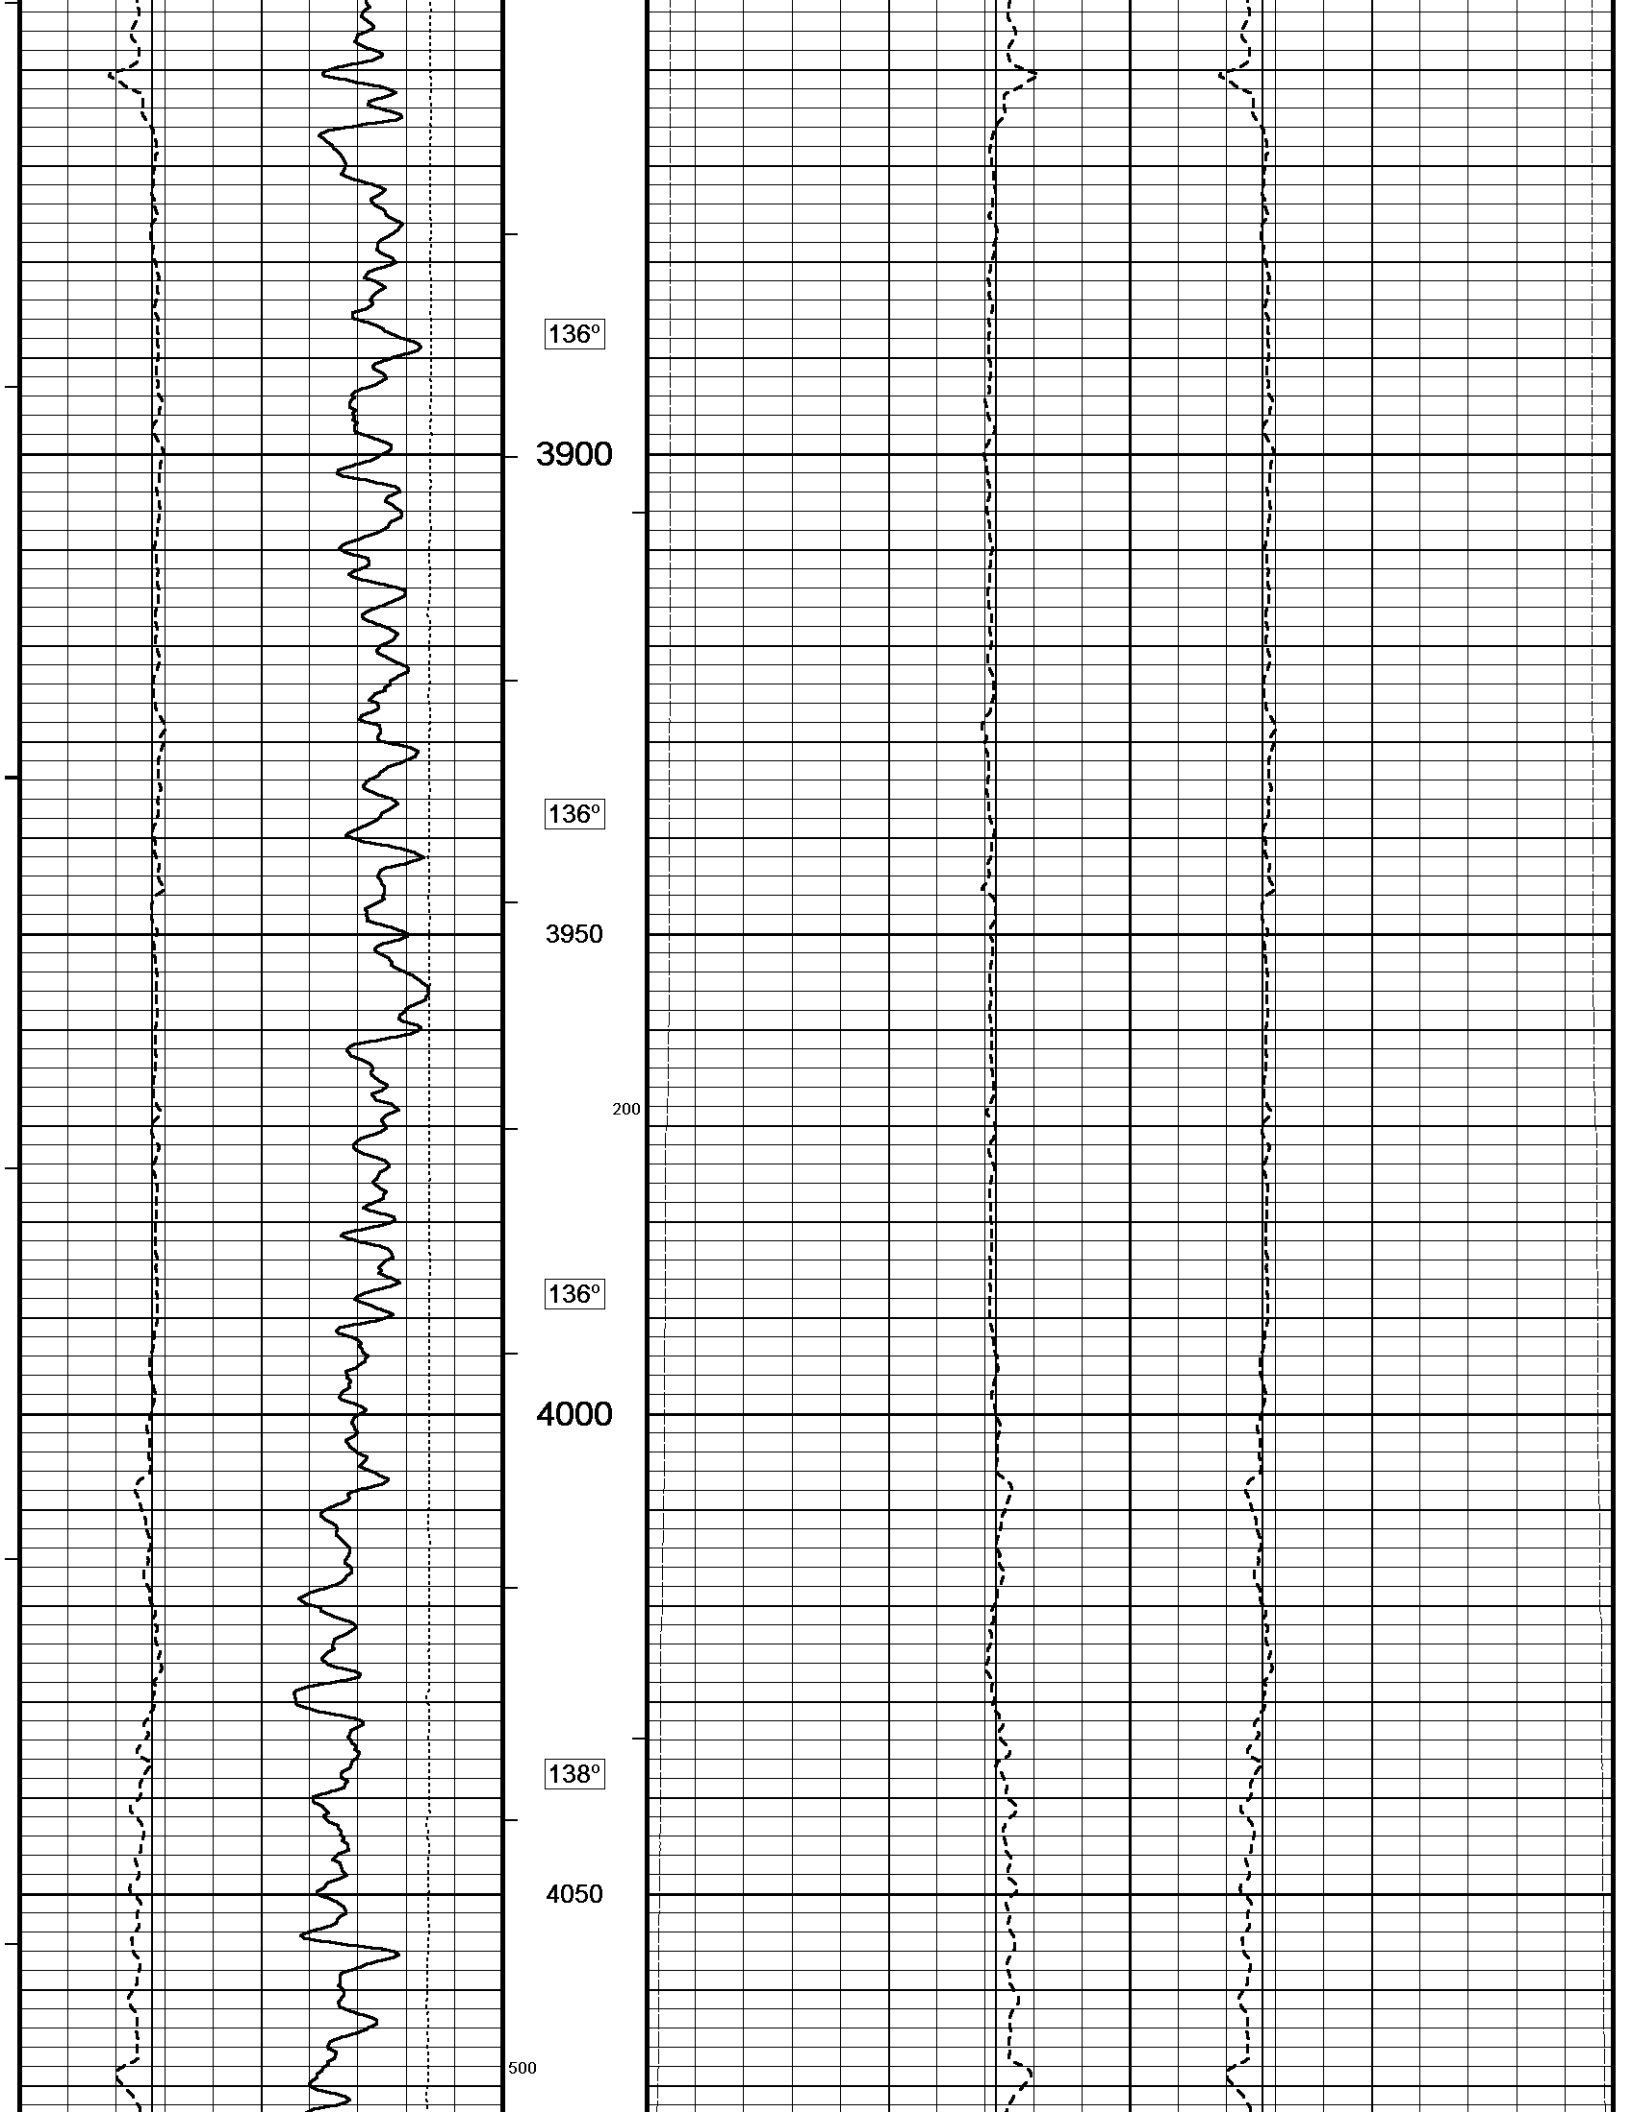


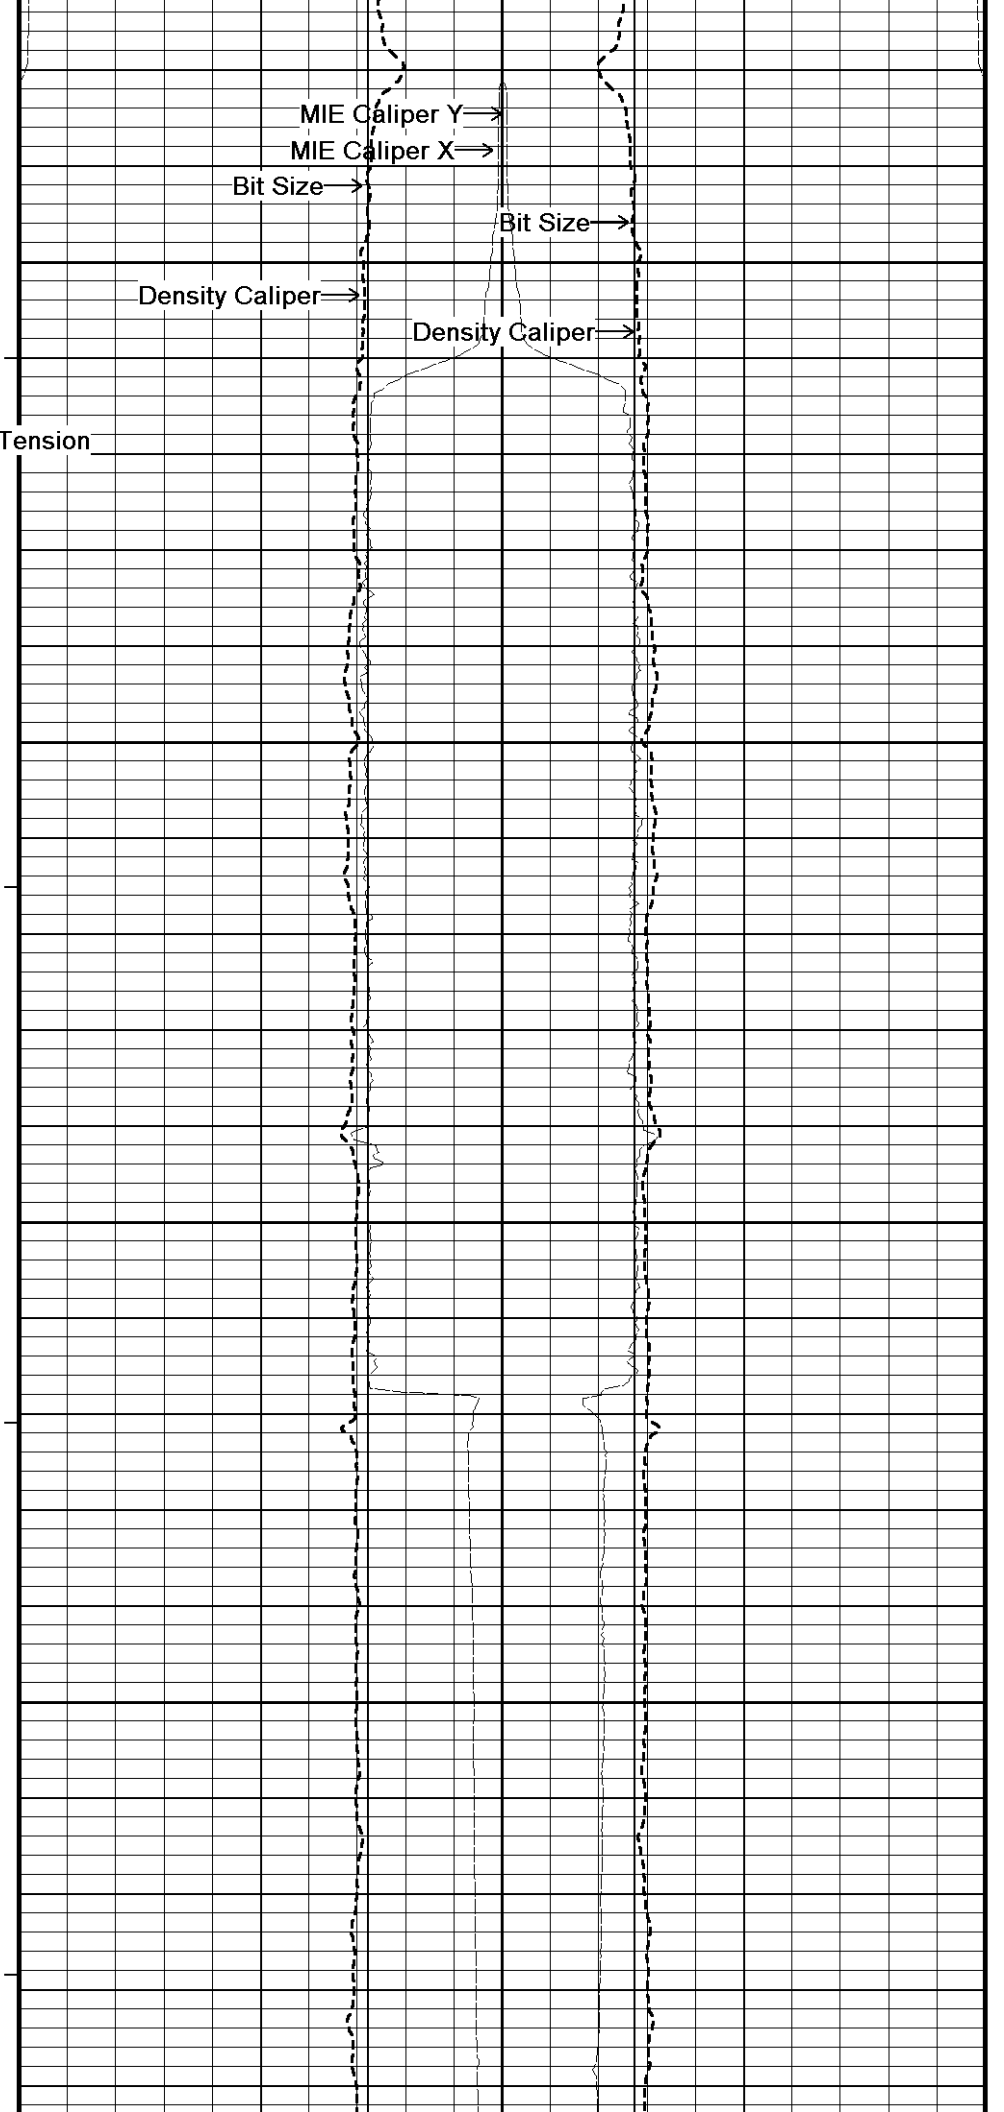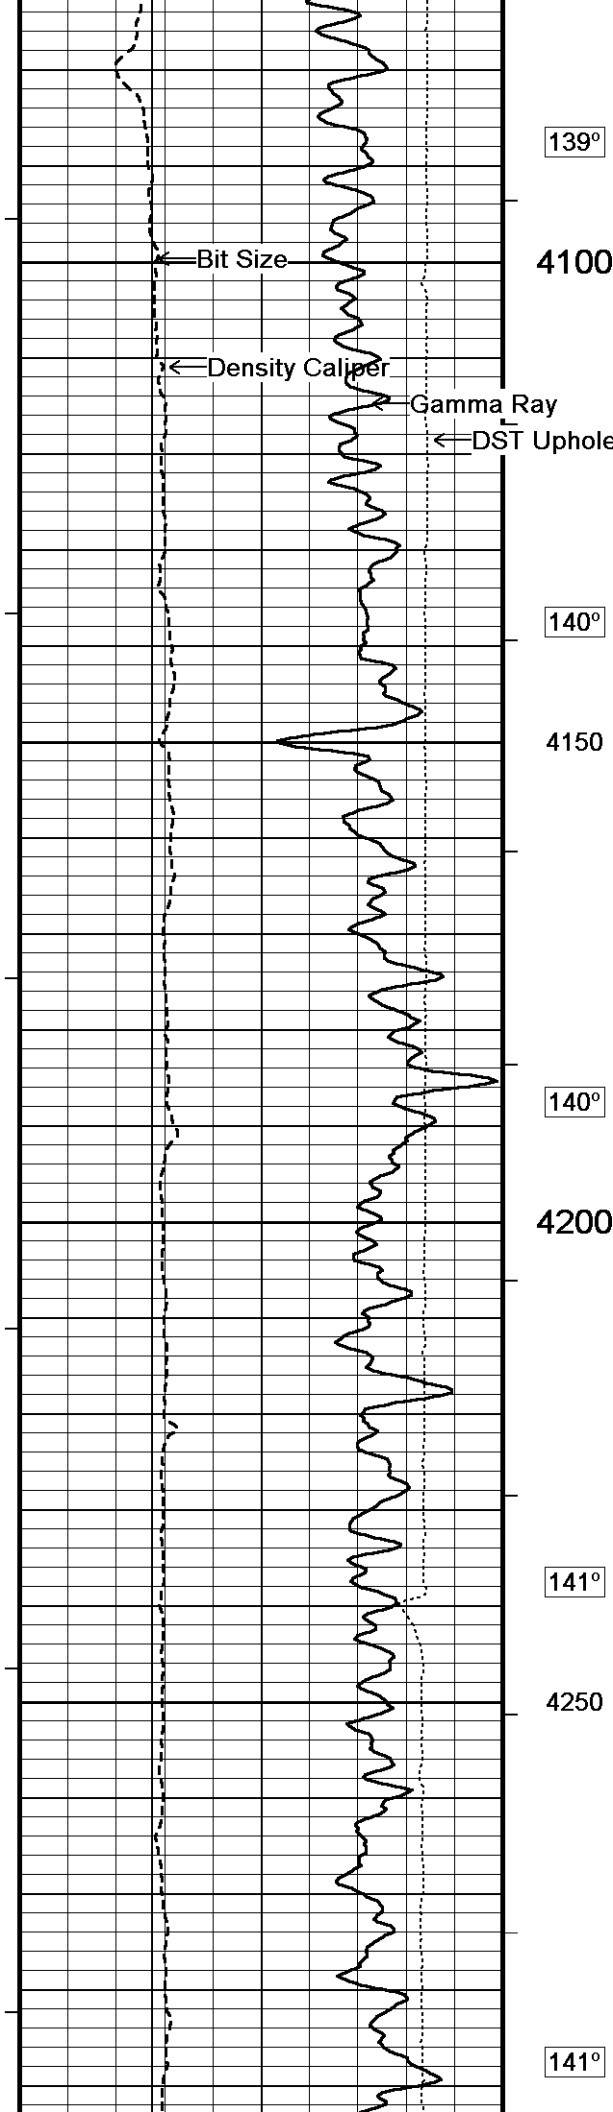


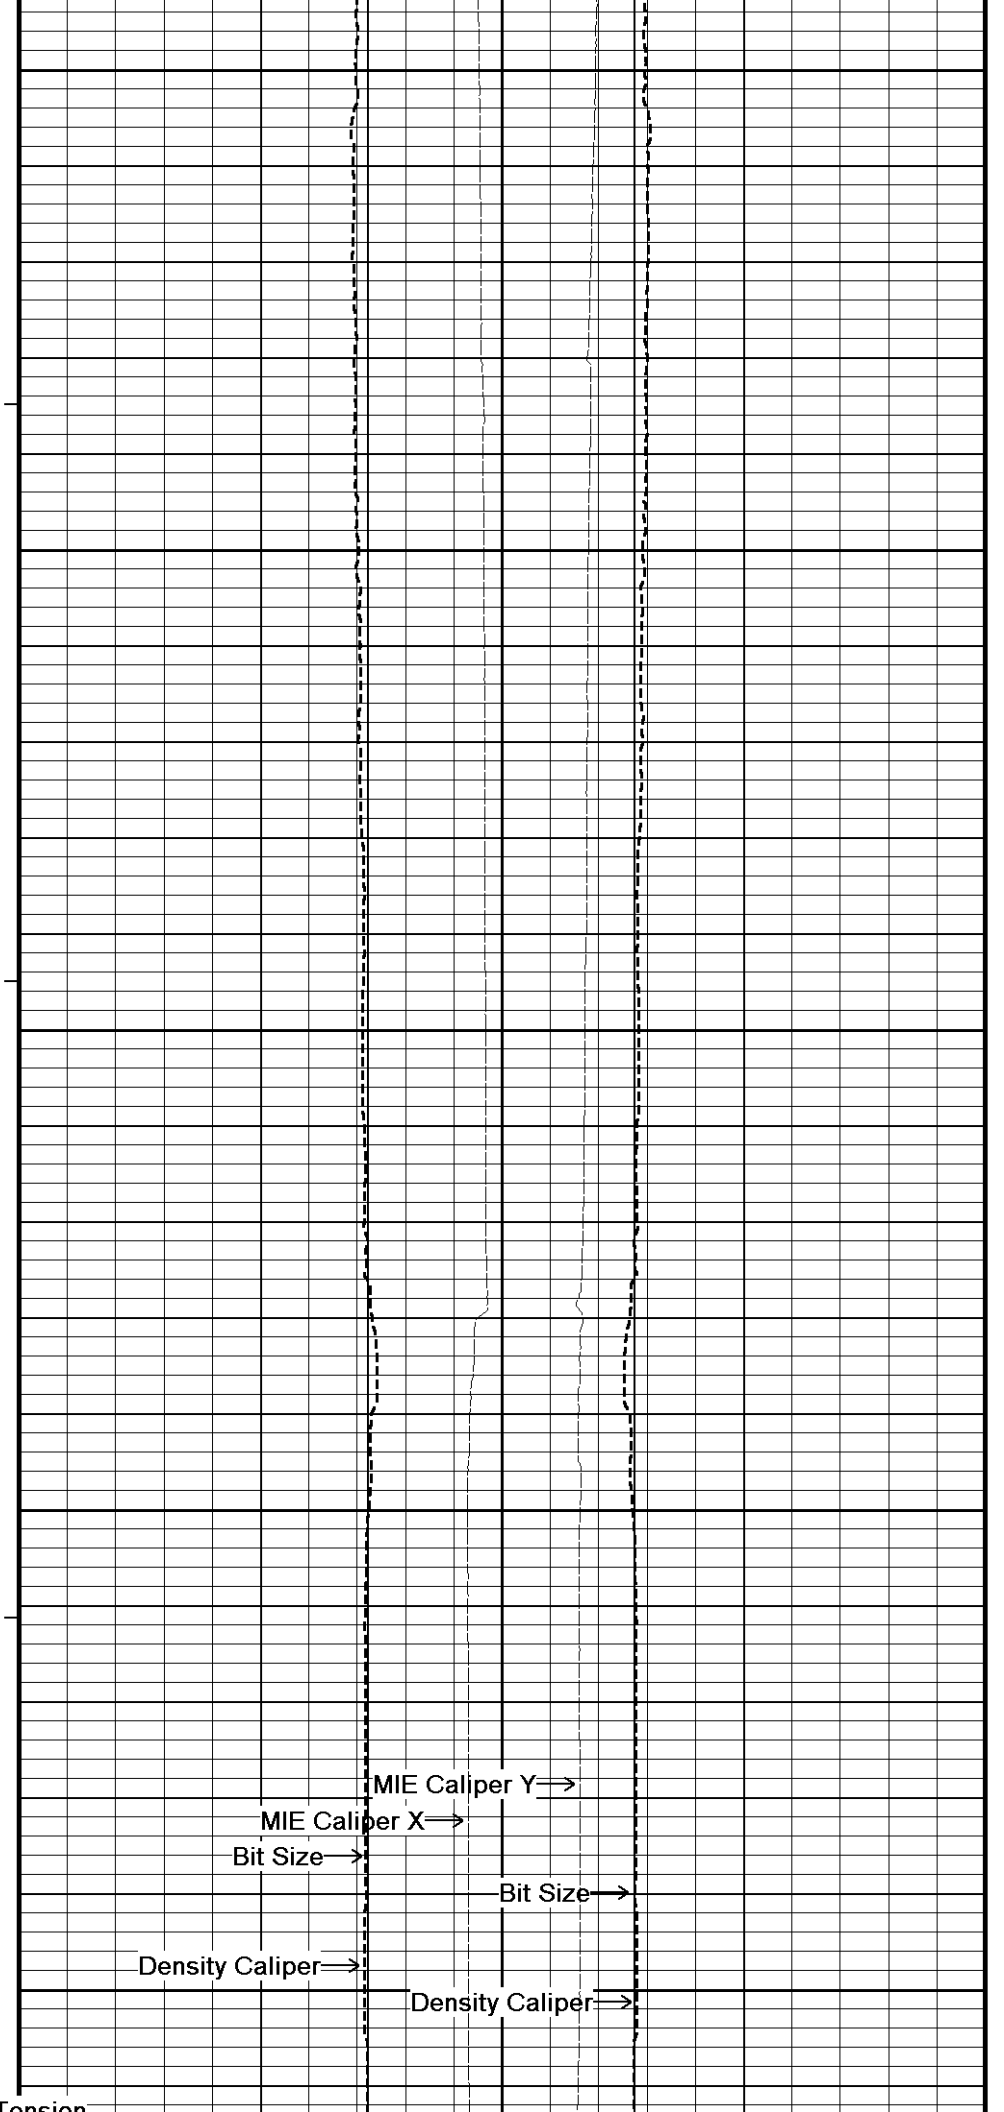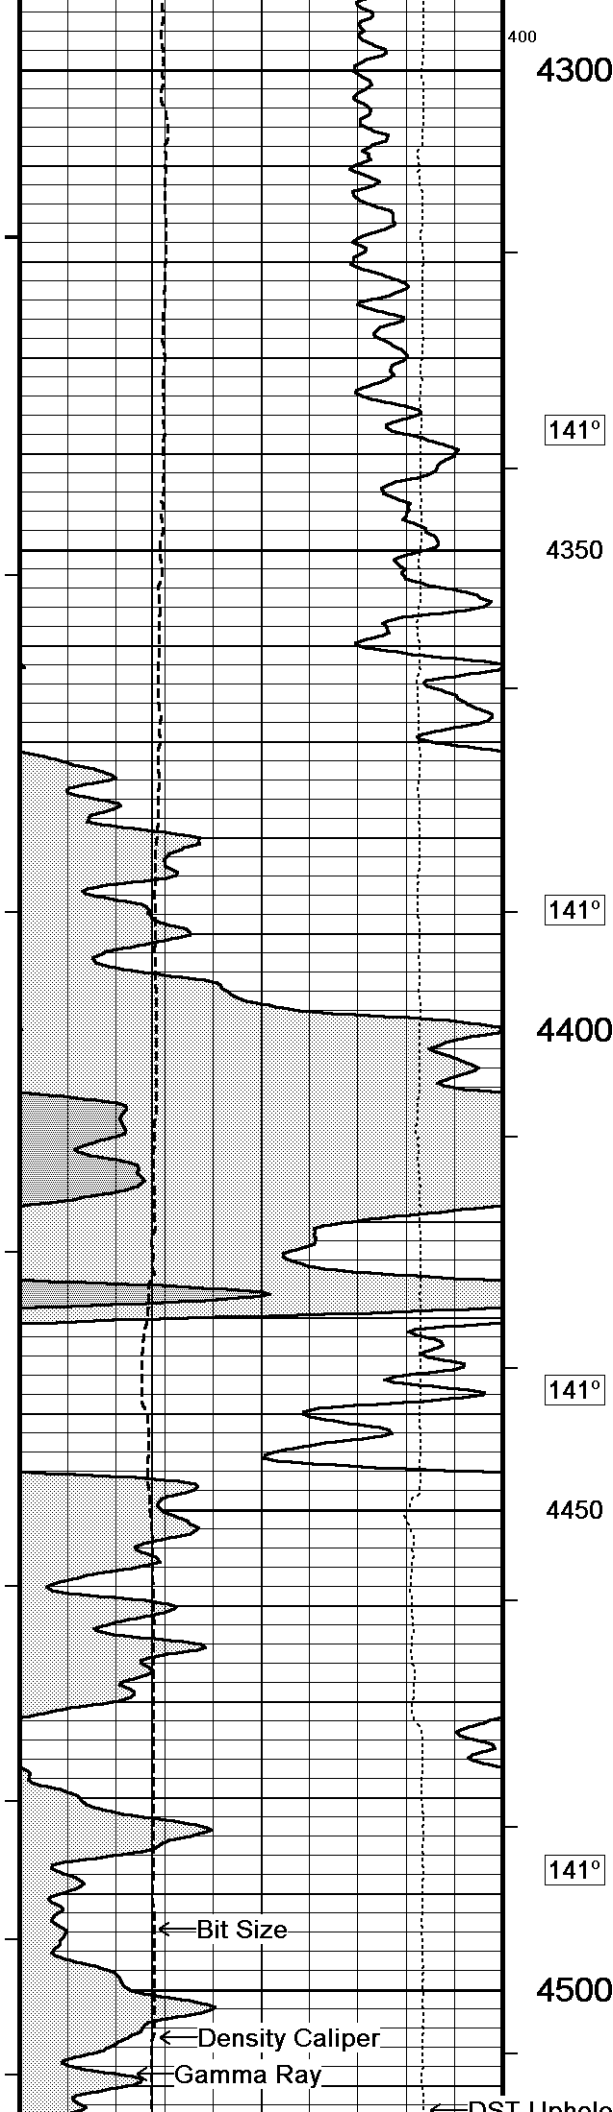

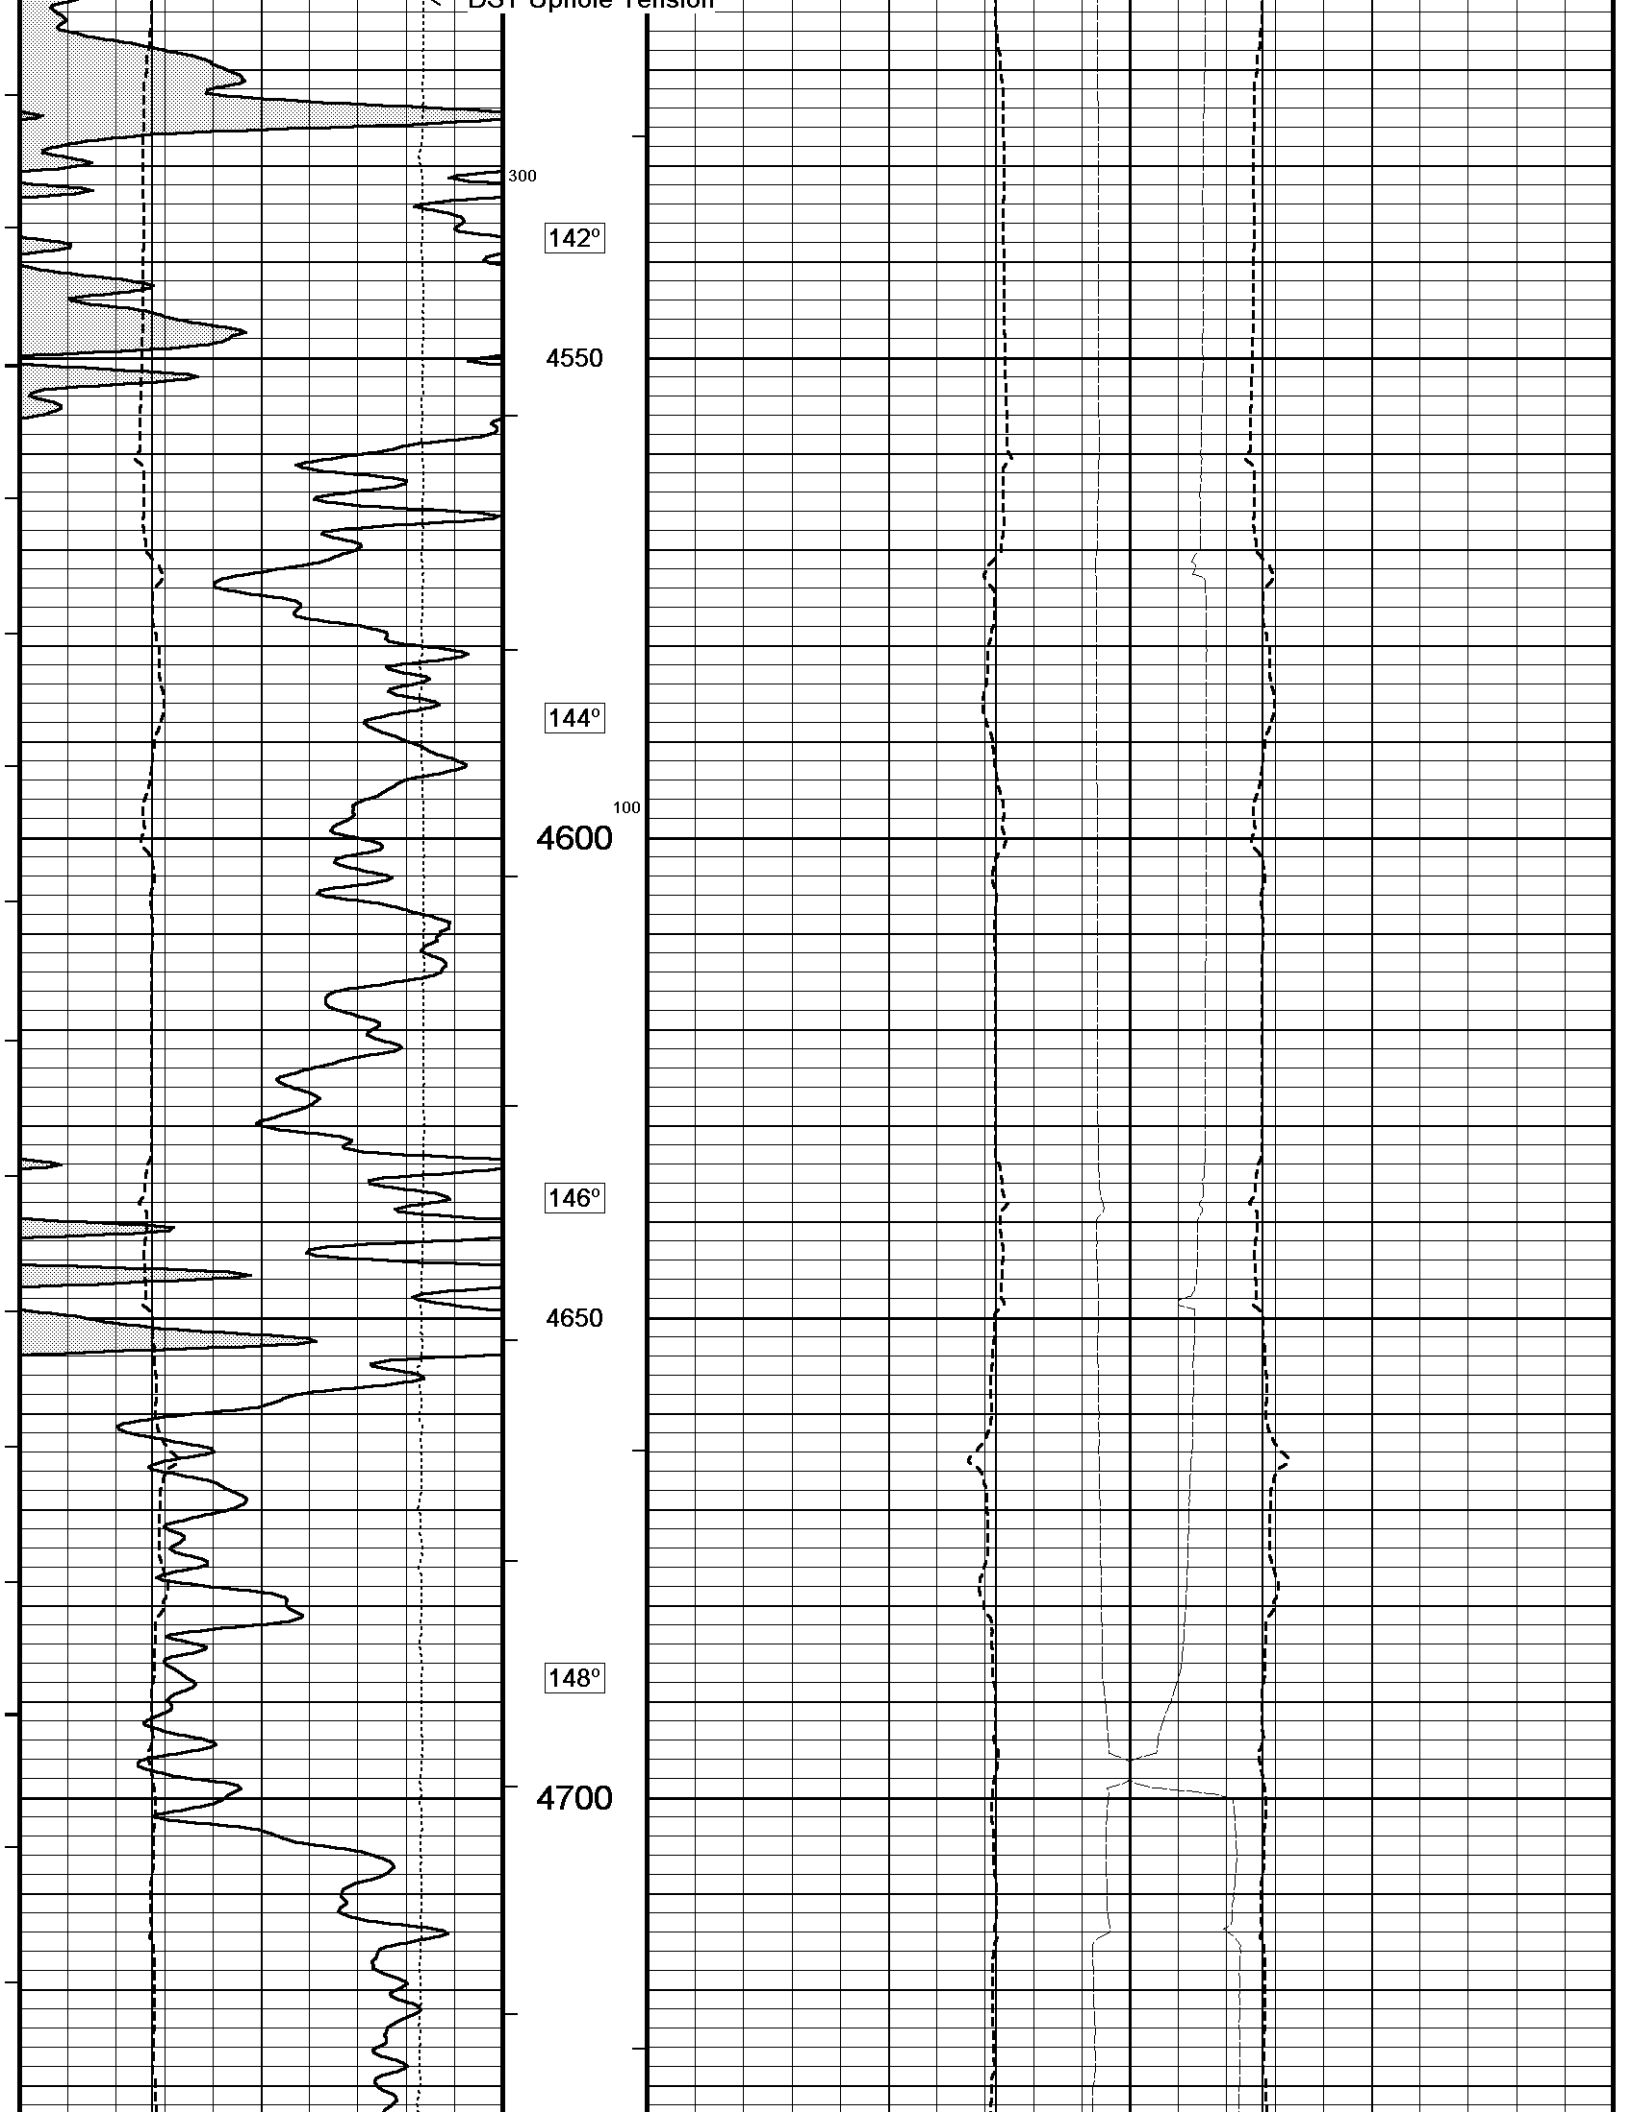

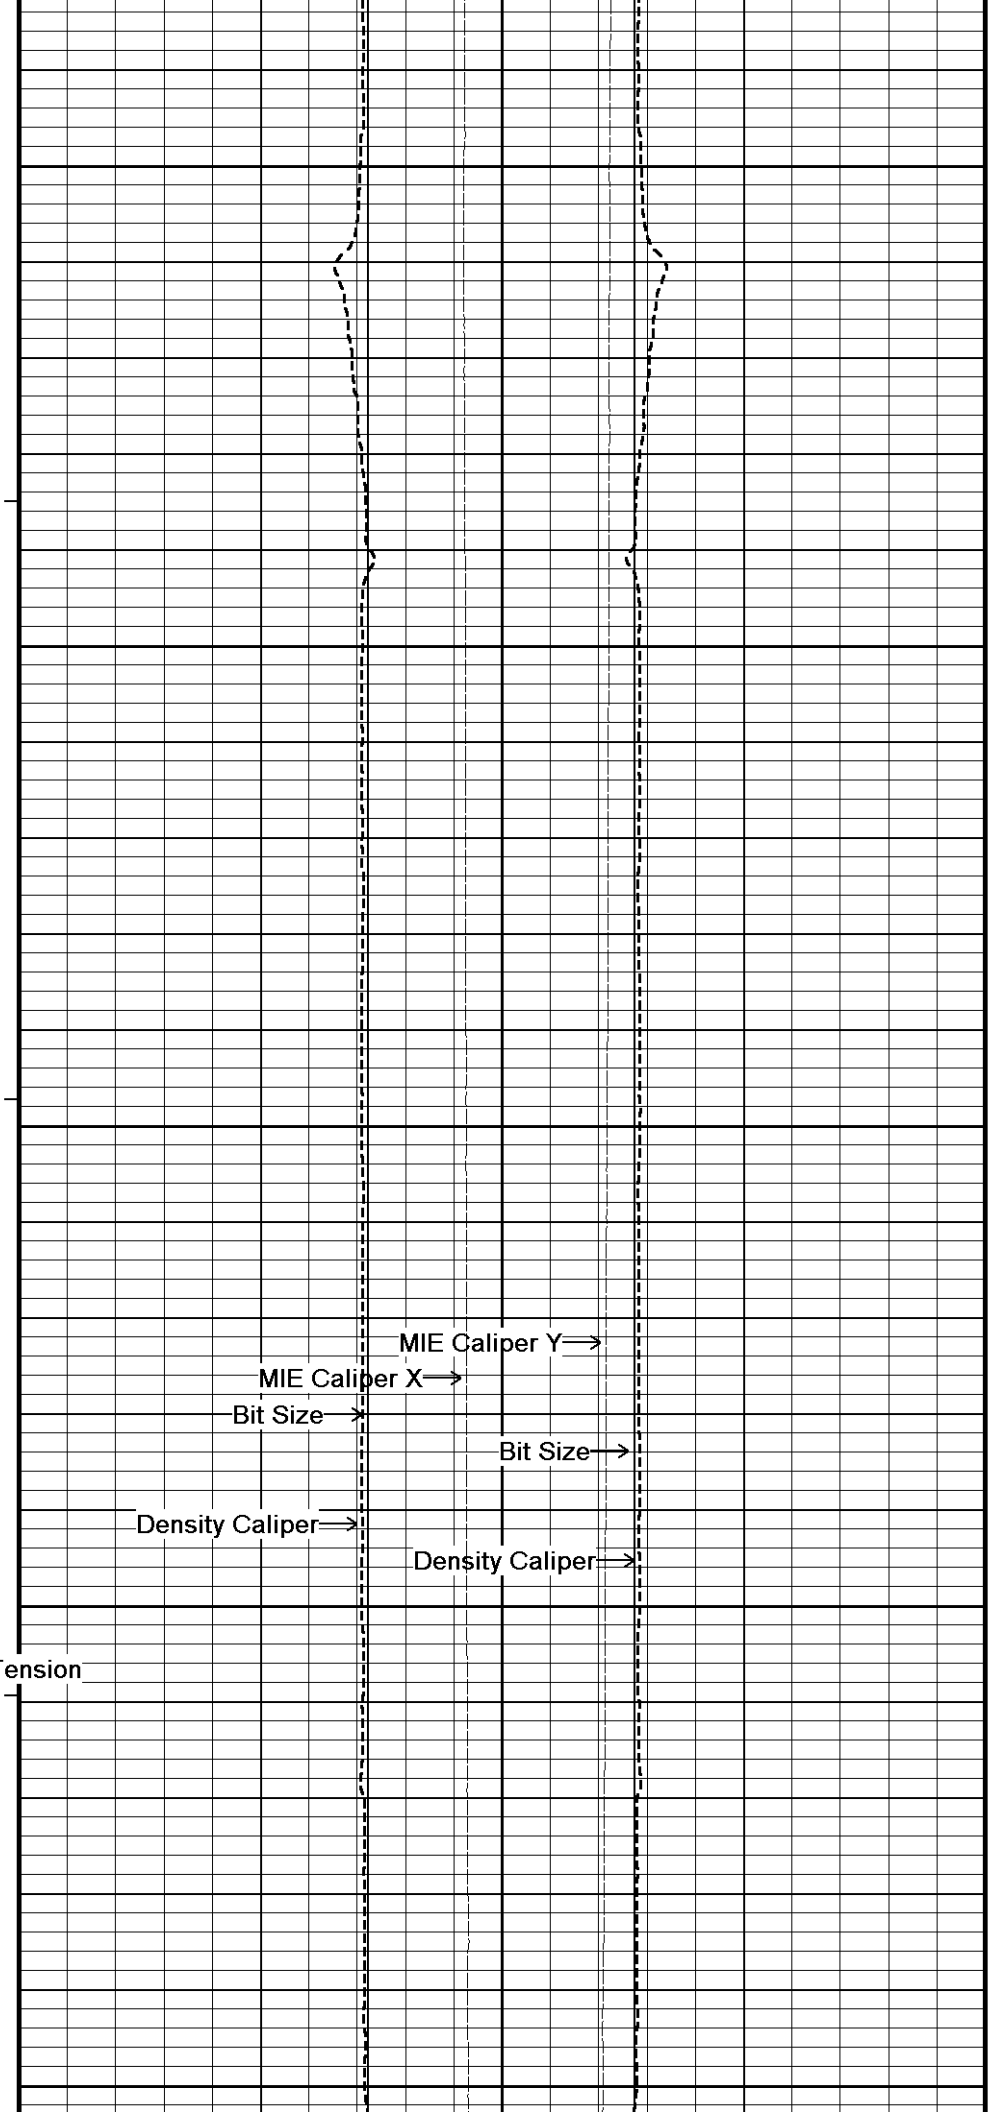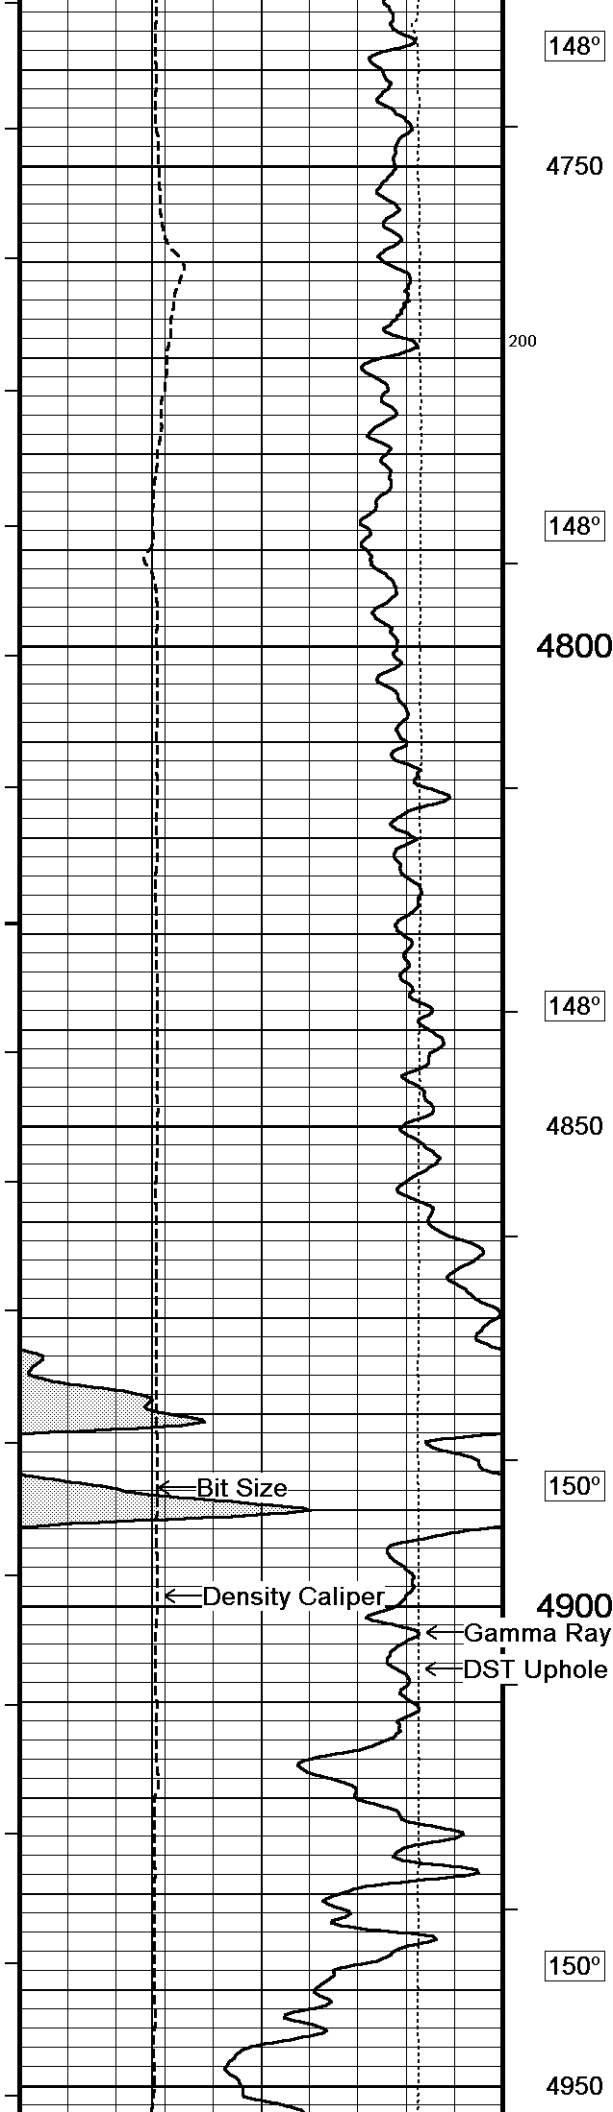

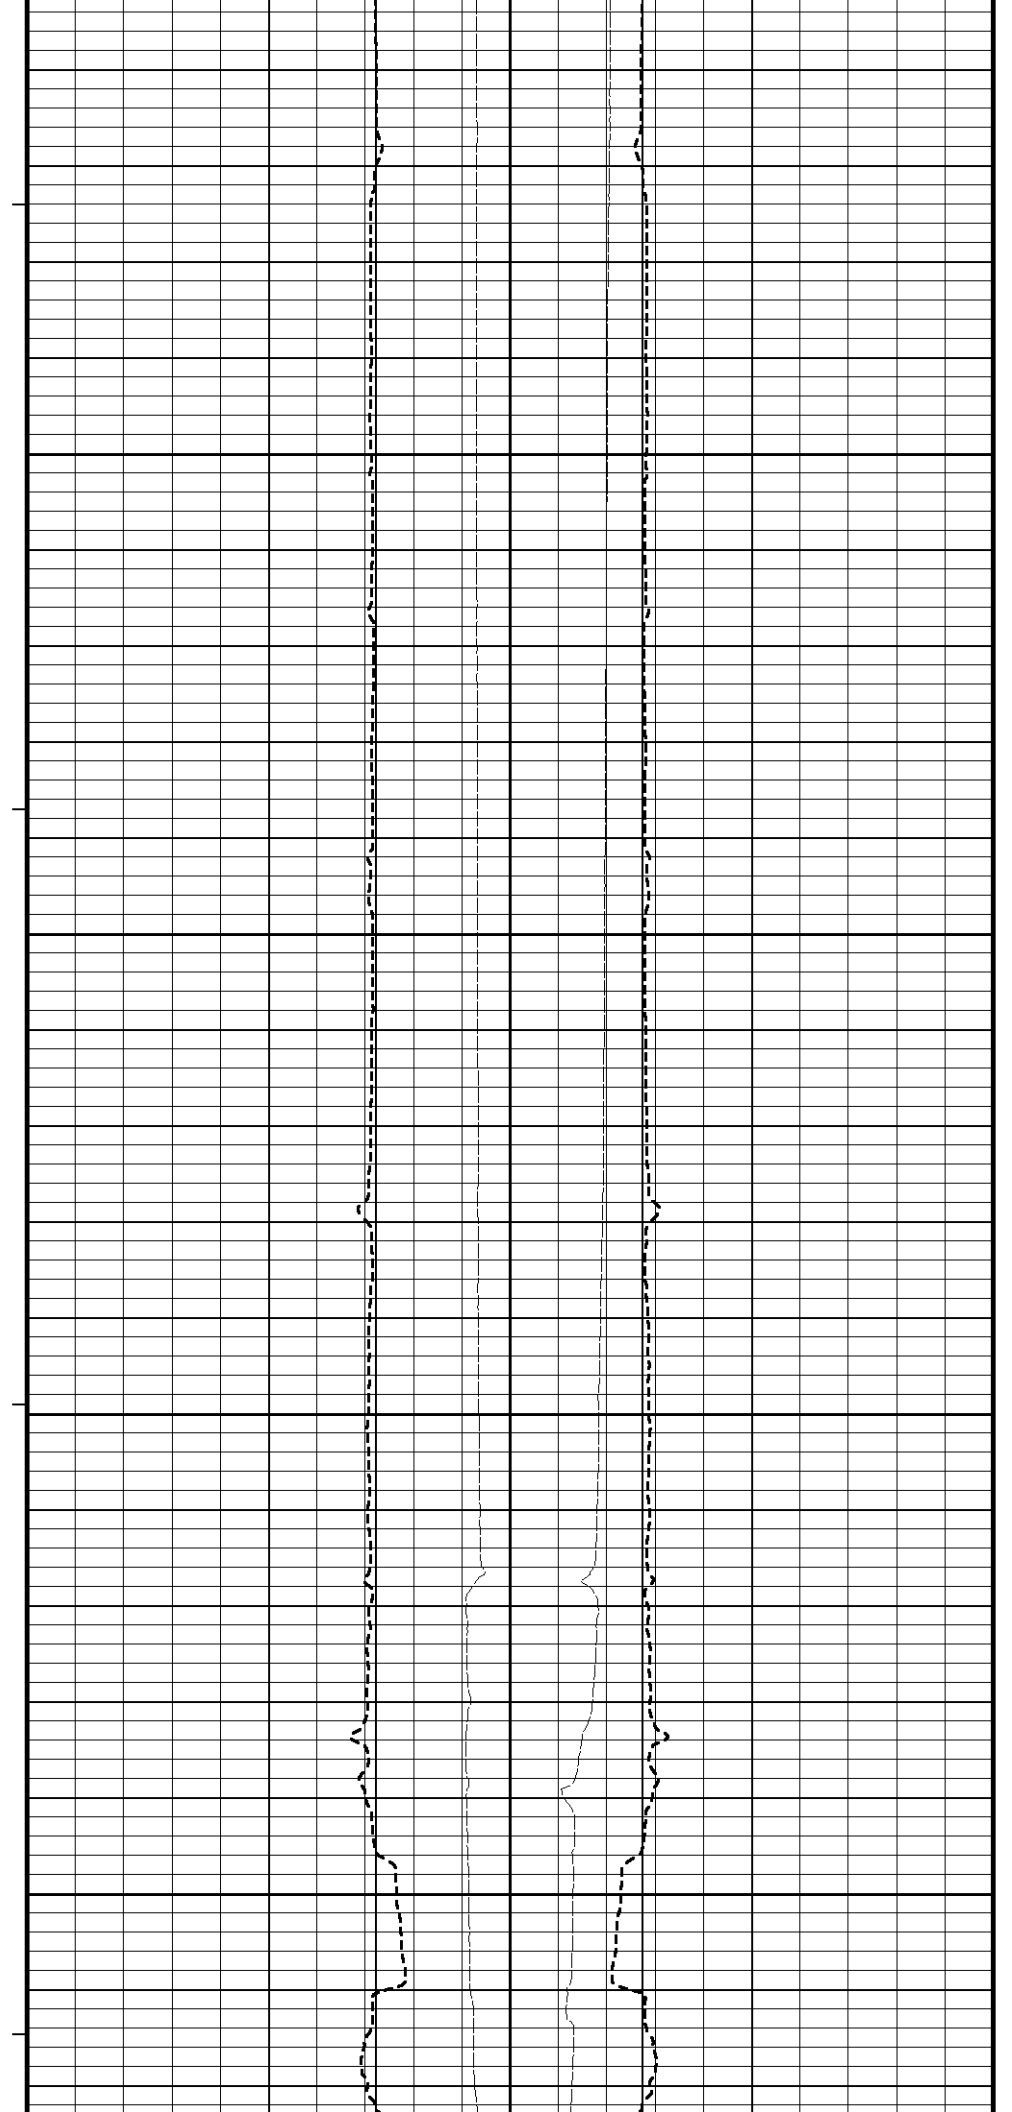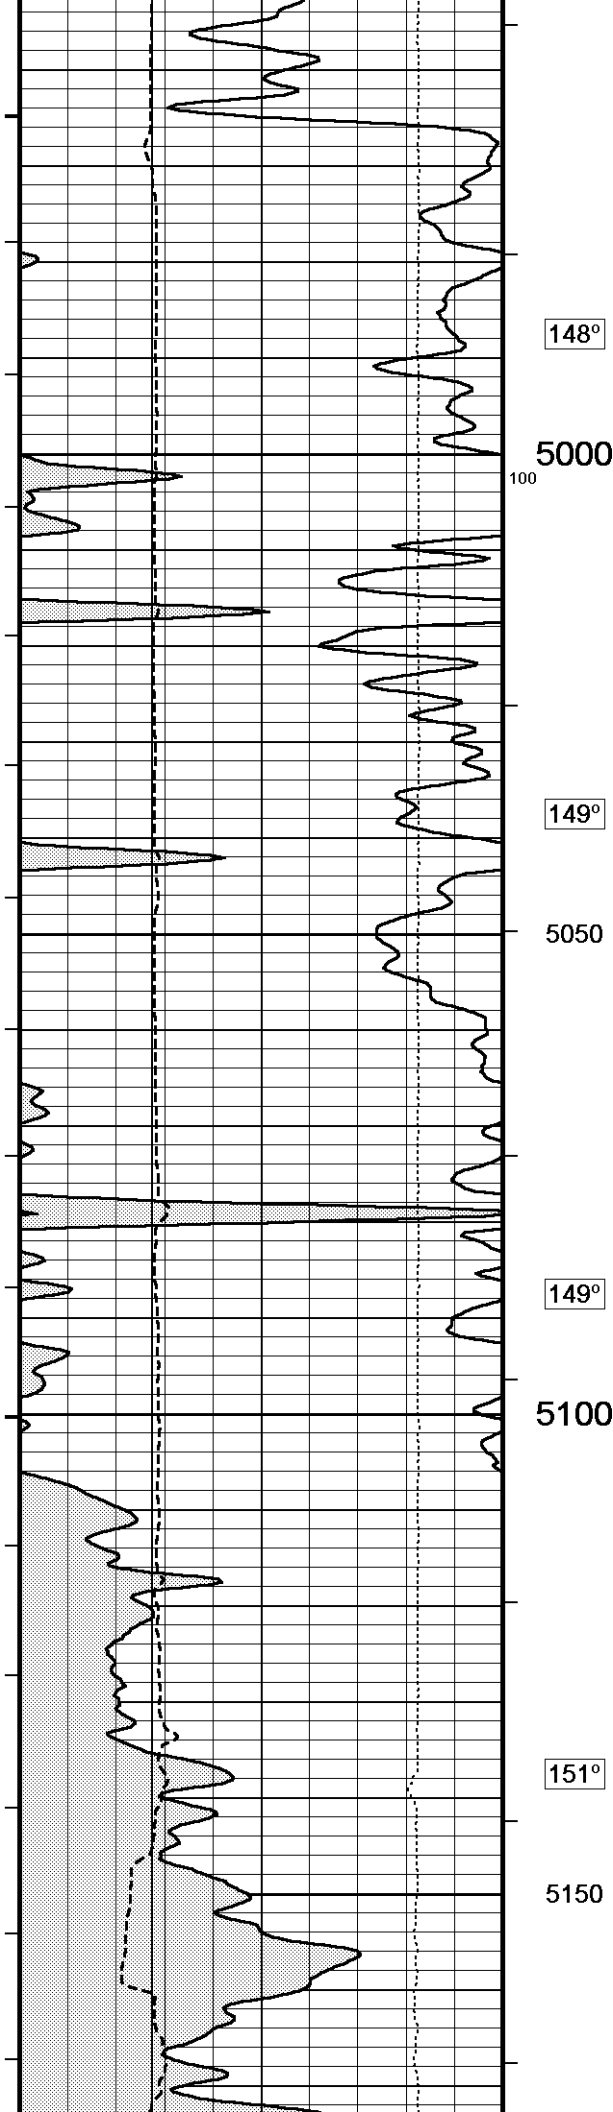

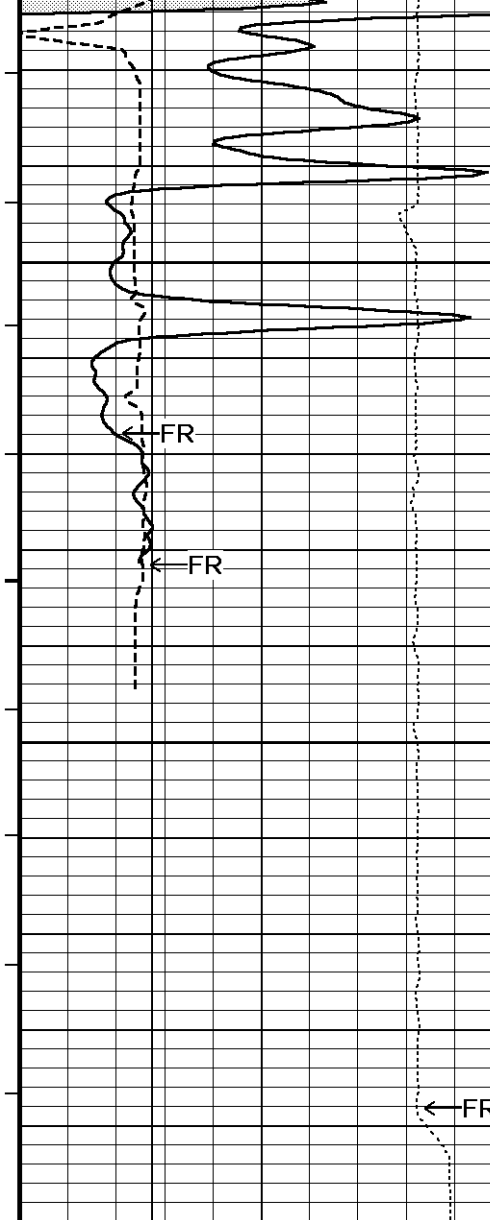

153°

5200

5250

TD

5300

Depth
In
Feet

Timing Marks
every 60.0 sec

DST Uphole Tension
pounds

10000 5000 0
0 -5000 -10000

Gamma Ray

API
0 75 150
150 225 300


Density Caliper
inches

6 11 16

Borehole
Temp in
deg F

HVI
every
10 cu ft

Annular
Integral
every
10 cu ft

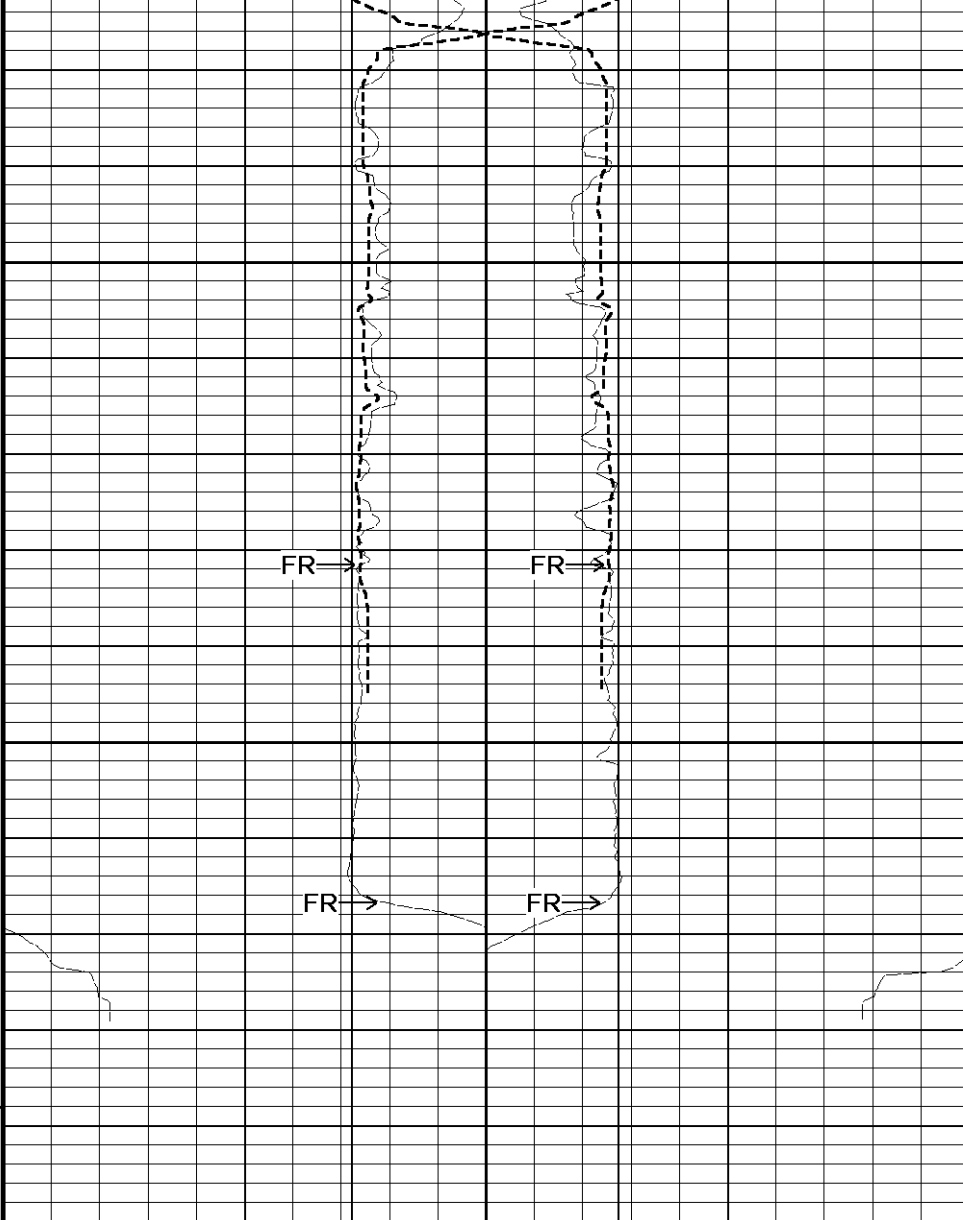

Density Caliper
inches

16 11 6.6 11 16

Density Caliper
inches

Bit Size
inches

16 11 6.6 11 16

Bit Size
inches

MIE Caliper X
inches

16 11 6.6 11 16

MIE Caliper Y
inches

<div> <div>Bit Size</div> <div>inches</div> <div>61116</div> </div>		<div> <div>Replay</div> <div>Scale</div> <div>1:240</div> </div>	
<div> <div>Depth Based Data - Maximum Sampling Increment 10.0cm</div> <div>Plotted on 29-OCT-2012 08:59</div> <div>Filename: C:\Users\E164620\AppData\Local\Temp\Wear... \IECGS No 6-19D WPD003-1_MAINPASS.dta</div> <div>Recorded on 28-OCT-2012 20:01</div> <div>System Versions: Processed with 13.03.7779 Plotted with 13.03.6602</div> </div>			
↑		5 INCH MAIN LOG	↑

BEFORE SURVEY CALIBRATION			
C:\Users\E164620\AppData\Local\Temp\Weatherford PreView5\IECGS No 6-19D WPD003-1_MAINPASS.dta			
Down-hole Tension Calibration All 000			Field Calibration on 24-OCT-2010 03:34
Reading No	Measured	0	
1	15659.85	0.00	
2	15734.68	370.00	
General Constants All 000			Last Edited on 28-OCT-2012,19:11
General Parameters			
Mud Resistivity	3.330	ohm-metres	
Mud Resistivity Temperature	62.700	degrees F	
Water Level	0.000	feet	
Density/Neutron Processing	Wet Hole		
Hole/Annular Volume and Differential Caliper Parameters			
HVOL Method	Single Caliper		
HVOL Caliper 1	Density Caliper		
HVOL Caliper 2	N/A		
Annular Volume Diameter	7.000	inches	
Caliper for Differential Caliper	Density Caliper		
Rwa Parameters			
Porosity used	Base Density Porosity		
Resistivity used	Array Ind. One Res Rt		
RWA Constant A	0.610		
RWA Constant M	2.150		
Down-hole Tension Calibration SMS 0			Field Calibration on 28-OCT-2012 18:35
Reading No	Measured	Calibrated (lbs)	
1	15363.35	0.00	
2	16651.73	510.00	
Gamma Calibration MCG-D.K 483			Field Calibration on 28-OCT-2012 08:43
	Measured	Calibrated (API)	
Background	74	50	
Calibrator (Gross)	832	569	
Calibrator (Net)	758	519	
Gamma Constants MCG-D.K 483			Last Edited on 05-OCT-2012,14:10
Gamma Calibrator Number GRCC119			
Mud Density	1.00	gm/cc	
Caliper Source for Processing	Density Caliper		
Tool Position	Eccentred		
Concentration of KCl	0.00	kppm	
SP Calibration MCG-D.K 483			Field Calibration on 23-SEP-2012,10:15
	Measured	Calibrated (mV)	
Reference 1	100.0	100.0	
Reference 2	-100.0	-100.0	
High Resolution Temperature Calibration MCG-D.K 483			Field Calibration on 30-SEP-2012,04:09

	Measured	Calibrated(Deg F)		
Lower	50.00	50.00		
Upper	75.00	75.00		
High Resolution Temperature Constants MCG-D.K 483			Last Edited on 02-OCT-2012,09:19	
Pre-filter Length	11			
Neutron Calibration MDN-B.J 372			Base Calibration on 09-OCT-2012 10:28 Field Check on 28-OCT-2012 09:04	
Base Calibration				
	Measured		Calibrated (cps)	
	Near	Far	Near	Far
	2898	88	3714	110
Ratio	32.889		33.764	
Field Calibrator at Base			Calibrated (cps)	
			2351	3475
Ratio	0.677			
Field Check			Calibrated (cps)	
			0	0
Ratio	0.000			
Neutron Constants MDN-B.J 372			Last Edited on 28-OCT-2012,16:55	
Neutron Source Id	P31115B			
Neutron Jig Number	NJ5299			
Epithermal Neutron	No			
Caliper Source for Processing	Density Caliper			
Stand-off	0.00	inches		
Mud Density	1.00	gm/cc		
Limestone Sigma	7.10	cu		
Sandstone Sigma	7.00	cu		
Dolomite Sigma	4.70	cu		
Formation Pressure Source	None			
Formation Pressure	N/A	kpsi		
Temperature Source	None			
Temperature	N/A	degrees F		
Mud Salinity	0.00	kppm		
Salinity Correction	Not Applied			
Formation Fluid Salinity Source	None			
Formation Fluid Salinity	N/A	kppm		
Barite Mud Correction	Not Applied			
Navigation Constants MIE-A.A 207			Last Edited on 28-OCT-2012,16:53	
Magnetic Declination	7.96	degrees	East	
Magnetometer Parameters MIE-A.A 207				
Date Of Last Magnetometer Calibration		3-OCT-2012,17:23		
	X Magnetometer	Y Magnetometer	Z Magnetometer	
Slope	-1.000000	-1.000965	-0.989937	
Offset	0.014422	-0.012785	0.011064	
Magnetometer Constants MIE-A.A 207			Last Edited on	
Magnetometer Calibrator Number	000			
Accelerometer Parameters MIE-A.A 207				
Date Of Last Accelerometer Calibration		28-OCT-2012,16:53		
	X Accelerometer	Y Accelerometer	Z Accelerometer	
Slope	-1.112364	-1.102657	-1.101773	
Offset	0.011564	0.008310	0.010144	
Accelerometer Constants MIE-A.A 207			Last Edited on 17-AUG-2011,09:33	
Accelerometer Calibrator Number	000			
Accelerometer Temperature Characterisation				
X Accelerometer				

X Accelerometer		818			
Serial Number		10-Mar-2009			
Calibration Date		B0 B1 B2 B3			
Bias(g)	0.00000e+000	-9.54720e-006	-3.37284e-009	2.77661e-012	
	SF0	SF1	SF2	SF3	
Scale Factor(mA/g)	3.00000e+000	2.89756e-004	3.97830e-007	3.83291e-010	
Y Accelerometer					
Serial Number		808			
Calibration Date		25-Feb-2009			
	B0	B1	B2	B3	
Bias(g)	0.00000e+000	-2.75932e-006	-2.07753e-008	1.48470e-010	
	SF0	SF1	SF2	SF3	
Scale Factor(mA/g)	3.00000e+000	2.72438e-004	2.93457e-007	8.36055e-010	
Z Accelerometer					
Serial Number		835			
Calibration Date		19-Mar-2009			
	B0	B1	B2	B3	
Bias(g)	0.00000e+000	-9.62639e-006	-1.21867e-008	9.07240e-011	
	SF0	SF1	SF2	SF3	
Scale Factor(mA/g)	3.00000e+000	2.81882e-004	3.88354e-007	7.48706e-010	

Caliper Calibration MIE-A.A 207				Base Calibration on 28-OCT-2012 09:19	
				Field Calibration on 28-OCT-2012 09:22	
Base Calibration					
Reading No	Pads 1-5 Meas.	Pads 3-7 Meas.	Calibrator Size (in)		
1	26888	26971	5.97		
2	37117	37129	7.96		
3	47211	46396	9.87		
4	58796	57746	11.92		
5	0	0	0.00		
Reading No	Pad 2 Meas.	Pad 4 Meas.	Pad 6 Meas.	Pad 8 Meas.	Calibrator Size (in)
1	24831	25507	24808	25761	5.97
2	33668	34186	33550	34279	7.96
3	41838	42174	42148	42696	9.87
4	51734	51950	51983	52871	11.92
5	0	0	0	0	0.00
Field Calibration					
	Measured	Measured	Actual		
	Pads 1-5 Caliper(in)	Pads 3-7 Caliper(in)	Caliper(in)		
	7.96	7.91	7.96		
	Measured	Measured	Measured	Measured	Actual
	Pad 2 Caliper(in)	Pad 4 Caliper(in)	Pad 6 Caliper(in)	Pad 8 Caliper(in)	Caliper(in)
	3.96	3.96	4.00	4.00	7.96

Caliper Constants MIE-A.A 207			Last Edited on 12-OCT-2011,10:05		
Caliper Difference for BRKT		0.120	inches		

Imager Pad Check MIE-A.A 207				Field Check on	
Pad 1	Pad Not Tested	Pad 5	Pad Not Tested		
Pad 2	Pad Not Tested	Pad 6	Pad Not Tested		
Pad 3	Pad Not Tested	Pad 7	Pad Not Tested		
Pad 4	Pad Not Tested	Pad 8	Pad Not Tested		

Compact Micro Imager Constants MIE-A.A 207			Last Edited on 28-OCT-2012,09:23		
Sonde Configuration	Imager Mode		degrees		
Arm-Pad Kit	Normal Pads (12.25 in)				
Centre Pad 1 Rotational Offset	0.00				
Image/Borehole Ovality Reference	Azimuth of Pad 1		degrees		
Non Active Buttons	Omit		feet		
Search Angle	0.00		feet		
Correlation Interval	3.28		mAmp		
Correlation Step	1.64		mAmp		
Current Offset	0.0000				
Squasher Start	0.0500				
Image Processing	Enabled				

FE Calibration MFE-A.A 76

Base Calibration on 08-OCT-2012 10:03

Field Check on 28-OCT-2012 05:48

Base Calibration

	Measured	Calibrated (ohm-m)
Reference 1	0.0	0.0
Reference 2	965.4	126.8
Base Check		279.7
Field Check		279.8

FE Constants MFE-A.A 76

Last Edited on 28-OCT-2012,16:57

Running Mode	No Sleeve	
MFE K Factor	0.1268	
Caliper Source for FE correction	Density Caliper	
Caliper Value for FE correction	N/A	inches
Rm Source for FE correction	Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature	
Stand-off	1.0	inches

High Resolution Temperature Calibration MAI-B.A 219

Field Calibration on 10-AUG-2011,00:10

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	75.00	75.00

High Resolution Temperature Constants MAI-B.A 219

Last Edited on 30-SEP-2012,04:08

Pre-filter Length	11
-------------------	----

Induction Calibration MAI-B.A 219

Base Calibration on 08-MAY-2012,15:56

Field Check on 28-OCT-2012 05:39

Base Calibration

Test Loop Calibration		Measured		Calibrated (mmho/m)	
Channel		Low	High	Low	High
1		17.4	478.1	9.3	966.2
2		5.8	380.3	7.6	821.4
3		3.5	258.5	5.2	566.0
4		1.9	136.0	2.6	279.2

Array Temperature	77.2	Deg F
-------------------	------	-------

Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1	0.0	0.0	12.4	3793.5
2	0.0	0.0	30.9	3537.3
3	0.0	0.0	28.6	3056.1
4	0.0	0.0	19.3	2028.4
Deep	0.0	0.0	16.5	1948.6
Medium	0.0	0.0	42.7	4088.7
Shallow	0.0	0.0	47.6	5283.8

Array Temperature	0.0	68.4	Deg F
-------------------	-----	------	-------

Induction Constants MAI-B.A 219

Last Edited on 28-OCT-2012,16:58

Induction Model	RtAP-WBM	
Caliper for Borehole Corr.	Density Caliper	
Hole Size for Borehole Correction	N/A	inches
Tool Centred	No	
Stand-off Type	Fins	
Stand-off	1.00	inches
Number of Fins on Stand-off	6.0000	
Stand-off Fin Angle	60.00	degrees
Stand-off Fin Width	0.5000	inches
Borehole Corr. Rm Source	Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature	
Squasher Start	0.0020	mhos/metre
Squasher Offset	N/A	mhos/metre

Borehole Normalisation

DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections

Channel 1	0.00	mmhos/metre
Channel 2	0.00	mmhos/metre
Channel 3	0.00	mmhos/metre
Channel 4	0.00	mmhos/metre

Apparent Porosity and Water Saturation Constants

Archie Constant (A)	1.00	
Cementation Exponent (M)	2.00	
Saturation Exponent (N)	2.00	
Saturation of Water for Apor	100.00	percent
Resistivity of Water for Apor and Sw	0.05	ohm-m
Resistivity of Mud Filtrate for Sw	0.00	ohm-m
Source for Rt	0.00	
Source for Rxo	0.00	

Caliper Calibration MPD-B 183

Base Calibration on 18-OCT-2012 14:40

Field Calibration on 28-OCT-2012 06:03

Base Calibration

Reading No	Measured	Calibrator Size (in)
1	17392	3.99
2	25904	5.97
3	34387	7.96
4	42672	9.87
5	52112	11.92
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
7.86	7.96

Photo Density Calibration MPD-B 183

Base Calibration on 18-OCT-2012 14:23

Field Check on 28-OCT-2012 06:00

Density Calibration

Base Calibration	Measured		Calibrated (sdu)	
	Near	Far	Near	Far
Reference 1	39817	13046	52994	19123
Reference 2	18730	1788	25185	2558

Field Check at Base

639.0	756.5
-------	-------

Field Check

640.8	751.3
-------	-------

PE Calibration

Base Calibration	WS	Measured		Calibrated Ratio
		WH	Ratio	
Background	118	573		
Reference 1	13710	39721	0.347	0.309
Reference 2	5433	18657	0.294	0.274

Field Check at Base

117.9	572.8
-------	-------

Field Check

117.6	578.7
-------	-------

Density Constants MPD-B 183

Last Edited on 28-OCT-2012,16:56

Density Source Id	P15771B
Nylon Calibrator Number	527
Aluminium Calibrator Number	527
Density Shoe Profile	8 inch
Caliper Source for Processing	Density Caliper

Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.19	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	

Matrix Density (gm/cc)	Depth (ft)
2.68	
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00

DOWNHOLE EQUIPMENT

C:\Users\E164620\AppData\Local\Temp\Weatherford PreView\5\ECGS No 6-19D WPD003-1_MAINPASS.dta

3/8" Triple Cone Cable Head (MCB C A)

MCB-C.A 5 LG: 1.58 ft WT: 15.4 lb OD: 2.24 in

SHA-H Compact Swivel Head Adaptor

SHA-H 142 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

Compact Comms Gamma

MCG-D.K 483 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in

Compact Neutron

MDN-B.J 372 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Density/Caliper

MPD-B 183 LG: 9.59 ft WT: 90.4 lb OD: 2.45 in

MIS-D.B Compact Inline Bowspring sub

MIS-D.B 660 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

SKJ-D.A Compact Knuckle Joint

SKJ-D.A 112 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MIS-E.A Compact Inline Standoff sub

MIS-E.A 334 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

SKJ-D.A Compact Knuckle Joint

SKJ-D.A 143 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

SHA-J.B Compact Swivel Head Adaptor

SHA-J.B 574 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

Compact MMI Memory Section


MIM-A.A 207 LG: 4.65 ft WT: 26.5 lb OD: 2.24 in

Compact MMI Electrode Section

MIE-A.A 207 LG: 13.96 ft WT: 99.2 lb OD: 4.09 in

SKJ-E.B Compact Knuckle Joint


SKJ-E.B 583 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

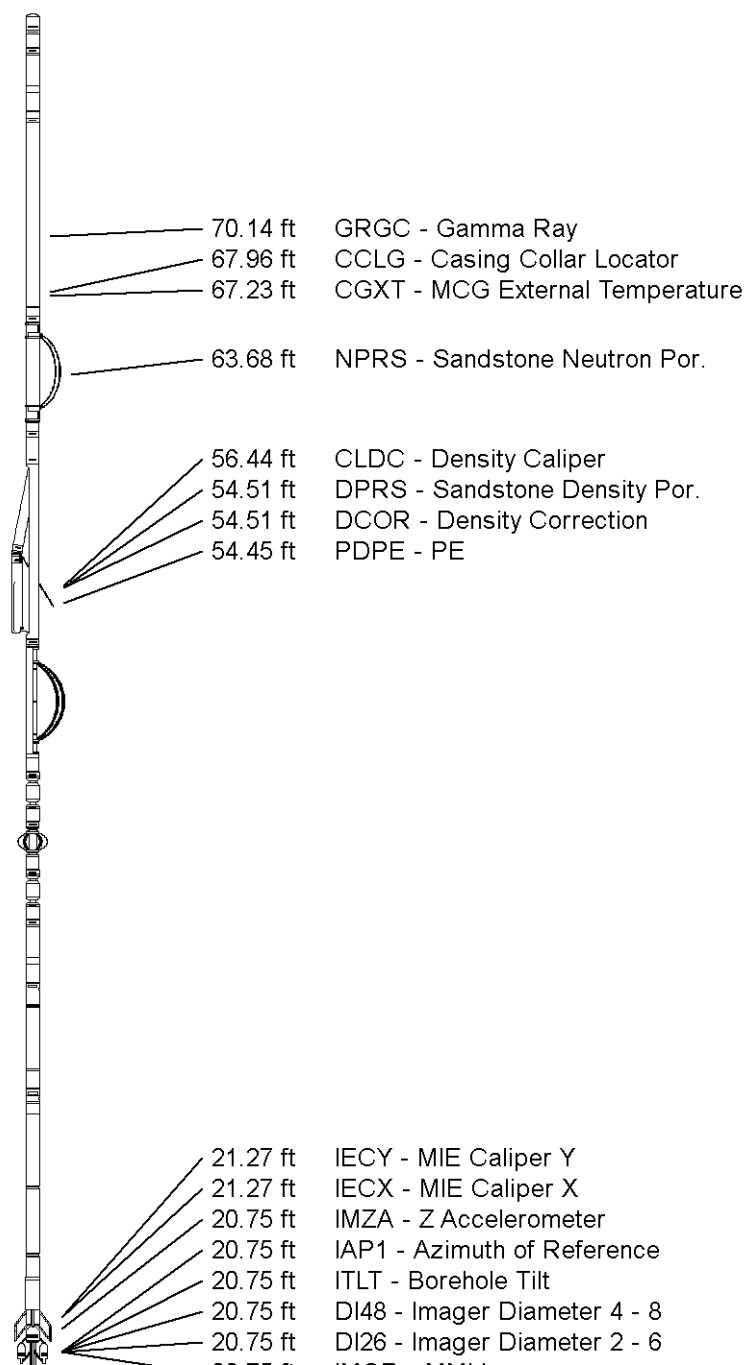

Compact Focussed Electric
MFE-A.A 76 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

Compact Induction
MAI-B.A 219 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 79.30 ft Weight: 608.5 lb

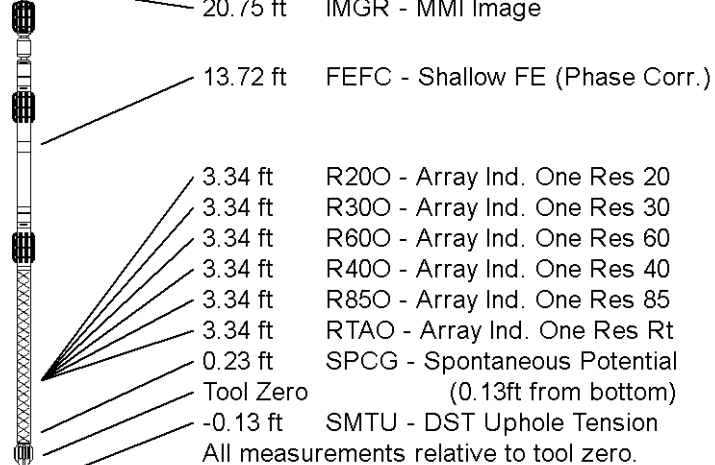

COMPANY	EAST CHEYENNE GAS STORAGE LLC
WELL	ECGS No 6-19D WPD003-1
FIELD	PEETZ WEST
PROVINCE/COUNTY	LOGAN
COUNTRY/STATE	USA/COLORADO

Elevation Kelly Bushing	4566.00	feet	First Reading	5232.00	feet
Elevation Drill Floor	4565.00	feet	Depth Driller	5285.00	feet
Elevation Ground Level	4553.00	feet	Depth Logger	5288.00	feet



Weatherford®

CALIPER
LOG