

NOBLE ENERGY INC.
 CON GQ07-01
 NENE 7-10N-61W
 635' FNL & 687' FEL
 Weld County, Colorado
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 3/12/2013

API: 05-123-35654
 COGCC #

GL Elev: 5078
 KB Elev: 5091

Spud Date: 6/26/2012


Surface Casing :

9 5/8" 36# @ 1104'
 Cement: 514 sx
 TOC: Surface

TOC @ 6000' (Estimated)

Production Casing :

7" 26# @ 9000'
 Cement: 405 sx
 TD: 1/0/1900

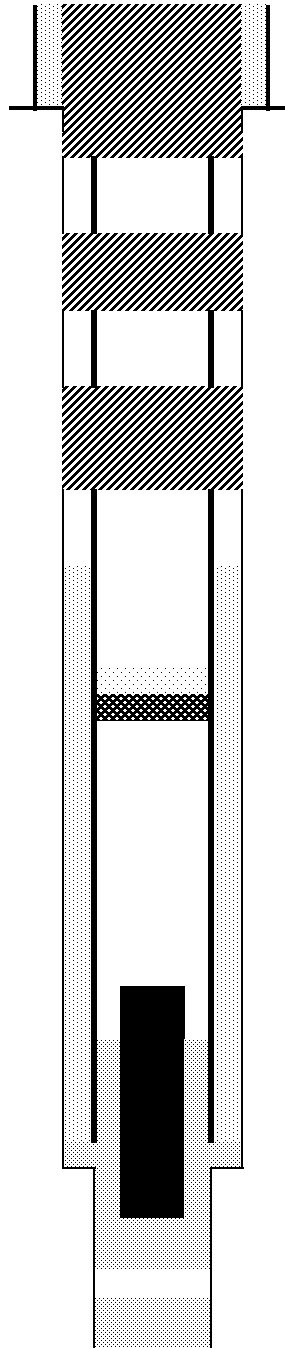

Cut surface casing off 6'-8' below surface.

Pump approx 500 sx shoe plug @ 1200'
 Will bring cement to surface.

Perforate @ 2500'
 125 sx Plug through CICR

Perforate @ 5000'
 125 sx Plug through CICR

CIBP @ 7830' w/ cement on top (Current)

Top of Fish @ 8006'
 (Stuck Drill Pipe)

Cement Plug 8783' - 9589' (Current)
 Cement = 134 sx

Cement Plug 9611' - 10,372' (Current)
 Cement = 134 sx

TD: 10372