

Company: ENCANA OIL & GAS (USA) INC

Well: SHIDELER 30-3A (O19EB)

Field: MAMM CREEK

County: GARFIELD State: COLORADO

SLIM CEMENT MAPPING LOG  
CBL – VDL  
GR-CCL

County: GARFIELD

Field: MAMM CREEK

Location: SHL: 569 FSL & 1658 FEL

Well: SHIDELER 30-3A (O19EB)

Company: ENCANA OIL & GAS (USA) INC

LOCATION	
SHL: 569 FSL & 1658 FEL BHL: 162 FNL & 2127 FEL	Elev.: K.B. 6631.00 ft G.L. 6509.00 ft D.F. 6530.00 ft
Permanent Datum: _____	GROUND LEVEL _____
Log Measured From: _____	KELLY BUSHING _____
Drilling Measured From: _____	KELLY BUSHING _____
API Serial No. 05-045-21835-000C	Section 19
	Township 7S
	Range 92W

	Run 1	Run 2	Run 3
PVT DATA			
Oil Density			
Water Salinity			
Gas Gravity			
Bo			
Bw			
1/Bg			
Bubble Point Pressure			
Bubble Point Temperature			
Solution GOR			
Maximum Deviation			
CEMENTING DATA			
Primary/Squeeze	Primary		
Casing String No			
Lead Cement Type			
Volume			
Density			
Water Loss			
Additives			
Tail Cement Type			
Volume			
Density			
Water Loss			
Additives			
Expected Cement Top			

Logging Date	28-Apr-2013		
Run Number	1		
Depth Driller	7854 ft		
Schlumberger Depth	7763 ft		
Bottom Log Interval	7754 ft		
Top Log Interval	80 ft		
Casing Fluid Type	FRESH WATER		
Salinity			
Density	8.4 lbm/gal		
Fluid Level	80 ft		
BIT/CASING/TUBING STRING			
Bit Size	8.750 in		
From	0 ft		
To	7854 ft		
Casing/Tubing Size	4.500 in		
Weight	11.6 lbm/ft		
Grade			
From	22 ft		
To	7824 ft		
Maximum Recorded Temperatures	229 degF		
Logger On Bottom	28-Apr-2013	22:30	
Unit Number	391	GRAND JUNCTION	
Recorded By	JASON BARRY		
Witnessed By	BILLY MYERS		

Logging Date			
Run Number			
Depth Driller			
Schlumberger Depth			
Bottom Log Interval			
Top Log Interval			
Casing Fluid Type			
Salinity			
Density			
Fluid Level			
BIT/CASING/TUBING STRING			
Bit Size			
From			
To			
Casing/Tubing Size			
Weight			
Grade			
From			
To			
Maximum Recorded Temperatures			
Logger On Bottom			
Unit Number			
Recorded By			
Witnessed By			

## DEPTH SUMMARY LISTING

Date Created: 14-MAR-2013 10:41:08

## Depth System Equipment

Depth Measuring Device		Tension Device		Logging Cable	
Type:	IDW-B	Type:	CMTD-B/A	Type:	1-25ZT
Serial Number:	6214	Serial Number:	3421	Serial Number:	112136
Calibration Date:	24-APR-2012	Calibration Date:	20-FEB-2011	Length:	19500 FT
Calibrator Serial Number:		Calibrator Serial Number:	174878	Conveyance Method:	Wireline
Calibration Cable Type:	1-25ZT	Number of Calibration Points:	10	Rig Type:	LAND
Wheel Correction 1:	-3	Calibration RMS:	4		
Wheel Correction 2:	-4	Calibration Peak Error:	8		

## Depth Control Parameters

Log Sequence:	First Log In the Well
Rig Up Length At Surface:	0.00 FT
Rig Up Length At Bottom:	0.00 FT
Rig Up Length Correction:	0.00 FT
Stretch Correction:	
Tool Zero Check At Surface:	

### Depth Control Remarks


1. ALL SCHLUMBERGER DEPTH CONTROL POLICIES APPLIED
2. IDW USED AS PRIMARY DEPTH REFERENCE
3. SWPT DRUM COUNTER USED AS SECONDARY DEPTH REFERENCE
- 4.
- 5.
- 6.

## DISCLAIMER

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE OF AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

OTHER SERVICES1	OTHER SERVICES2
OS1: RESERVOIR SATURATION	OS1:
OS2: LOG	OS2:
OS3: SIGMA MODE	OS3:
OS4:	OS4:
OS5:	OS5:
REMARKS: RUN NUMBER 1	REMARKS: RUN NUMBER 2
FIRST RUN IN HOLE CORRELATED TO DOWN LOG	
TOOL RAN AS PER TOOL SKETCH	
MAXIMUM RECORDED TEMPERATURE= 229 DEGF	
MAXIMUM RECORDED PRESSURE= 3257 PSIA	
ENTRANCE TIME= 22:00	



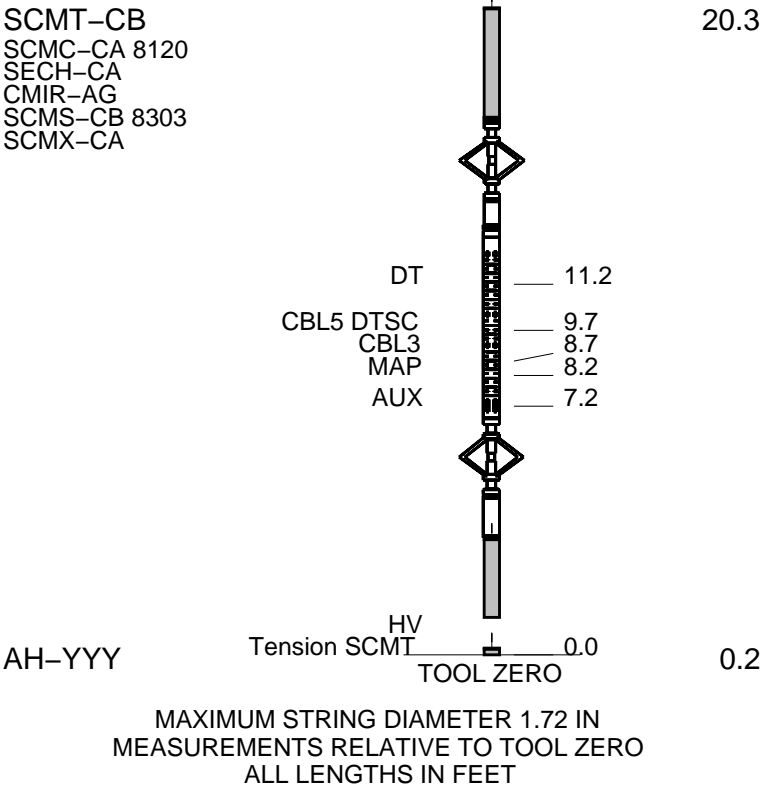

Schlumberger

MAIN PASS CBL VDL


MAXIS Field Log

Company: ENCANA OIL & GAS (USA) INC Well: SHIDELER 30-3A (O19EB)


Input DLIS Files						
DEFAULT	SCMT_RST_PSP_103LUP	FN:101	PRODUCER	28-Apr-2013 22:30	7765.5 FT	16.0 FT
Output DLIS Files						
DEFAULT	SCMT_RST_PSP_106PUP	FN:104	PRODUCER	29-Apr-2013 00:39	7767.5 FT	-26.5 FT
OP System Version: 19C0-187						
SCMT-CB	SRPC-5214-H2-2012-OP1	RST-C		SRPC-5214-H2-2012-OP1		
PSPT	SRPC-5214-H2-2012-OP1					

PIP SUMMARY


☒ Time Mark Every 60 S

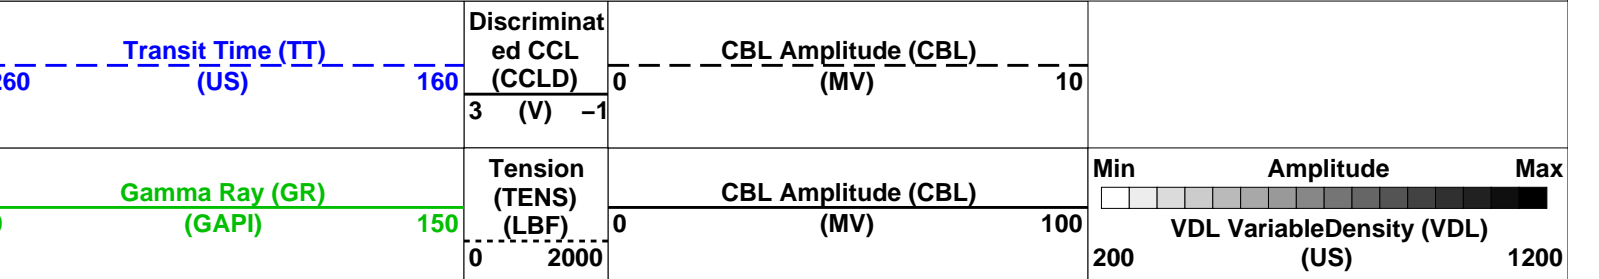





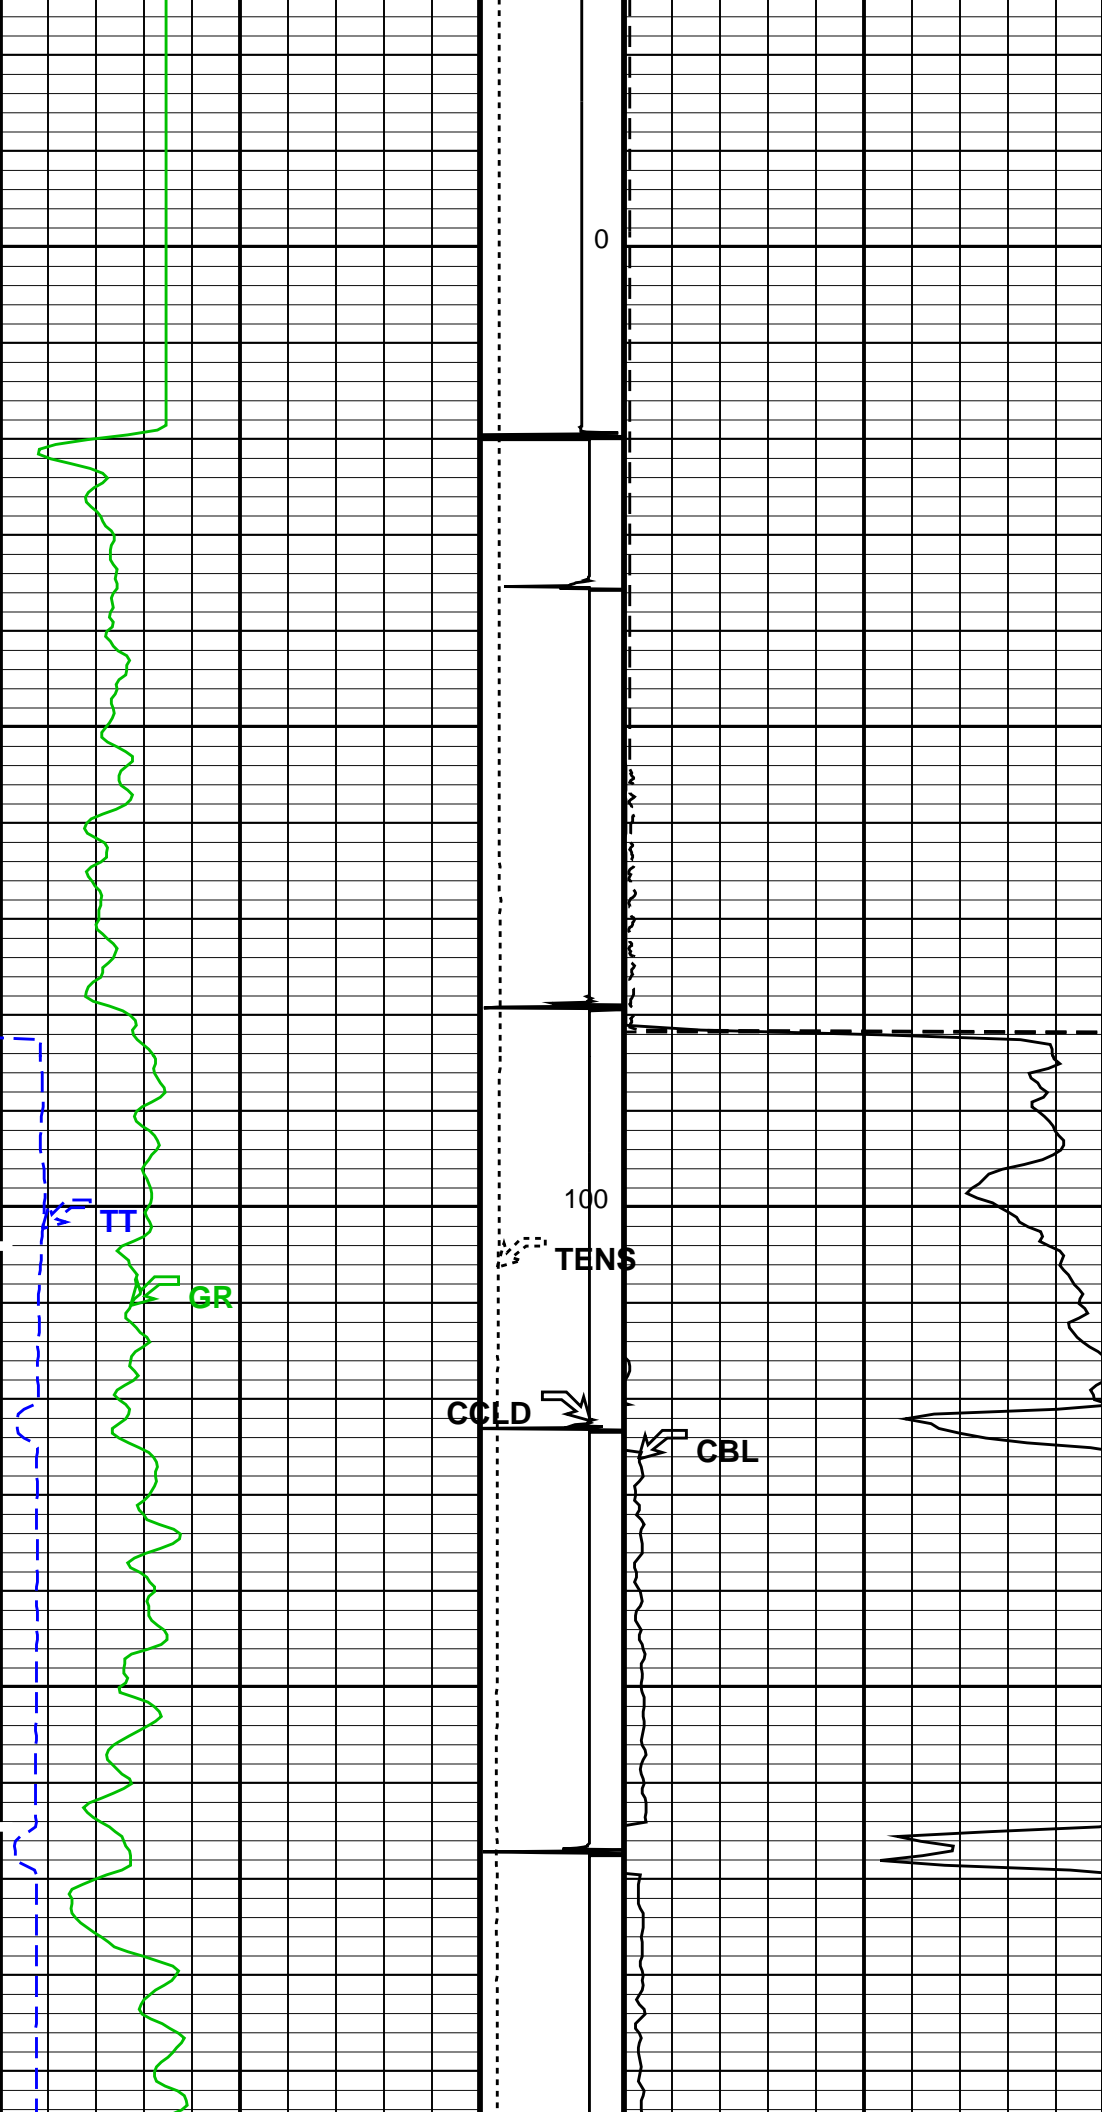



Last Reading CBL

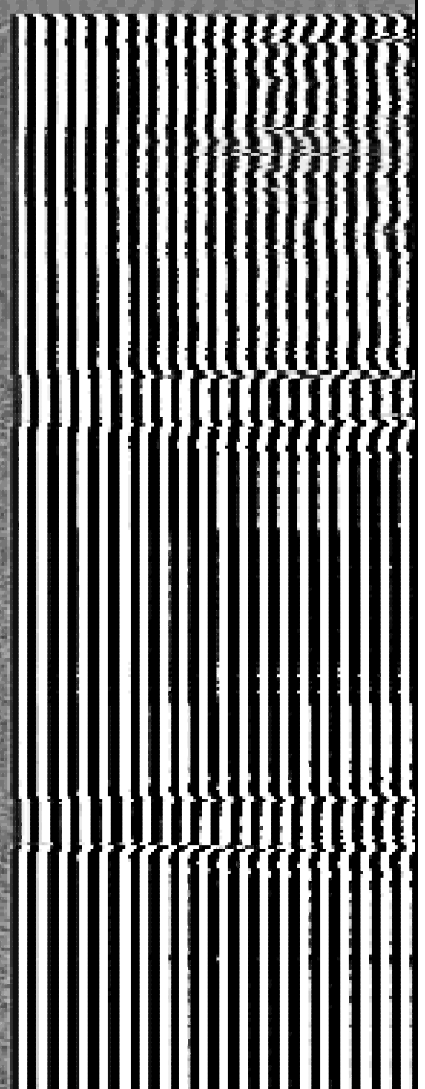

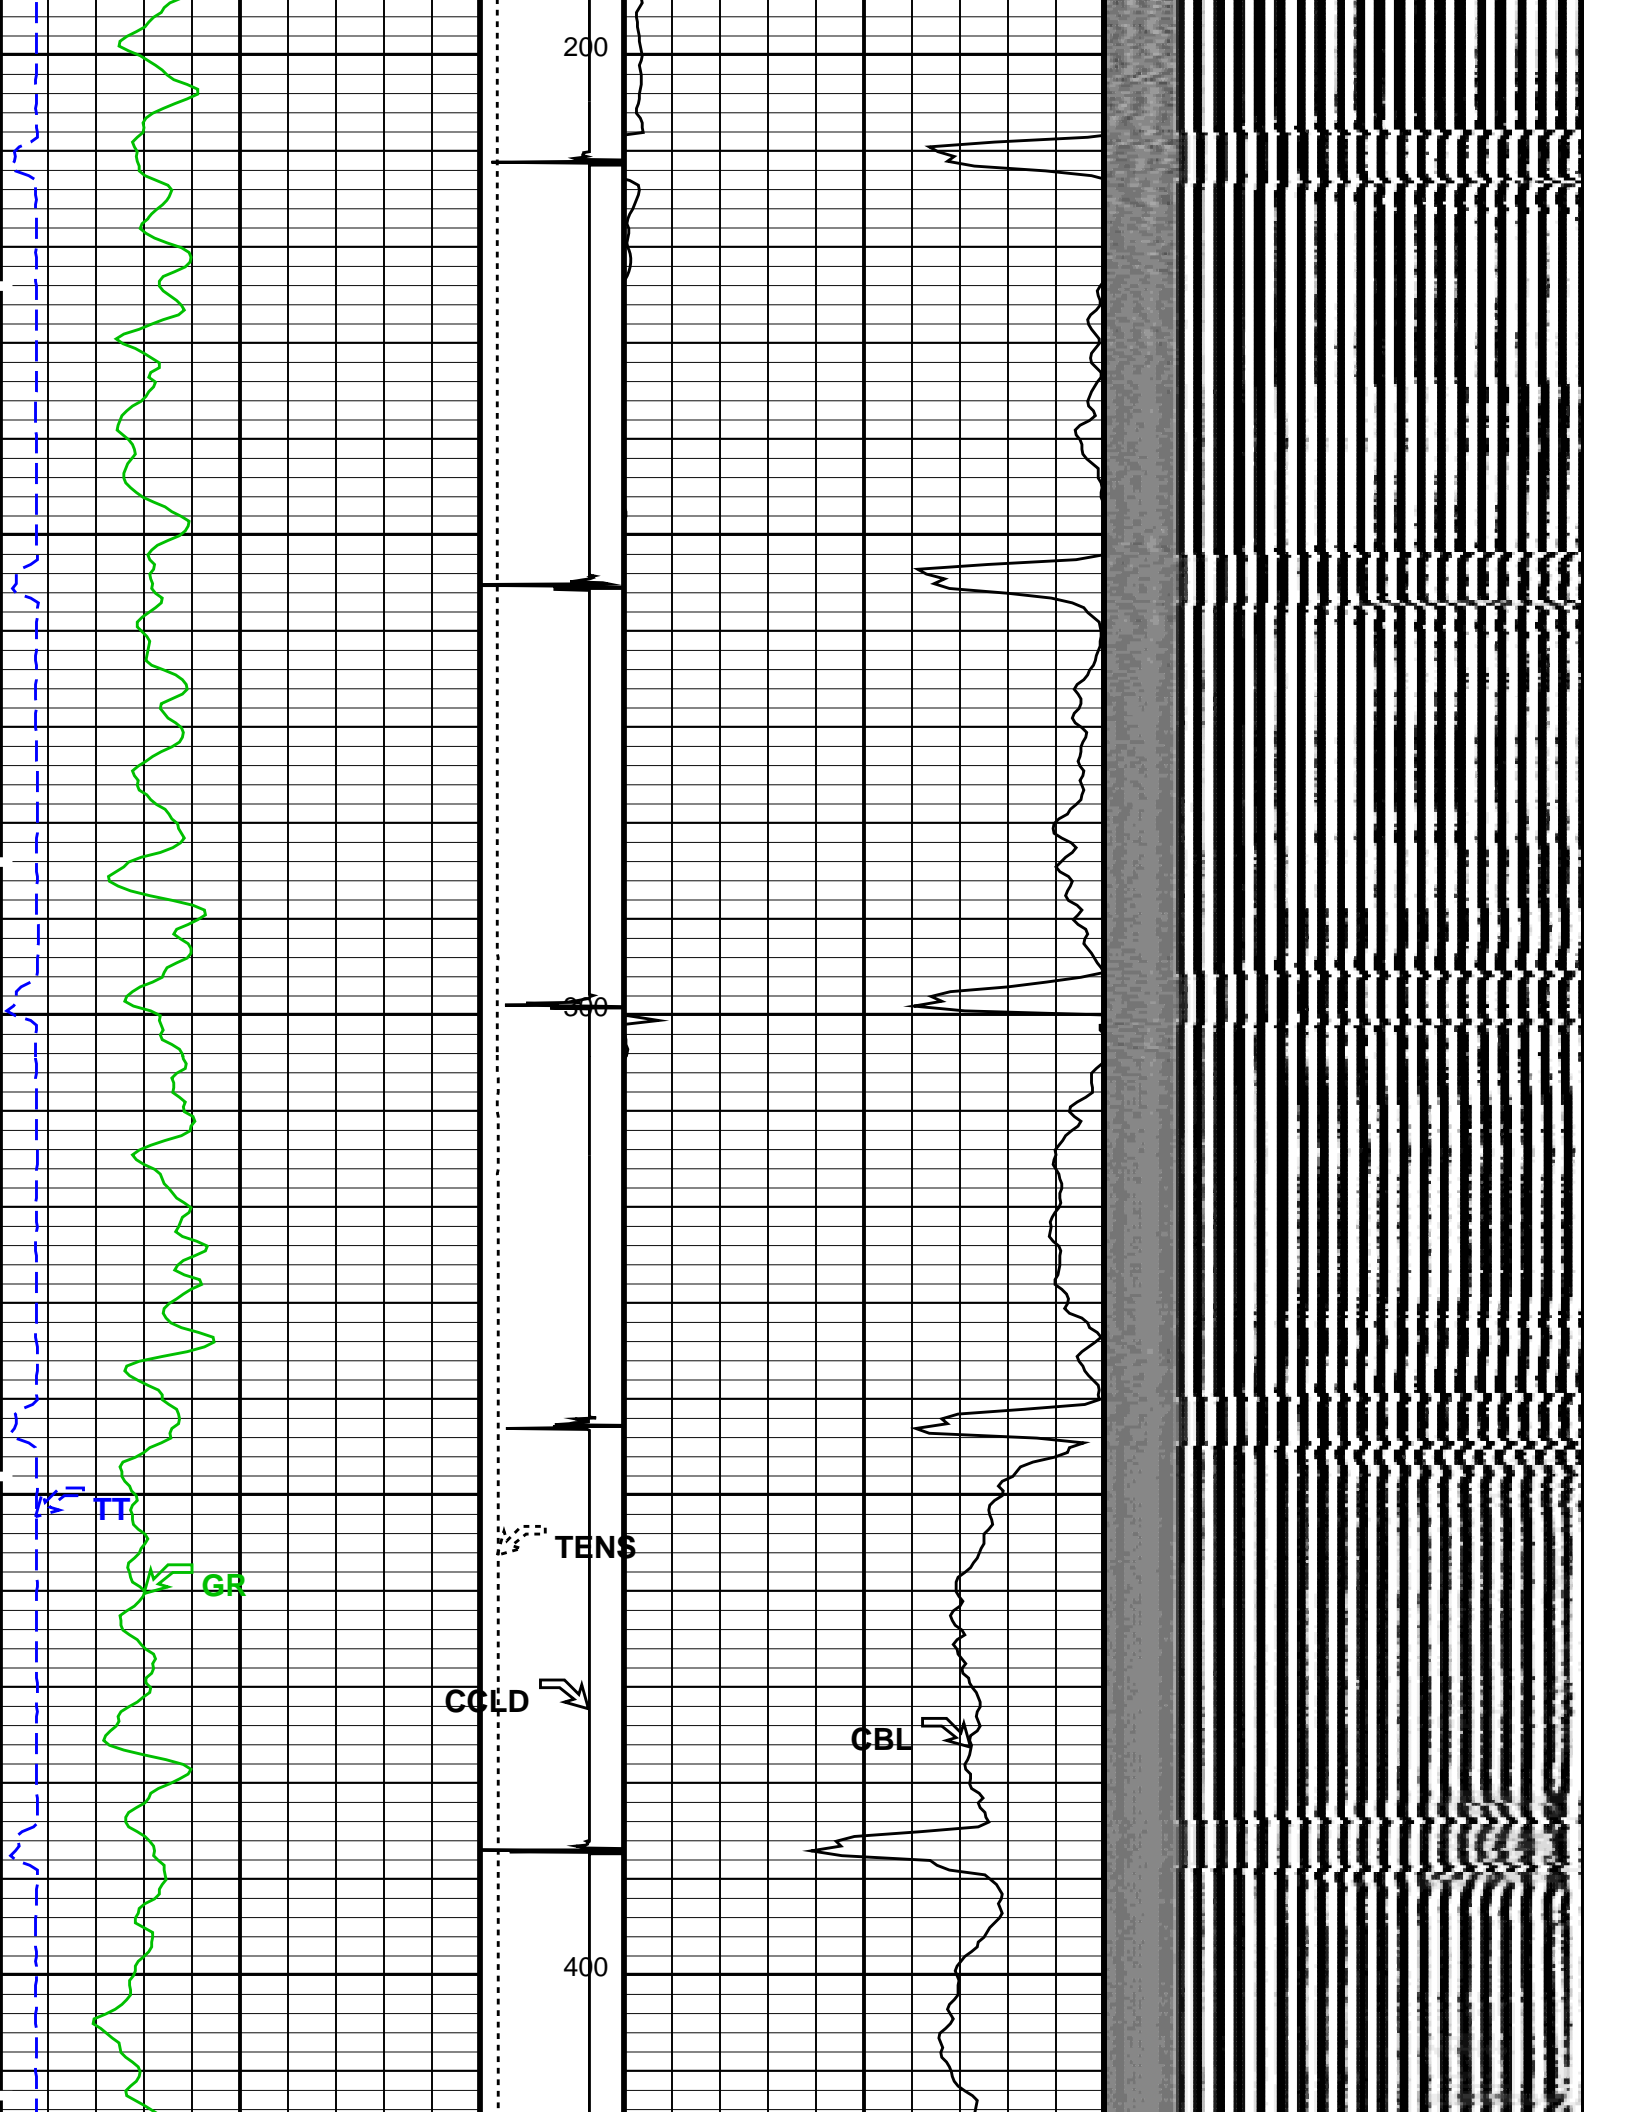


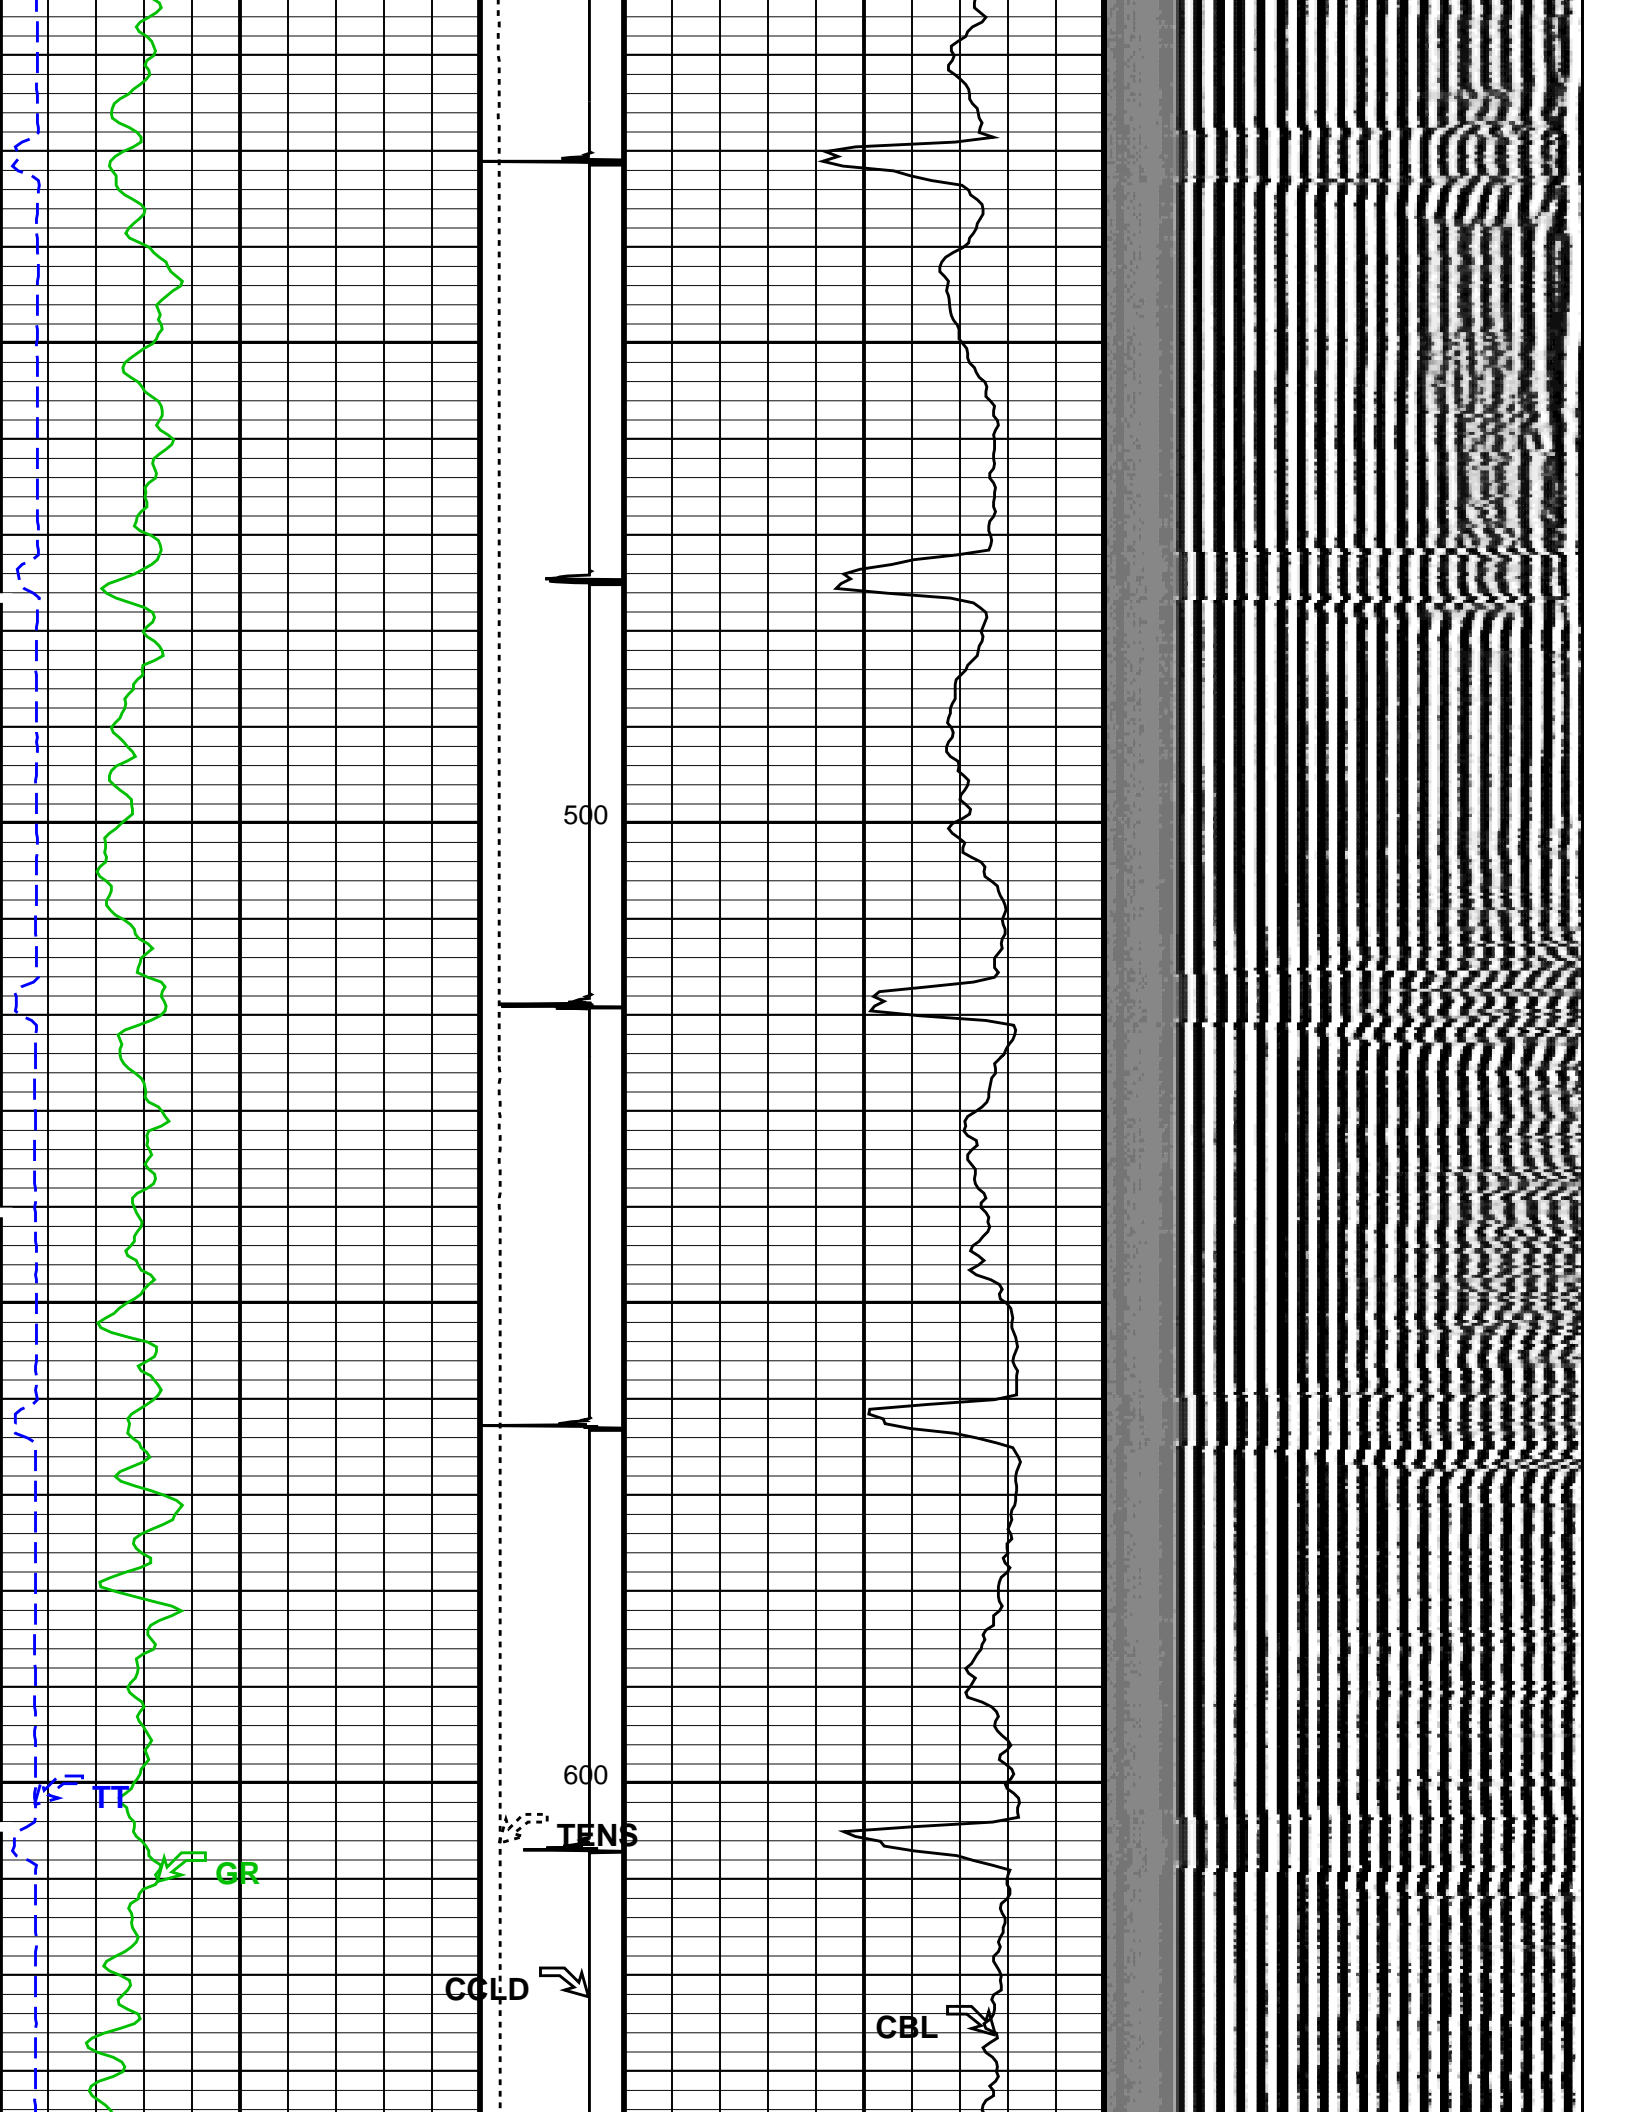


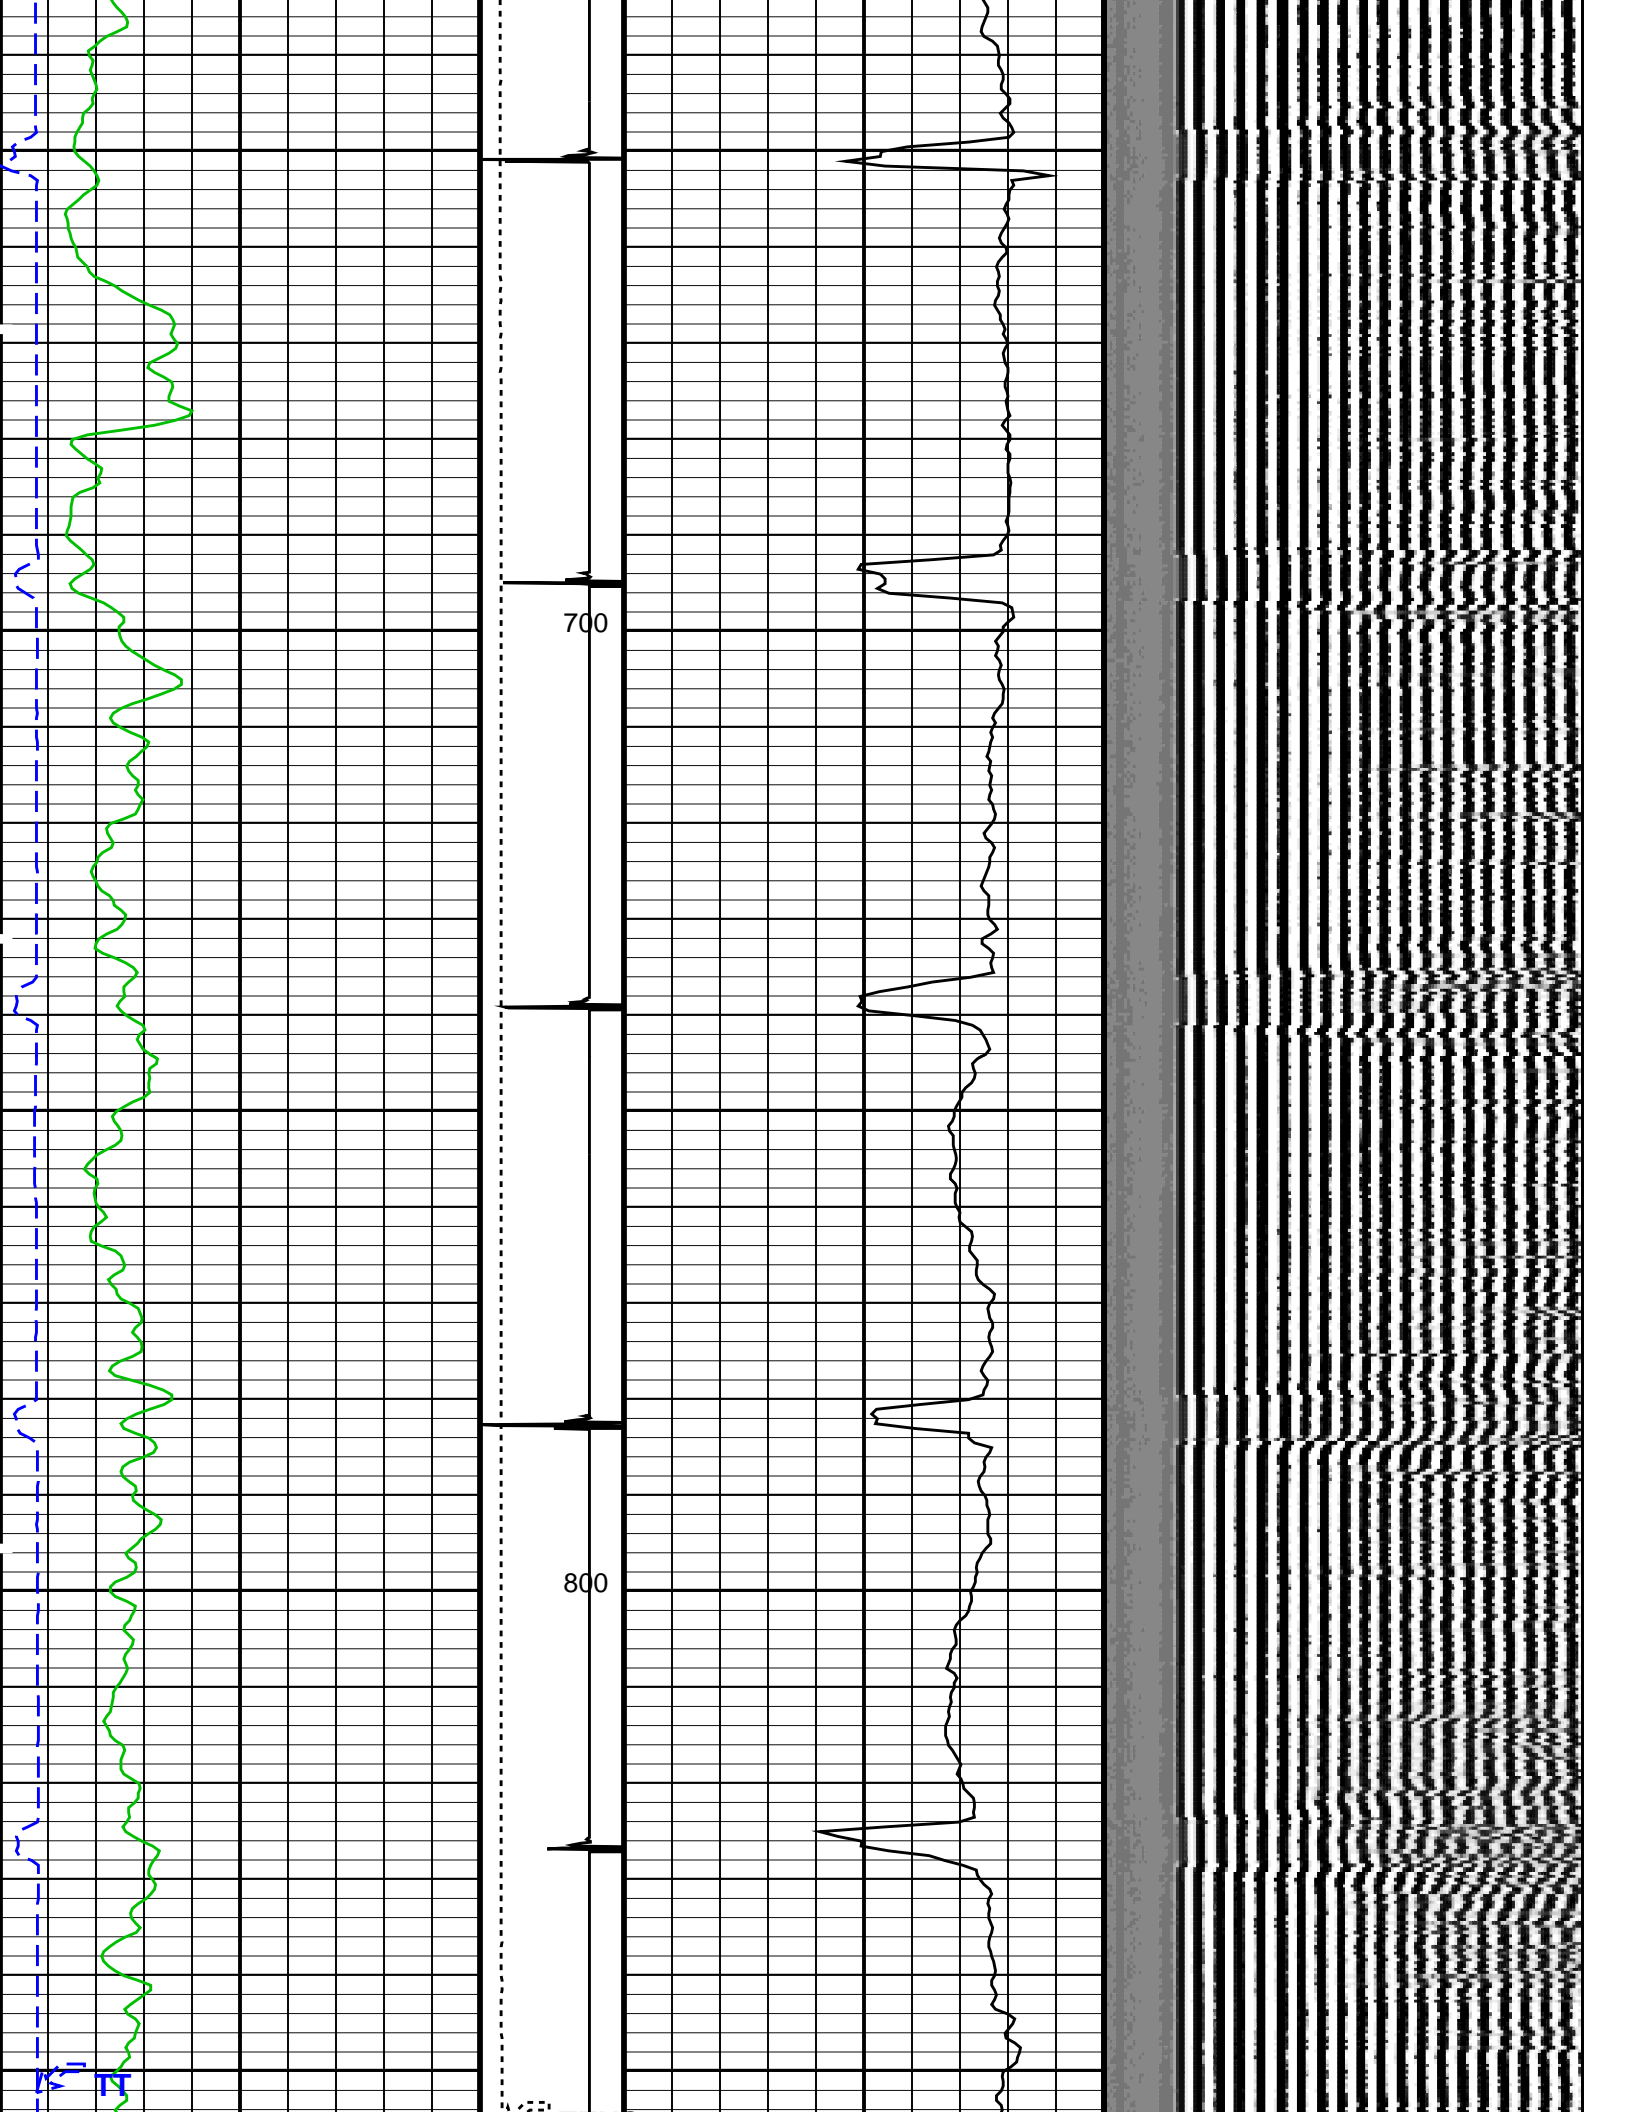


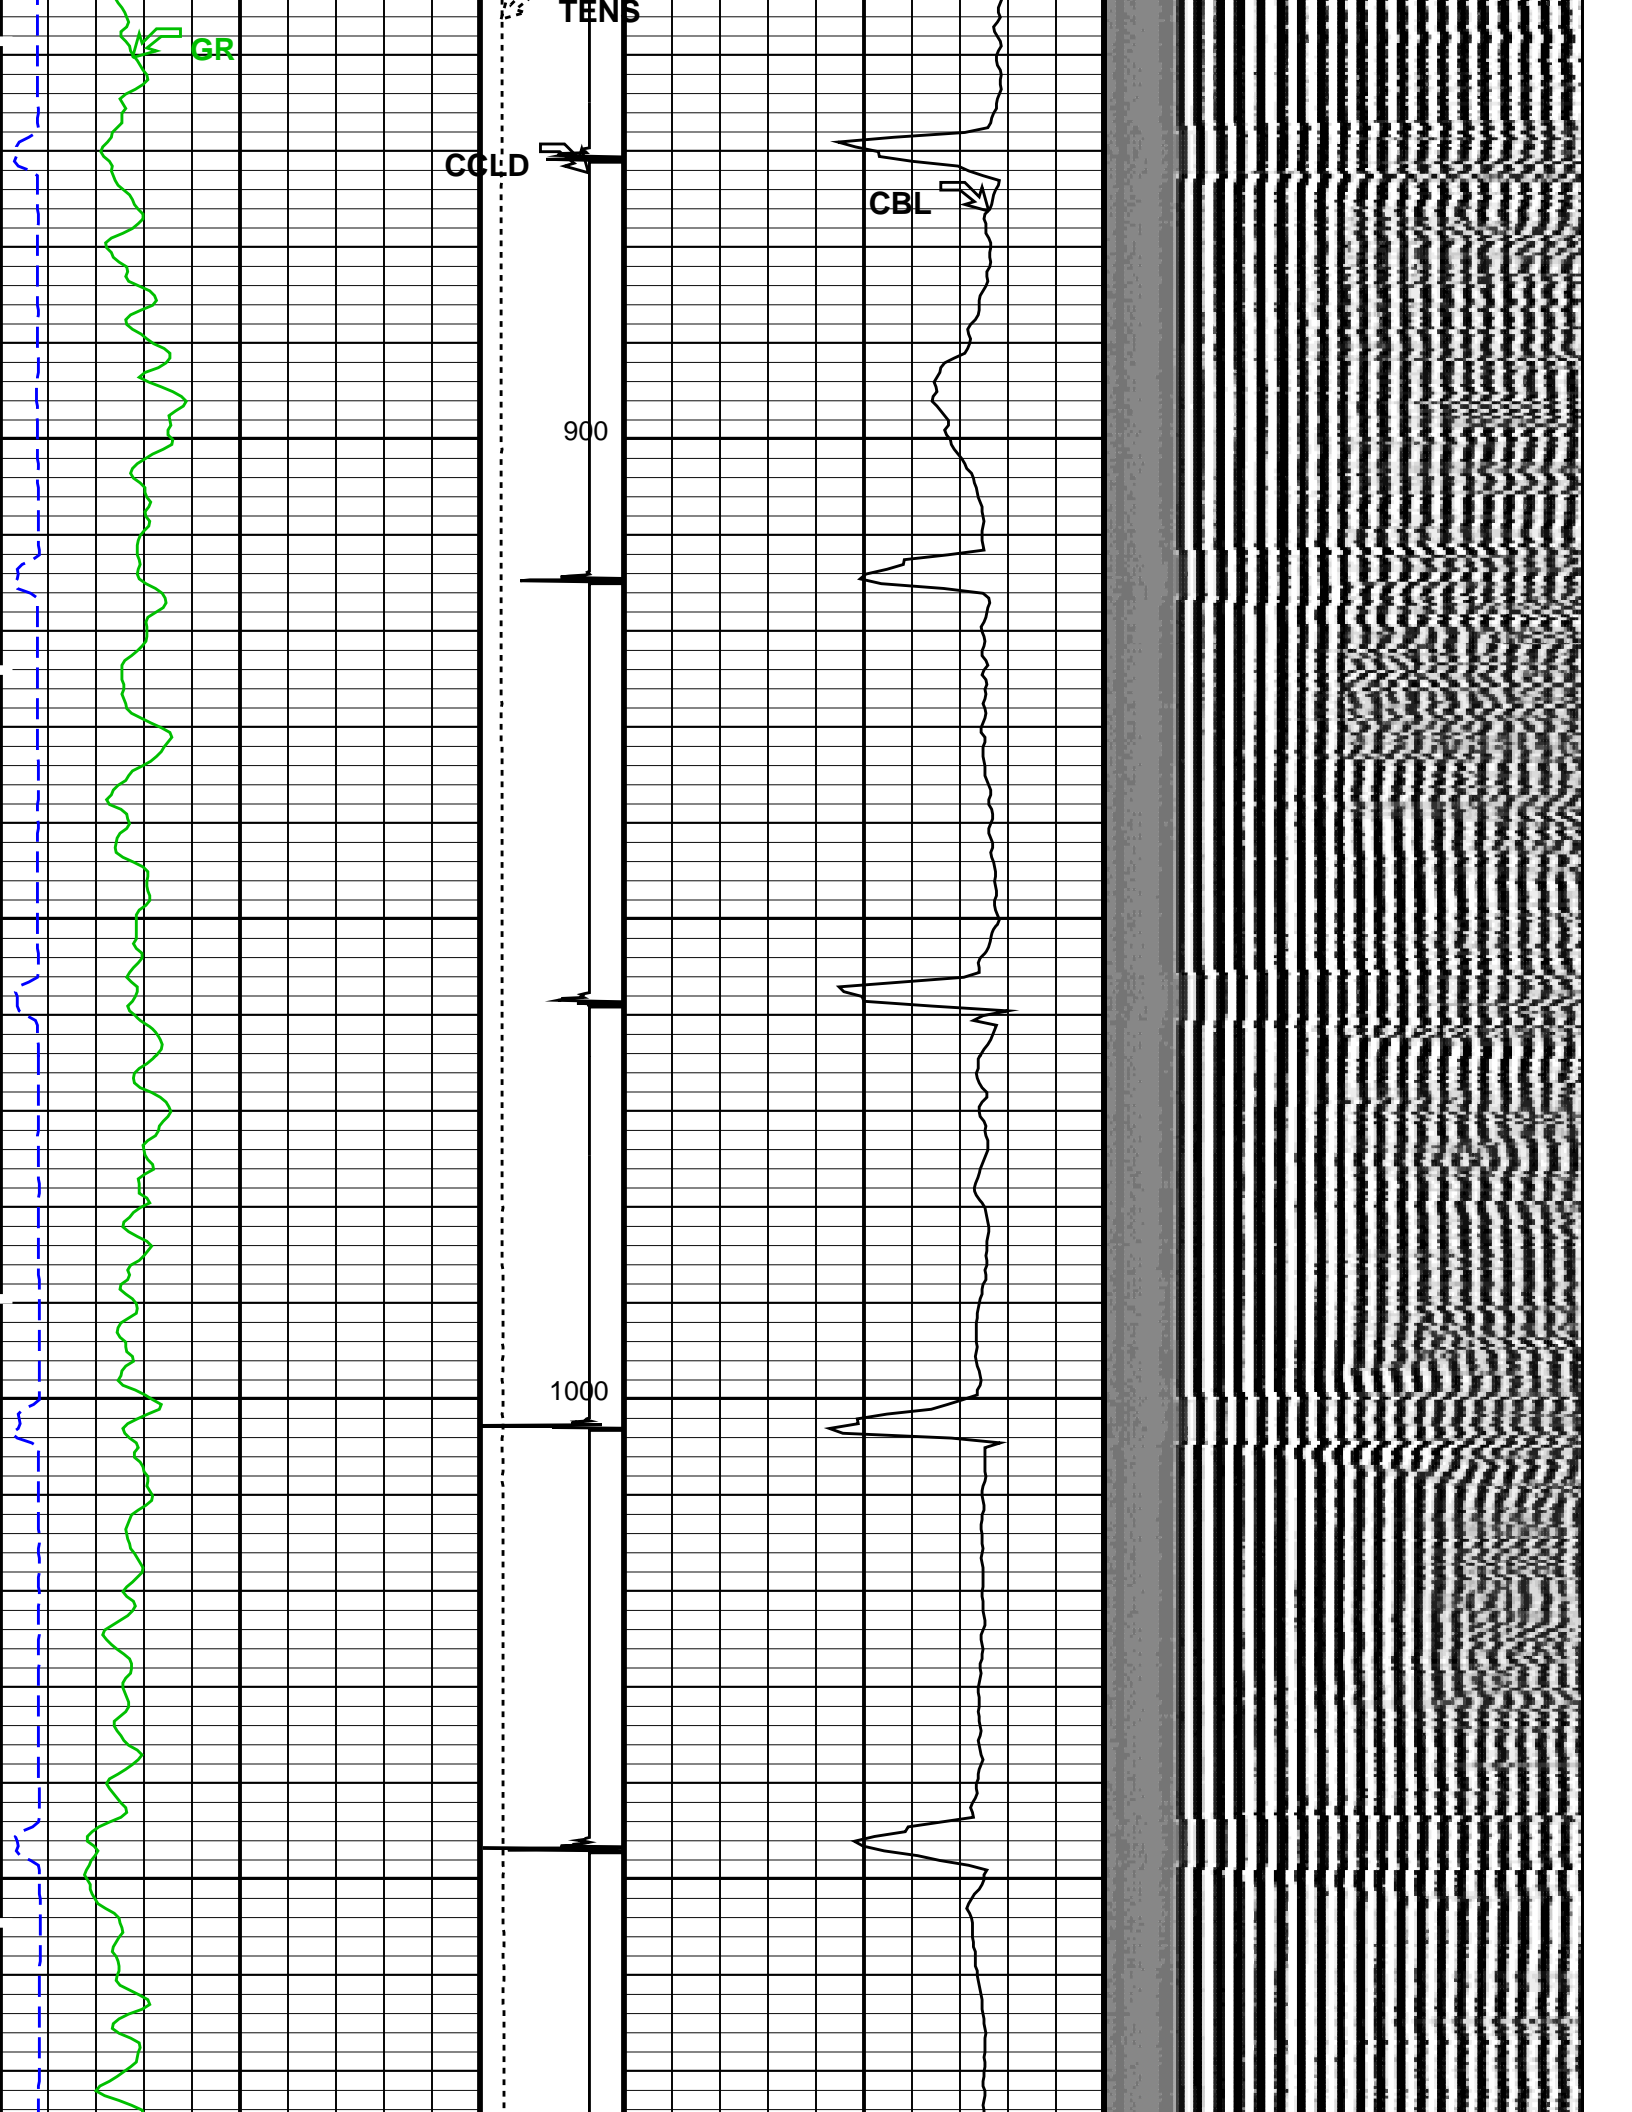




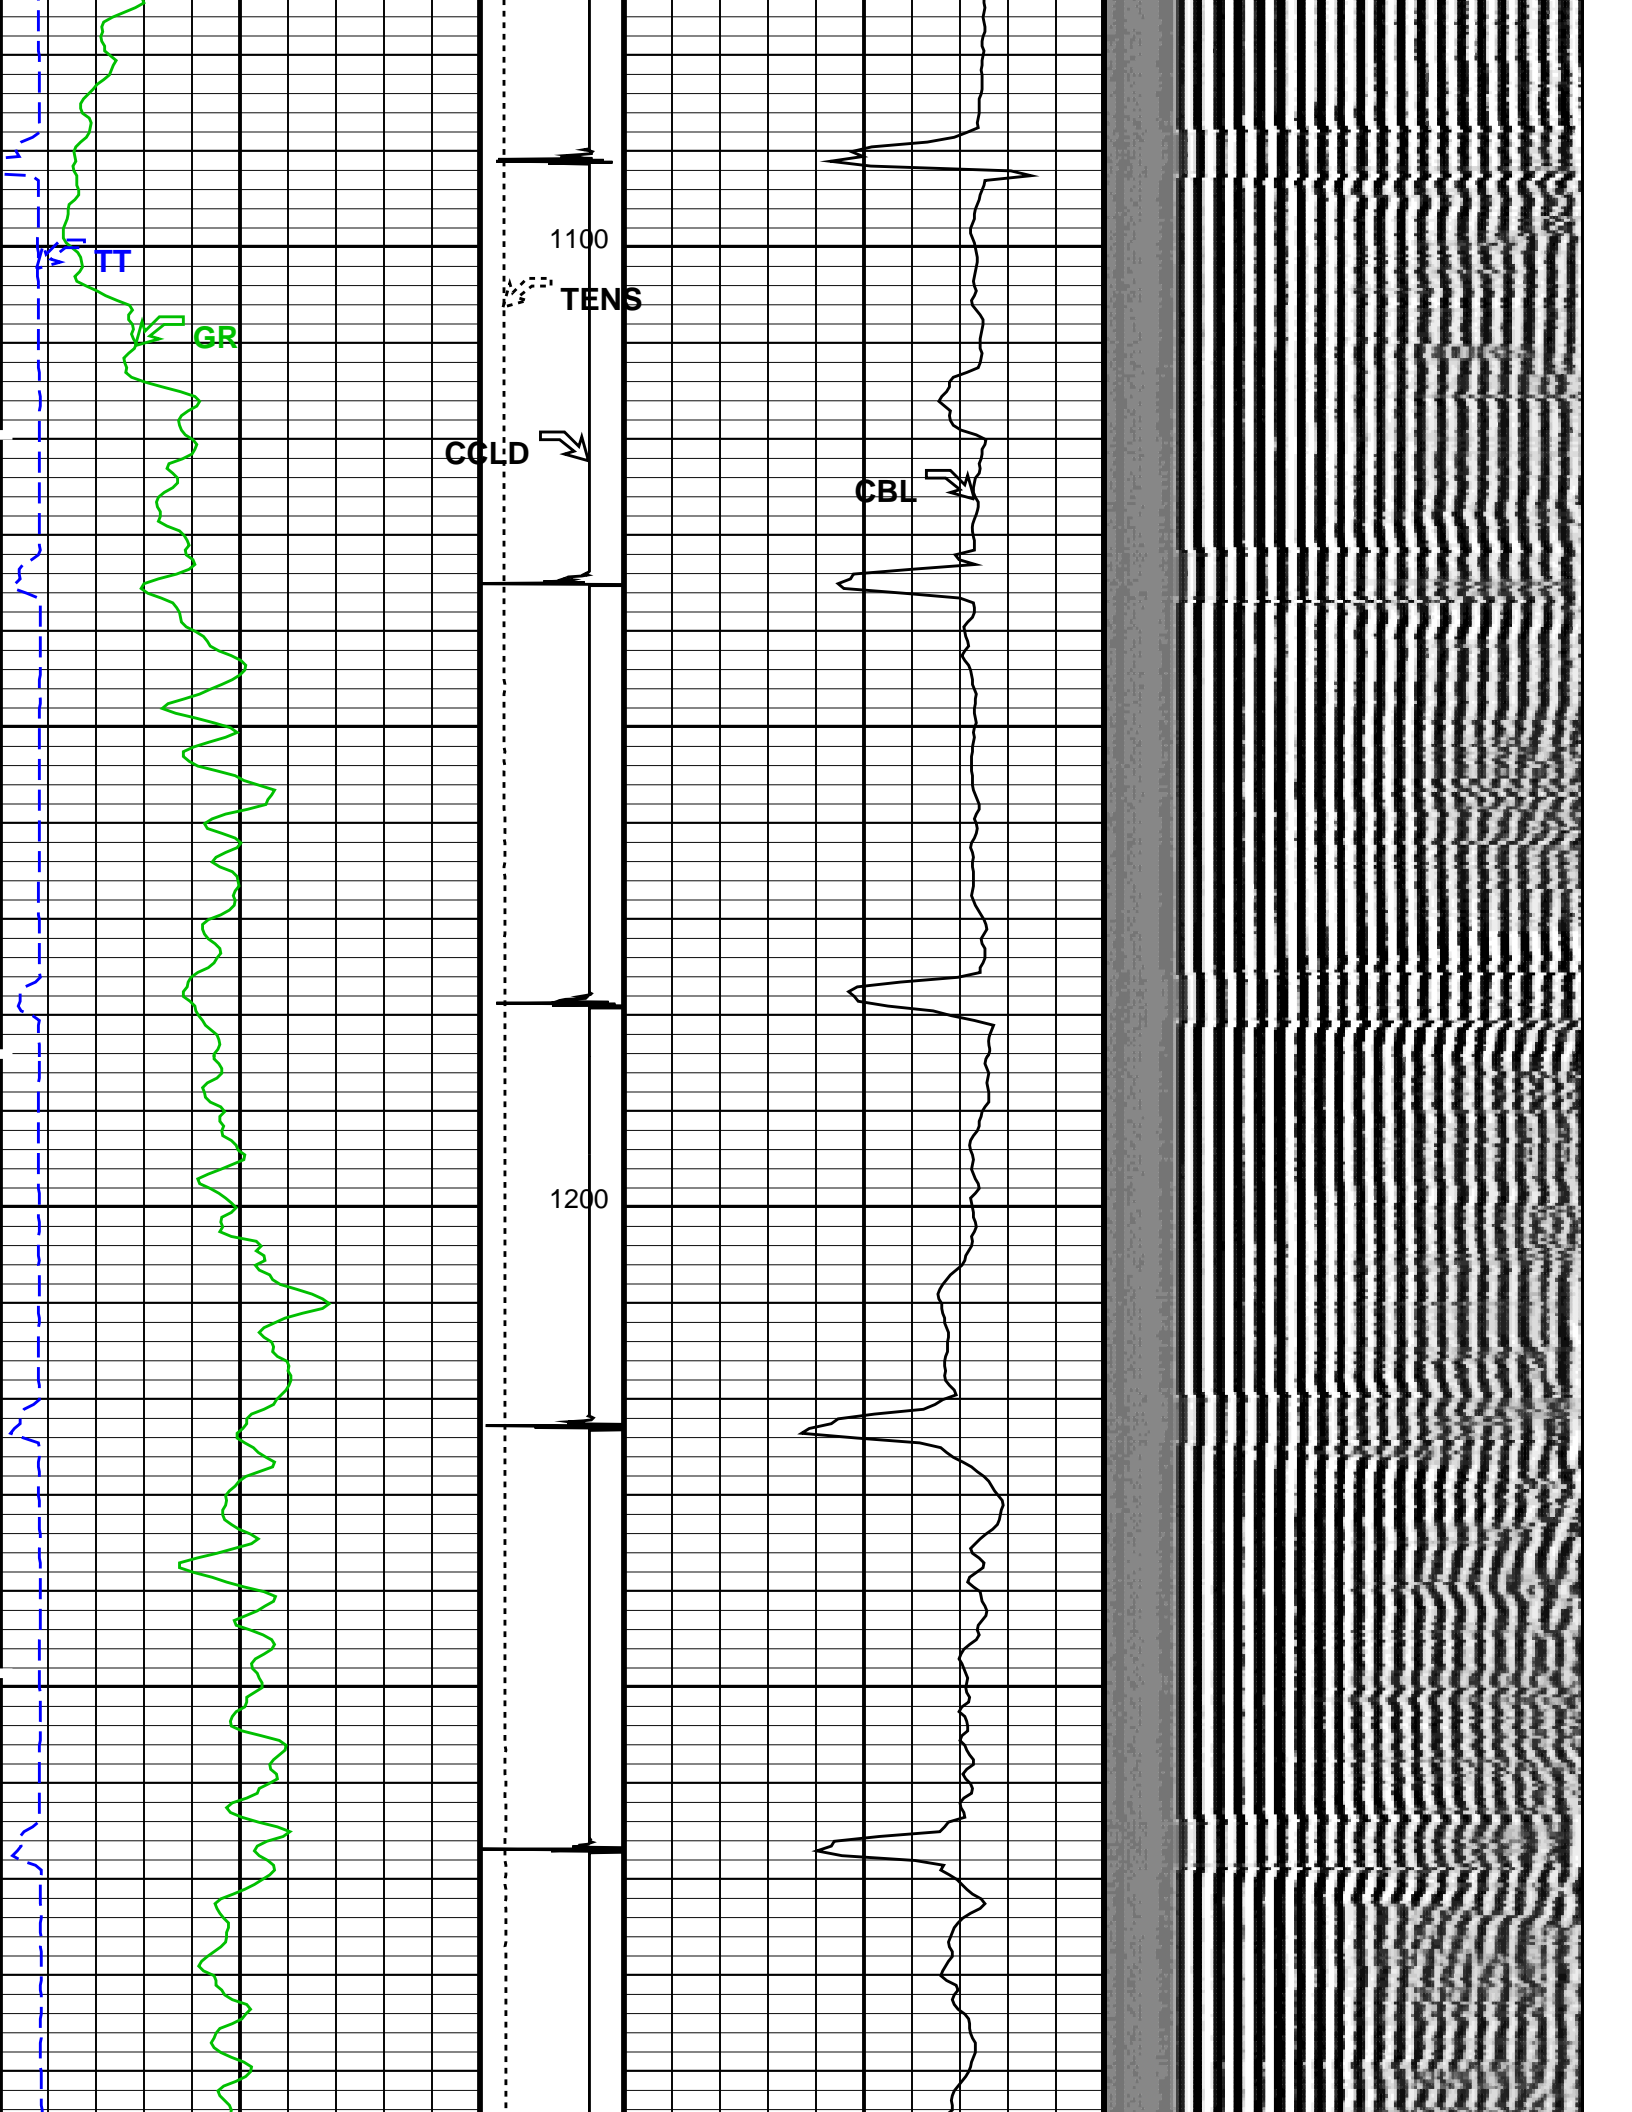


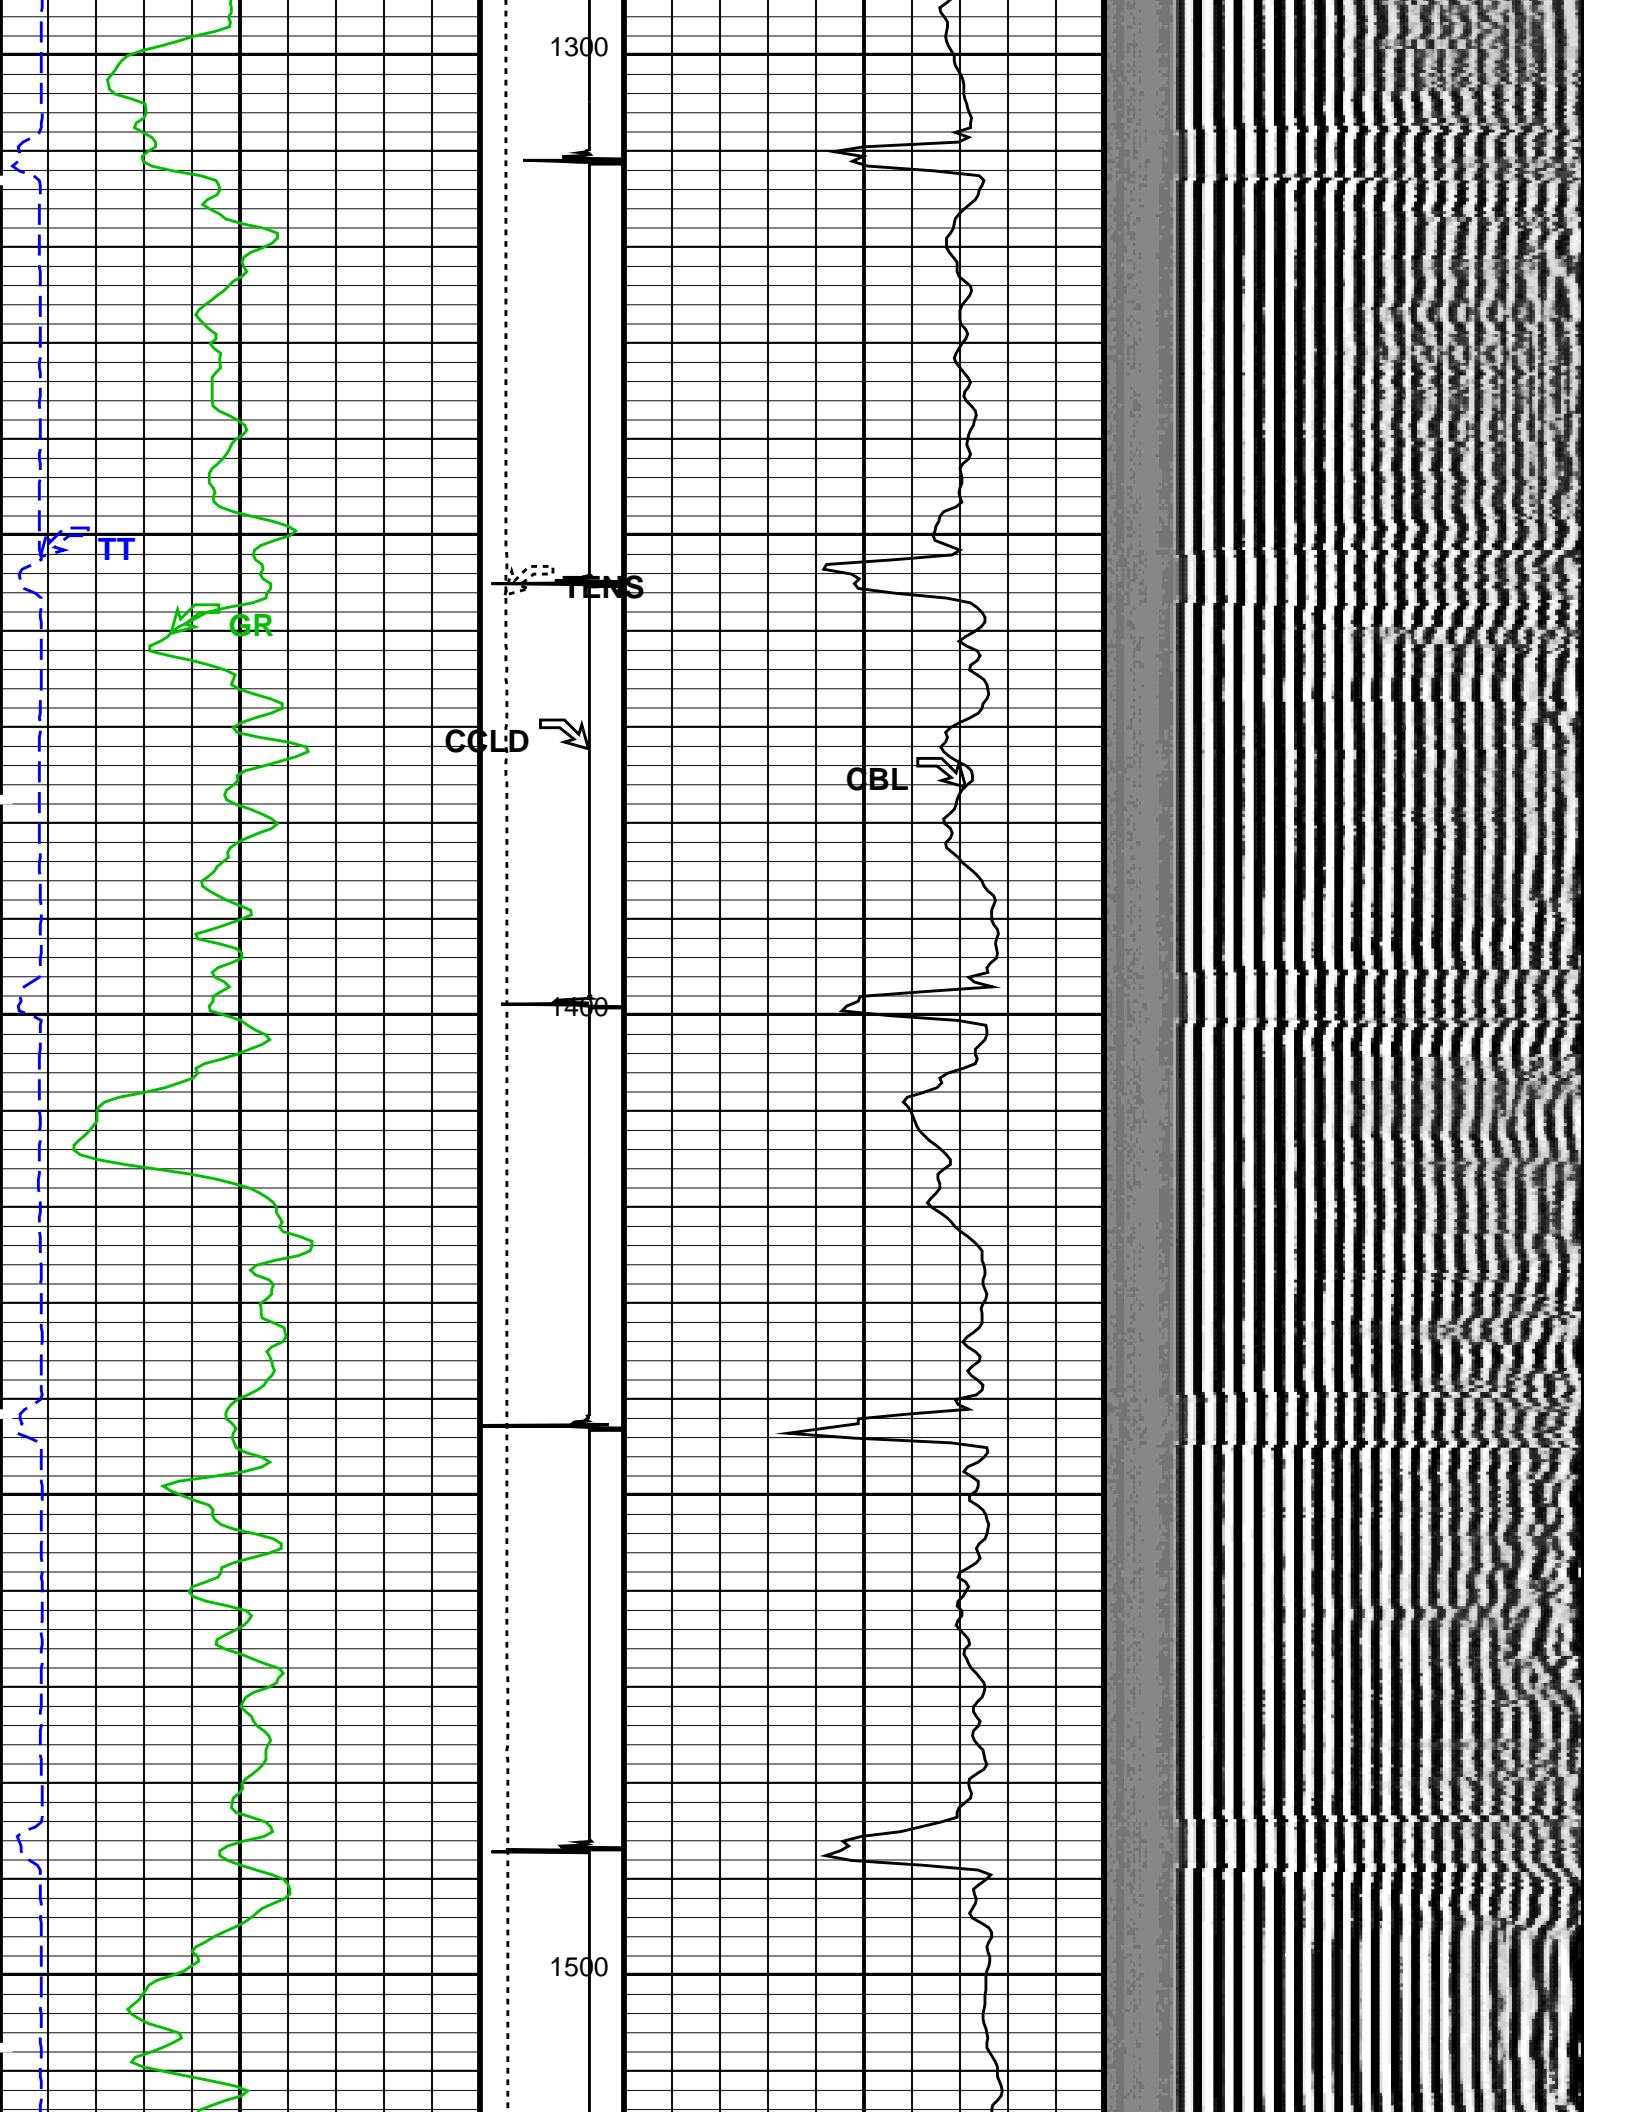


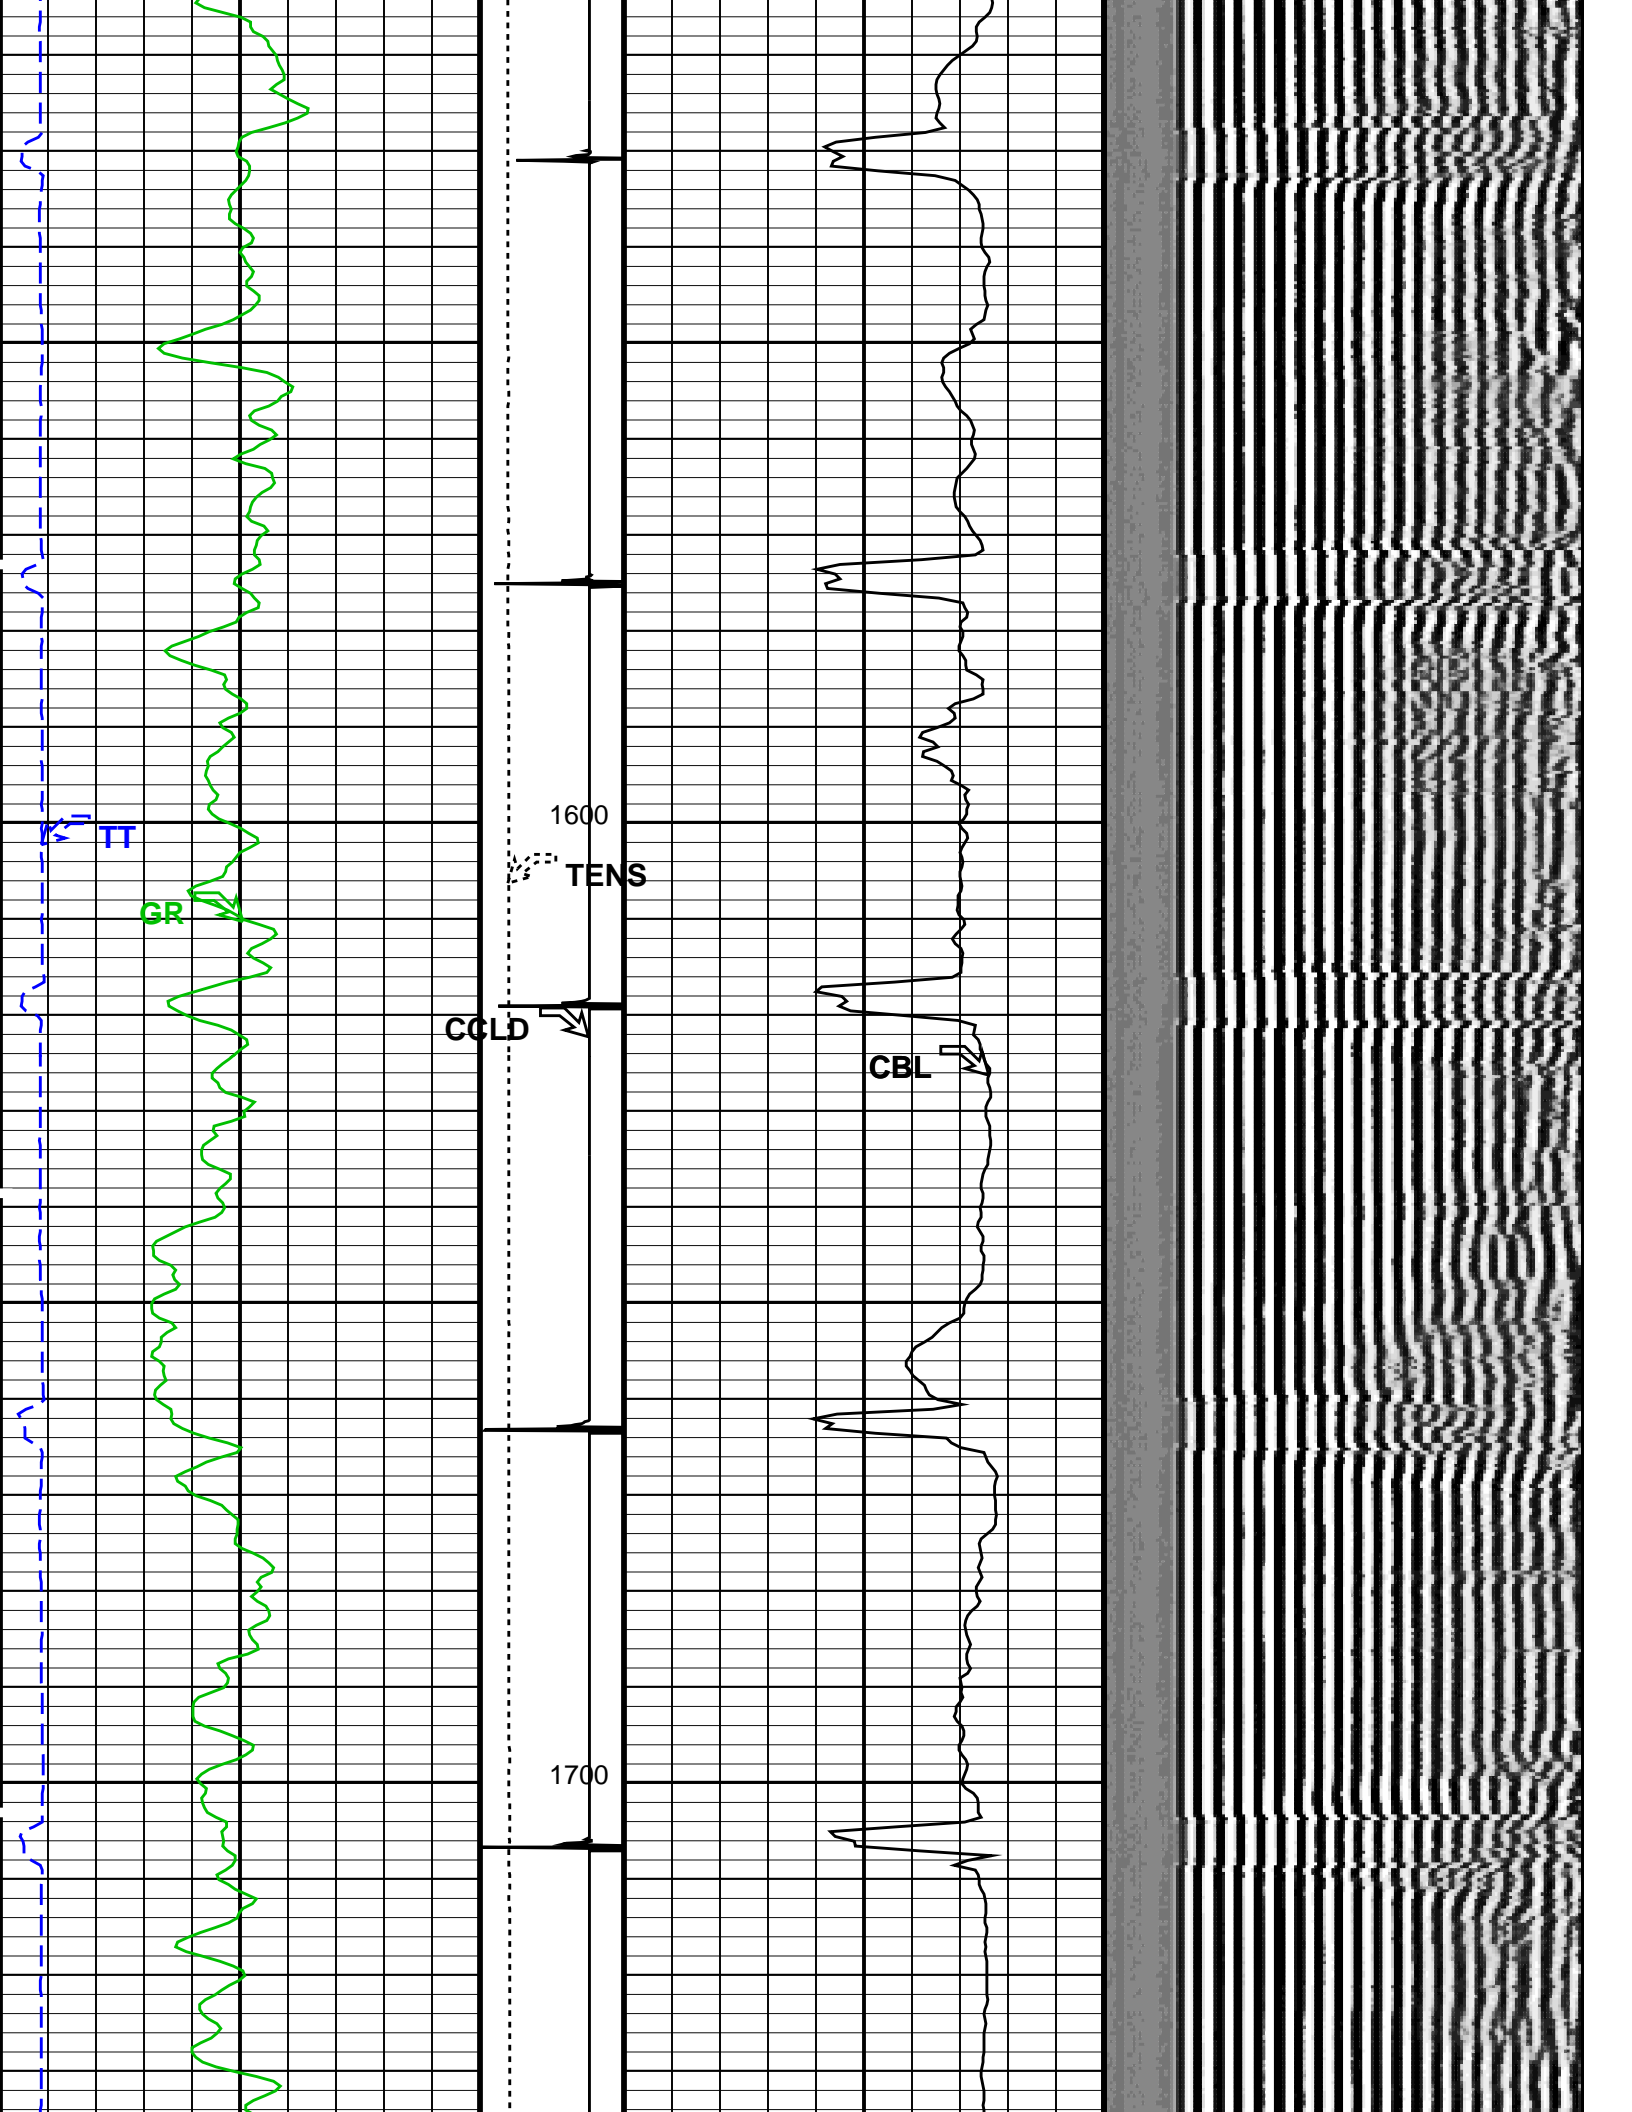




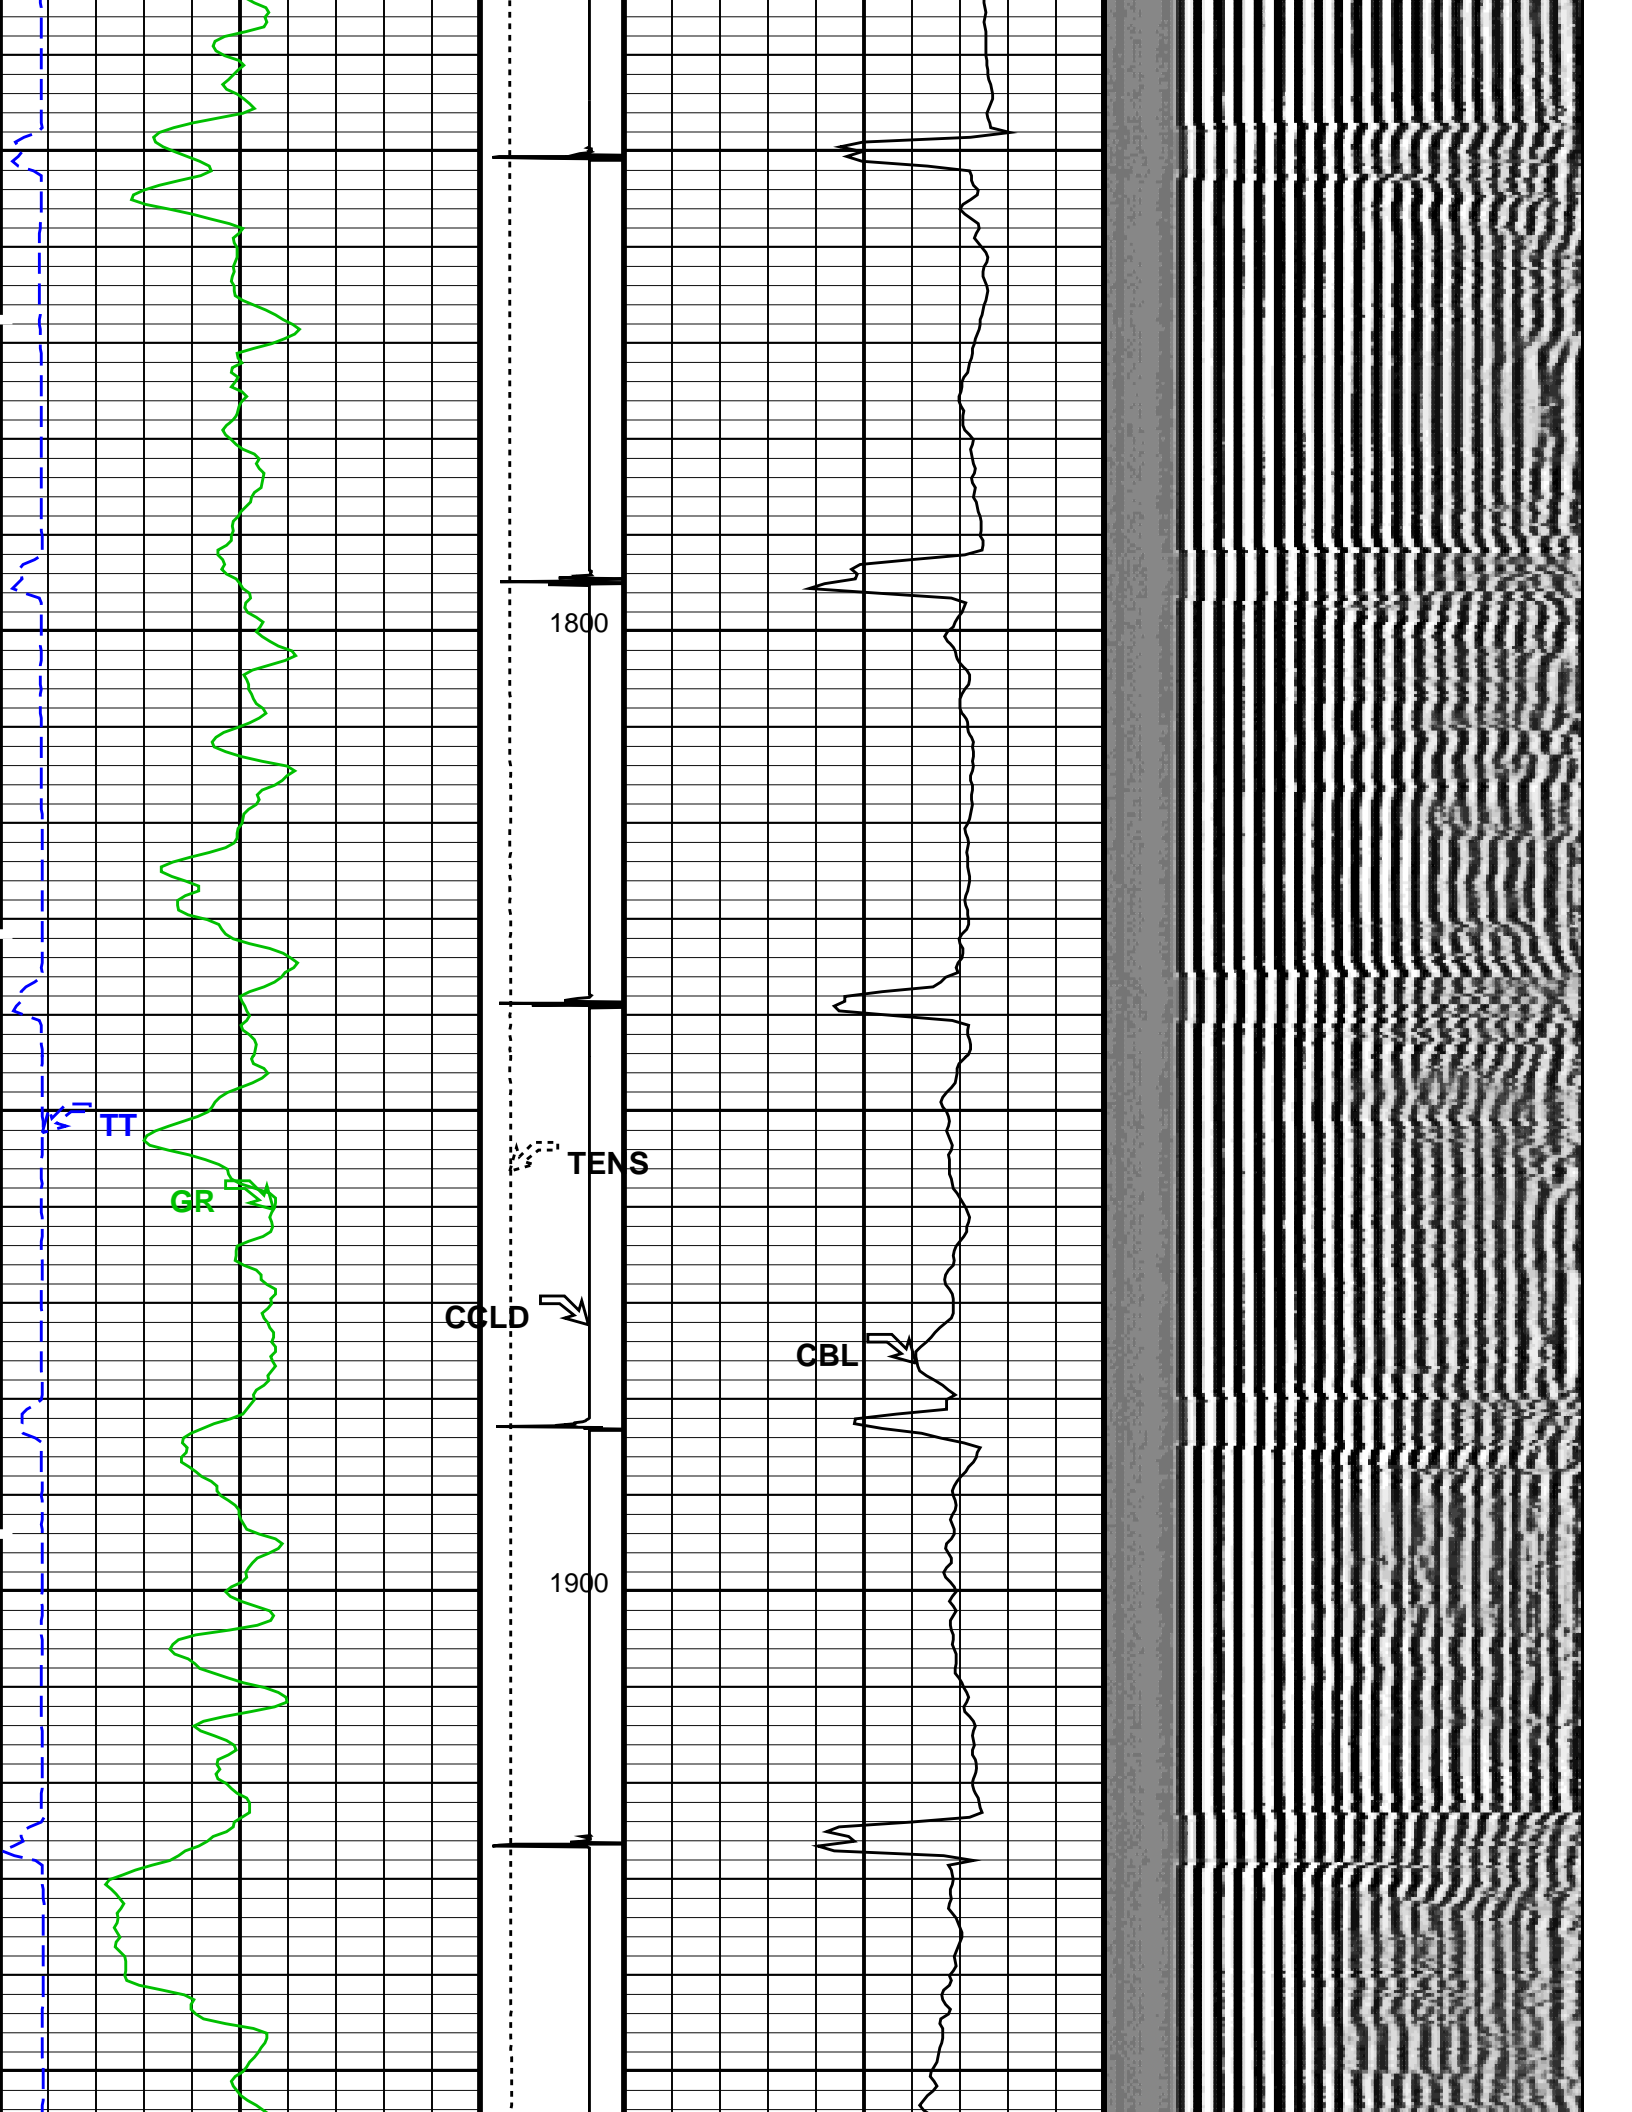


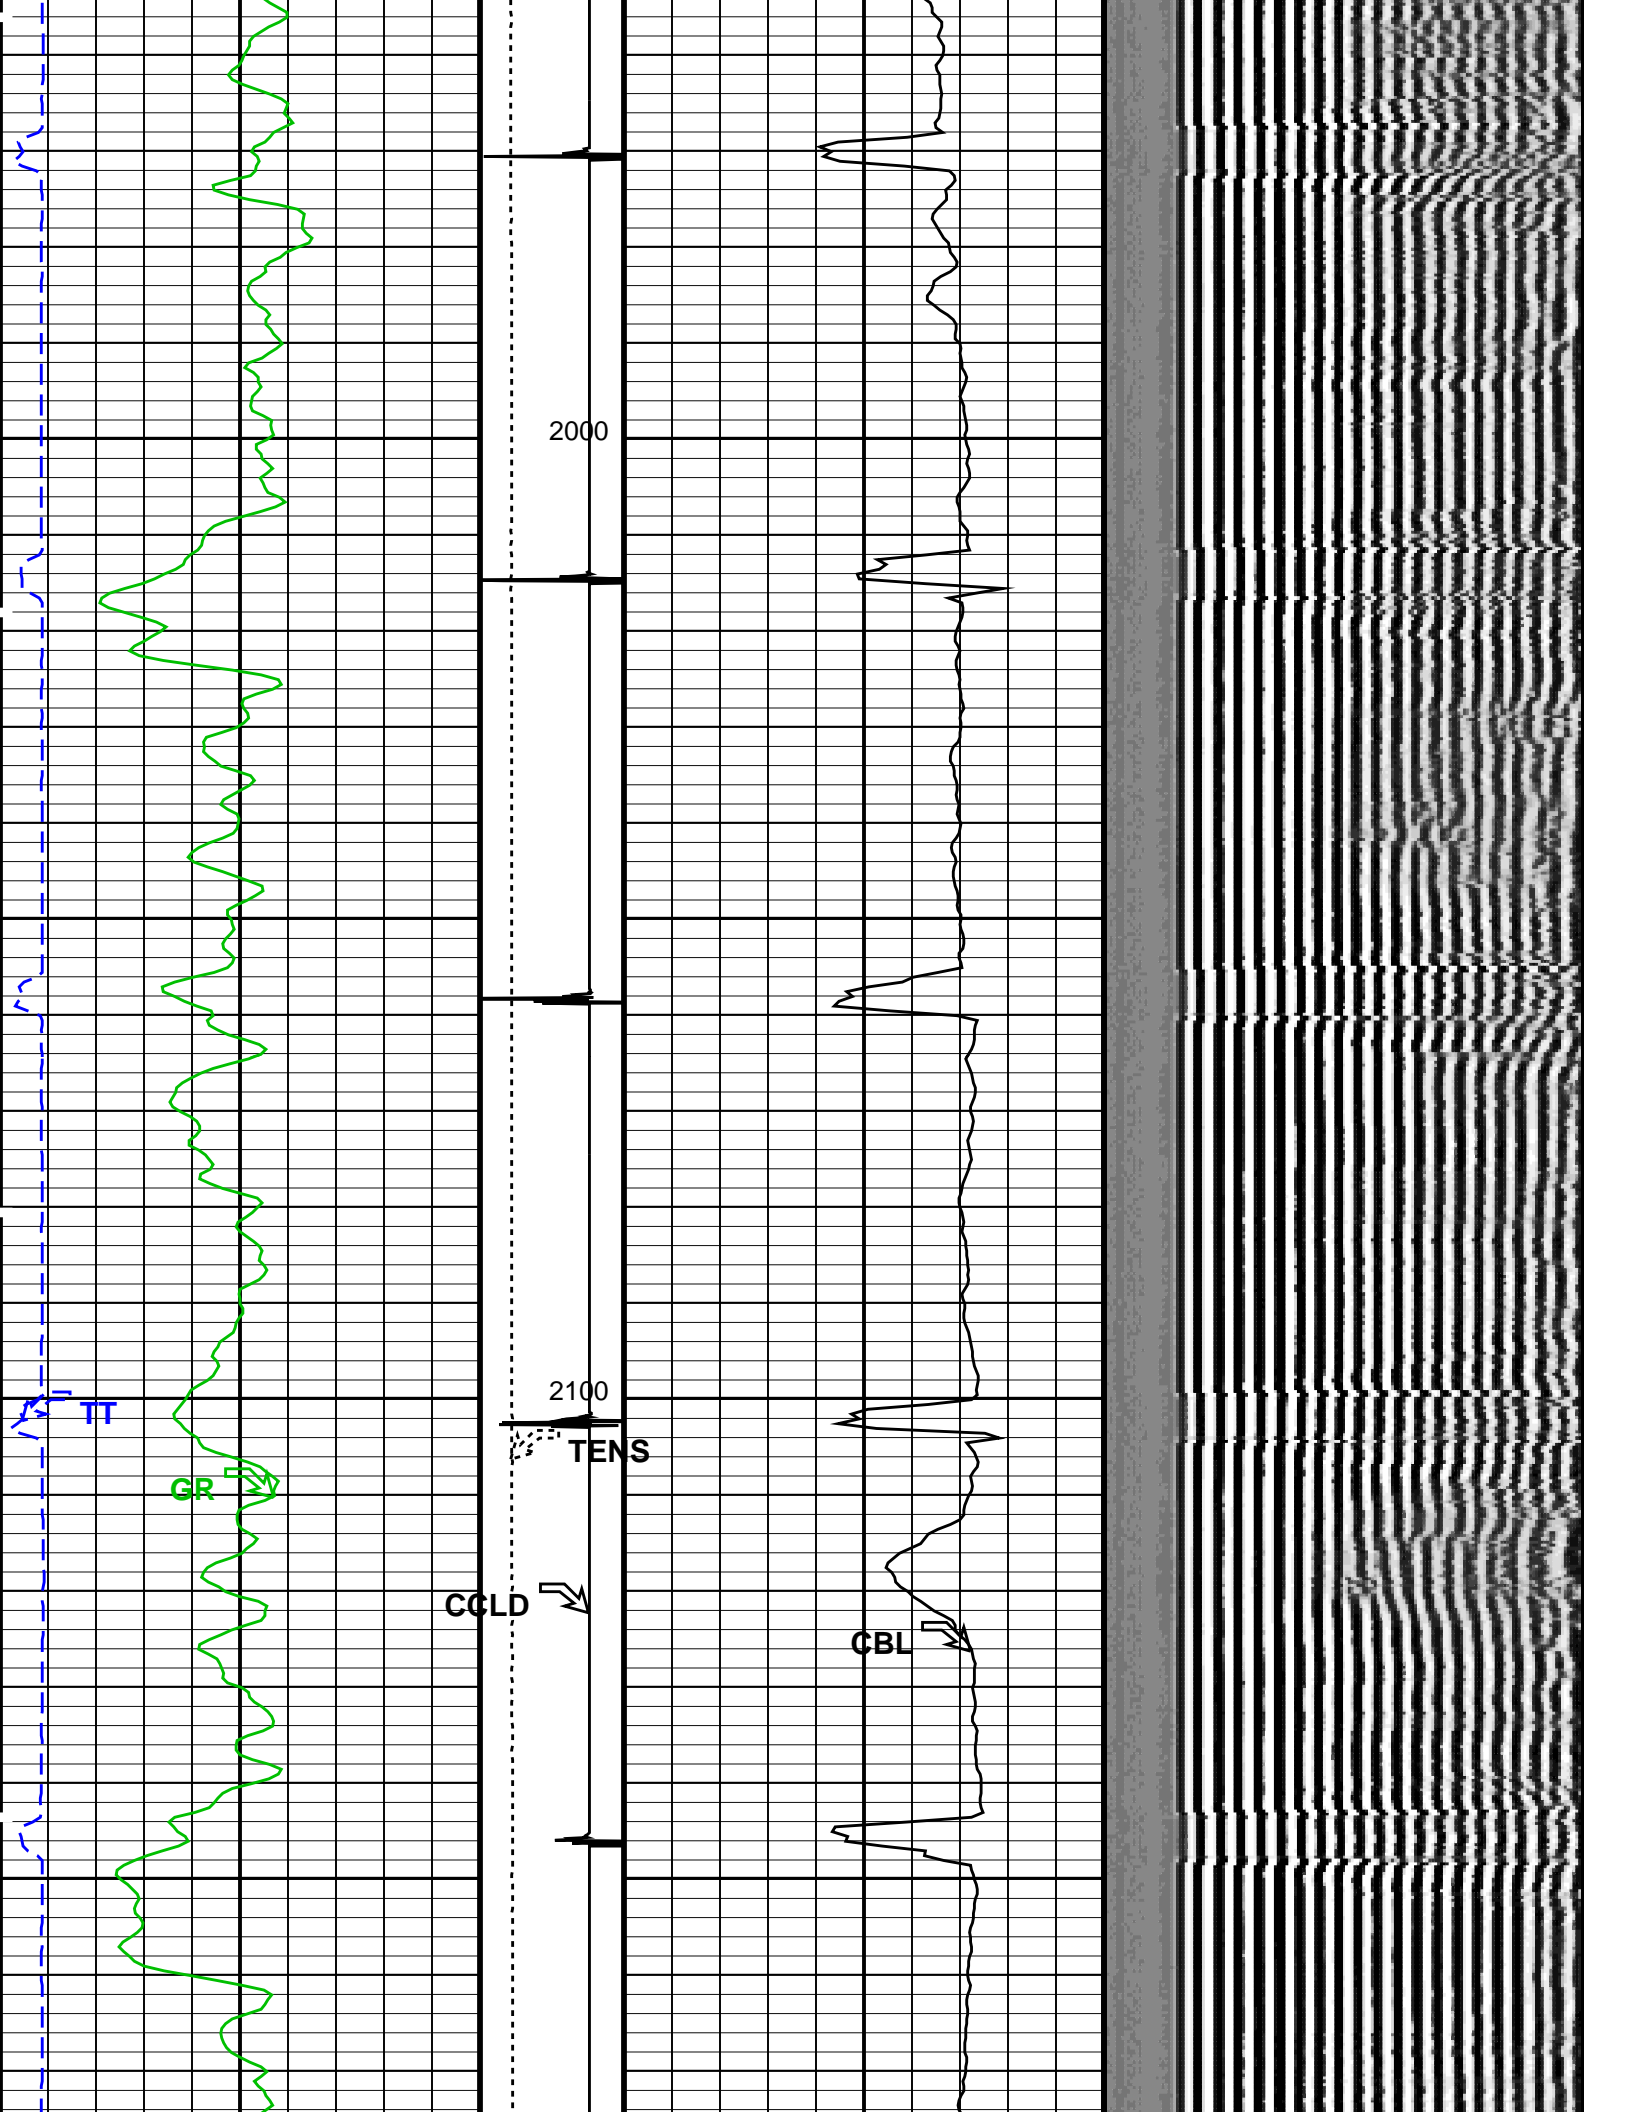


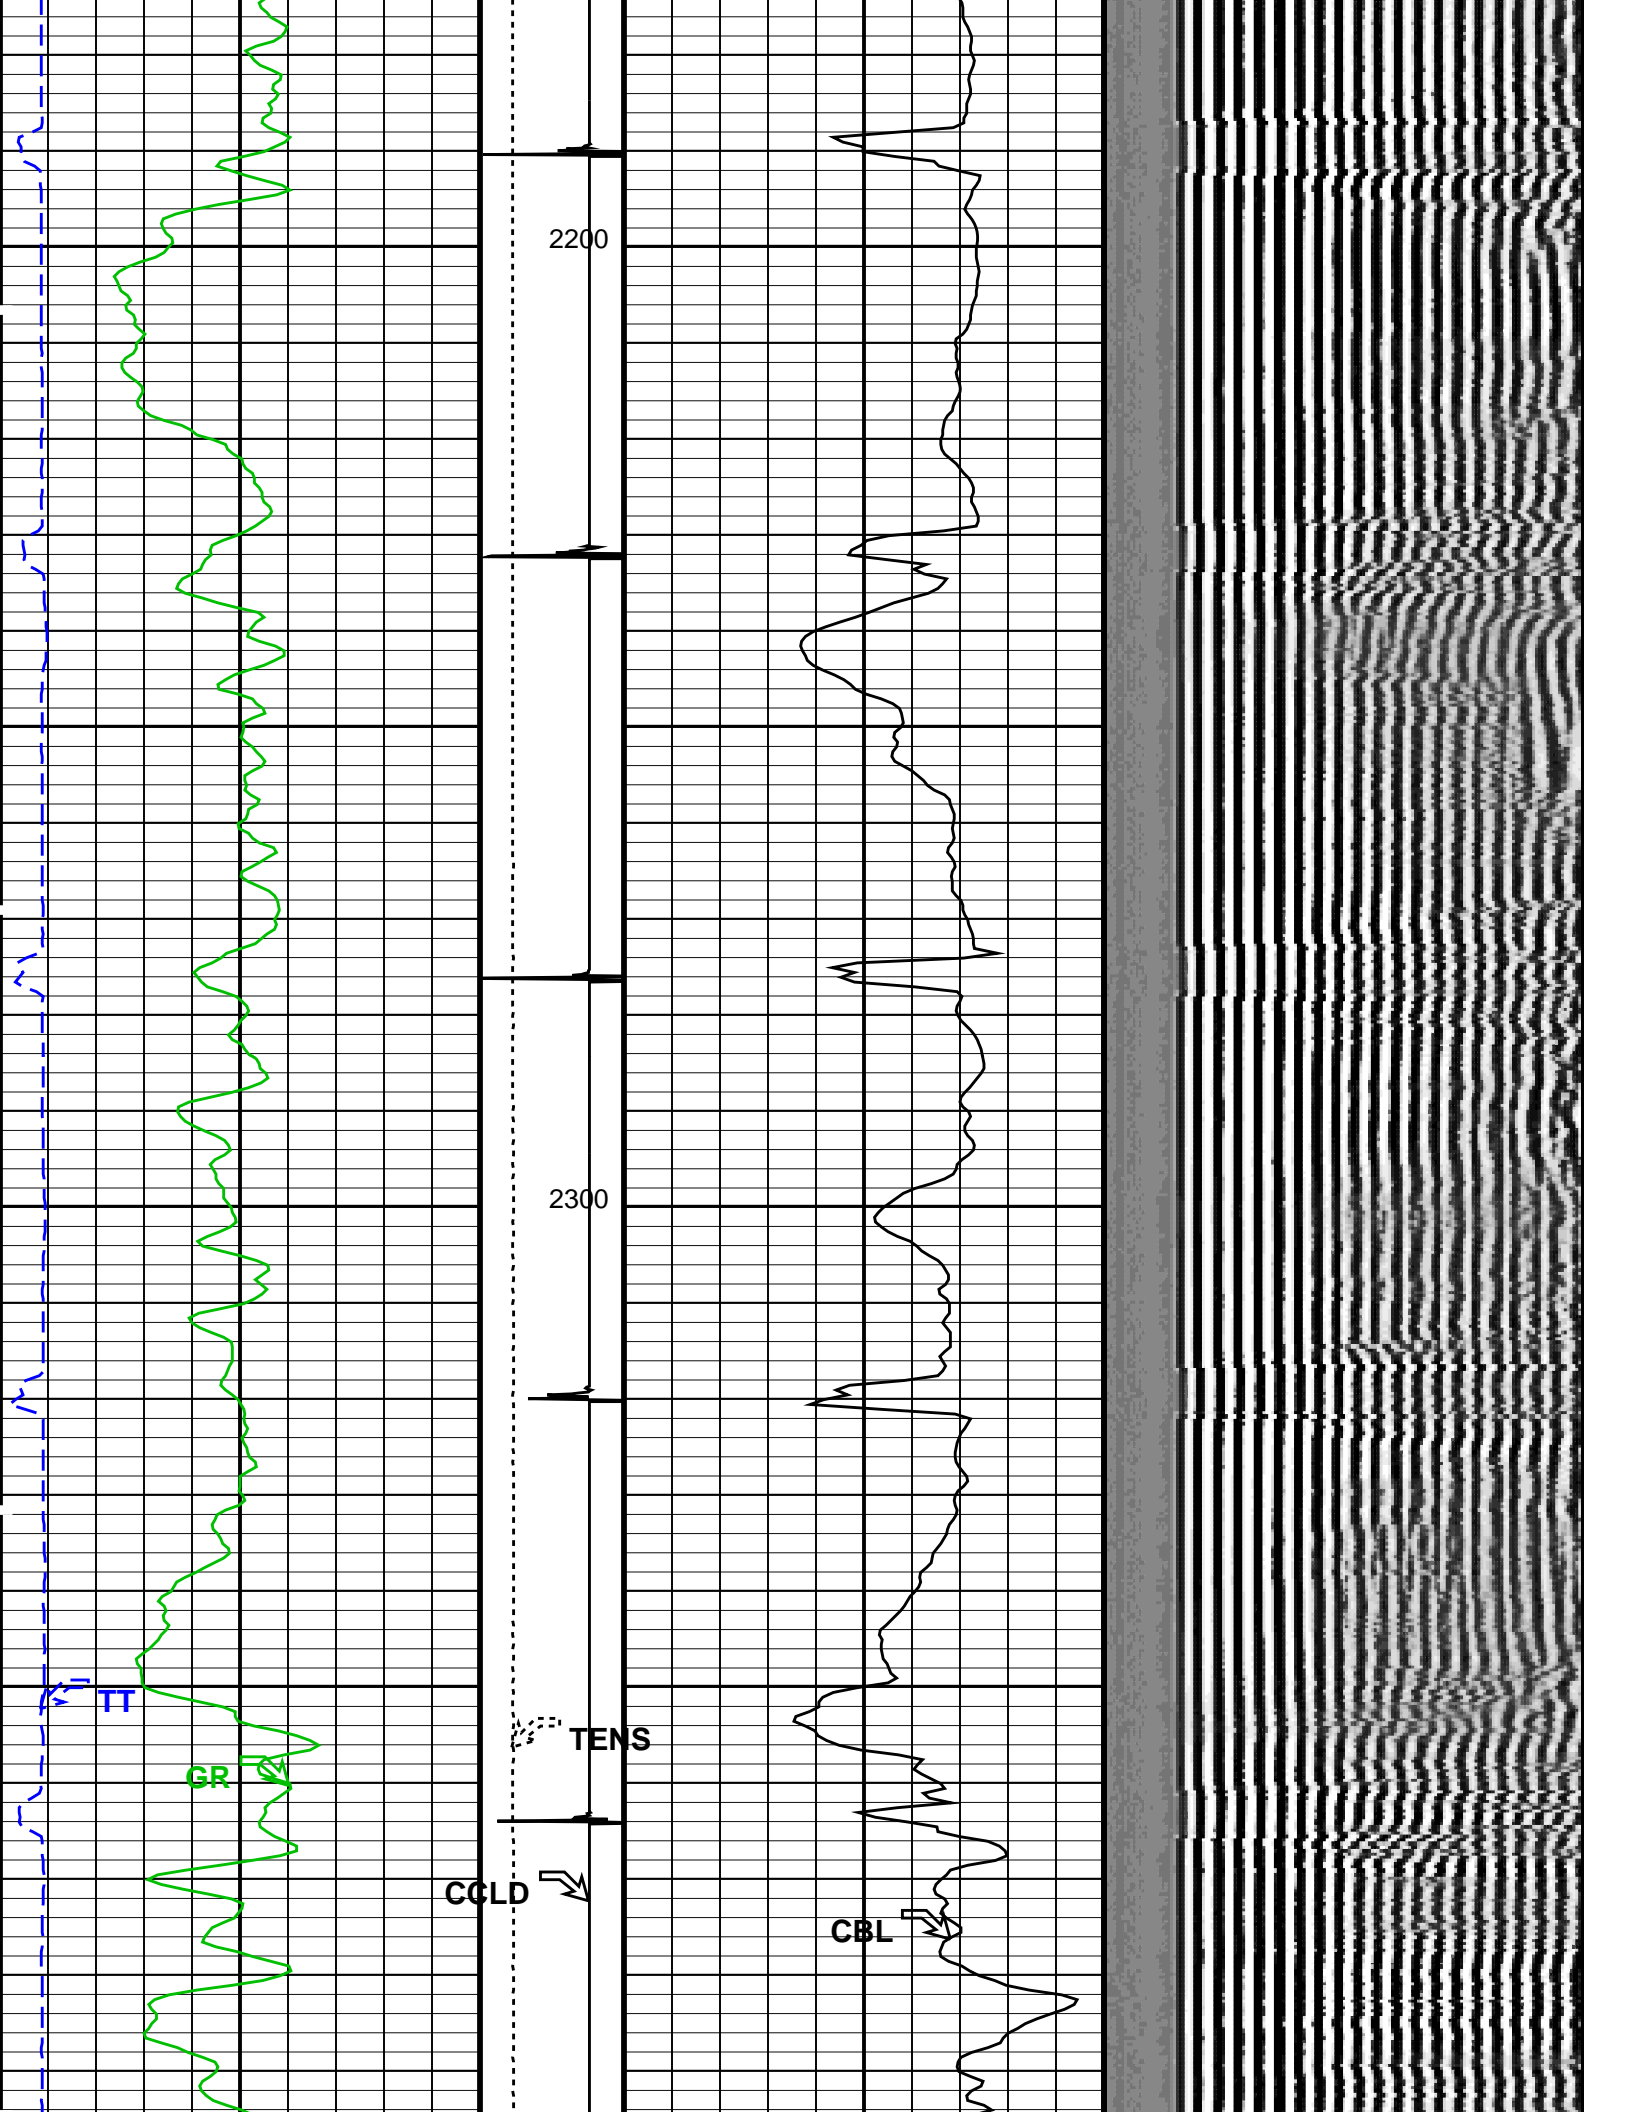


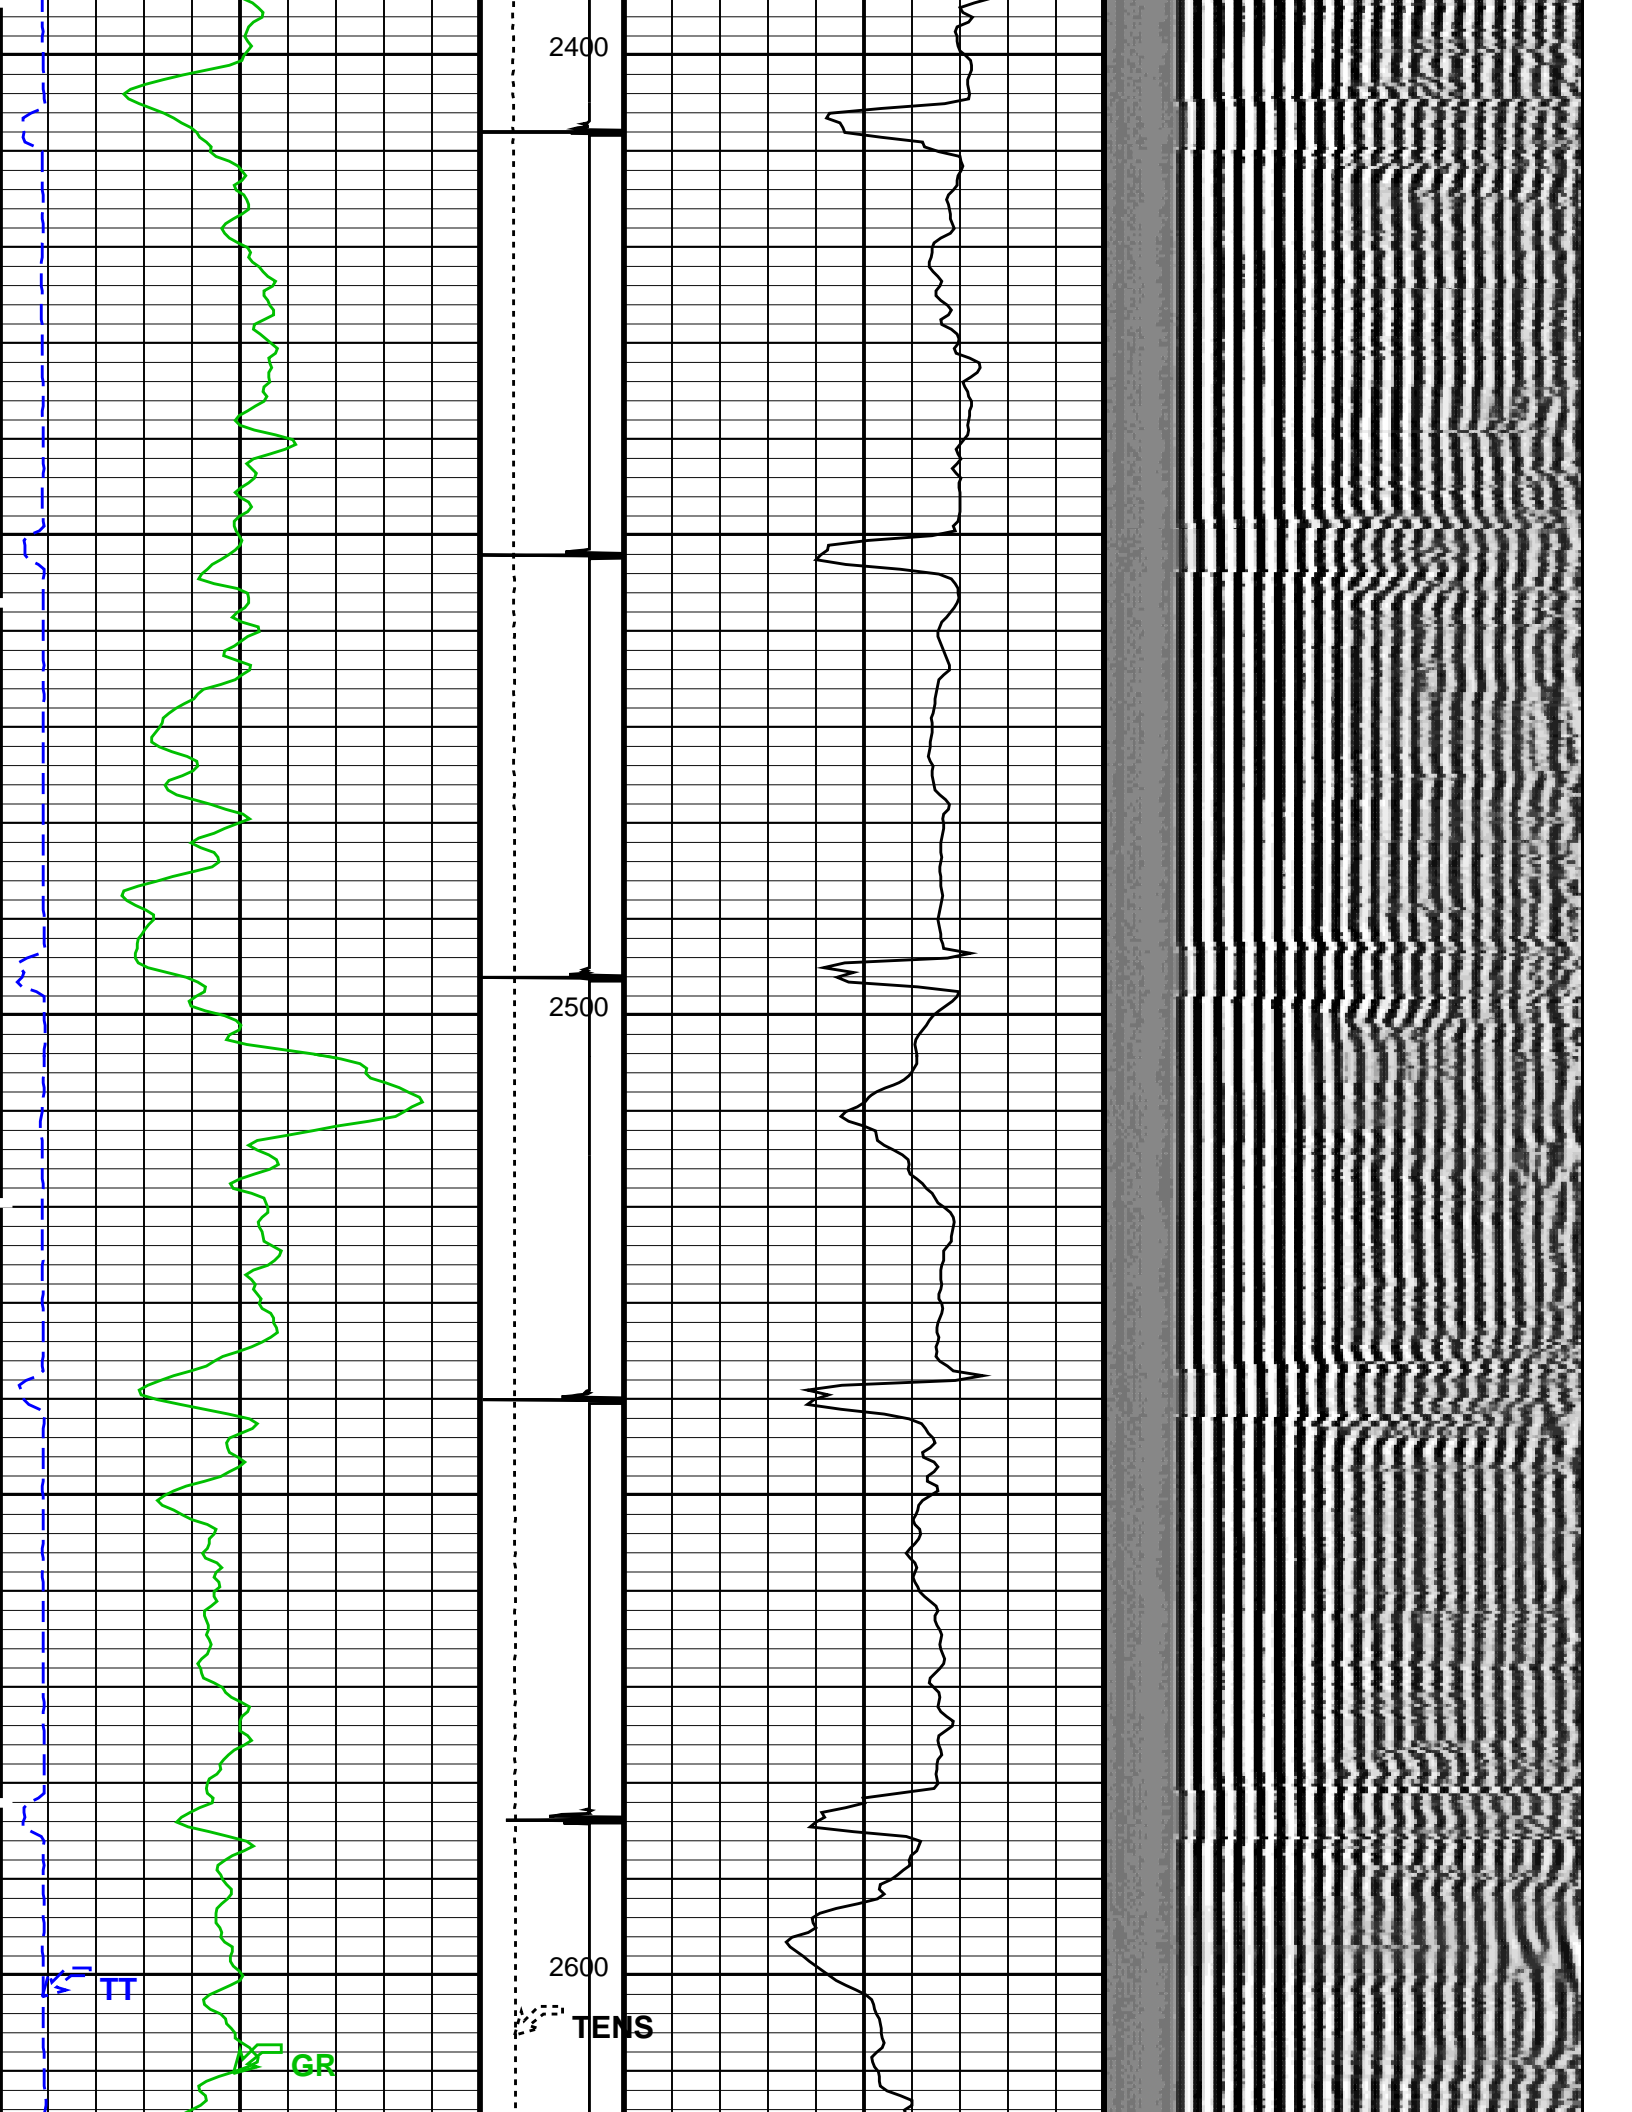




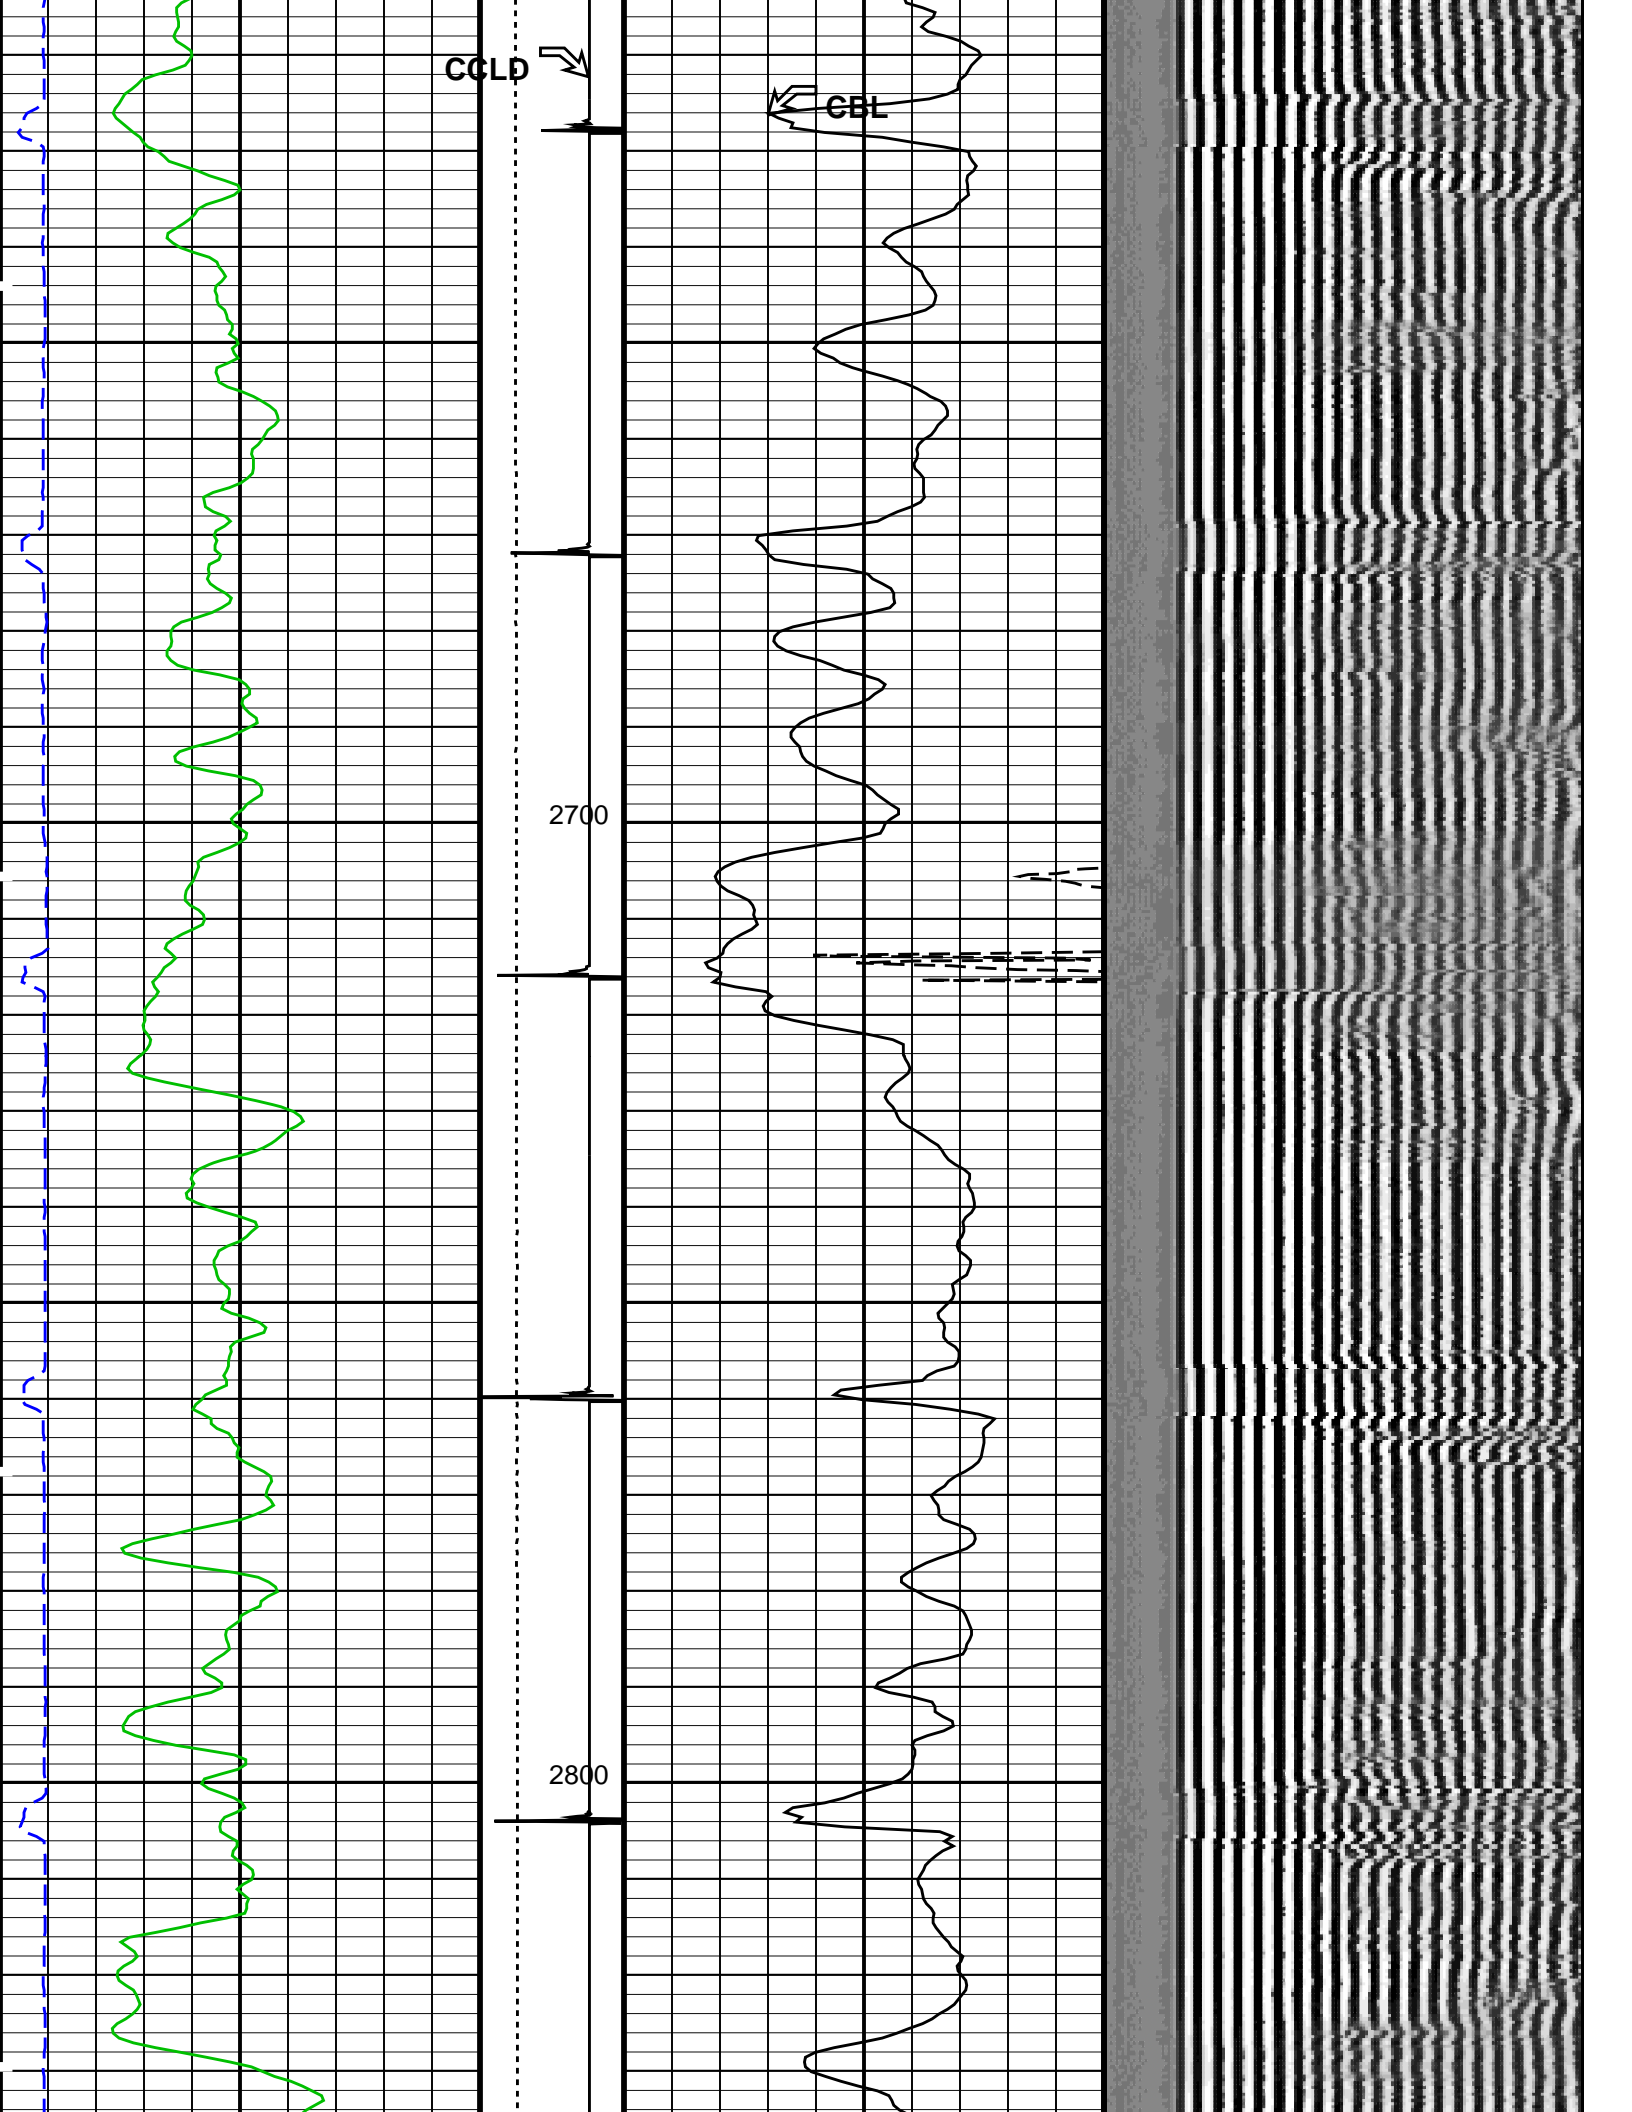


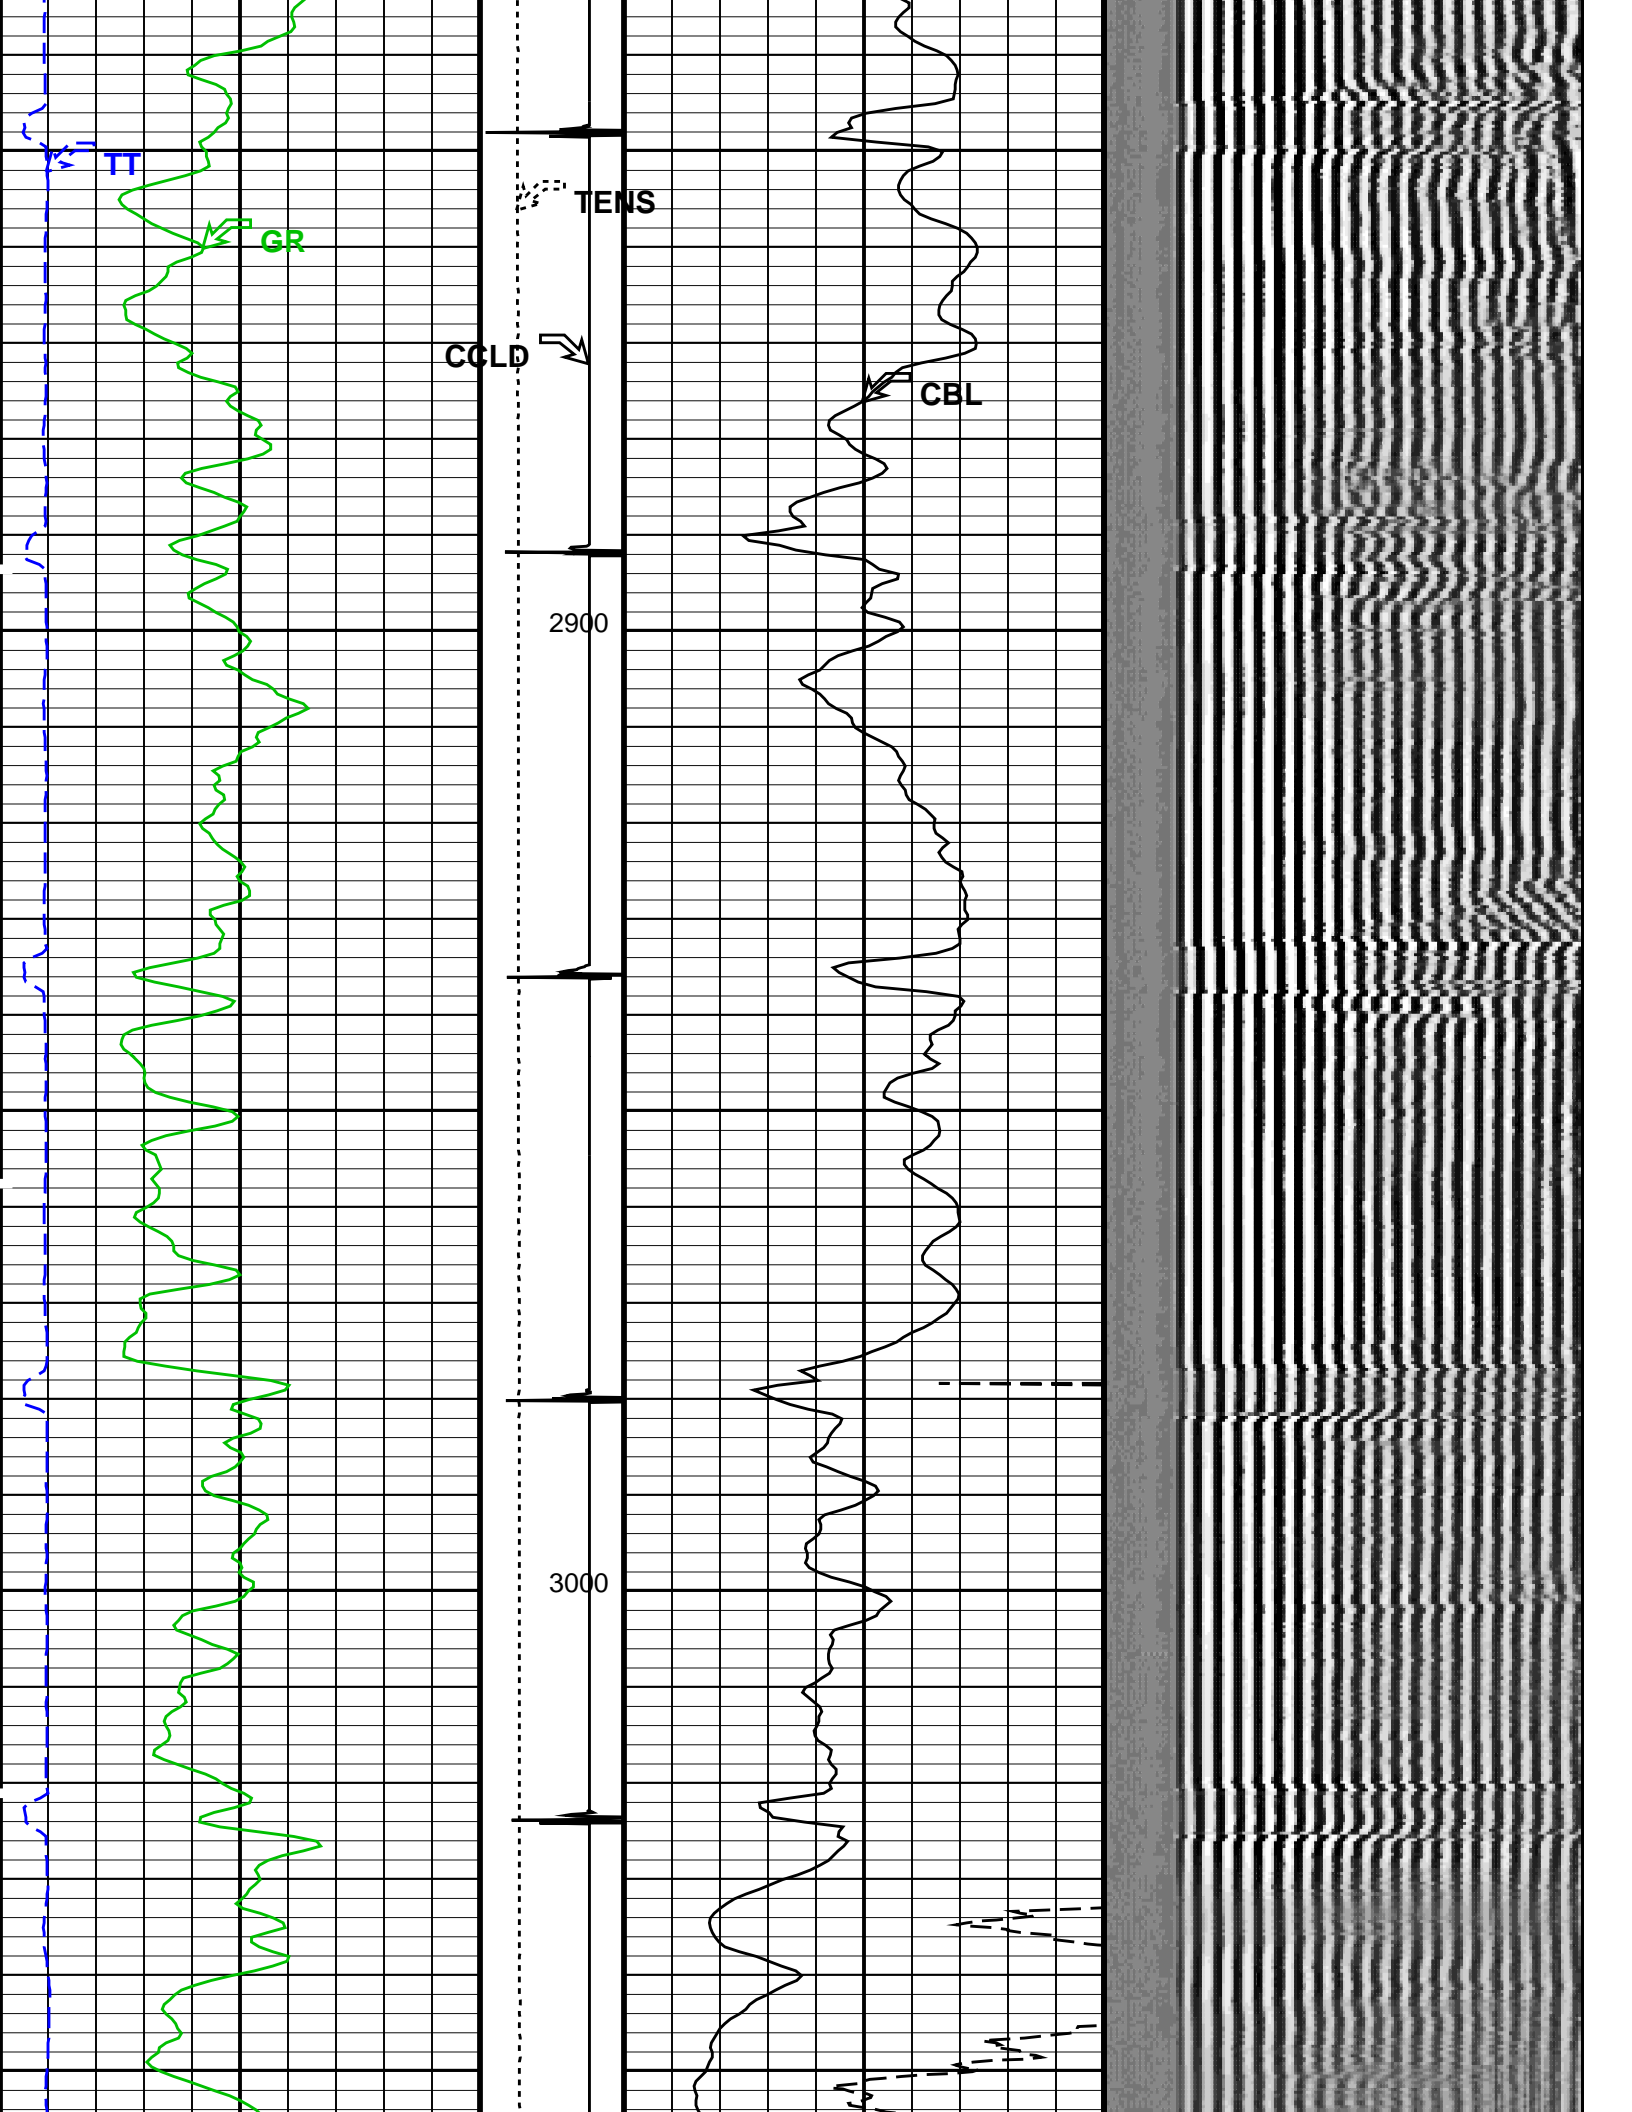


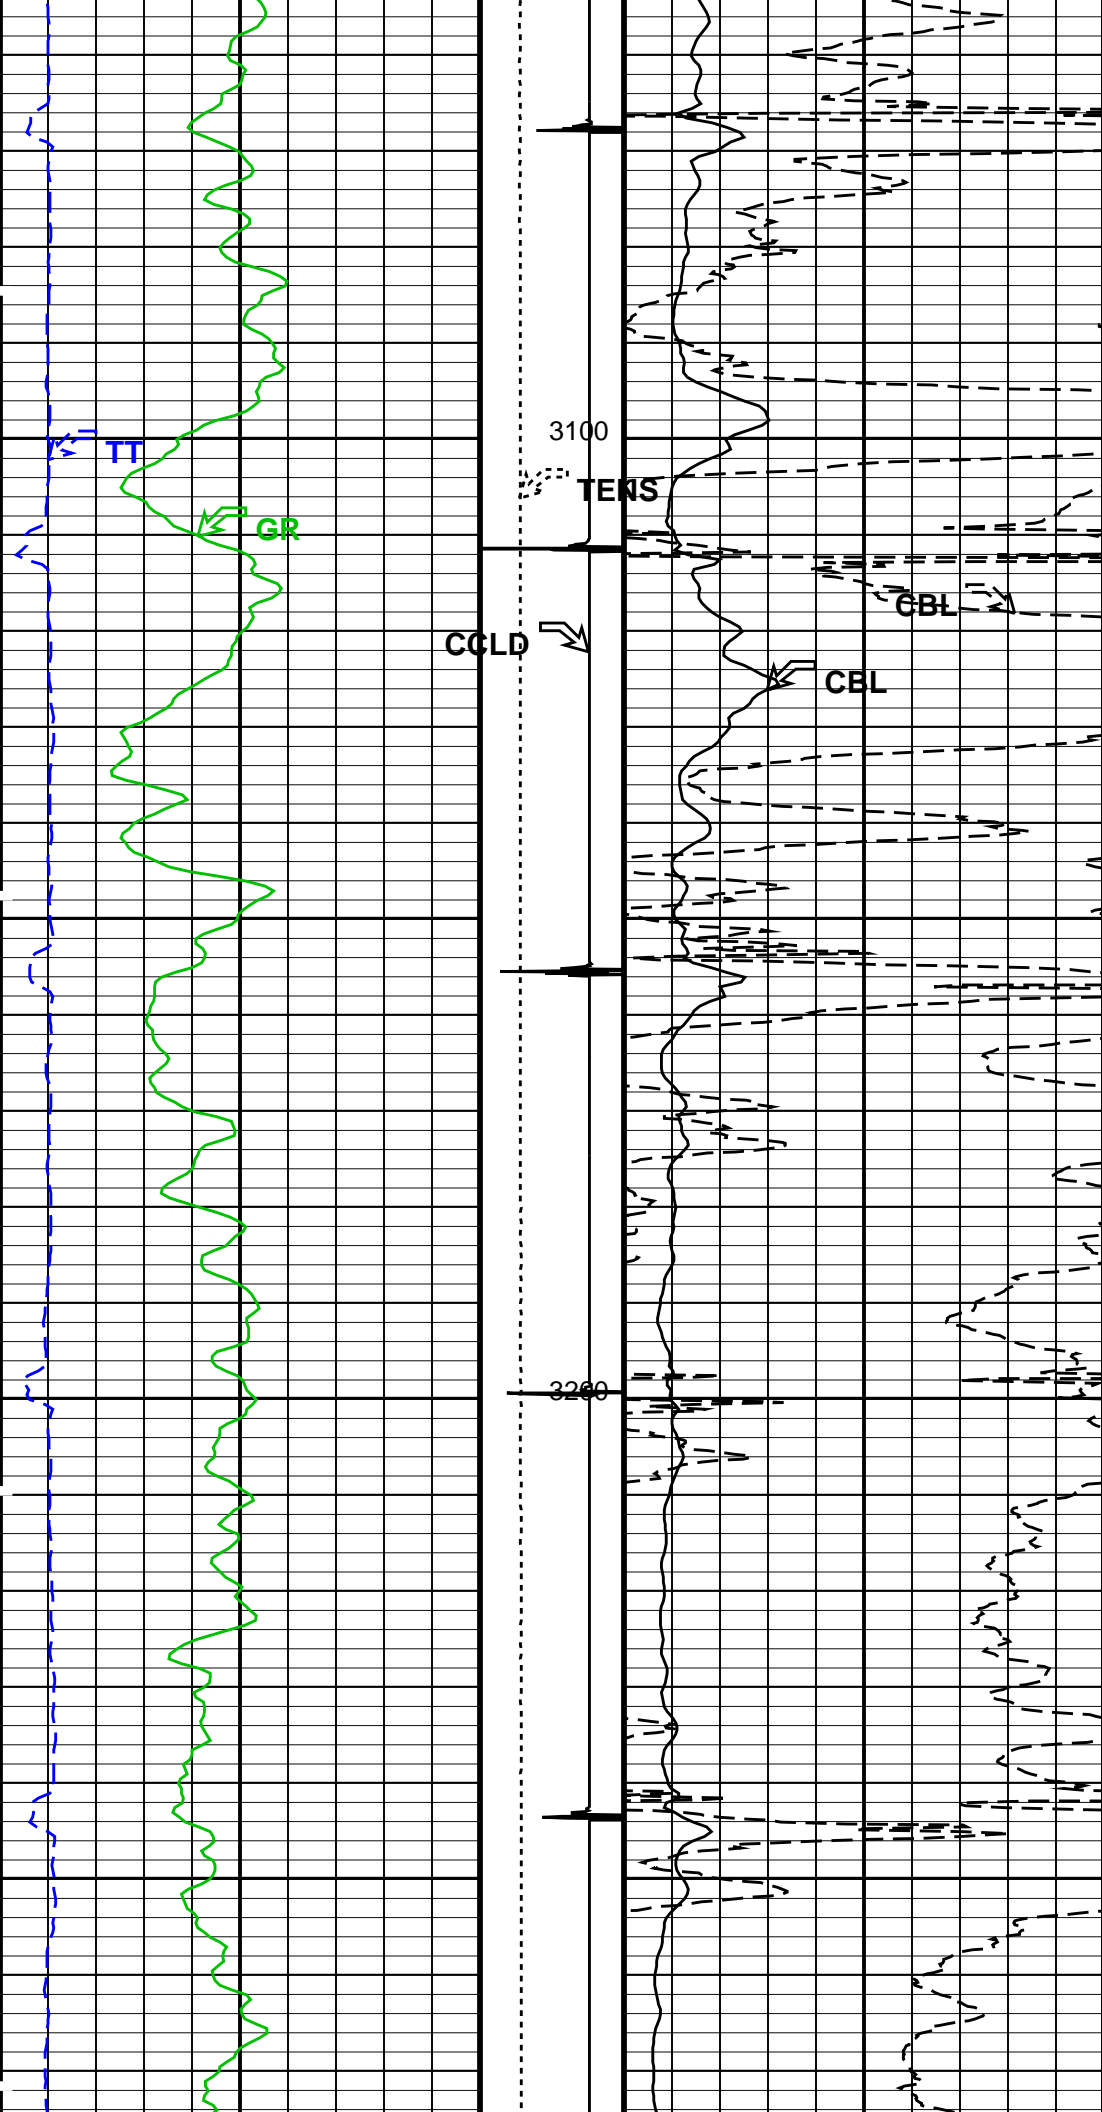


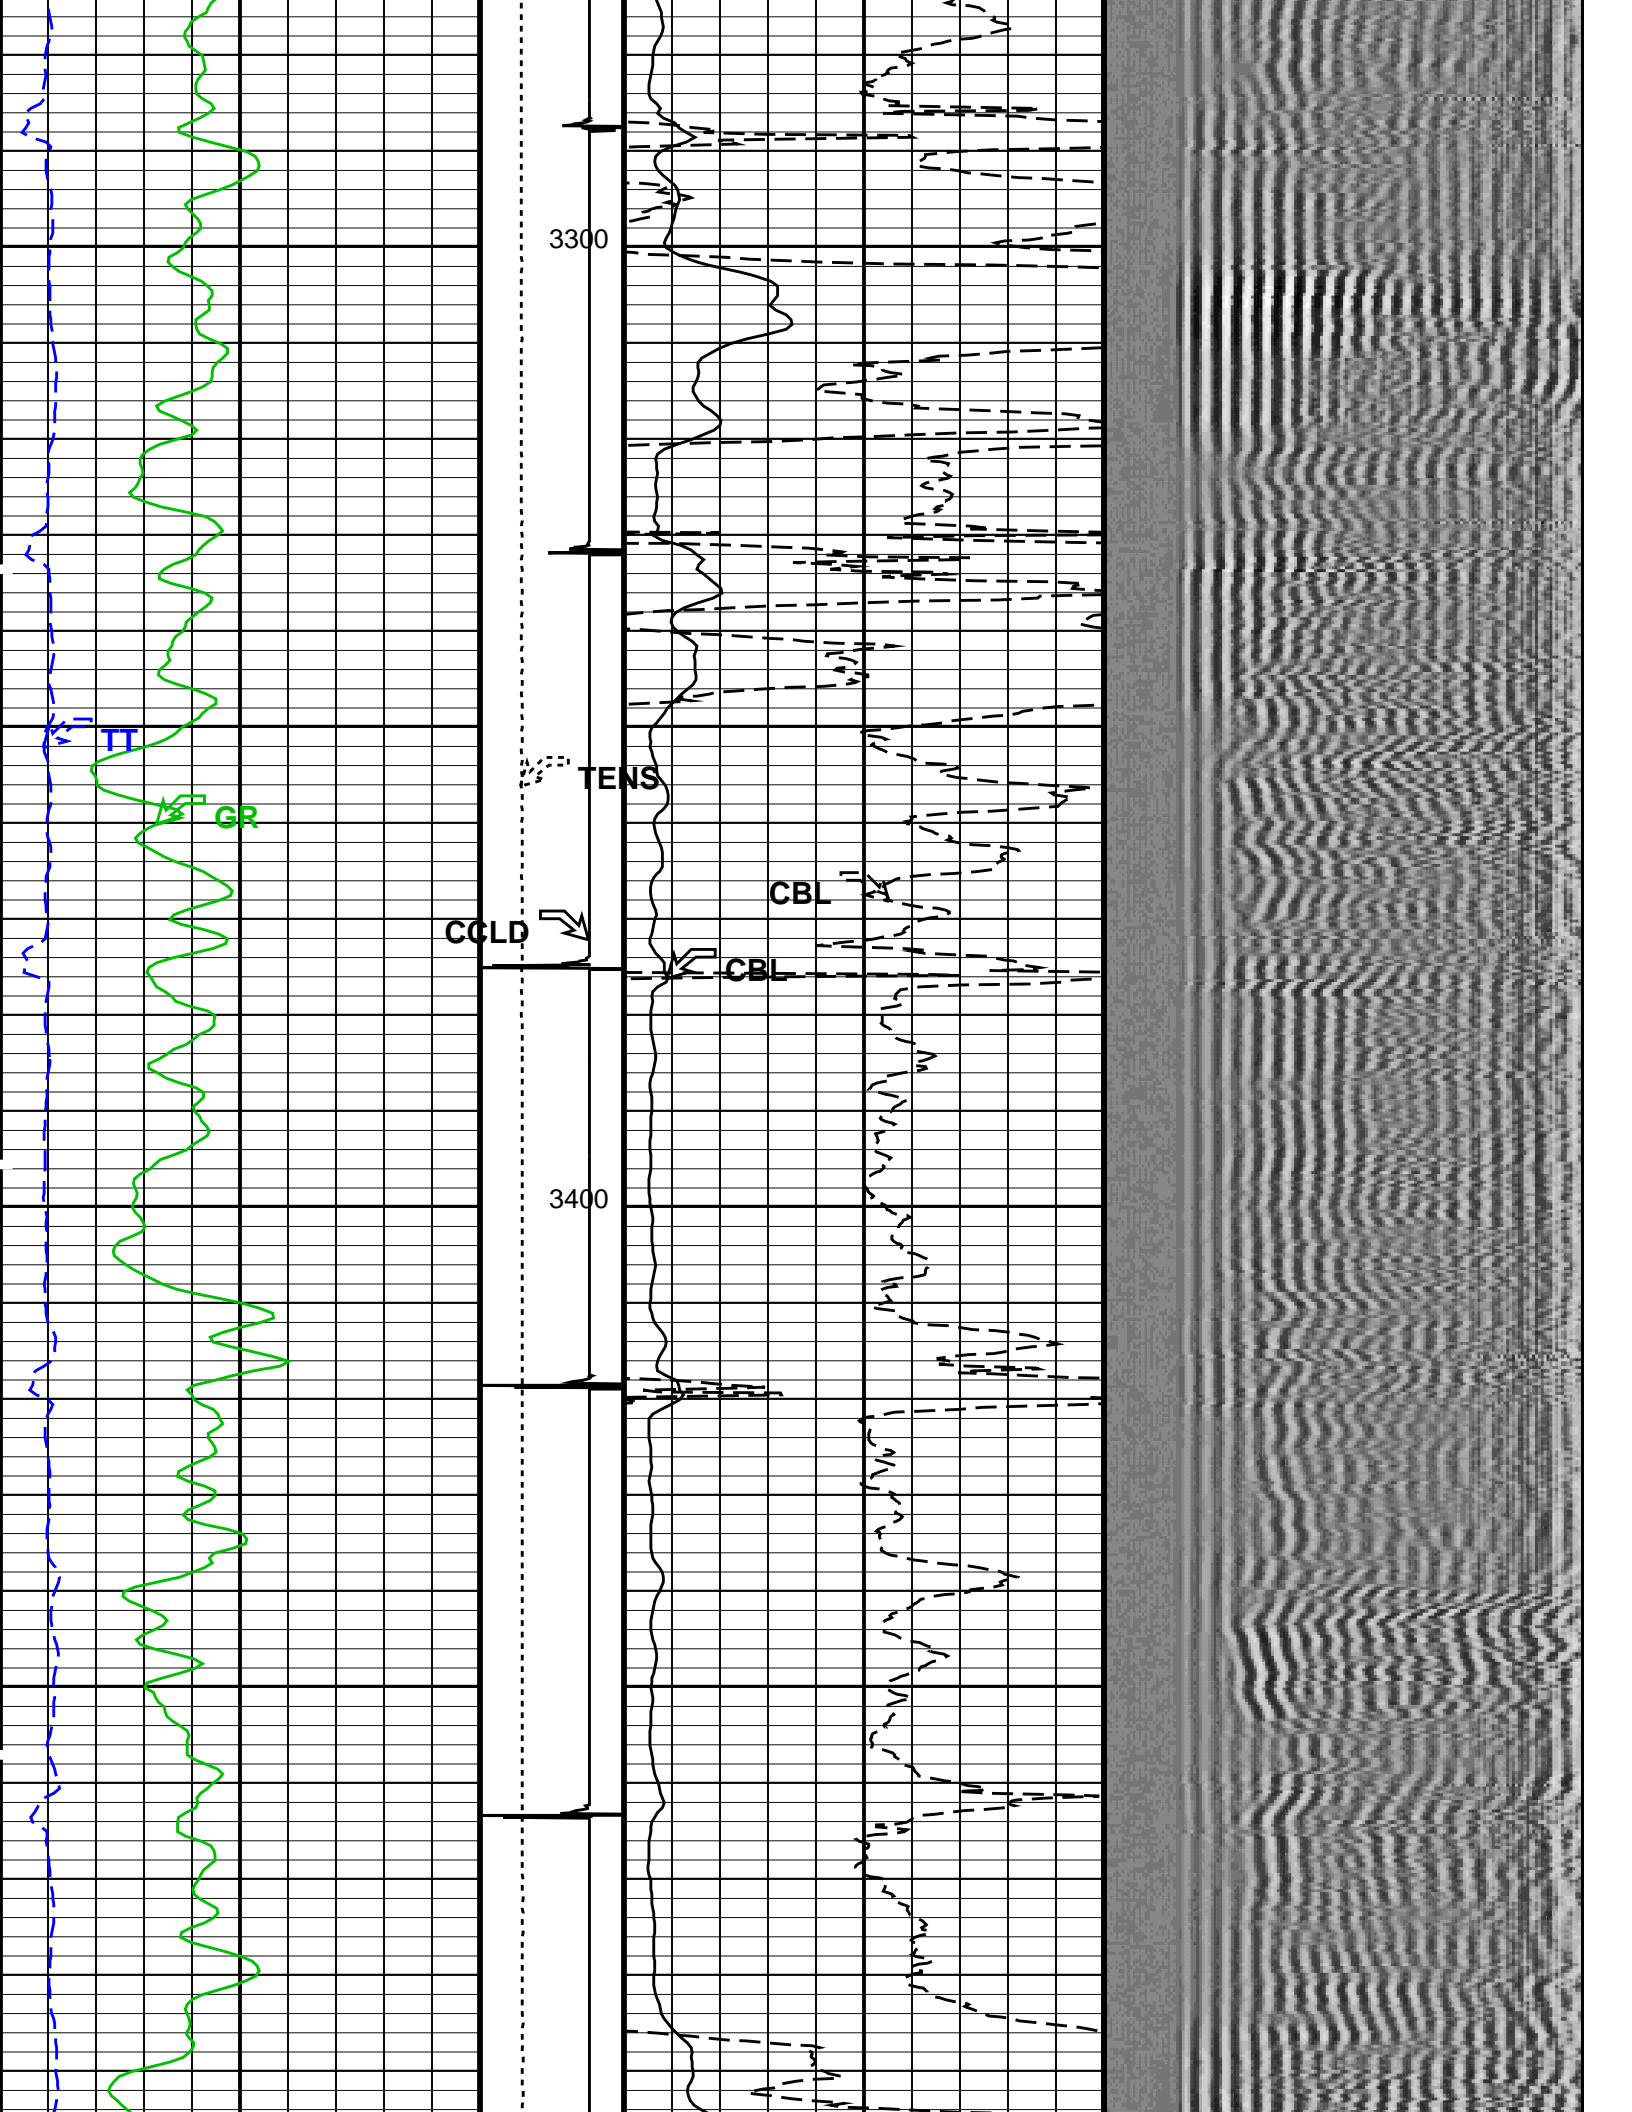





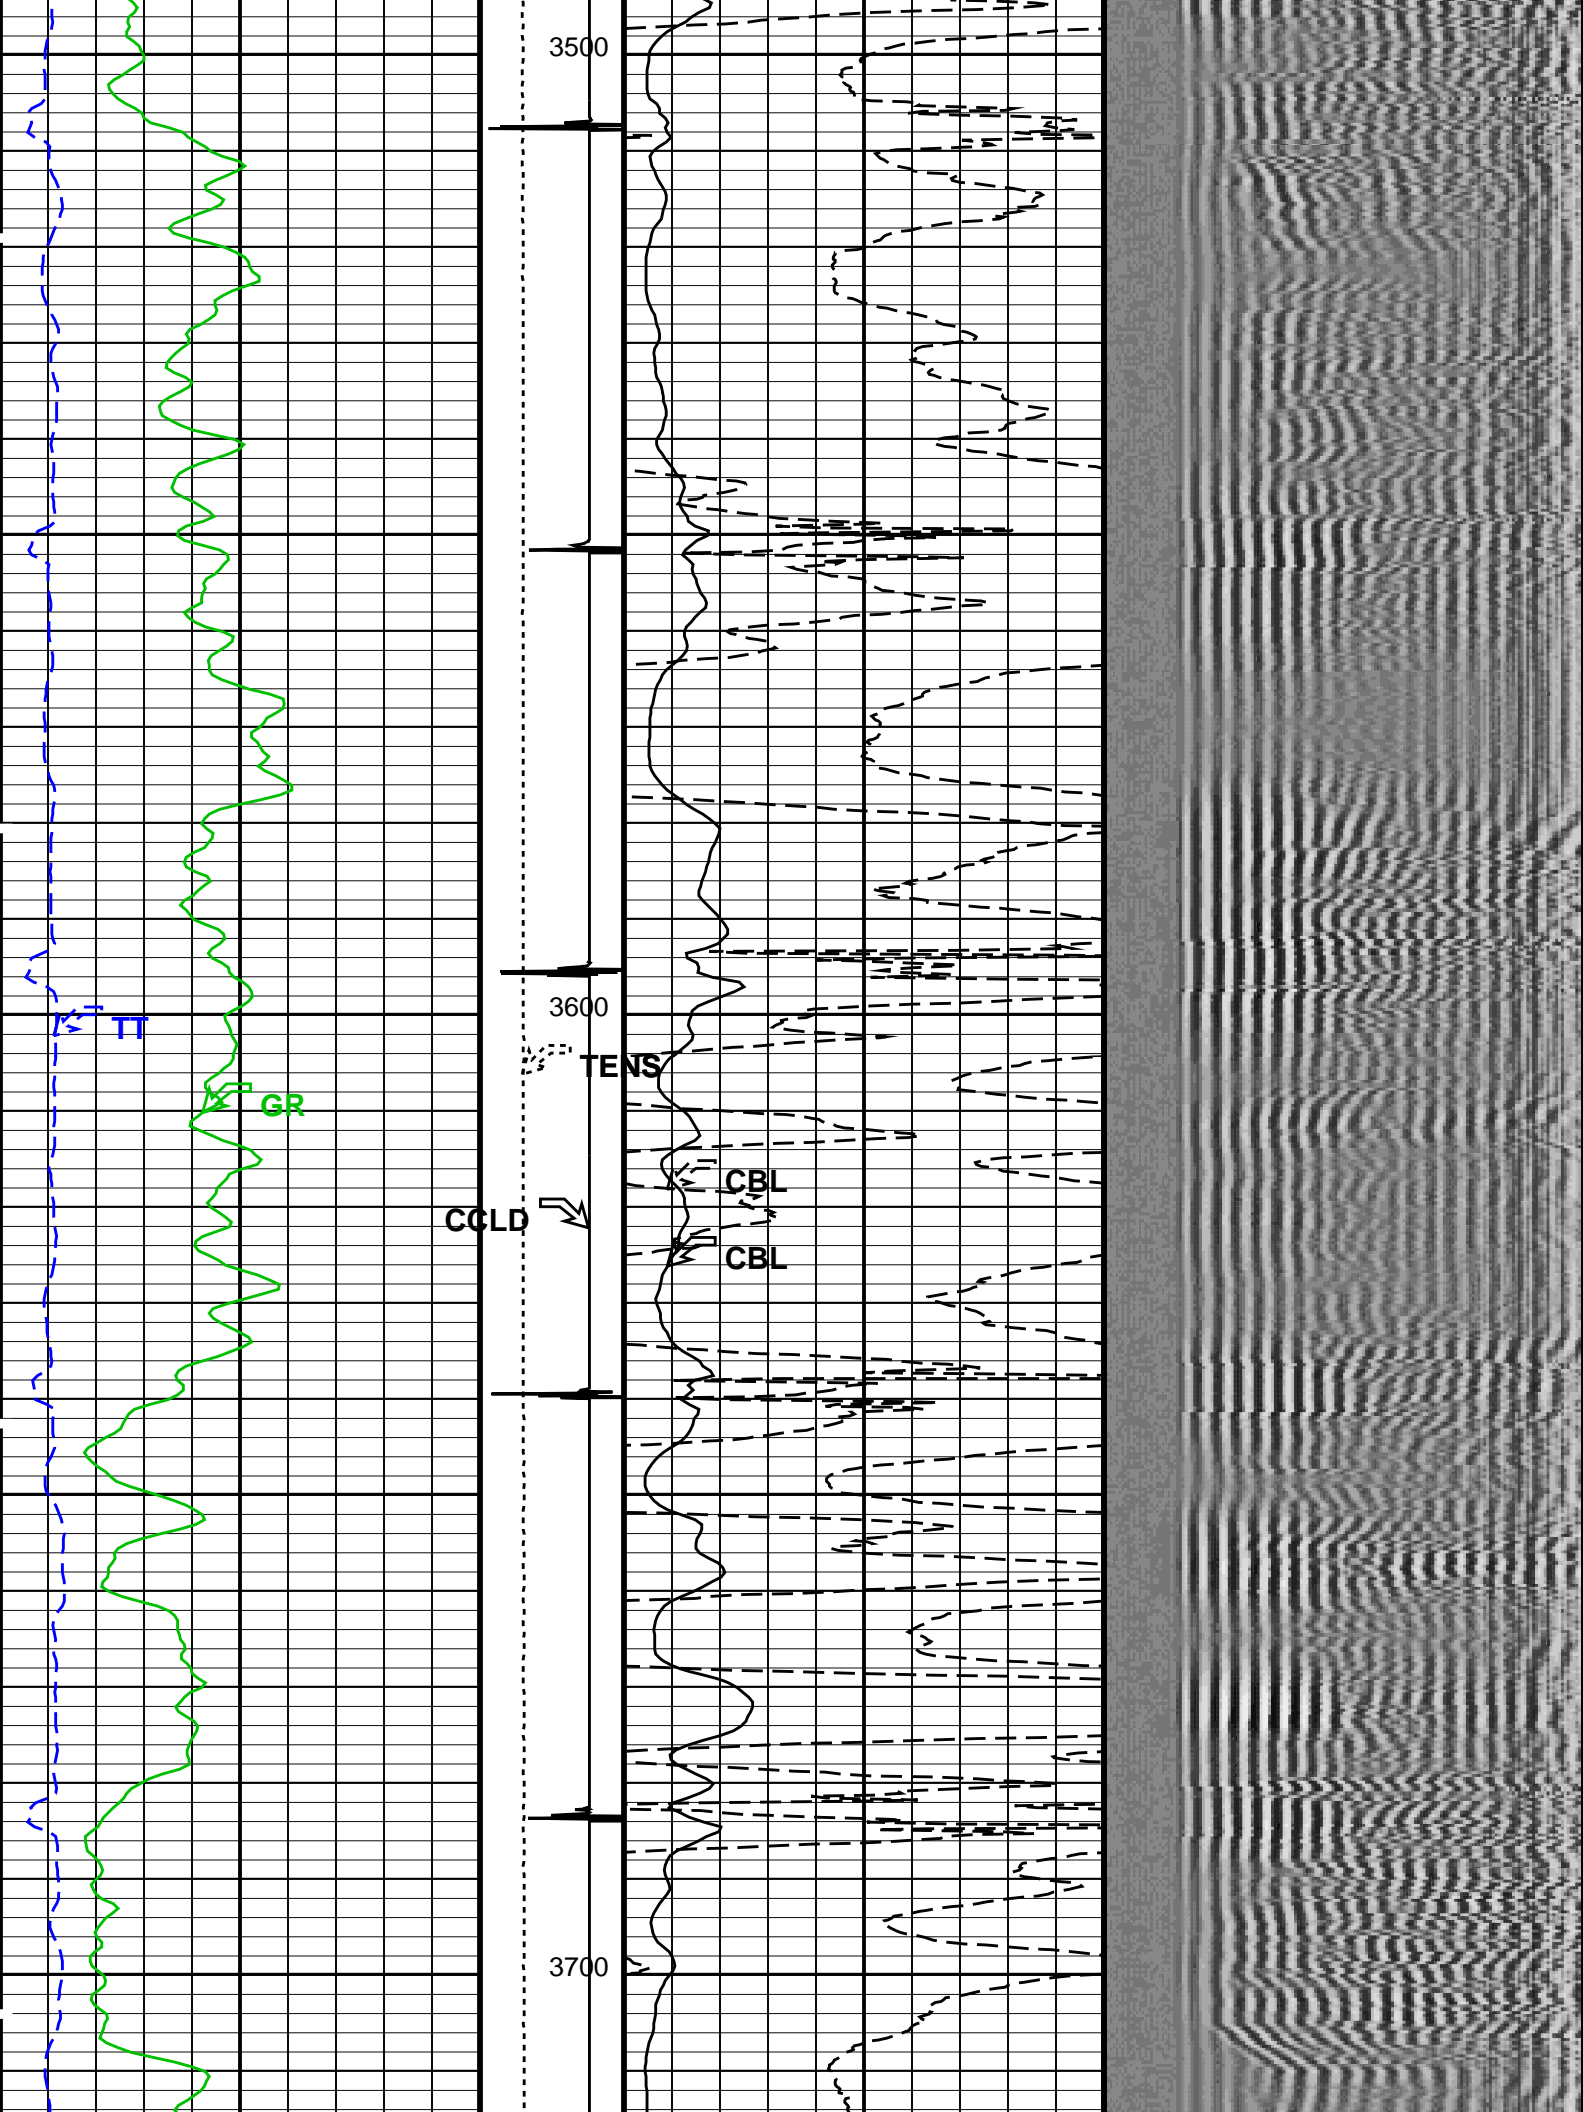

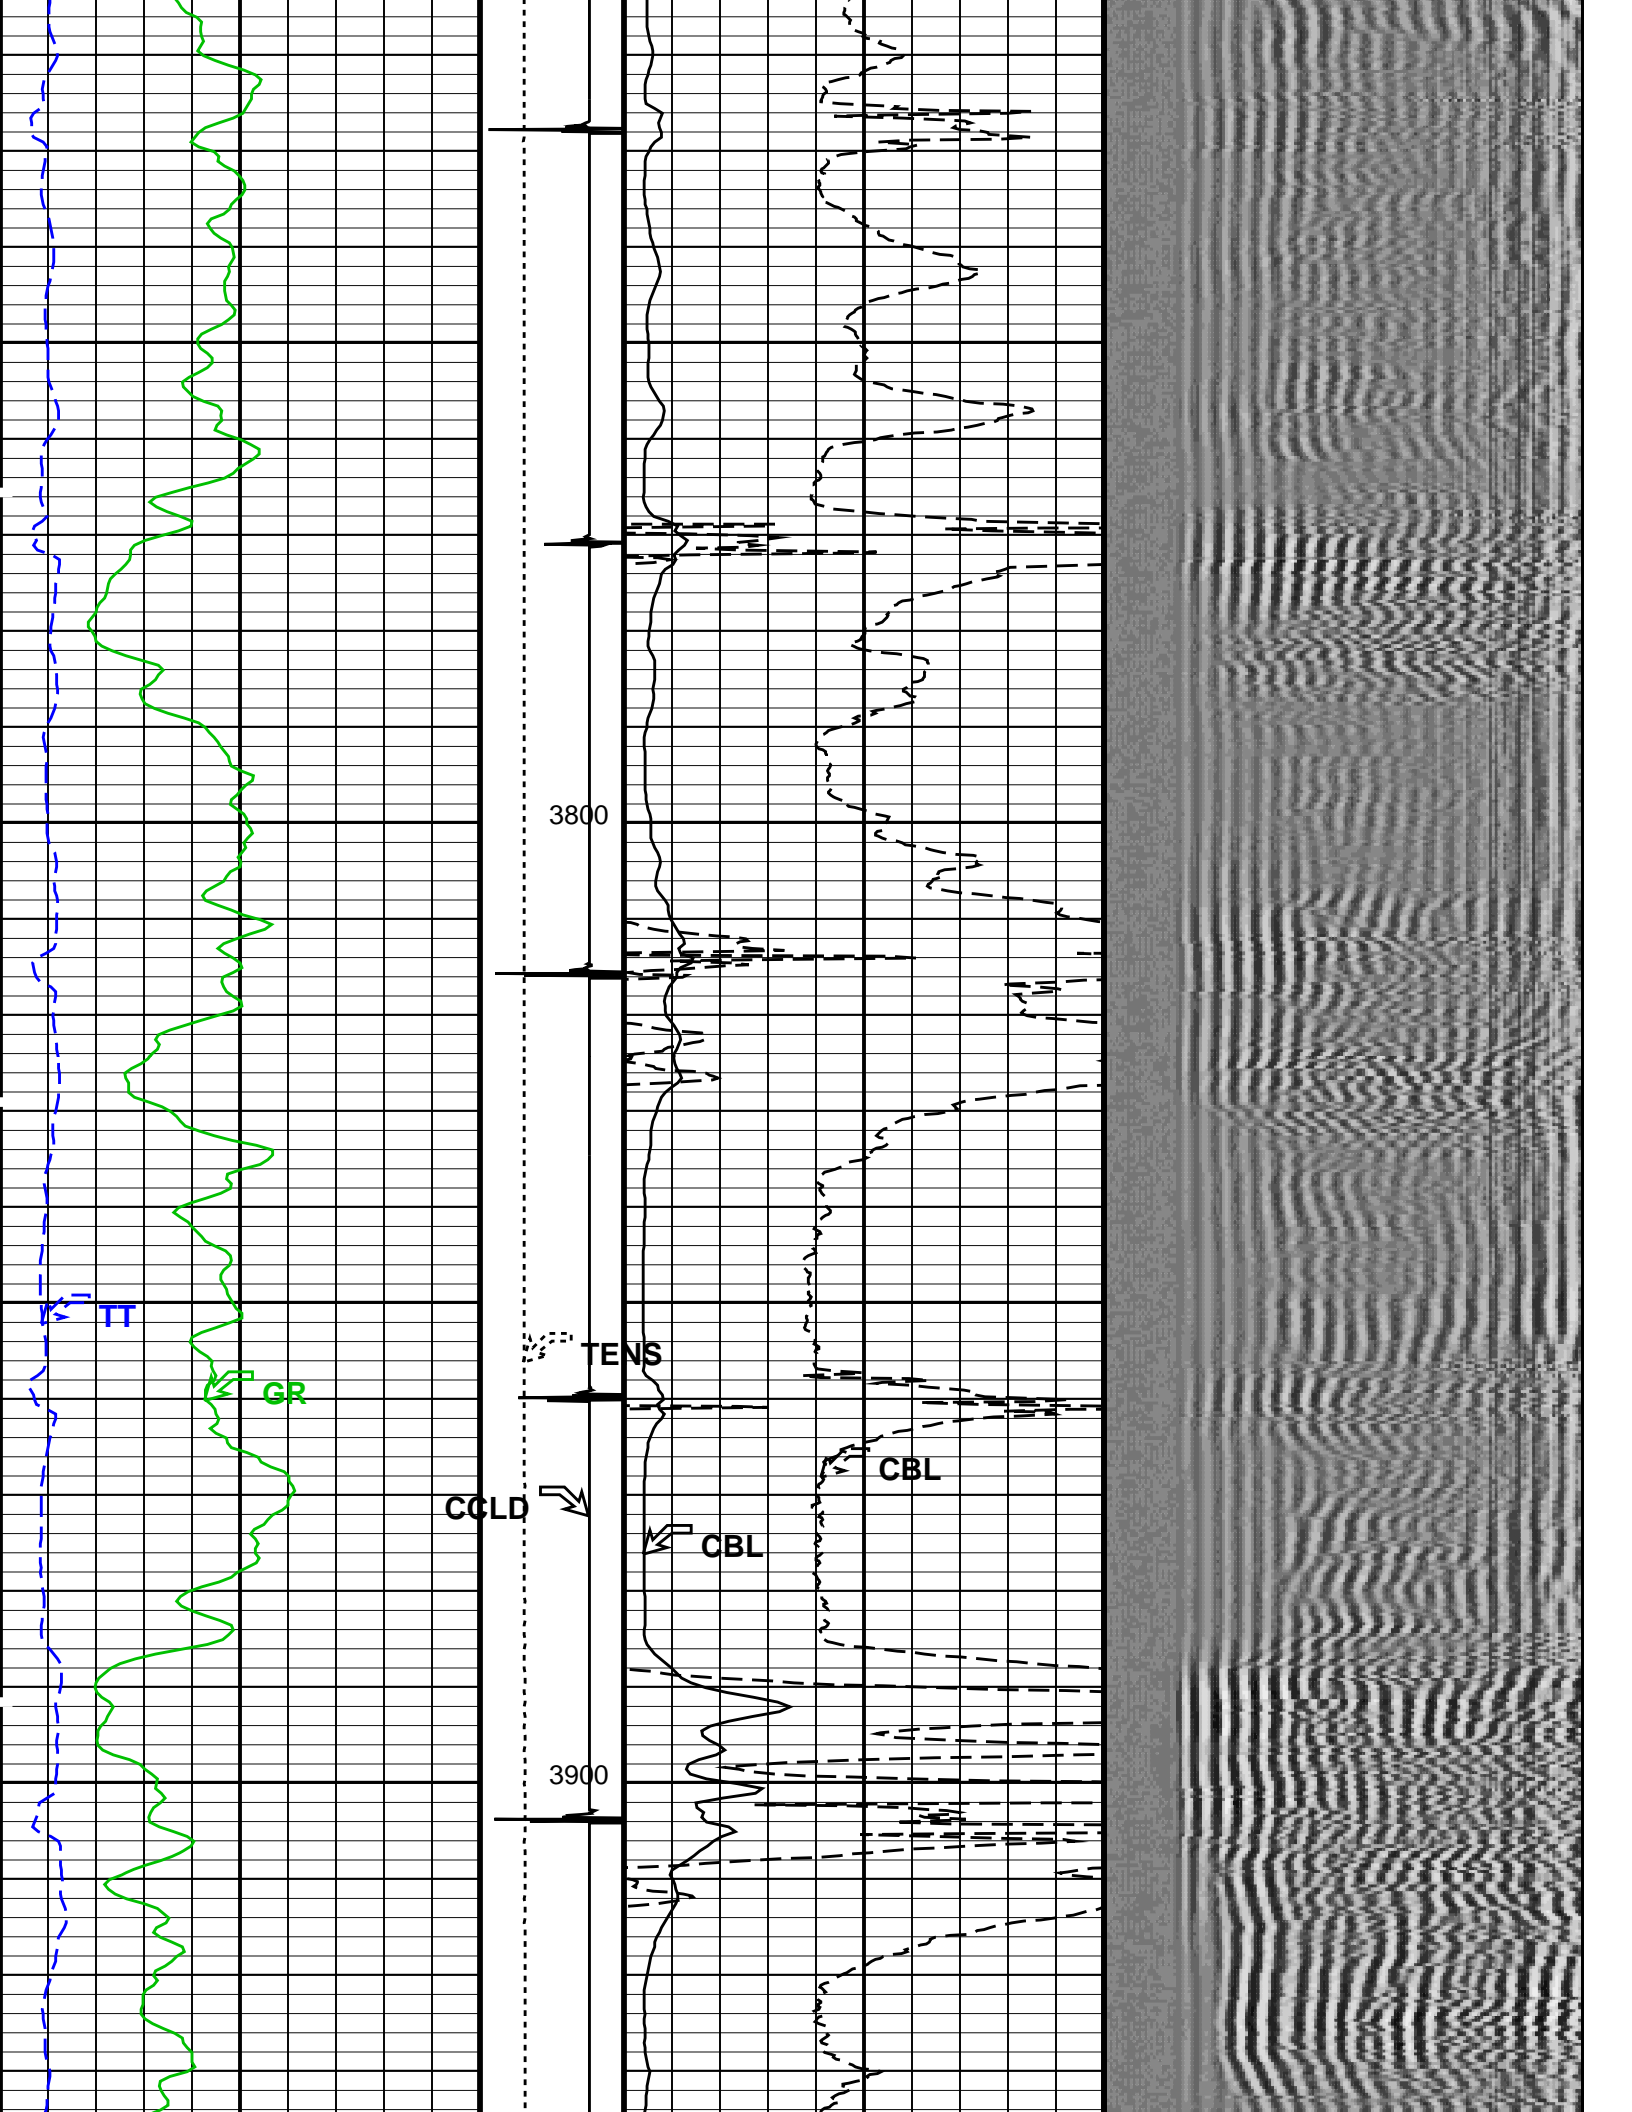



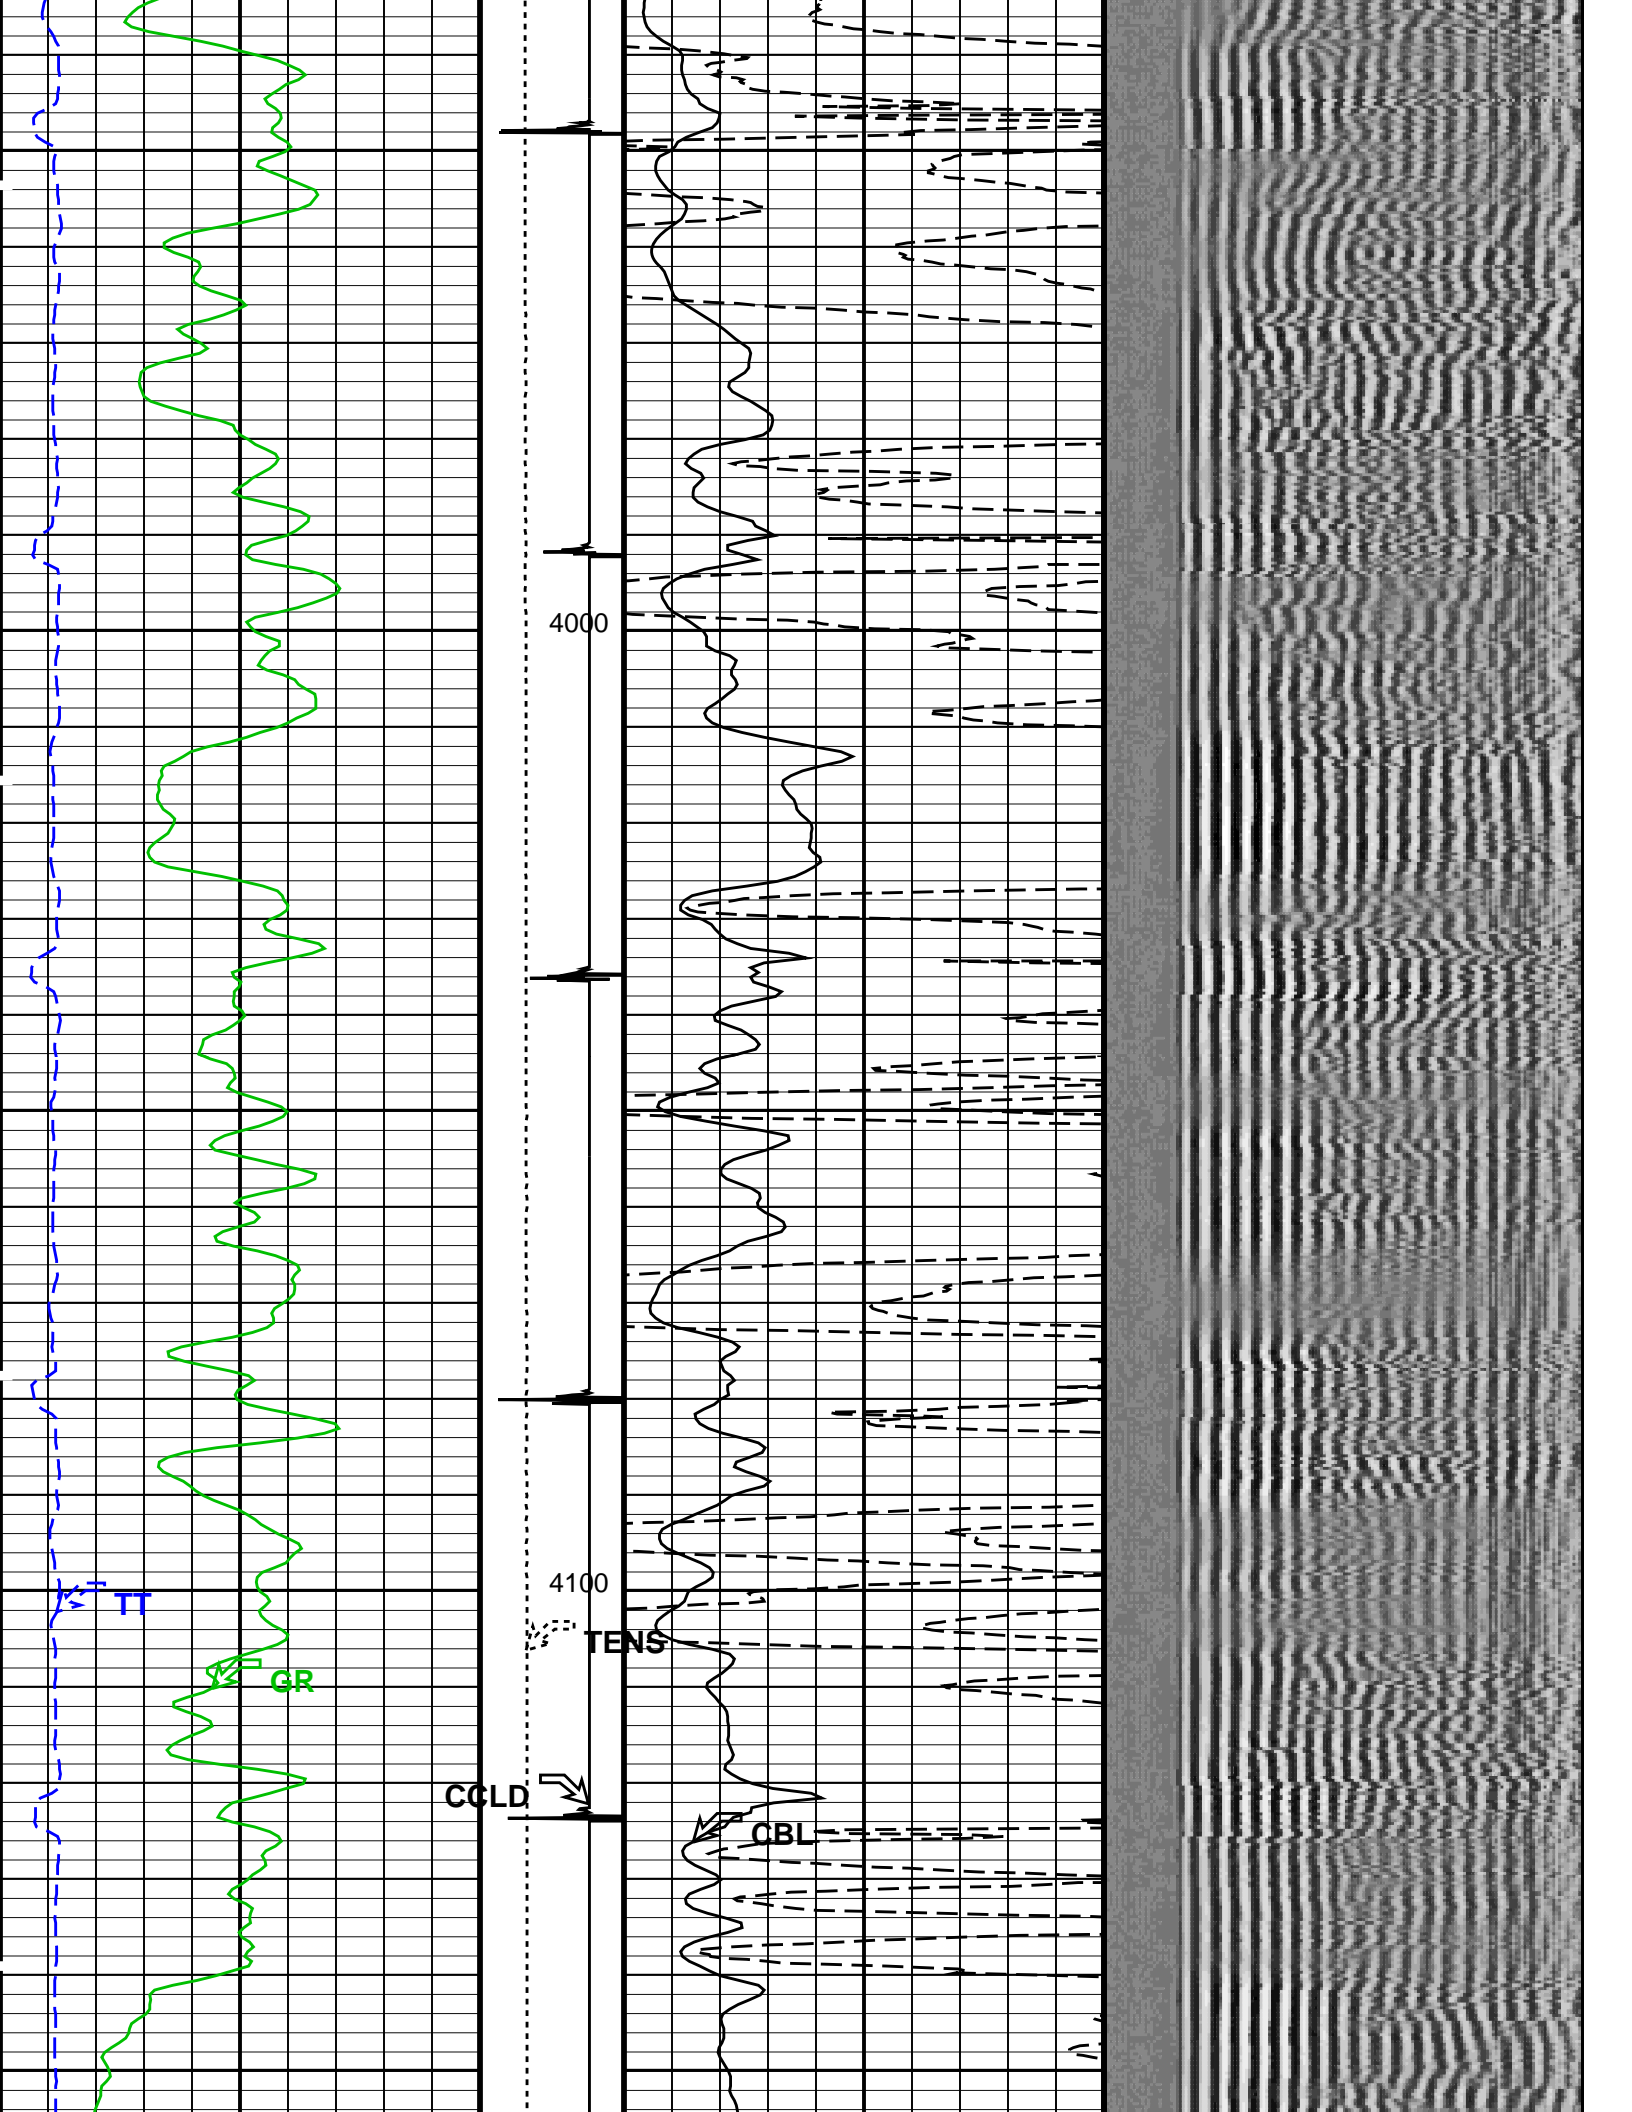





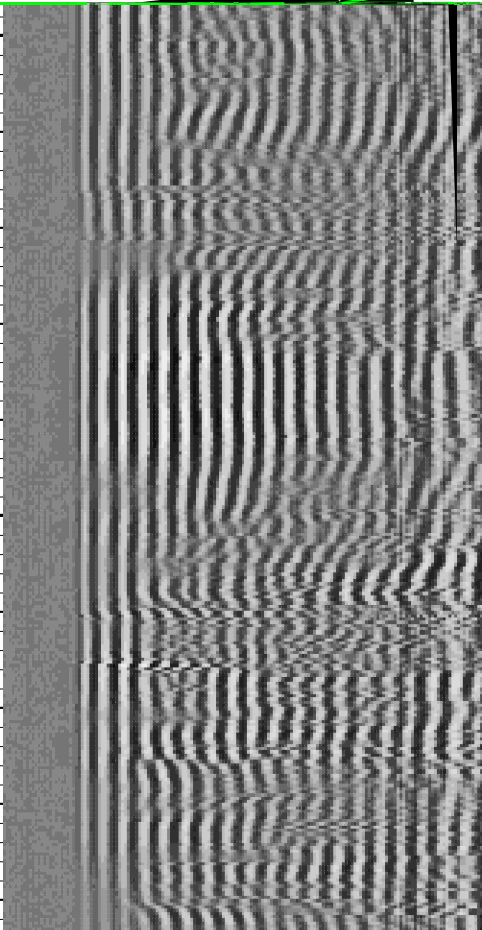




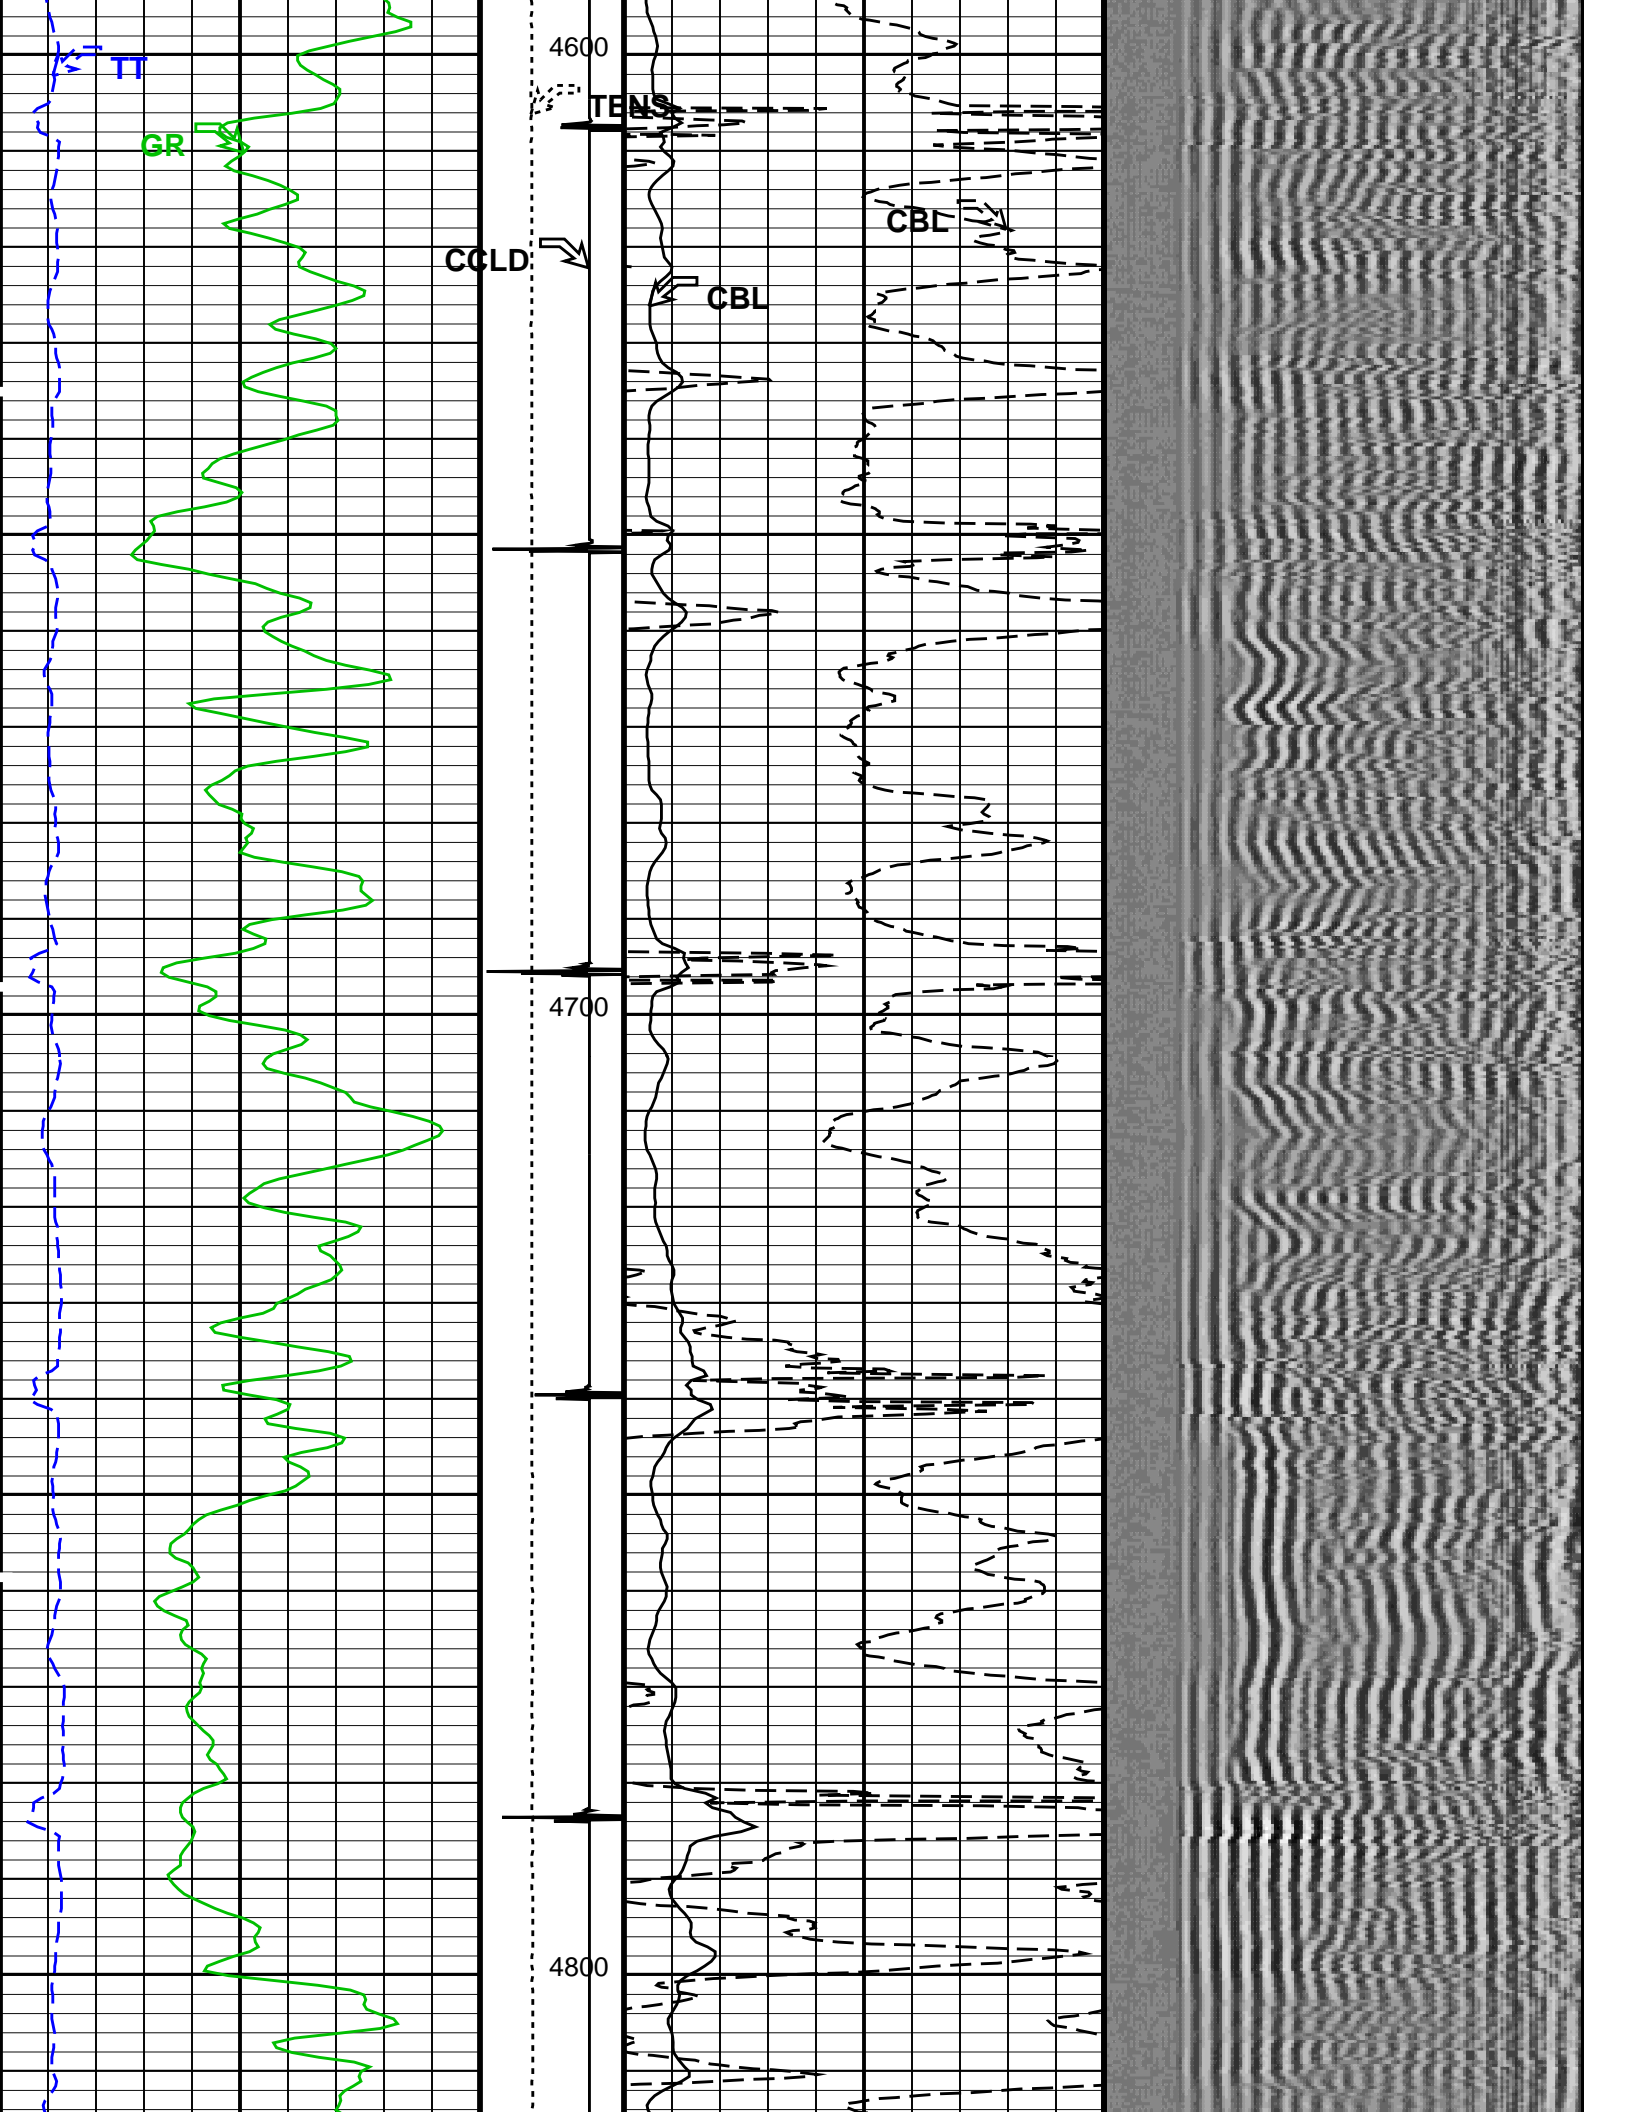


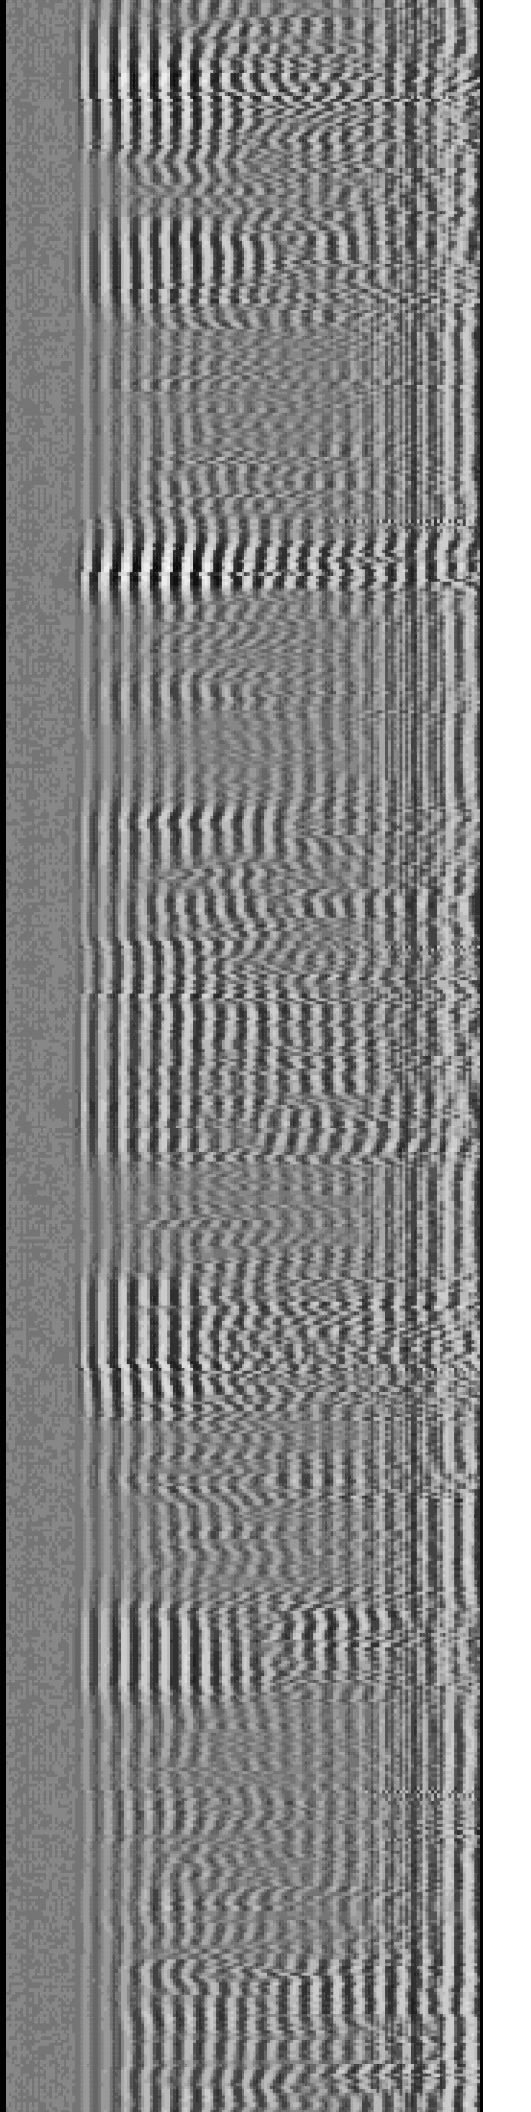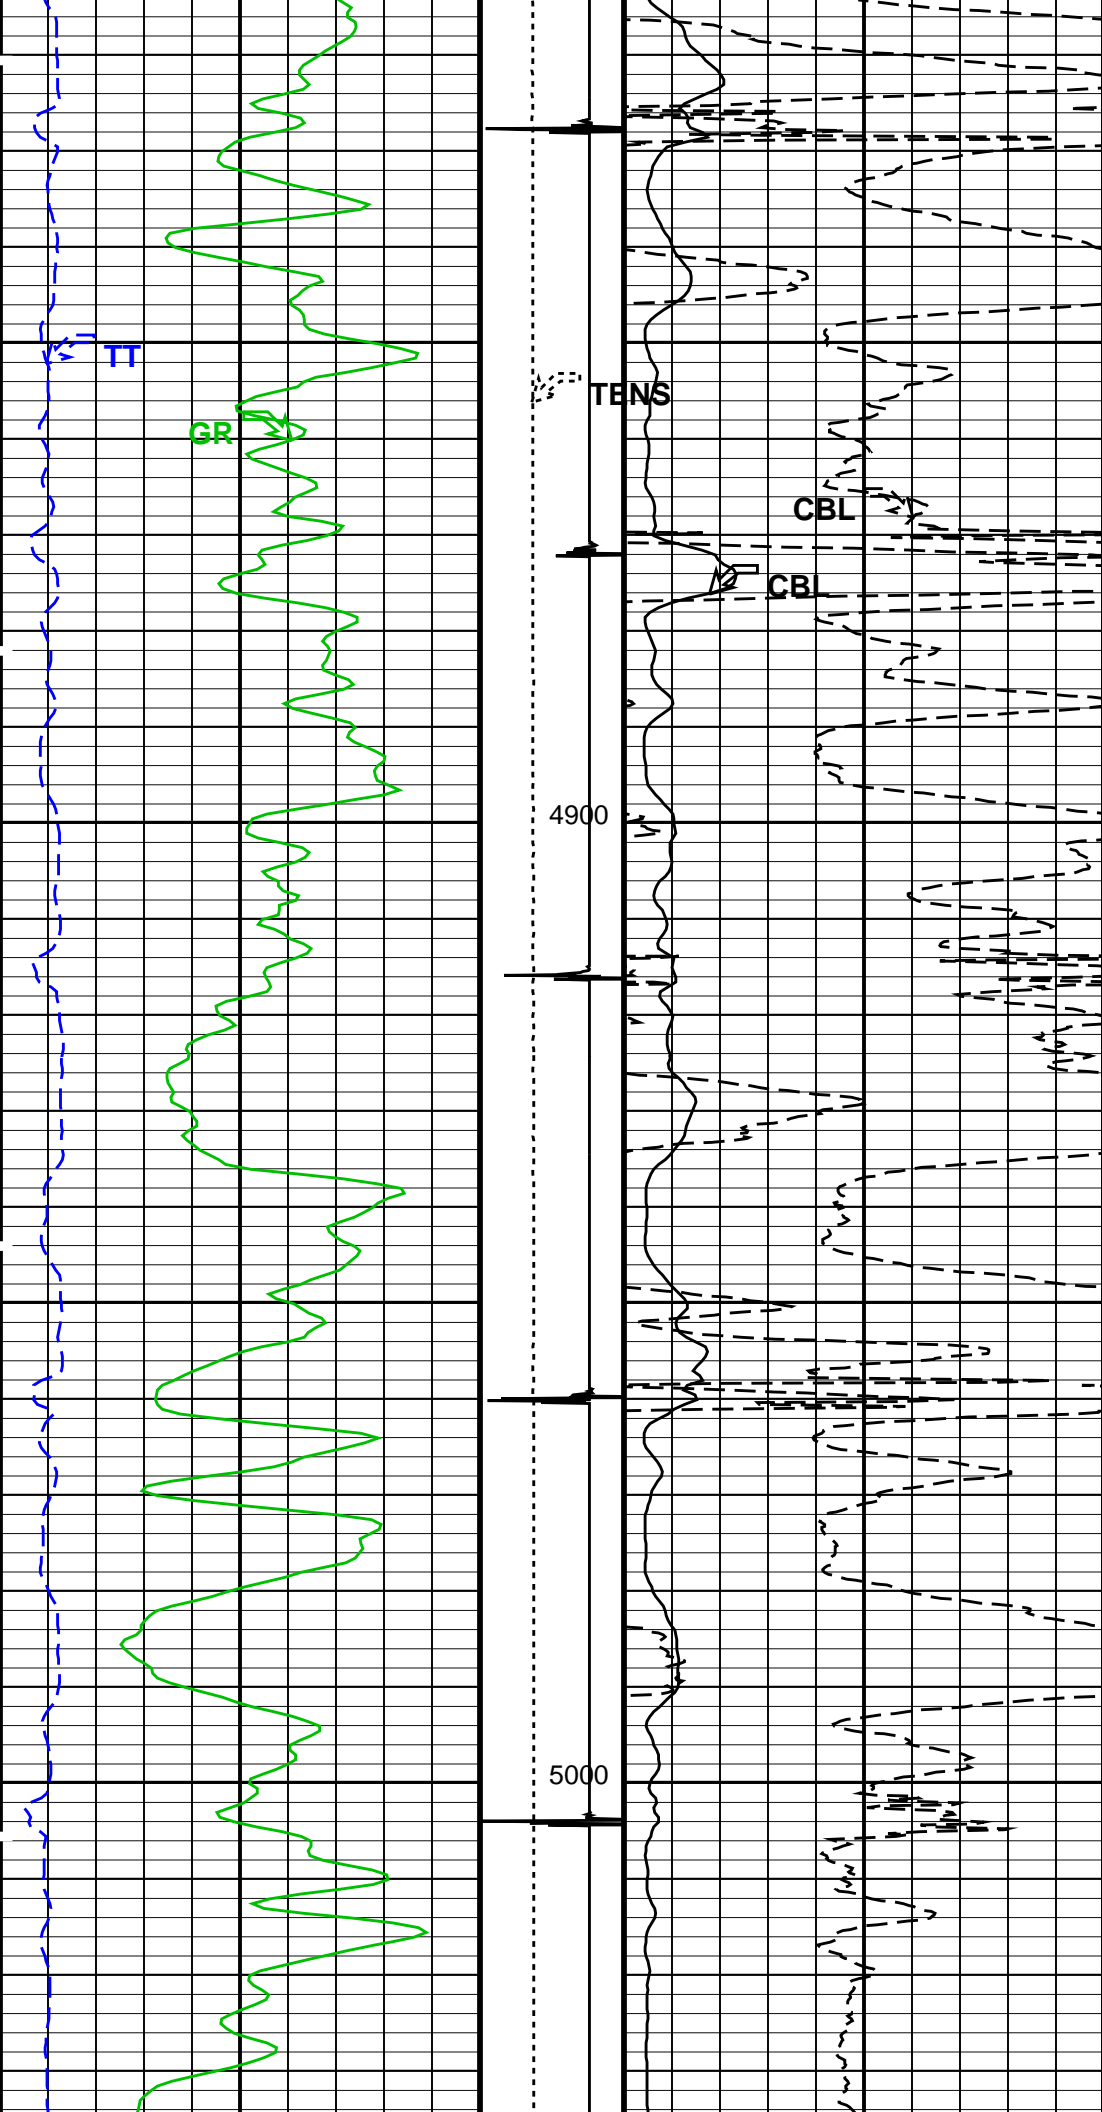


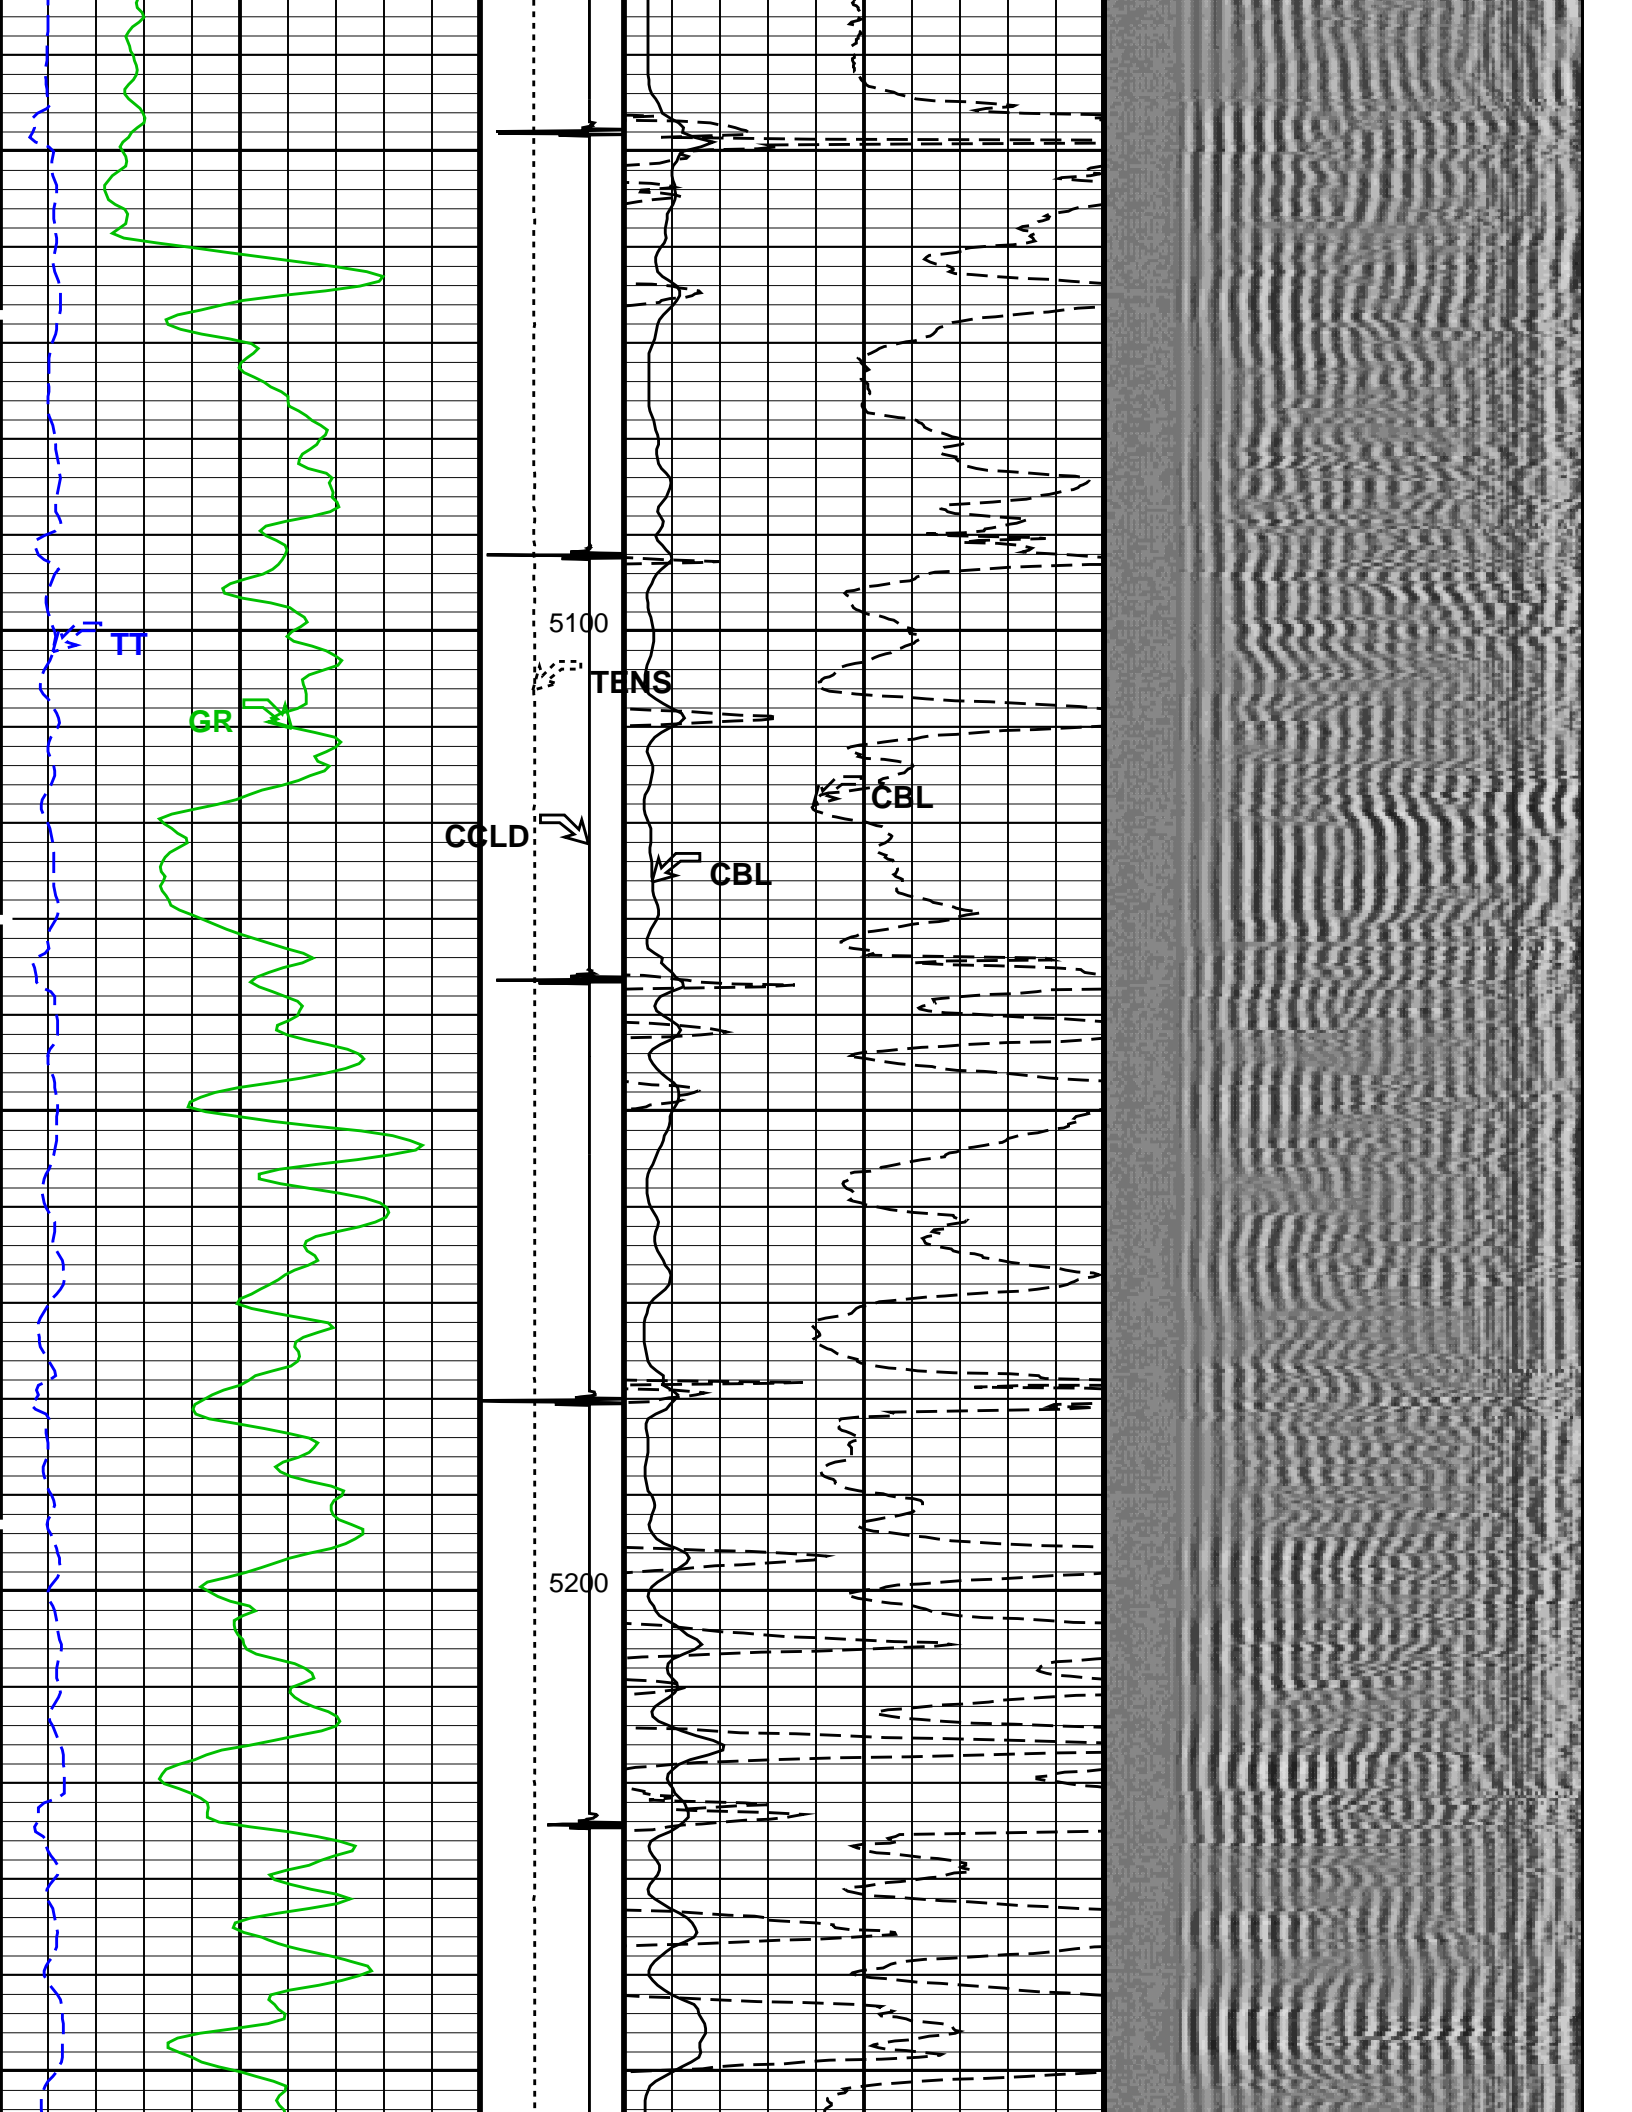




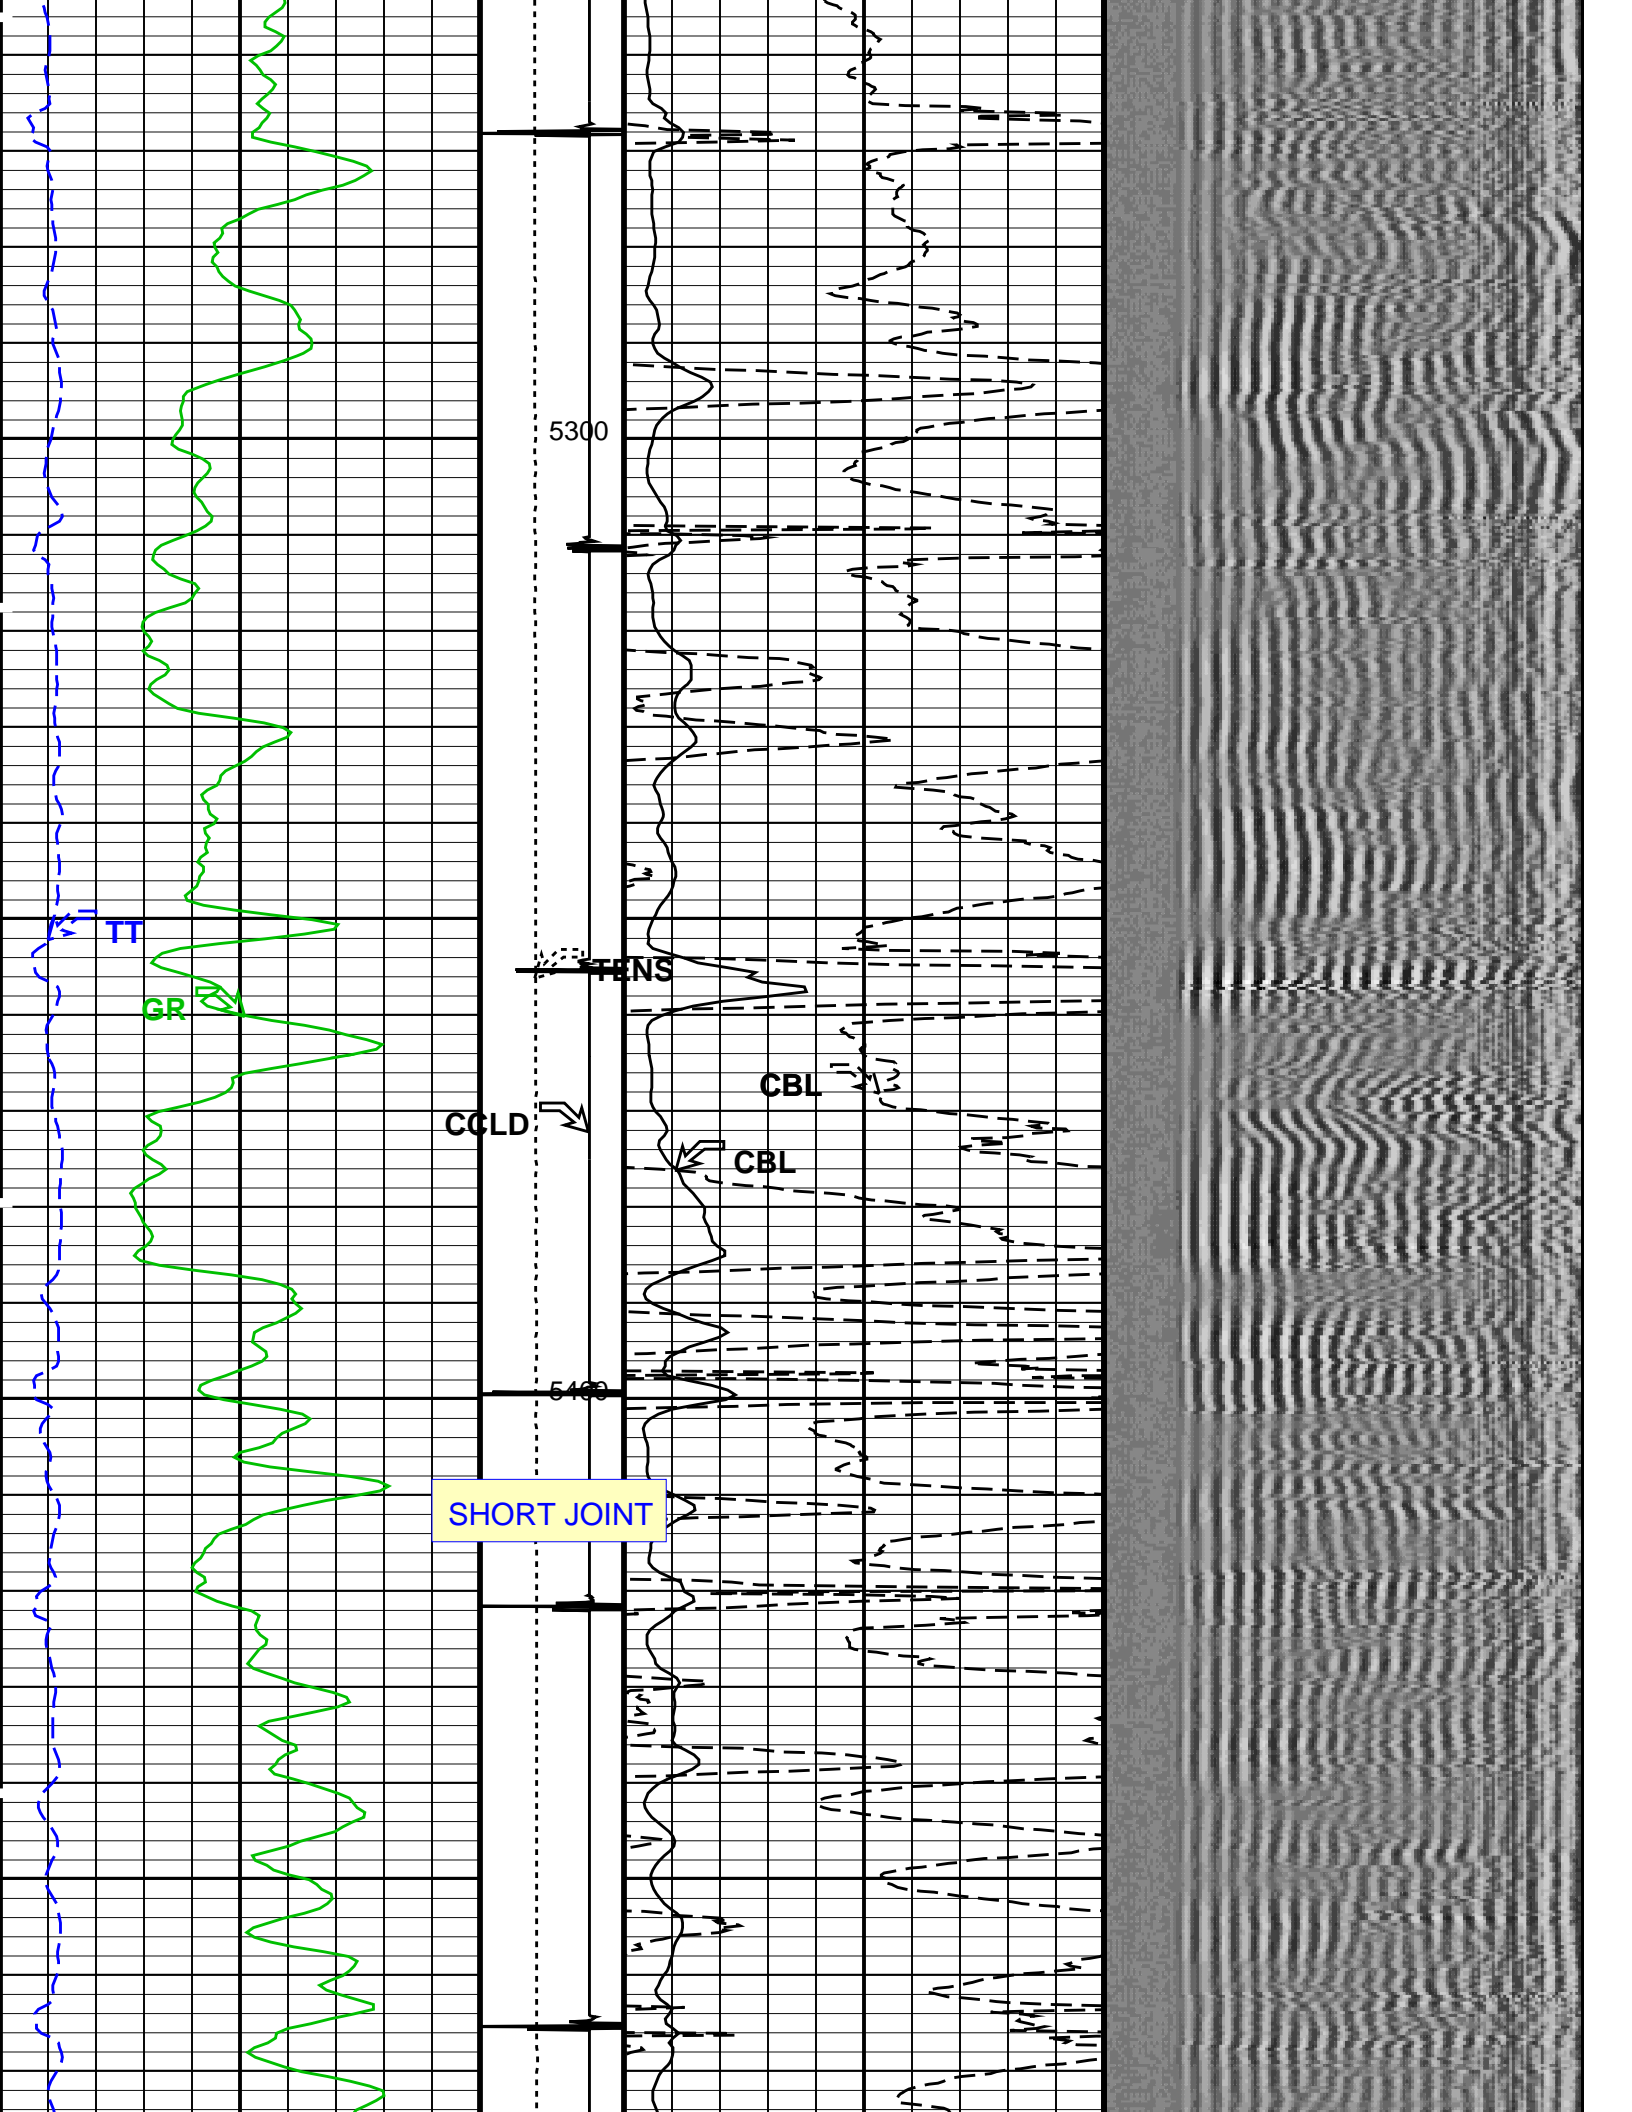


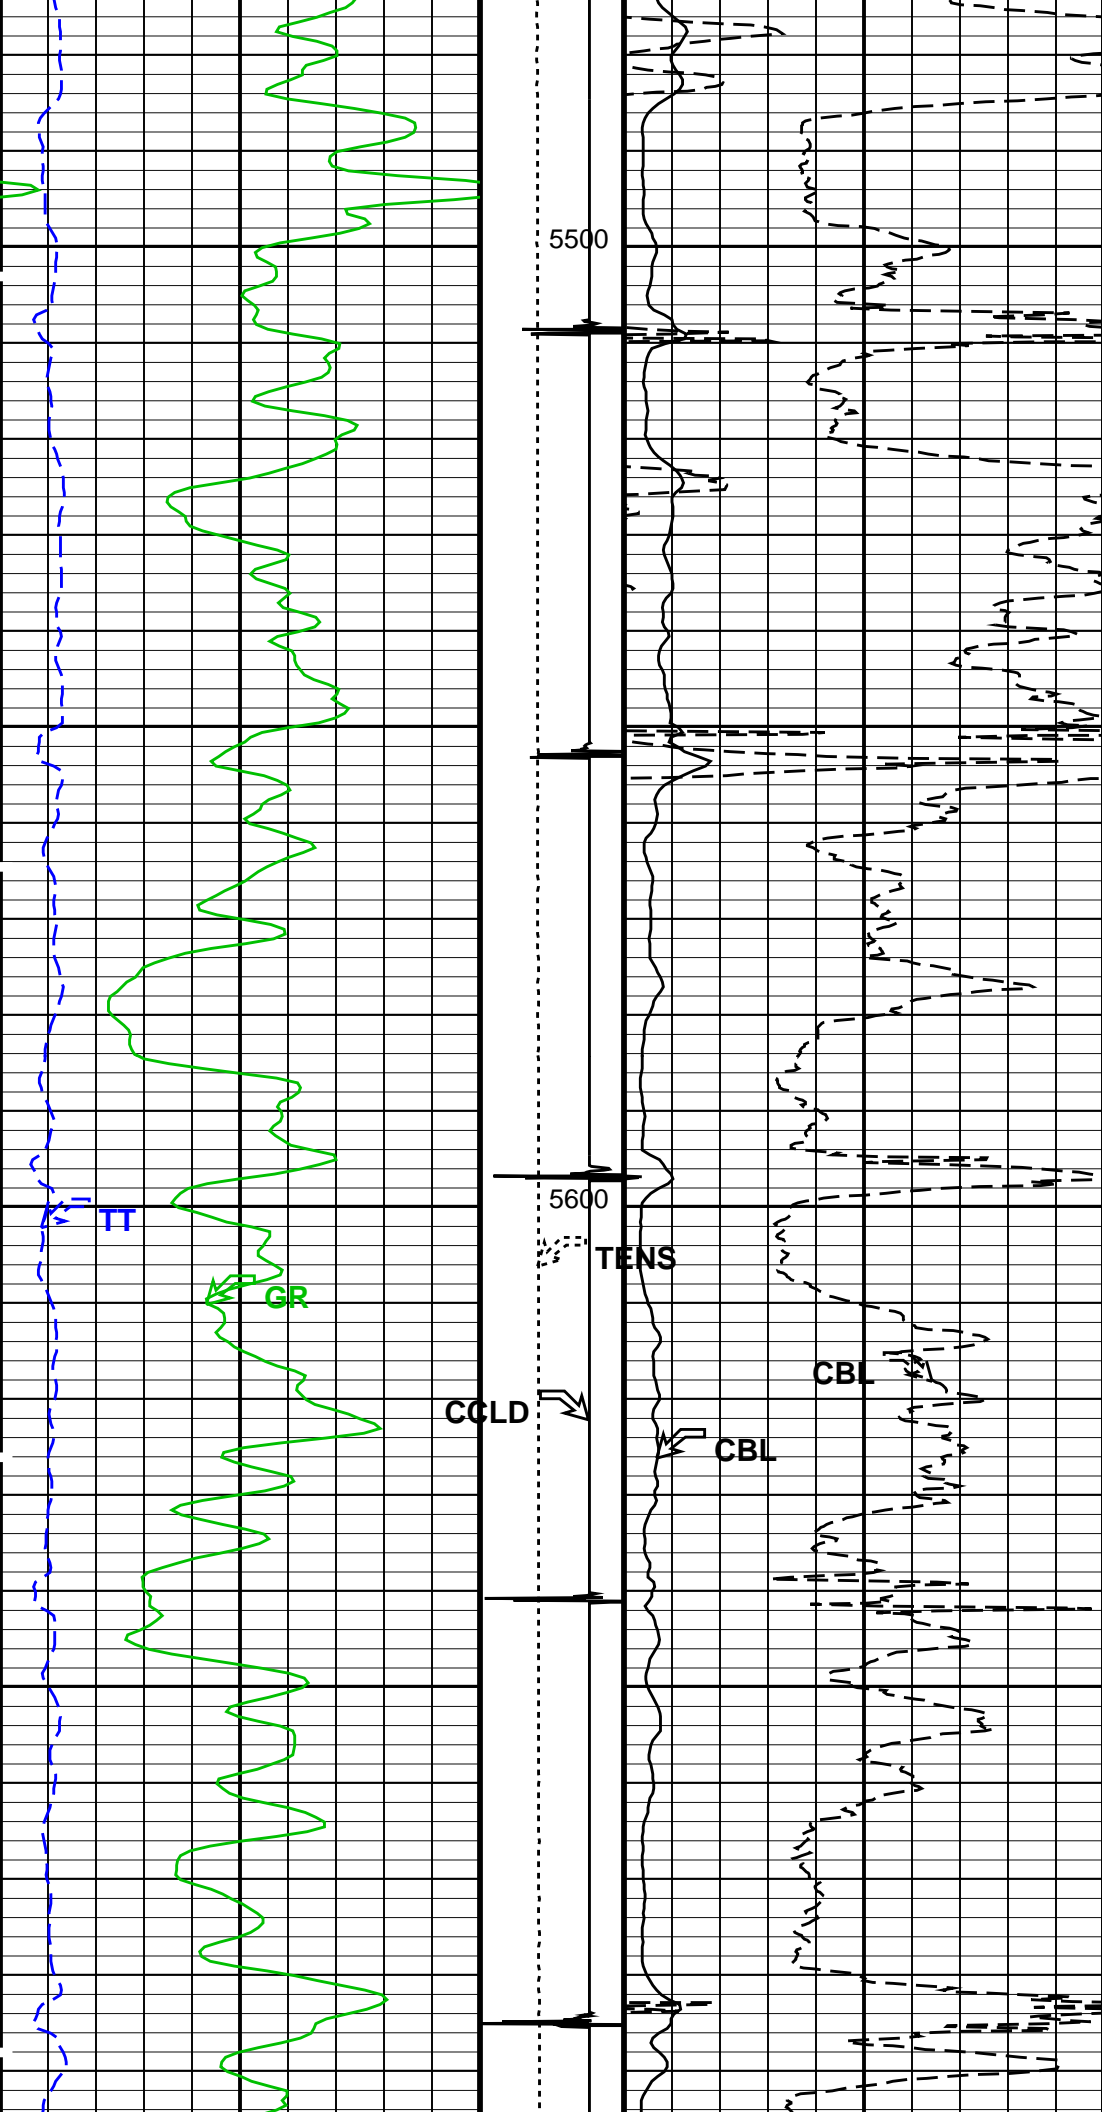


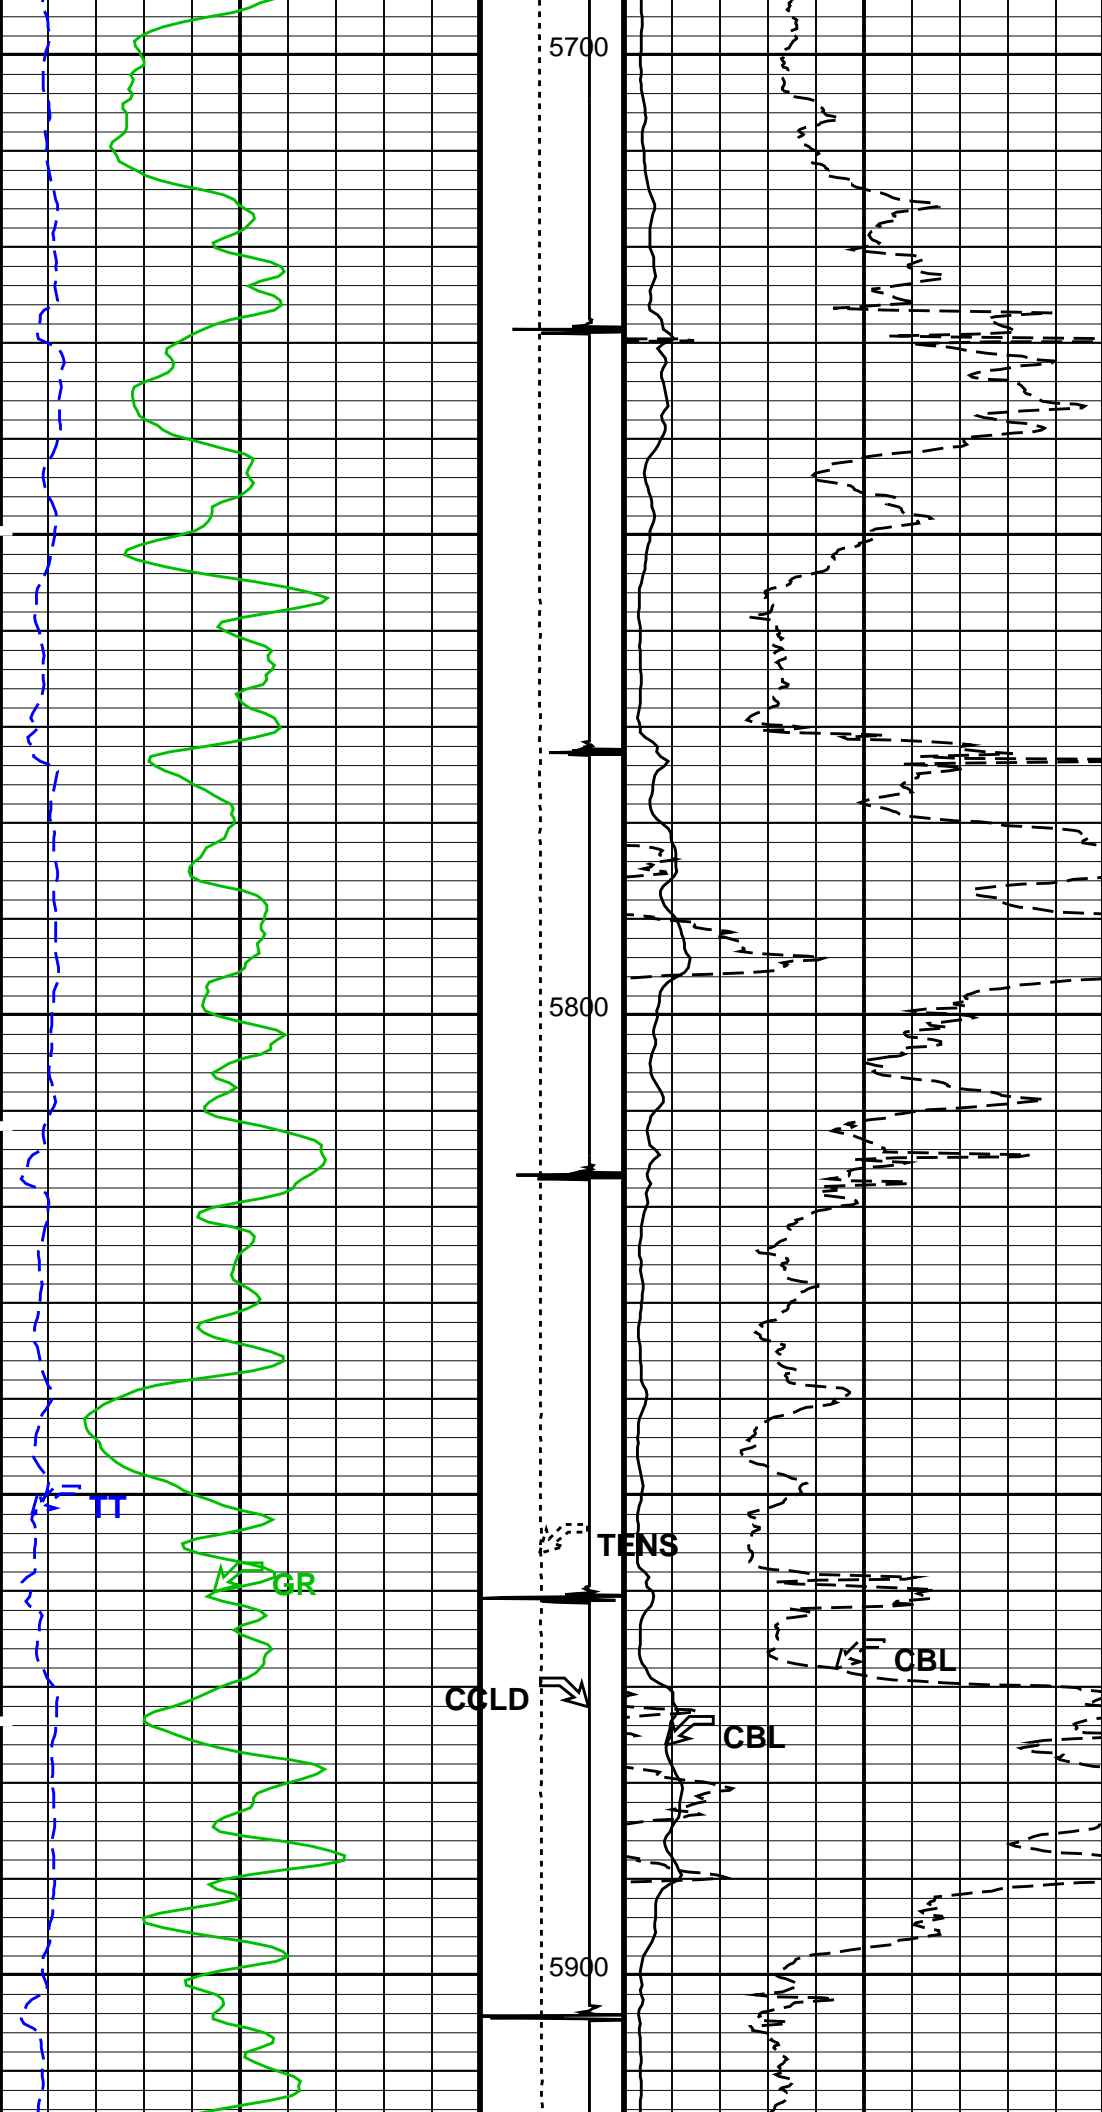




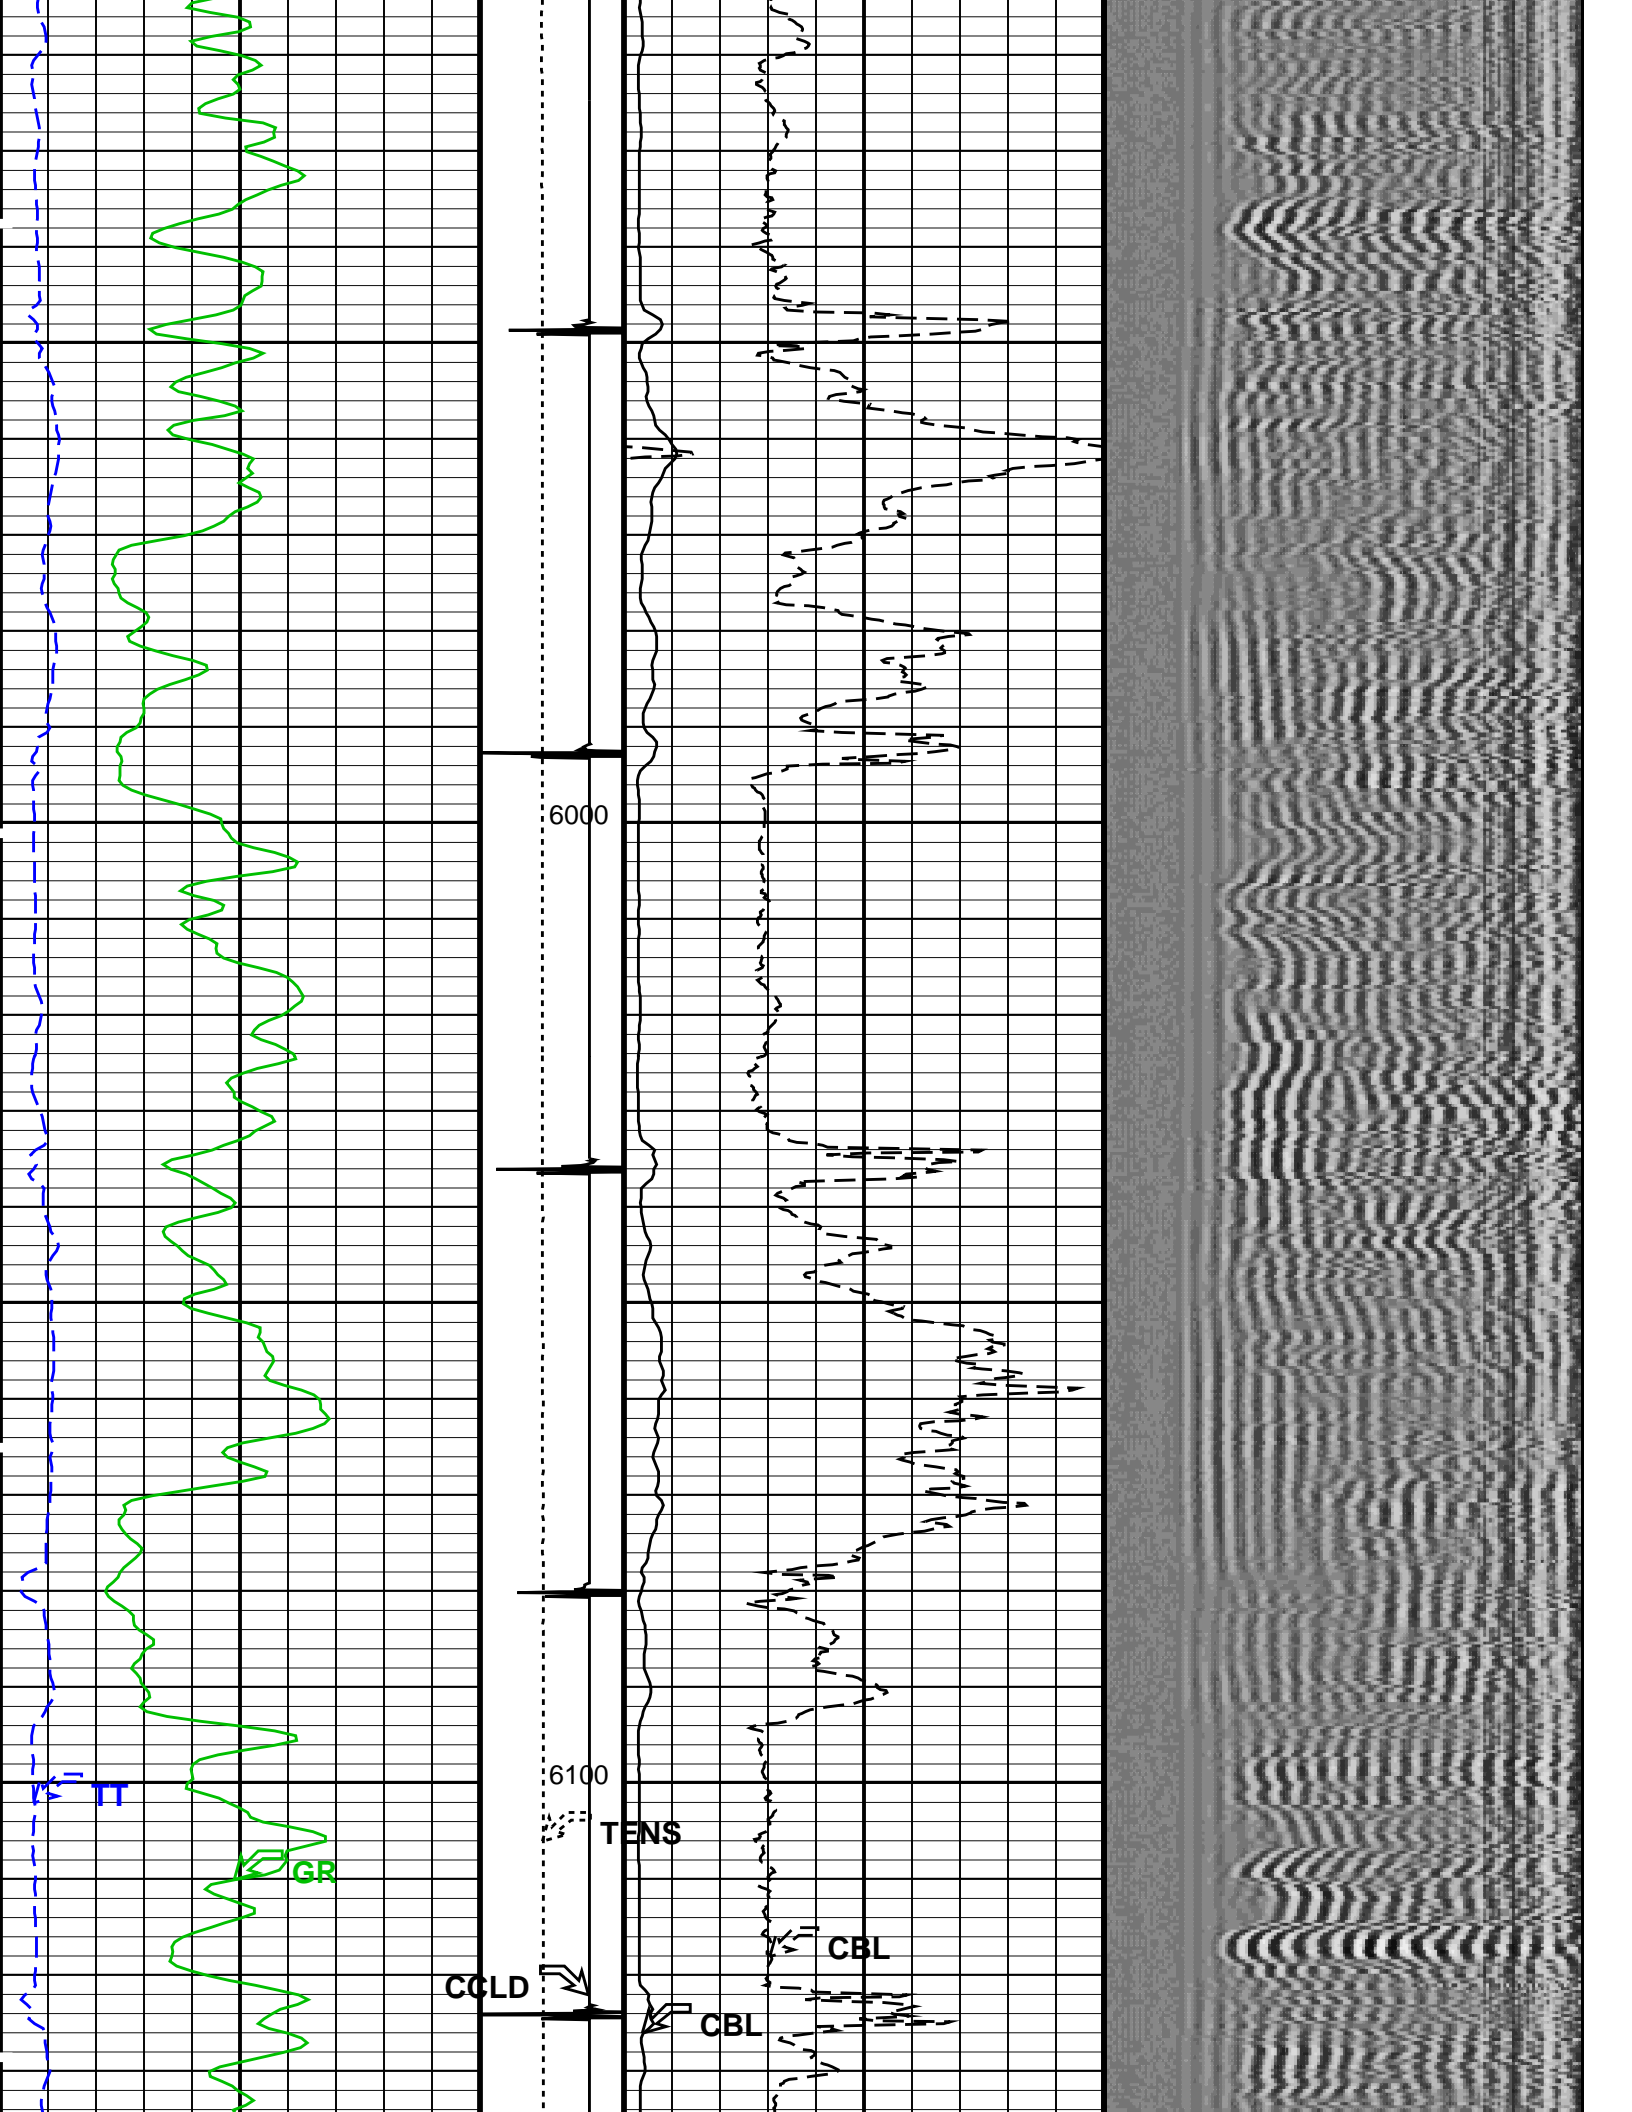


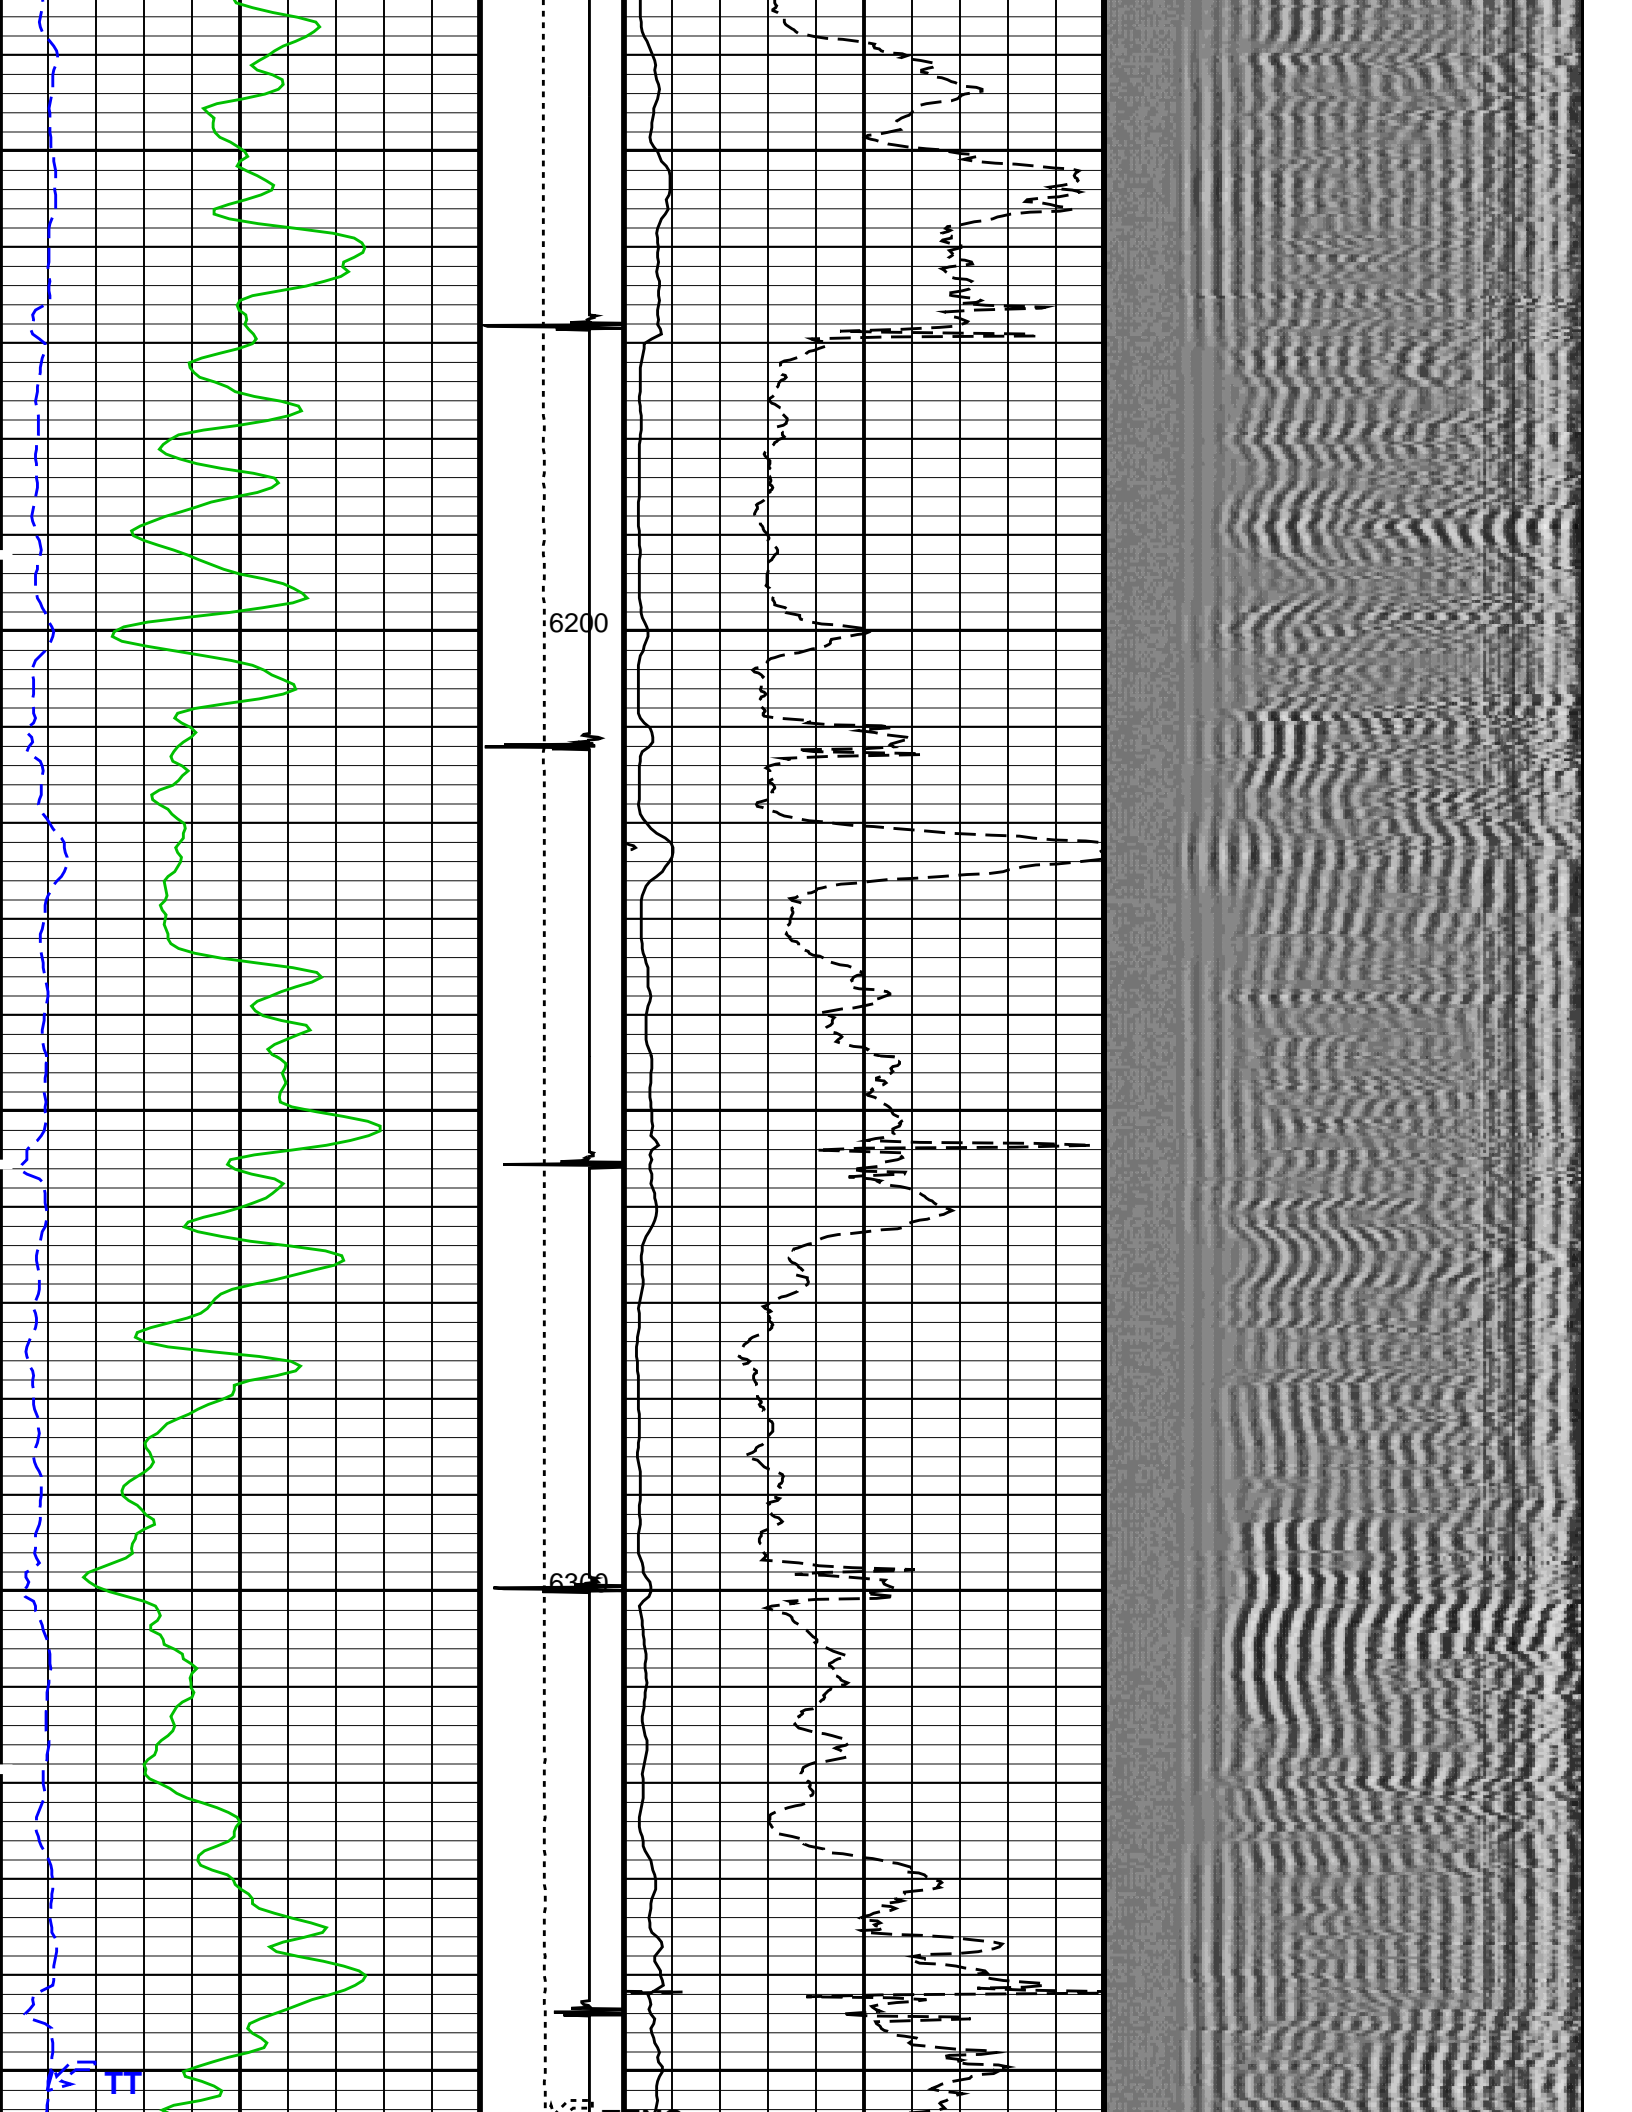

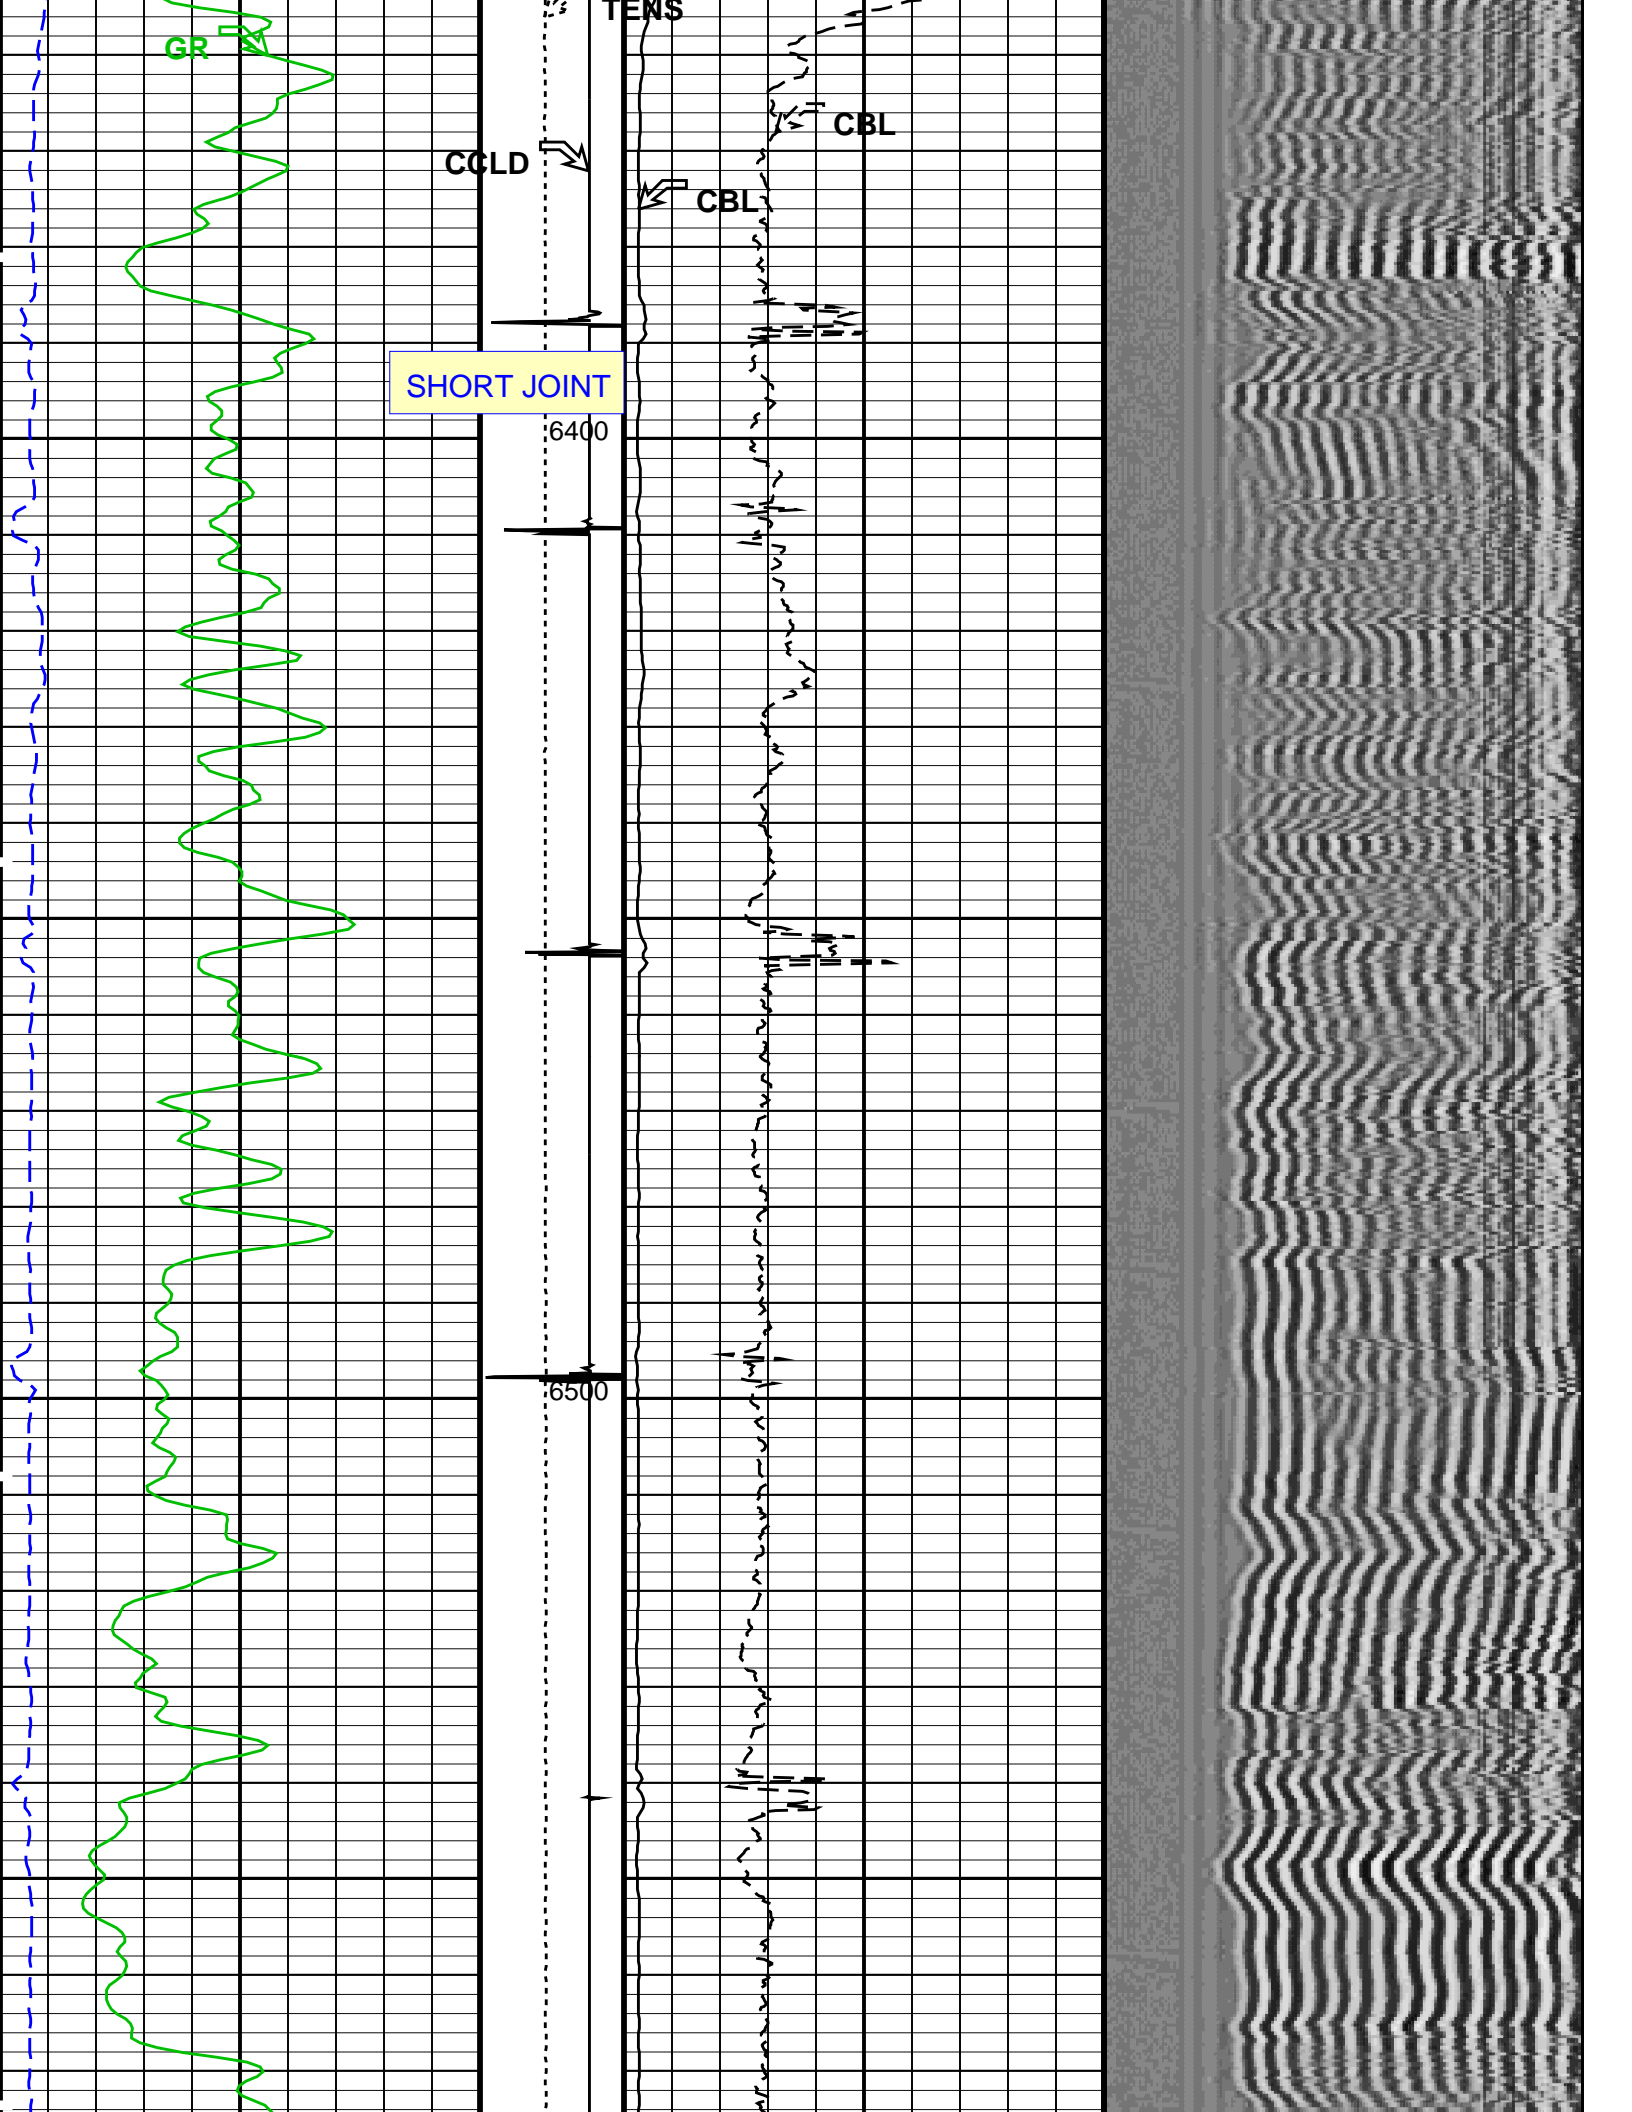


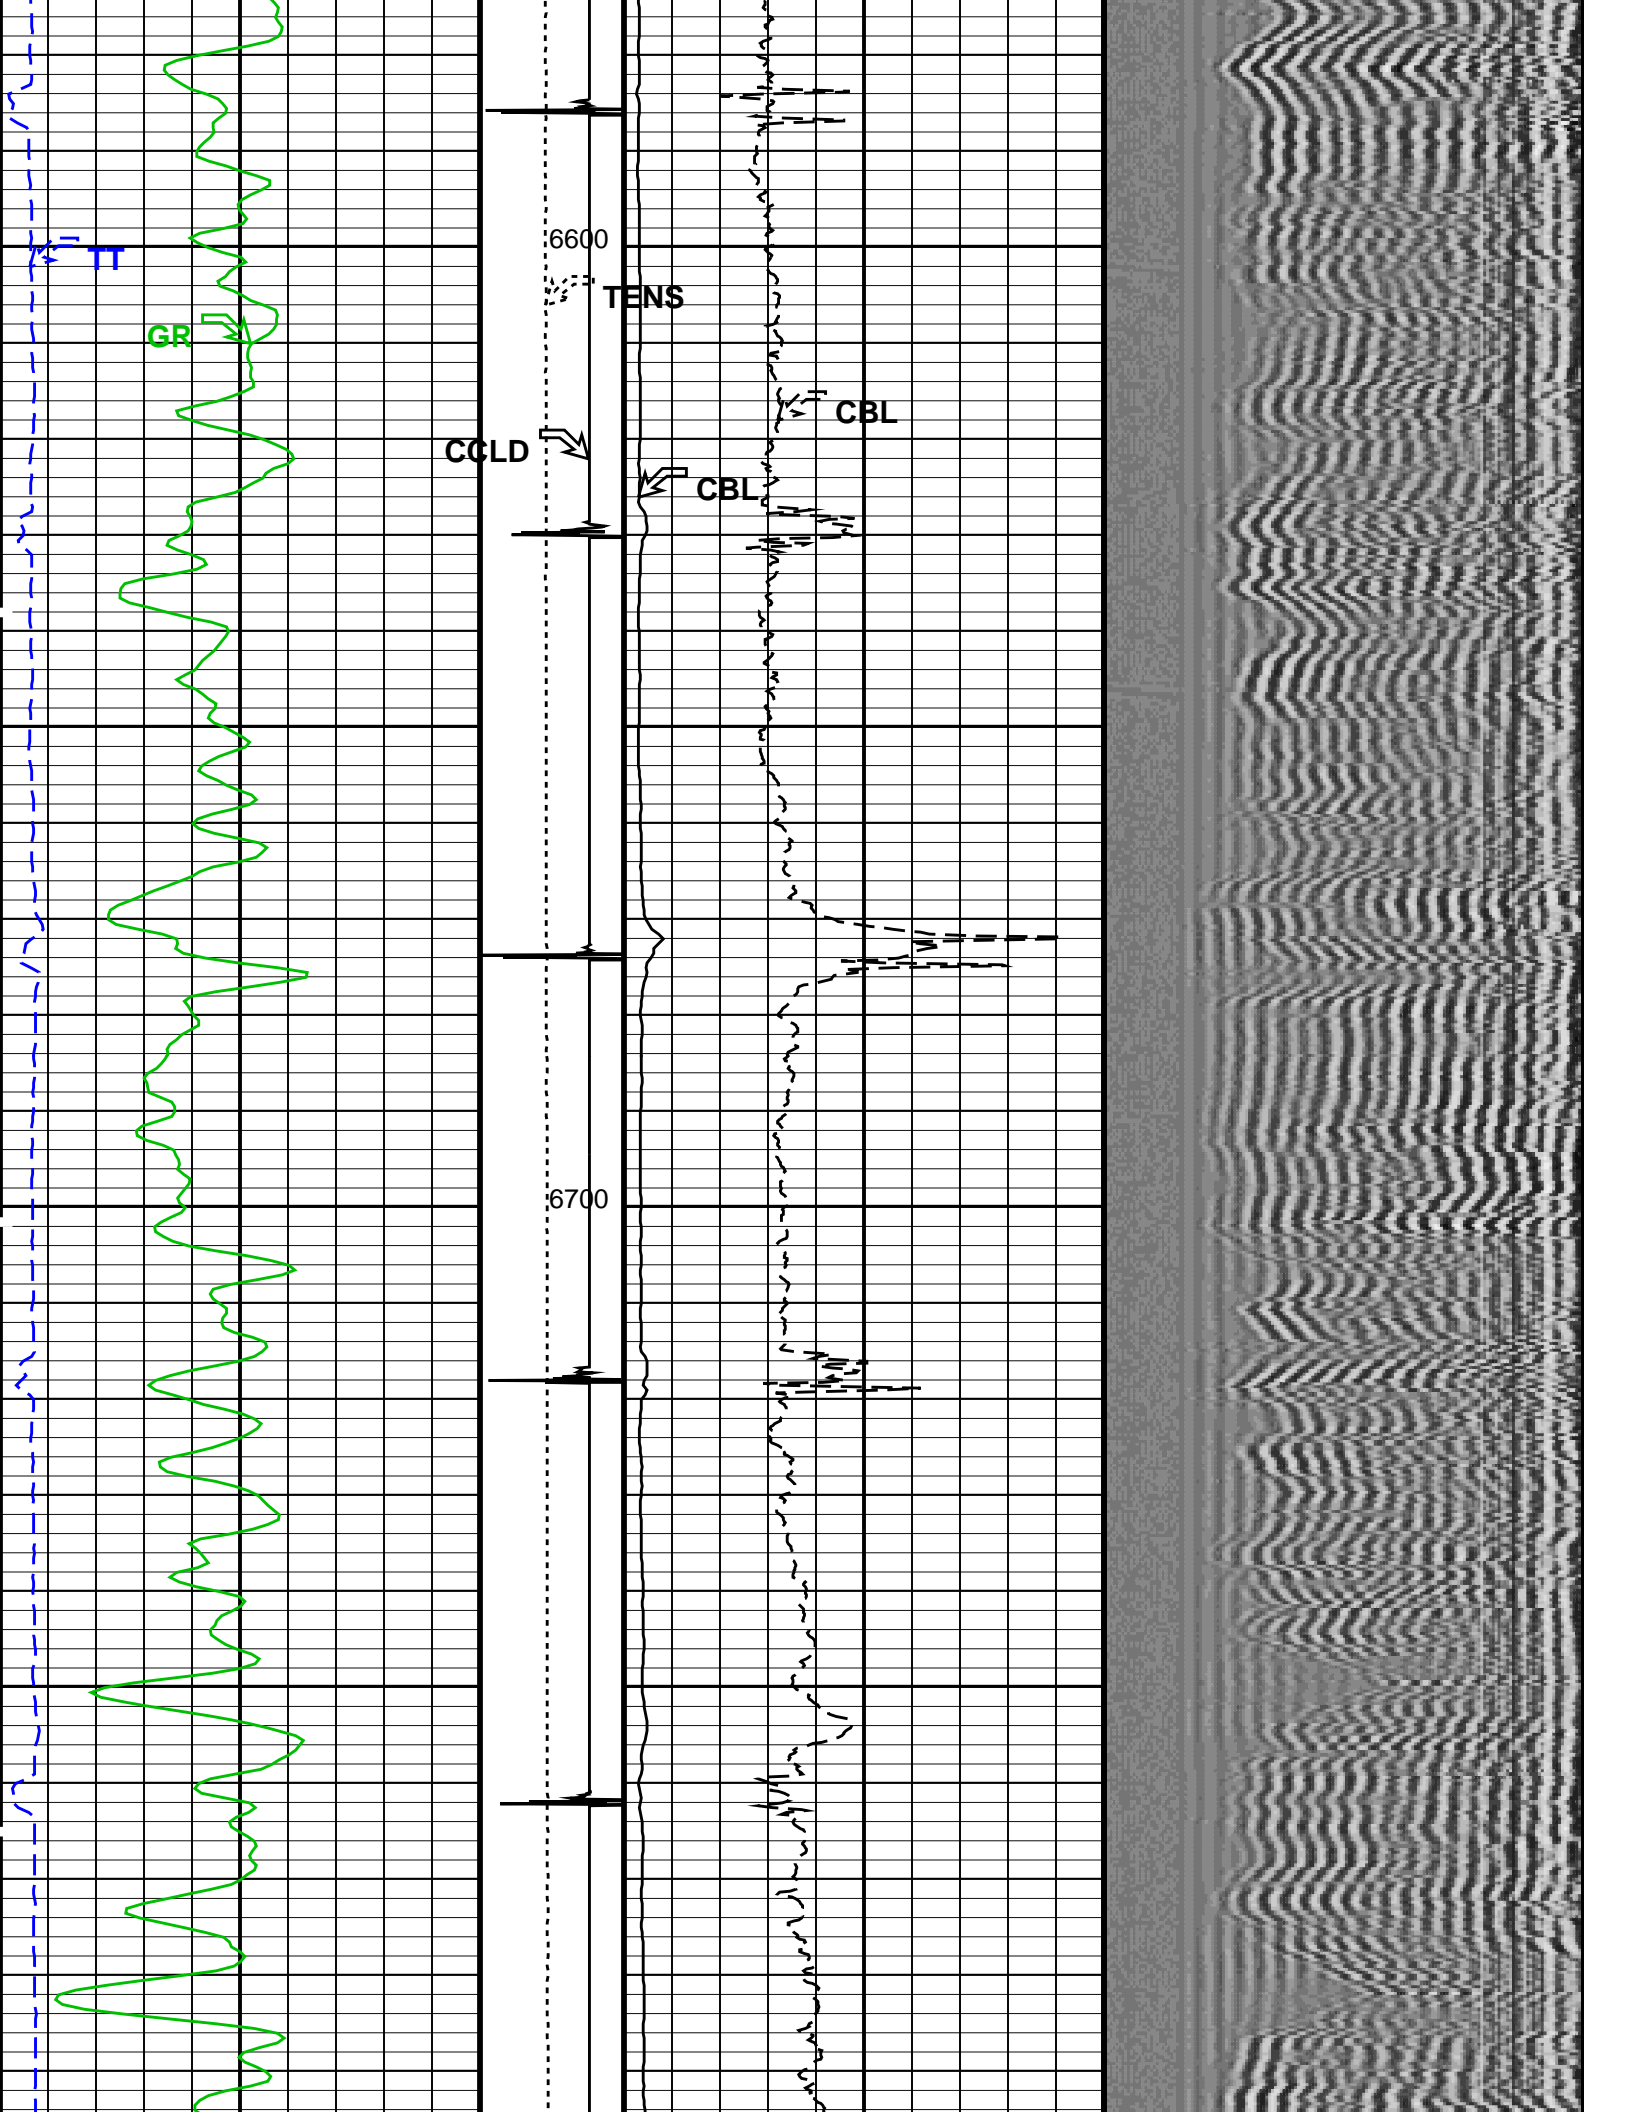





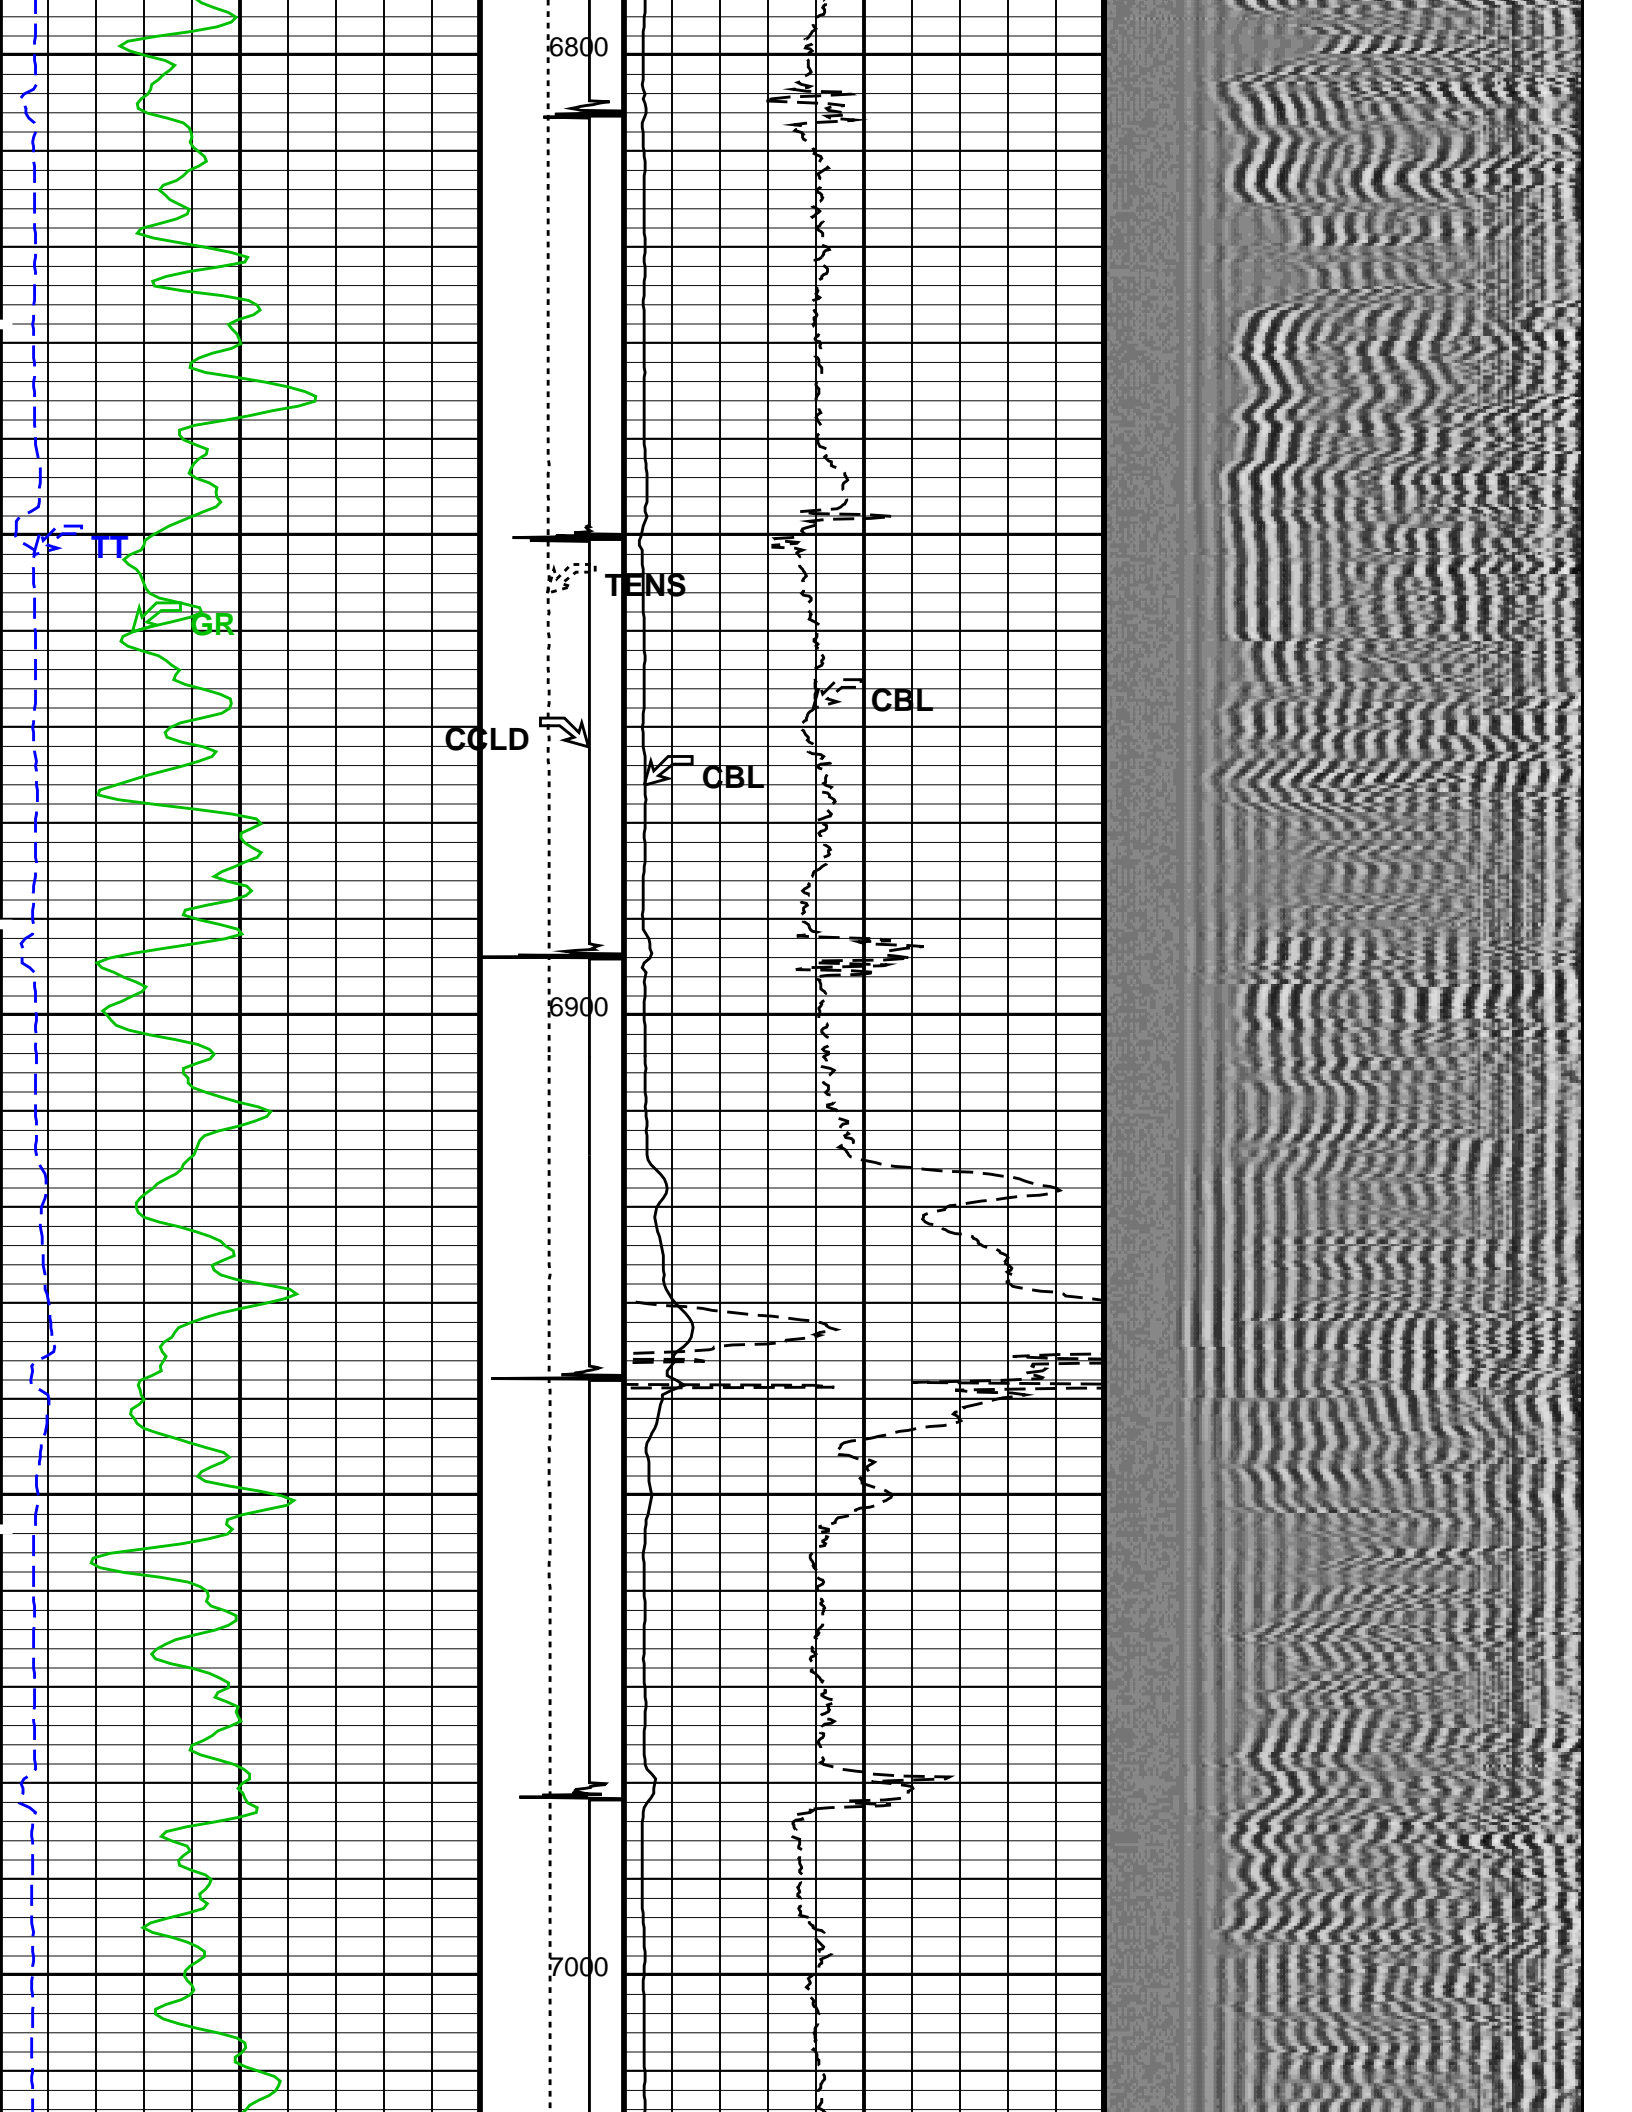




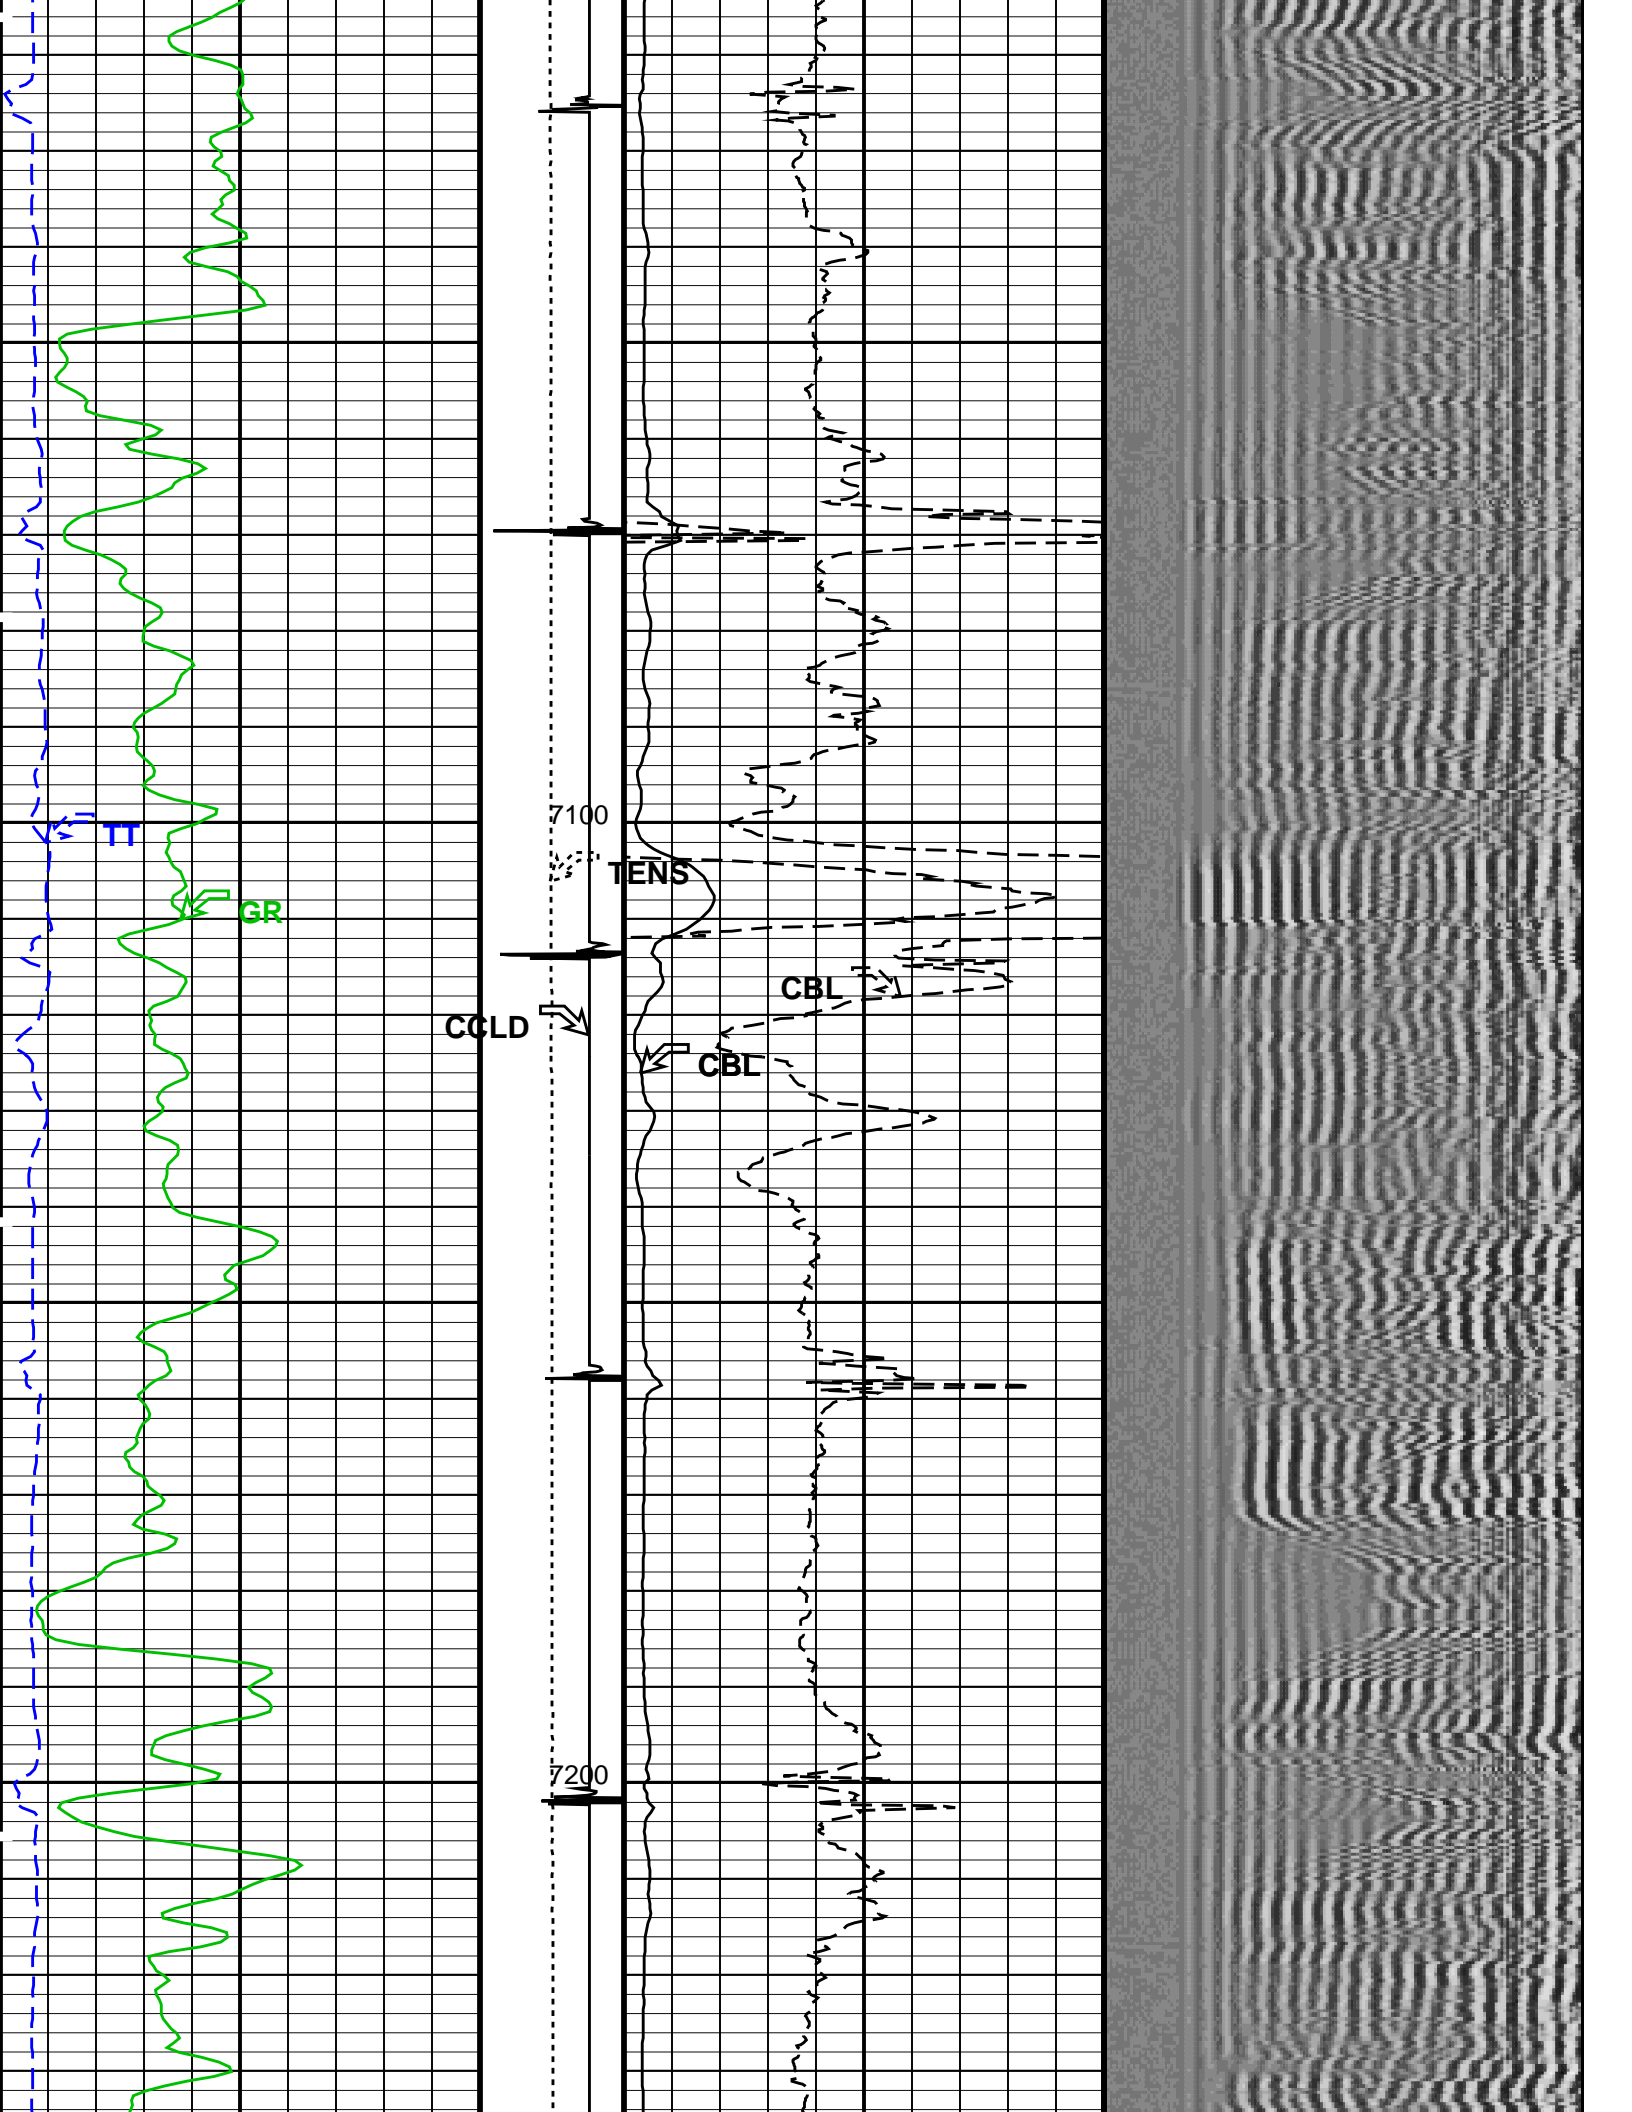

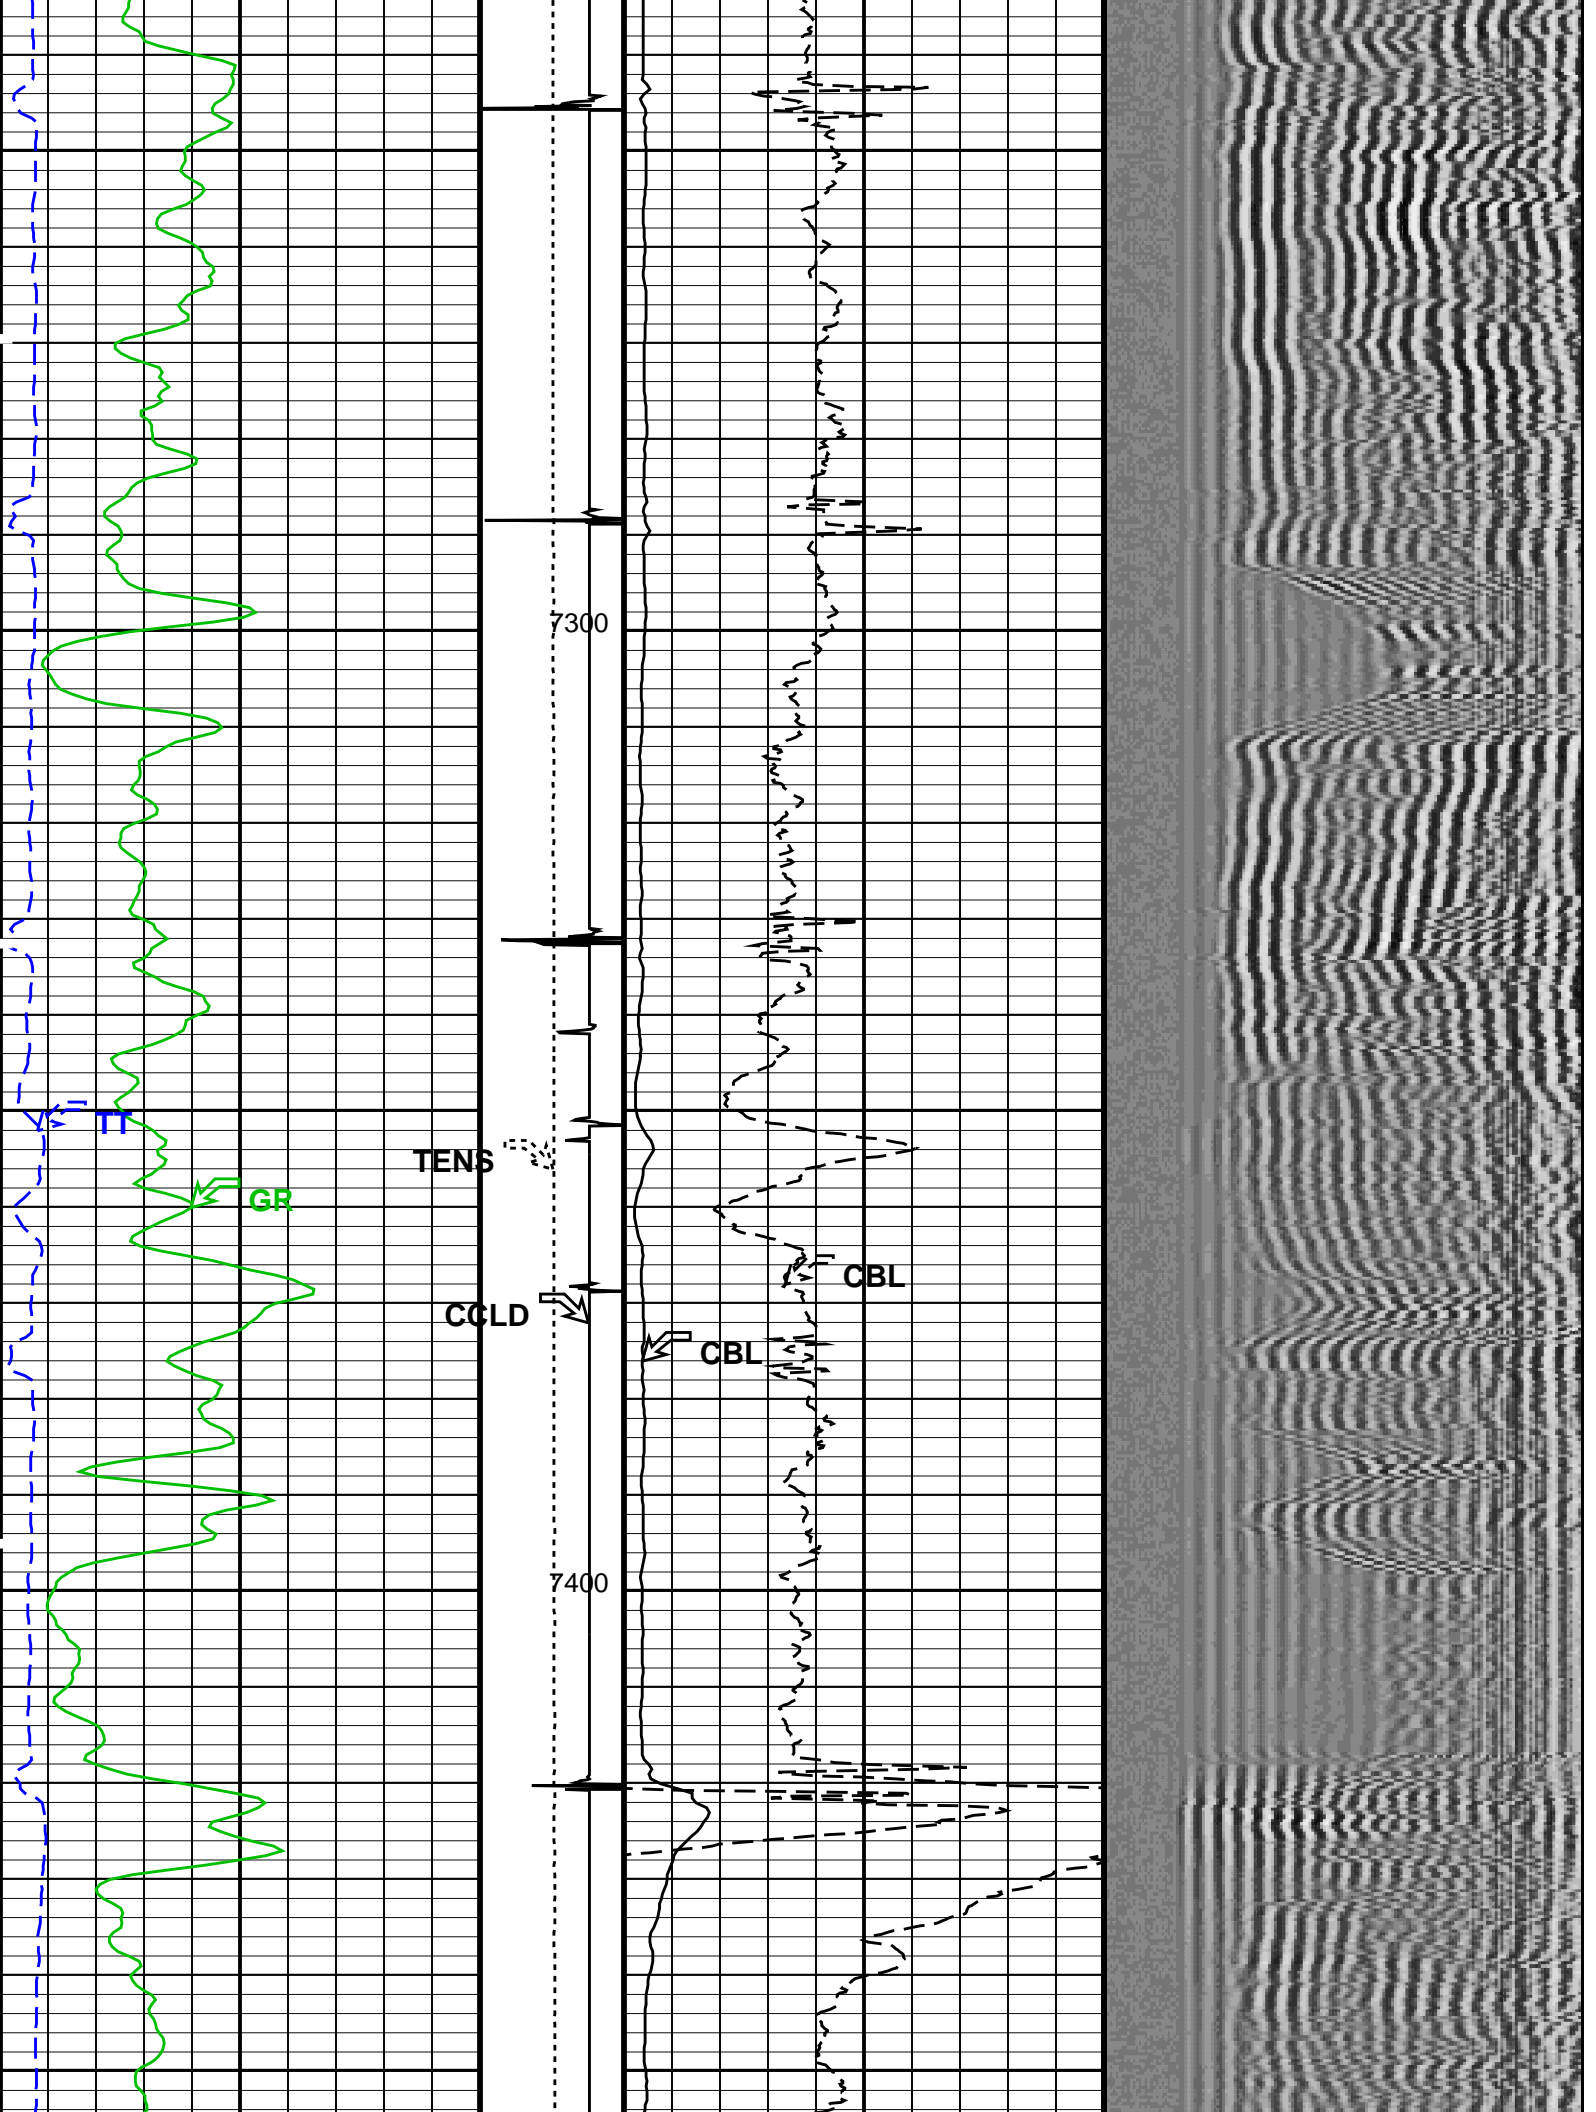

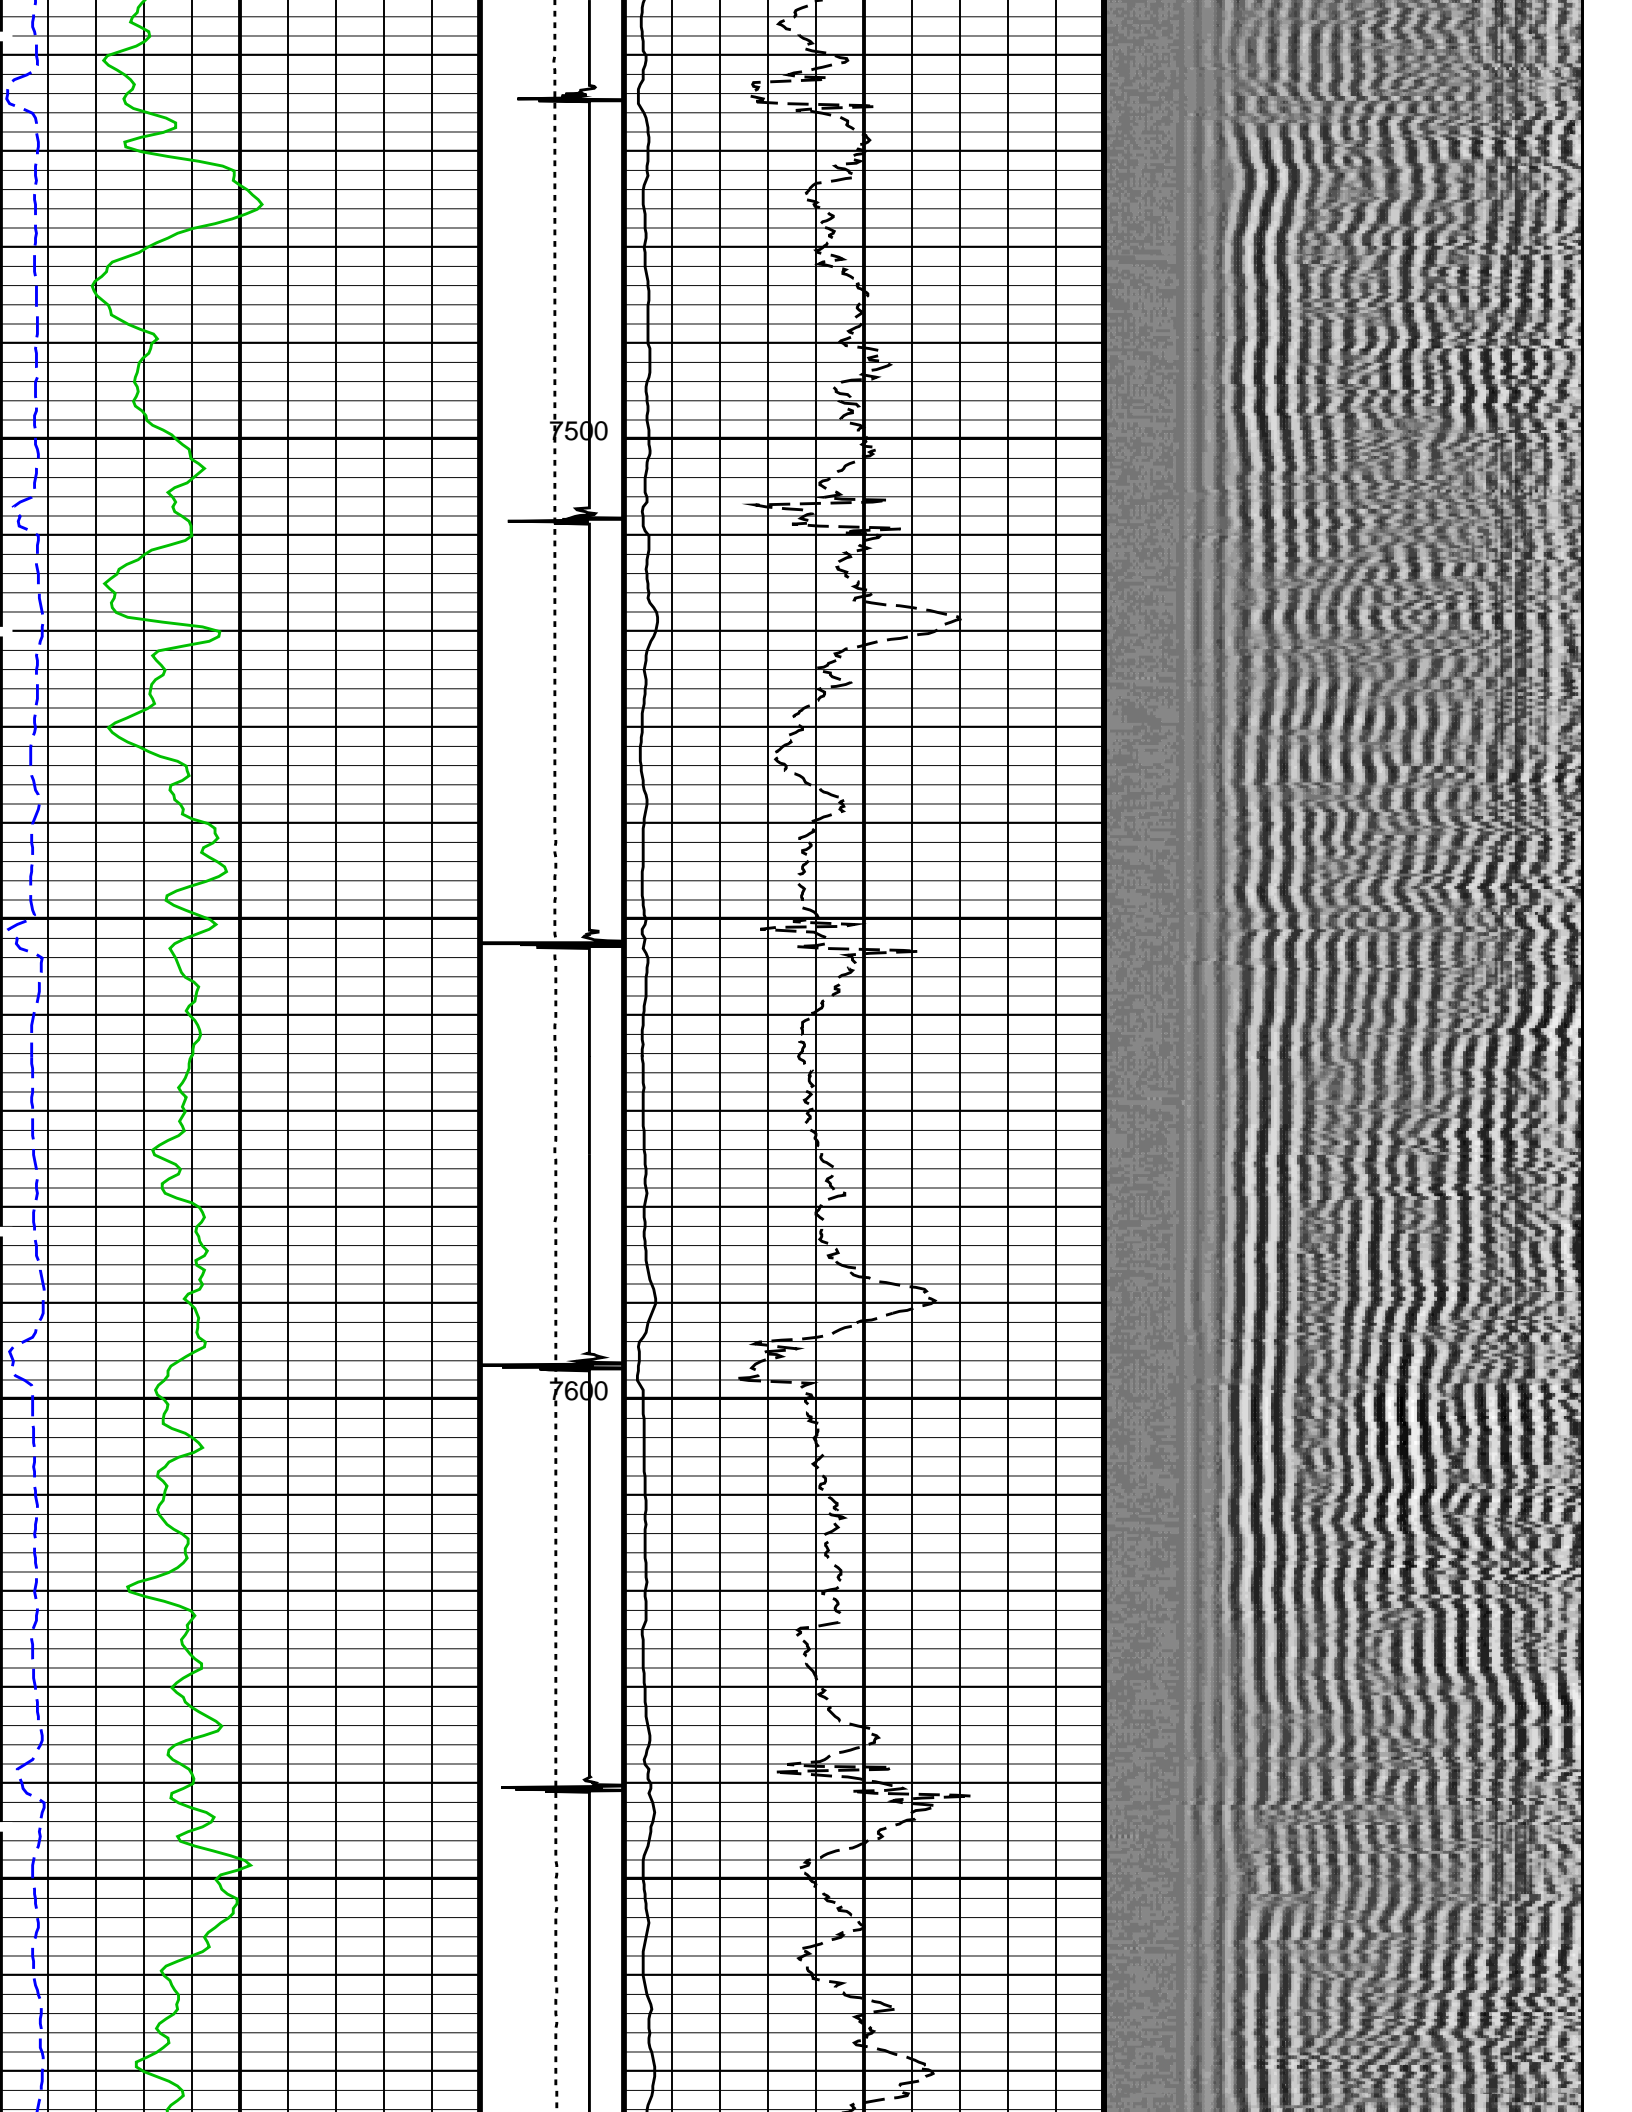

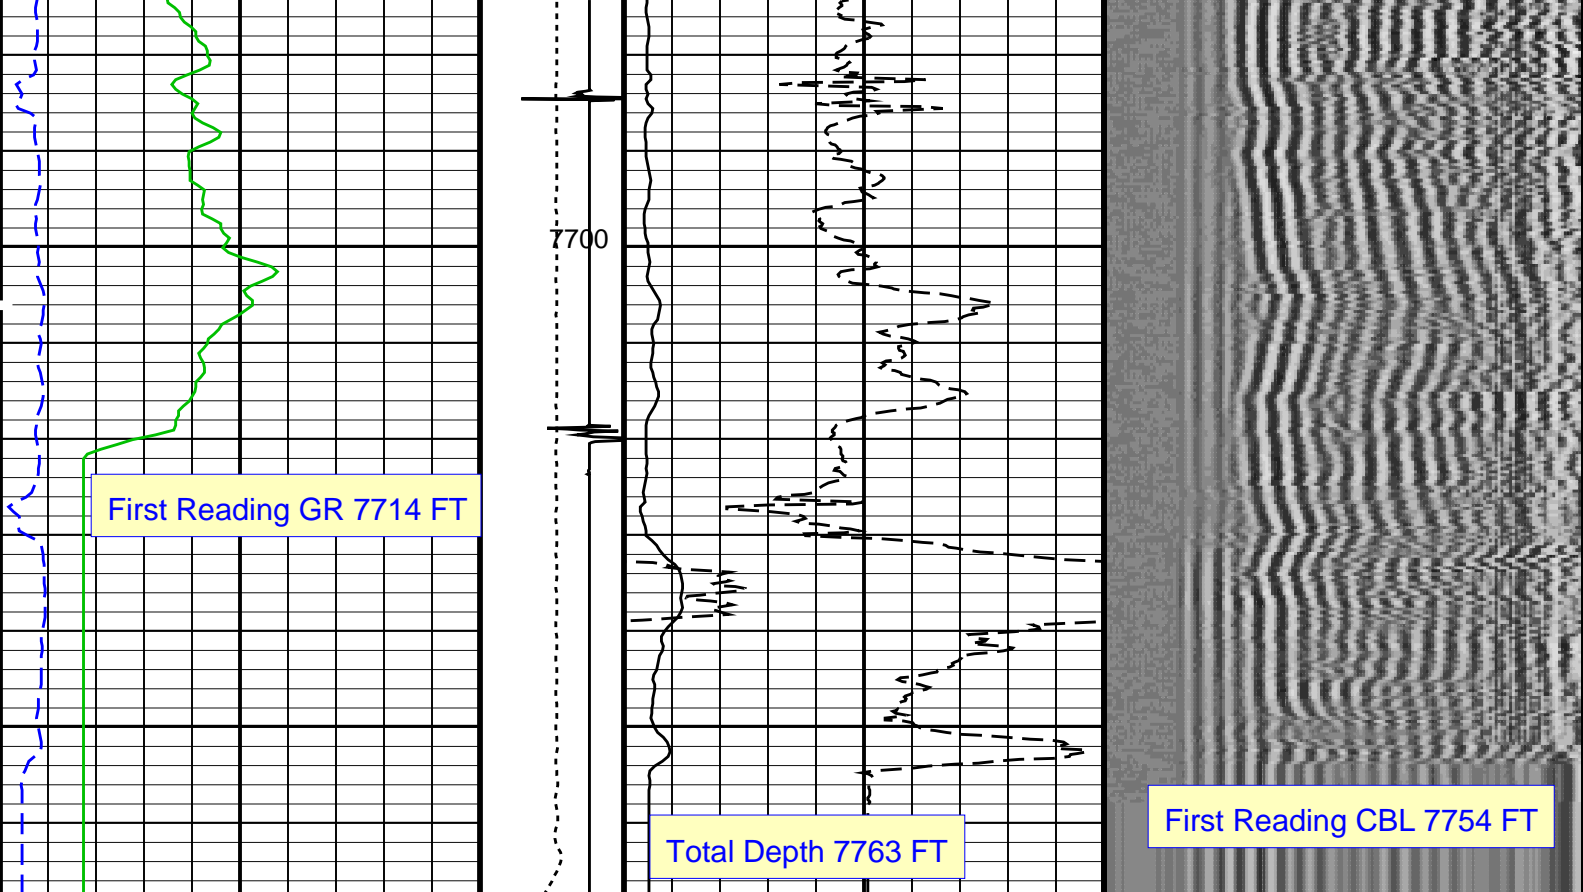

Gamma Ray (GR) (GAPI)	0	150	Tension (TENS) (LBF)	0	2000	CBL Amplitude (CBL) (MV)	0	100	Min	Amplitude	Max
Transit Time (TT) (US)	260	160	Discriminat ed CCL (CCLD)	3	-1	CBL Amplitude (CBL) (MV)	0	10	200	VDL VariableDensity (VDL) (US)	1200

#### PIP SUMMARY

Time Mark Every 60 S

Format: CBL\_VDL Vertical Scale: 5" per 100'

Graphics File Created: 29-Apr-2013 00:39

### OP System Version: 19C0-187

SCMT-CB SRPC-5214-H2-2012-OP1 RST-C SRPC-5214-H2-2012-OP1  
PSPT SRPC-5214-H2-2012-OP1

#### <<<SCMT Cement Evaluation Information Summary>>>

Sonde Serial Number	SCMS-CB 8303	Minimum Sonic Amplitude	0.579149 MV (100% Cement)
Current Casing Size	4.50000 IN		1.55185 MV (80% Cement)
Casing Weight	11.6000 LB/F	MAP Minimum Sonic Amplitude	4.32284 MV (100% Cement)
Expected CBL Amplitude in Free Pipe Section	80 MV		8.10244 MV (80% Cement)

#### Master Calibration (Normalization)

#### Before Calibration (Adjustment)

Date of Master Calibration	7-SEP-2012	CBL Adjustment Factor (CBAF)	0.900000
CBL Correction Factor	0.0756720	MAP Adjustment Factor (MPAF)	1.0
MAP 1 Correction Factor	0.136845		
MAP 2 Correction Factor	0.165126		
MAP 3 Correction Factor	0.125717		



MAP 4 Correction Factor	0.196395
MAP 5 Correction Factor	0.147692
MAP 6 Correction Factor	0.128887
MAP 7 Correction Factor	0.150775
MAP 8 Correction Factor	0.144577

## Parameters

DLIS Name	Description	Value	
SCMT-CB: Slim Cement Mapping Tool, 1-11/16 OD			
BILI	Bond Index Level for Zone Isolation	0.8	
CB3D	SCMT CBL 3 ft Peak Detection Mode	PEAK	
CB3G	SCMT CBL 3 ft Peak Detection T0_Delay and Noise Gate	224.559	US
CB3T	SCMT CBL 3 ft Fixed Threshold Level	20	MV
CB5D	SCMT CBL 5 ft Peak Detection Mode	PEAK	
CB5G	SCMT CBL 5 ft Peak Detection T0_Delay and Noise Gate	338.559	US
CB5T	SCMT CBL 5 ft Fixed Threshold Level	20	MV
CBLG	CBL Gate Width	45	US
CBRA	CBL LQC Reference Amplitude in Free Pipe	80	MV
CMCF	CBL Cement Type Compensation Factor	1	
CMTG	SCMT Slow Channel Multiplexer Mode	SCAN	
CMTM	SCMT Operating Mode	LOG	
CSCS	SCMT Slow Channel Index	VCC	
CTHI	Casing Thickness	0.255617	IN
DTF	Delta-T Fluid	189	US/F
FATT	Acoustic Attenuation due to Fluid	0	DB/F
FCF	CBL Fluid Compensation Factor	0.924277	
GOBO	Good Bond	1.55185	MV
MAPD	SCMT MAP Peak Detection Mode	PEAK	
MAPG	SCMT MAP Peak Detection T0_Delay and Noise Gate	167.559	US
MAPT	SCMT MAP Fixed Threshold Level	30	MV
MATT	Maximum Attenuation	16.5449	DB/F
MCCF	MAP Cement Type Compensation Factor	1	
MCI	Minimum Cemented Interval for Isolation	1.25	FT
MMSA	MAP Minimum Sonic Amplitude	4.32284	MV
MSA	Minimum Sonic Amplitude	0.579149	MV
PEDE	Peak Detection On/Off Switch in Playback	OFF	
VDLG	VDL Manual Gain	5	
ZCMT	Acoustic Impedance of Cement	6.8	MRAY
System and Miscellaneous			
CWEI	Casing Weight	11.60	LB/F
DFD	Drilling Fluid Density	8.40	LB/G
DO	Depth Offset for Playback	2.0	FT
PP	Playback Processing	RECOMPUTE	
TD	Total Depth	7763	FT

## Input DLIS Files

DEFAULT	SCMT_RST_PSP_103LUP	FN:101	PRODUCER	28-Apr-2013 22:30	7765.5 FT	16.0 FT
---------	---------------------	--------	----------	-------------------	-----------	---------

## Output DLIS Files

DEFAULT	SCMT_RST_PSP_106PUP	FN:104	PRODUCER	29-Apr-2013 00:39
---------	---------------------	--------	----------	-------------------

**Schlumberger**

**REPEAT ANALYSIS CBL VDL**

MAXIS Field Log

## Input DLIS Files

DEFAULT	SCMT_RST_PSP_101LUP	FN:99	PRODUCER	28-Apr-2013 22:09	5527.5 FT	5213.5 FT
DEFAULT	SCMT_RST_PSP_106PUP	FN:104	PRODUCER	29-Apr-2013 00:39	7767.5 FT	-26.5 FT

# Output DLIS Files


DEFAULT SCMT\_RST\_PSP\_107PUP FN:105 PRODUCER 29-Apr-2013 00:46 5528.5 FT 5170.0 FT

OP System Version: 19C0-187


SCMT-CB SRPC-5214-H2-2012-OP1 RST-C SRPC-5214-H2-2012-OP1  
PSPT SRPC-5214-H2-2012-OP1


## PIP SUMMARY

Time Mark Every 60 S

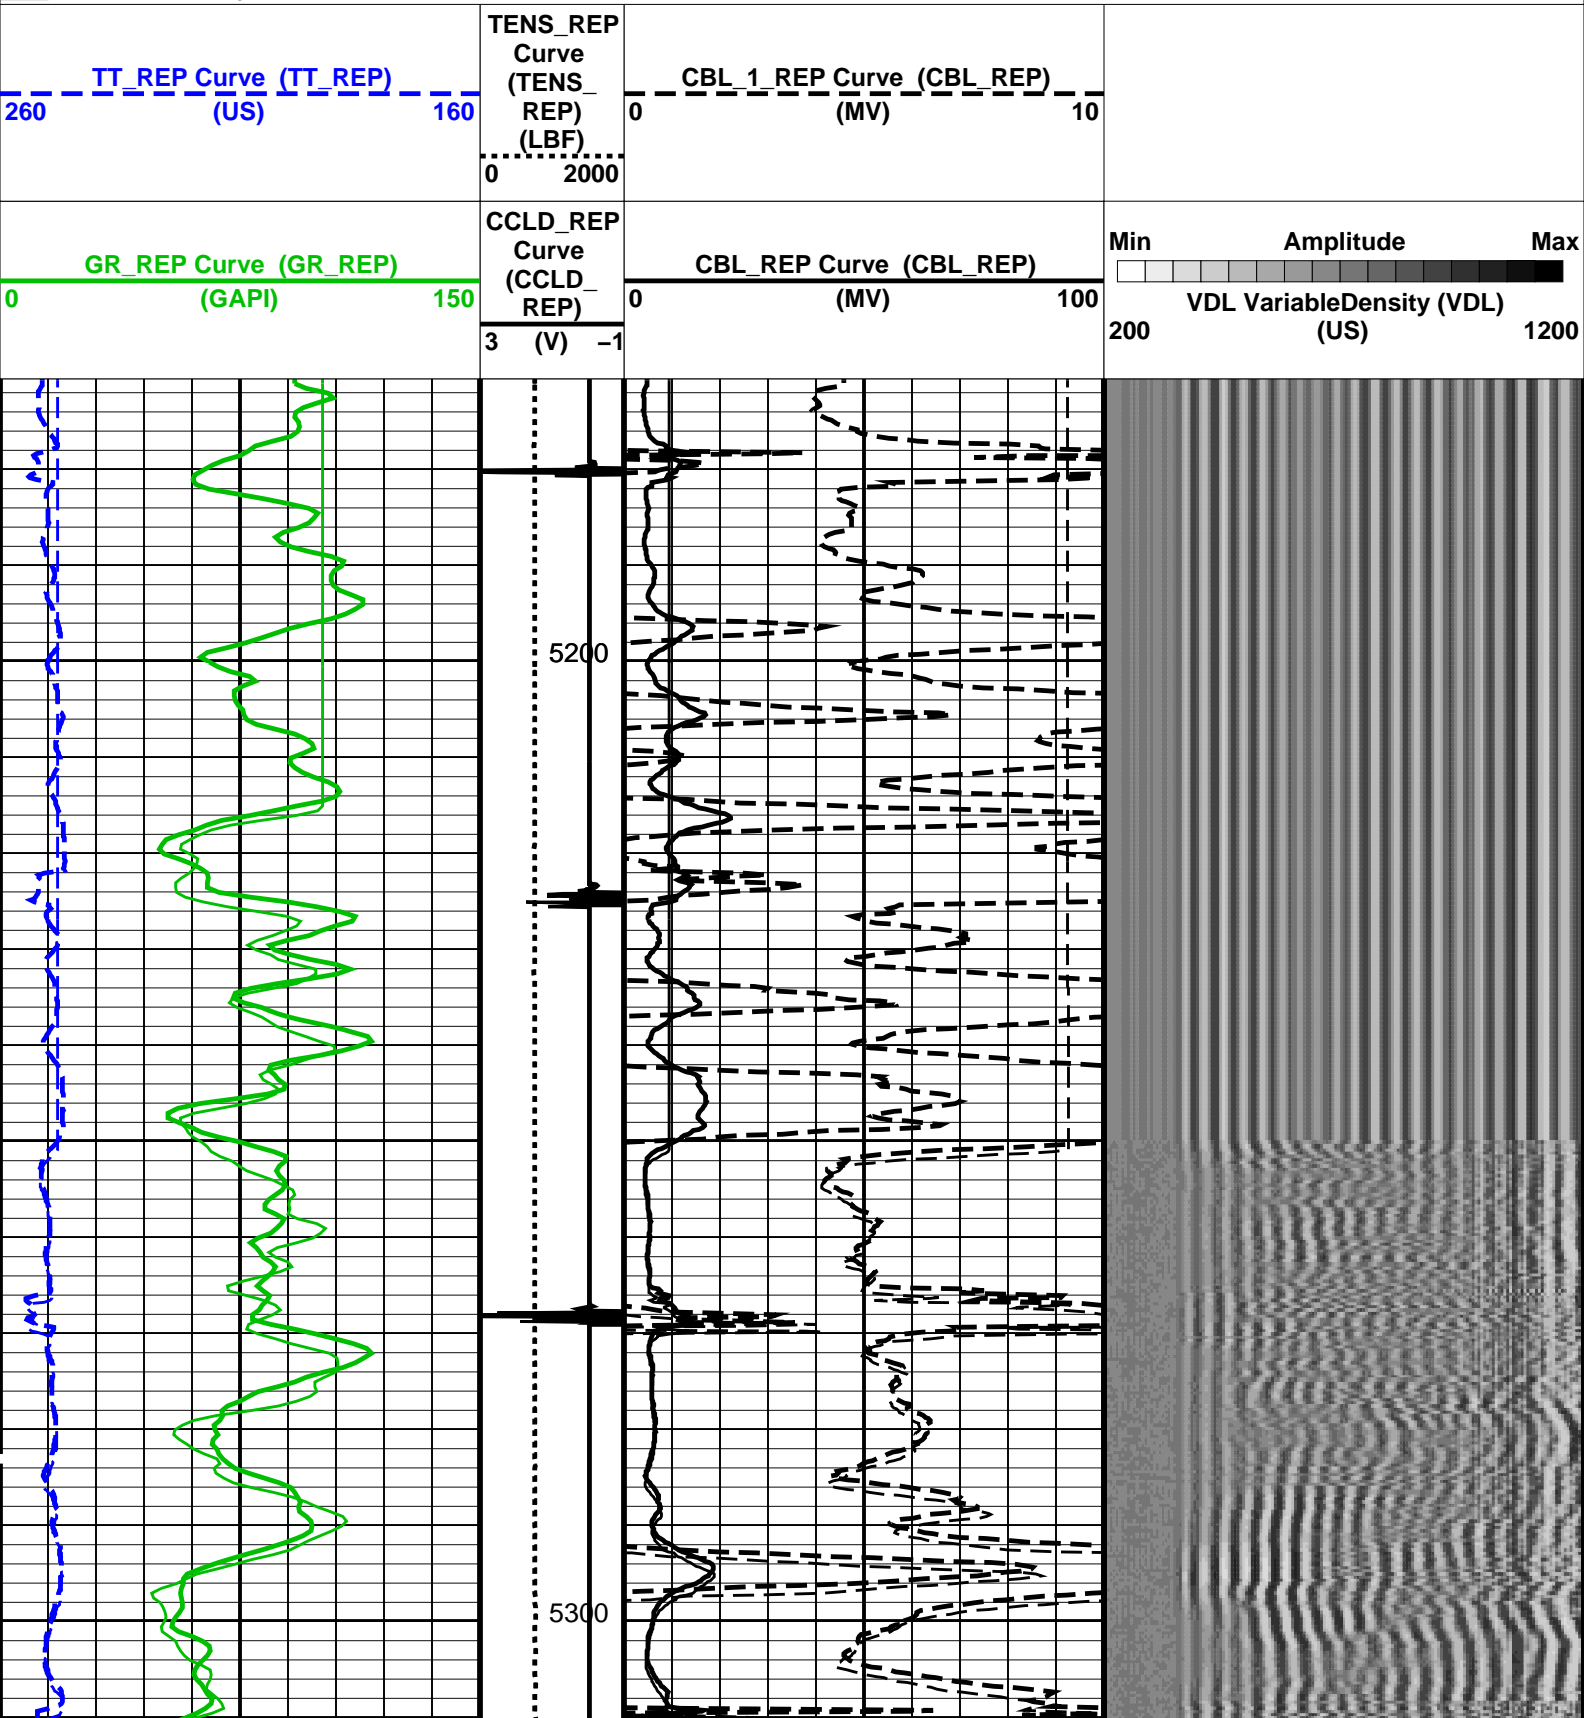



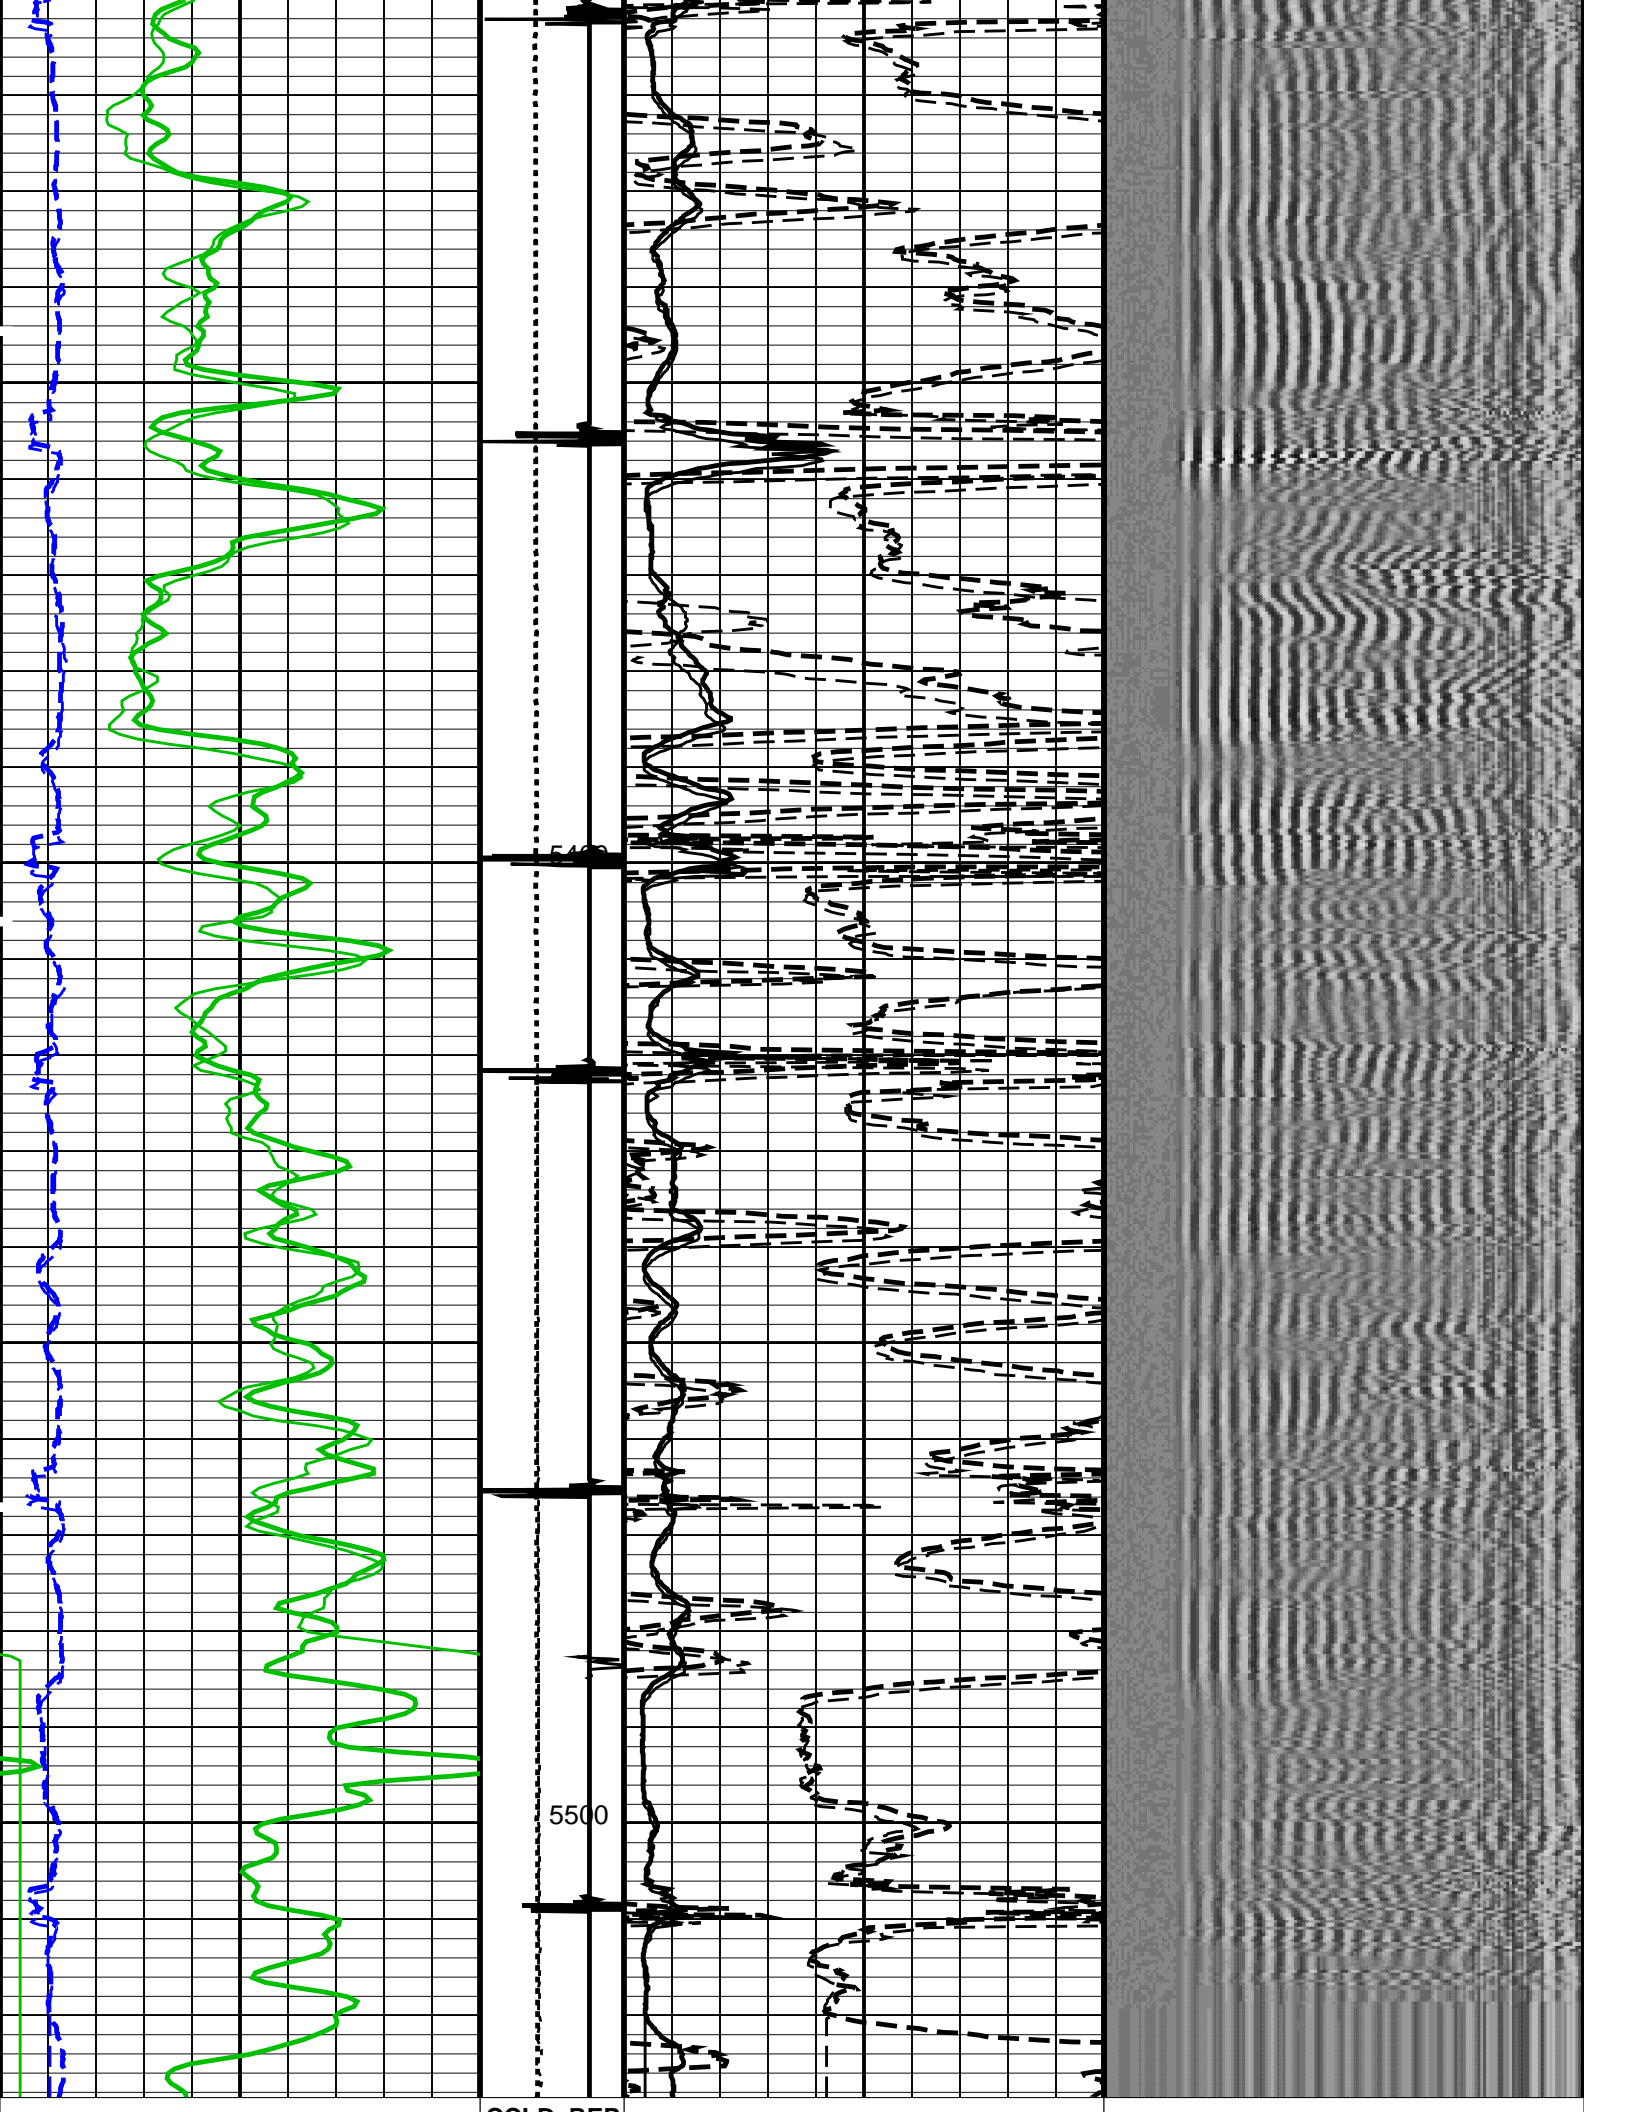

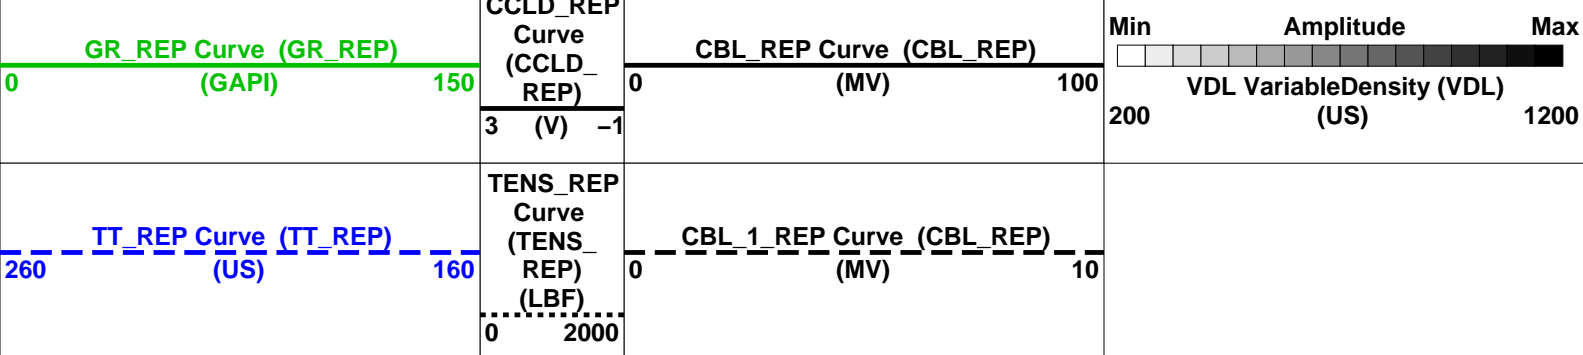

PIP SUMMARY

Time Mark Every 60 S

Format: CBL\_VDL\_REP    Vertical Scale: 5" per 100'    Graphics File Created: 29-Apr-2013 00:46

OP System Version: 19C0-187

SCMT-CB                      SRPC-5214-H2-2012-OP1!                      RST-C                      SRPC-5214-H2-2012-OP1!  
PSPT                      SRPC-5214-H2-2012-OP1!

<<<SCMT Cement Evaluation Information Summary>>>			
Sonde Serial Number	SCMS-CB 8303		
Current Casing Size	4.50000 IN		
Casing Weight	11.6000 LB/F		
Expected CBL Amplitude in Free Pipe Section	80 MV	Minimum Sonic Amplitude	0.579149 MV (100% Cement) 1.55185 MV (80% Cement)
		MAP Minimum Sonic Amplitude	4.32284 MV (100% Cement) 8.10244 MV (80% Cement)
Master Calibration (Normalization)		Before Calibration (Adjustment)	
Date of Master Calibration	7-SEP-2012		
CBL Correction Factor	0.0756720	CBL Adjustment Factor (CBAF)	0.900000
MAP 1 Correction Factor	0.136845	MAP Adjustment Factor (MPAF)	1.0
MAP 2 Correction Factor	0.165126		
MAP 3 Correction Factor	0.125717		
MAP 4 Correction Factor	0.196395		
MAP 5 Correction Factor	0.147692		
MAP 6 Correction Factor	0.128887		
MAP 7 Correction Factor	0.150775		
MAP 8 Correction Factor	0.144577		

Parameters			
DLIS Name	Description	Value	
SCMT–CB: Slim Cement Mapping Tool, 1–11/16 OD			
BILI	Bond Index Level for Zone Isolation	0.8	
CB3D	SCMT CBL 3 ft Peak Detection Mode	PEAK	
CB3G	SCMT CBL 3 ft Peak Detection T0_Delay and Noise Gate	224.559	US
CB3T	SCMT CBL 3 ft Fixed Threshold Level	20	MV
CB5D	SCMT CBL 5 ft Peak Detection Mode	PEAK	
CB5G	SCMT CBL 5 ft Peak Detection T0_Delay and Noise Gate	338.559	US
CB5T	SCMT CBL 5 ft Fixed Threshold Level	20	MV
CBLG	CBL Gate Width	45	US
CBRA	CBL LQC Reference Amplitude in Free Pipe	80	MV
CMCF	CBL Cement Type Compensation Factor	1	
CMTC	SCMT Slow Channel Multiplexer Mode	SCAN	
CMTM	SCMT Operating Mode	LOG	
CSCS	SCMT Slow Channel Index	VCC	
CTHI	Casing Thickness	0.255617	IN
DTF	Delta–T Fluid	189	US/F
FATT	Acoustic Attenuation due to Fluid	0	DB/F
FCF	CBL Fluid Compensation Factor	0.924277	
GOBO	Good Bond	1.55185	MV

MAPD	SCMT MAP Peak Detection Mode	PEAK	
MAPG	SCMT MAP Peak Detection T0_Delay and Noise Gate	167.559	US
MAPT	SCMT MAP Fixed Threshold Level	30	MV
MATT	Maximum Attenuation	16.5449	DB/F
MCCF	MAP Cement Type Compensation Factor	1	
MCI	Minimum Cemented Interval for Isolation	1.25	FT
MMSA	MAP Minimum Sonic Amplitude	4.32284	MV
MSA	Minimum Sonic Amplitude	0.579149	MV
PEDE	Peak Detection On/Off Switch in Playback	OFF	
VDLG	VDL Manual Gain	5	
ZCMT	Acoustic Impedance of Cement	6.8	MRAY
System and Miscellaneous			
CWEI	Casing Weight	11.60	LB/F
DFD	Drilling Fluid Density	8.40	LB/G
DO	Depth Offset for Playback	1.0	FT
DORL	Depth Offset for Repeat Analysis	0.0	FT
PP	Playback Processing	RECOMPUTE	
TD	Total Depth	7763	FT

### Input DLIS Files

DEFAULT	SCMT_RST_PSP_101LUP	FN:99	PRODUCER	28-Apr-2013 22:09	5527.5 FT	5213.5 FT
DEFAULT	SCMT_RST_PSP_106PUP	FN:104	PRODUCER	29-Apr-2013 00:39	7767.5 FT	-26.5 FT

### Output DLIS Files


DEFAULT	SCMT_RST_PSP_107PUP	FN:105	PRODUCER	29-Apr-2013 00:46
---------	---------------------	--------	----------	-------------------


**Schlumberger**

## TEMPERATURE PLOT

MAXIS Field Log

Index: 7767.5 – -26.5 FT

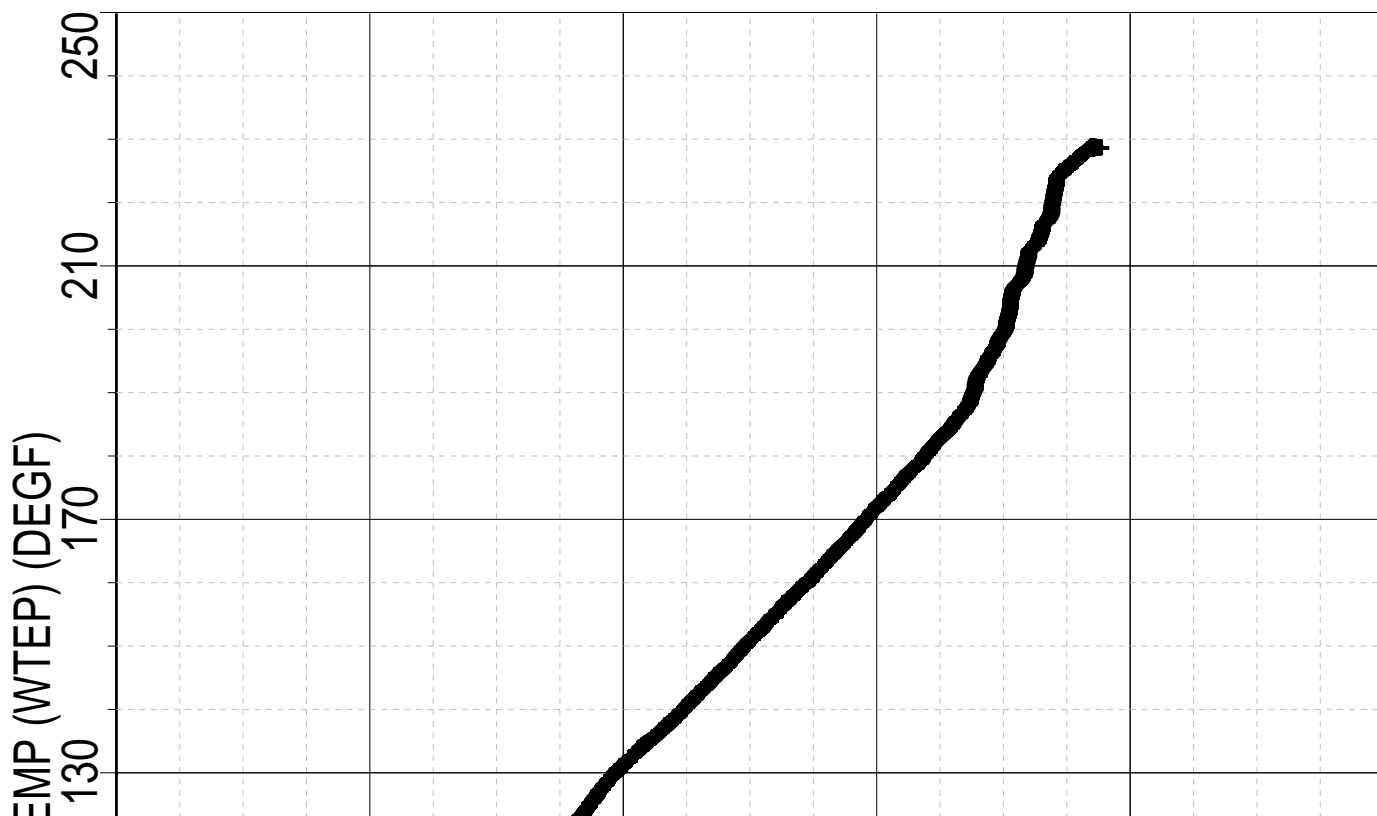

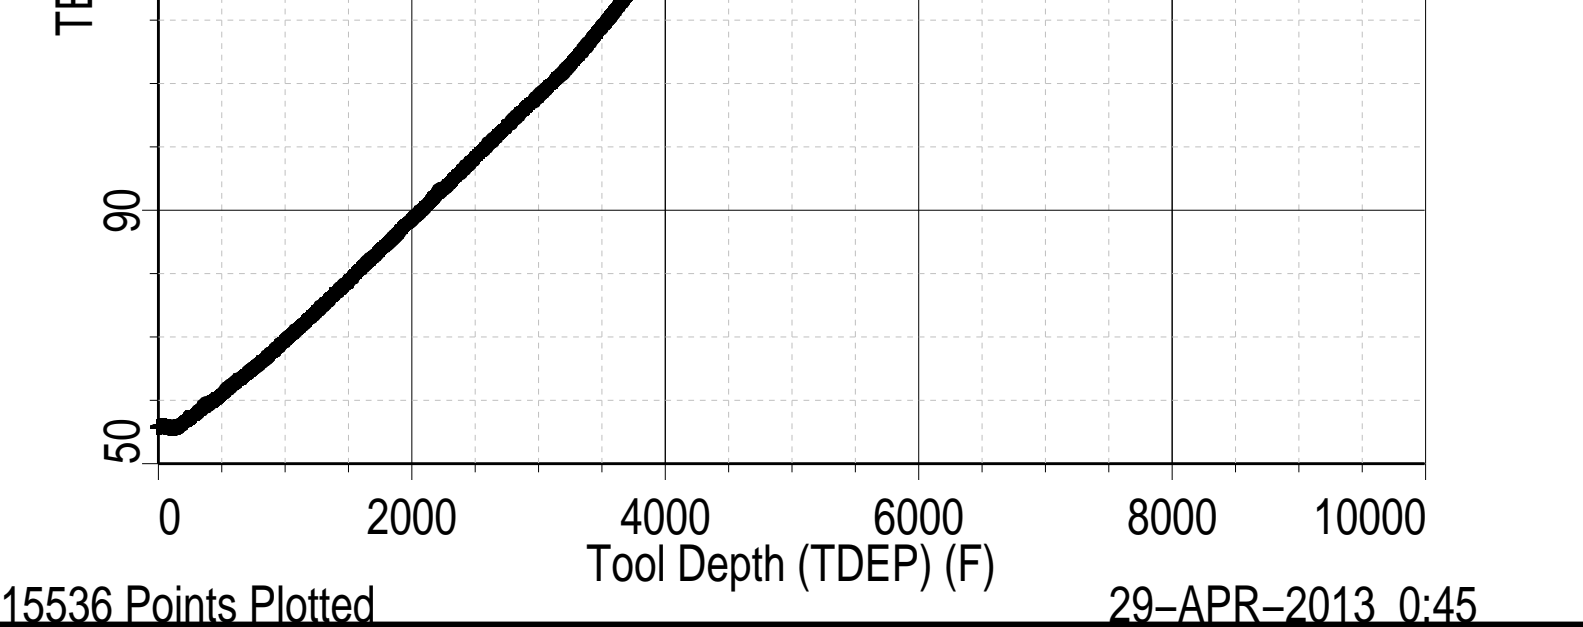

**Schlumberger**

## PBMS COEFFICIENTS

MAXIS Field Log

Client: ENCANA OIL & GAS (USA) INC  
Field: MAMM CREEK  
Well: SHIDELER 30-3A (O19EB)  
Run date: 28-Apr-2013

Tool: PSP  
Sub Type: PBMS  
Sensor: GR

### PBMS Gamma Ray

Sonde Serial NB

Sensor Serial NB

Calib Date ddmmyy

Matrix Size

Coeff CRC

RESISTORS FOR GR SENSOR N.33223, TOOL PBMS-BA0928. SENSOR S/N:

33223

090800

12

CFE2

GR HV Rt

Rt\*\*0

Rt\*\*1

Rt\*\*0

+.182000000000e+04

+.332000000000e+04

Client: ENCANA OIL & GAS (USA) INC

Field: MAMM CREEK

Well: SHIDELER 30-3A (O19EB)

Run date: 28-Apr-2013

Tool: PSP

Sub Type: PBMS

Sensor: WellTemp RTD

PBMS RTD Well Thermometer

Sonde Serial NB

Sensor Serial NB

Calib Date ddmmyy

Matrix Size

Coeff CRC

COEFFICIENTS FOR RTD THERMOMETER PBMS-B.928 S/N:

928

280612

16

A24E

WTemp Coeff

	Tt**0	Tt**1	Tt**2
Tt**0	-.391987973189E+03	+.191346892512E+03	-.440920753451E+02
	Tt**3	Tt**4	Tt**5
Tt**0	+.957191300908E+01	-.711421725686E+00	0.0

Client: ENCANA OIL & GAS (USA) INC

Field: MAMM CREEK

Well: SHIDELER 30-3A (O19EB)

Run date: 28-Apr-2013

Tool: PSP

Sub Type: PBMS

Sensor: CQG

PBMS Quartz Gauge type F

Sonde Serial NB

Sensor Serial NB

Calib Date ddmmyy

Matrix Size

Coeff CRC

COEFFICIENTS FOR CQG PBMS-B.928 S/N:

928

280612

66

9DC3

Pres Coeff

	Fb**0	Fb**1	Fb**2



Fc**0	+714463802232E+04	+183434658655E-01	-156620073569E-06
Fc**1	-100638308957E+01	-119899563644E-04	-912155899025E-10
Fc**2	+936268101283E-06	+423898071451E-10	+958076371919E-15
Fc**3	+185123362373E-11	+203107925433E-15	0.0
Fc**4	0.0	0.0	0.0
Fc**5	0.0	0.0	0.0

	Fb**3	Fb**4	Fb**5
Fc**0	-746577997611E-10	-588773826860E-15	-622250441458E-19
Fc**1	-120636521092E-15	+400325894750E-19	0.0
Fc**2	0.0	0.0	0.0
Fc**3	0.0	0.0	0.0
Fc**4	0.0	0.0	0.0
Fc**5	0.0	0.0	0.0

PBMS Quartz Gauge type F

Sonde Serial NB

:

Sensor Serial NB

928

Calib Date ddmmyy

280612

Matrix Size

66

Coeff CRC

283B

Temp Coeff

	Fc**0	Fc**1	Fc**2
Fb**0	+117016867873E+03	-284359629614E-03	+604391180345E-08
Fb**1	-598309140812E-02	+182731130848E-07	+160166486172E-12
Fb**2	-307621454576E-07	+300601550309E-12	+311233548560E-17
Fb**3	-419658736767E-12	+117473708647E-16	0.0
Fb**4	0.0	0.0	0.0
Fb**5	0.0	0.0	0.0

	Fc**3	Fc**4	Fc**5
Fb**0	+114322792679E-12	+153807711176E-17	-736714260866E-21
Fb**1	-528037875456E-18	-220337637519E-21	0.0
Fb**2	0.0	0.0	0.0
Fb**3	0.0	0.0	0.0
Fb**4	0.0	0.0	0.0
Fb**5	0.0	0.0	0.0

PBMS Quartz Gauge type F  
Sonde Serial NB :  
Sensor Serial NB 928  
Calib Date ddmmyy 280612  
Matrix Size 16  
Coeff CRC 093F

Clock Freq Coeff

	(Fb'-Fc')**0	(Fb'-Fc')**1	(Fb'-Fc')**2
(Fb'-Fc')**0	+310874009898E+05	+288920923041E-02	+697940727038E-06
	(Fb'-Fc')**3	(Fb'-Fc')**4	(Fb'-Fc')**5
(Fb'-Fc')**0	-.657432344763E-10	-.412920638782E-15	+213369826099E-20

PBMS Quartz Gauge type F  
Sonde Serial NB :  
Sensor Serial NB 928  
Calib Date ddmmyy 280612  
Matrix Size 16  
Coeff CRC 8419

Clock Temp Coeff

	(Fb'-Fc')**0	(Fb'-Fc')**1	(Fb'-Fc')**2
(Fb'-Fc')**0	+115369519827E+03	-.565338877075E-02	-.333717531829E-07
	(Fb'-Fc')**3	(Fb'-Fc')**4	(Fb'-Fc')**5
(Fb'-Fc')**0	-.124387135327E-12	+713102327208E-16	-.316084316842E-20










Schlumberger

MASTER CALIBRATION

MAXIS Field Log

Slim Cement Mapping Tool, 1-11/16 OD / Equipment Identification

Primary Equipment:		
Slim Cement Mapping Xmitter Electronics	SCMX - CA	
Slim Cement Mapping Sonde	SCMS - CB	8303
Slim Cement Mapping Cartridge	SCMC - CA	8120
Auxiliary Equipment:		
Slim Electronics Cartridge Housing	SECH - CA	

Slim Cement Mapping Tool, 1–11/16 OD Master Calibration									
SCMT CBL and MAP Amplitude Normalization in SFT–155/–255									
Phase	MAP 1 Amplitude Plus MV			Value	Phase	MAP 2 Amplitude Plus MV			Value
Master				876.9	Master				726.7
	500.0 (Minimum)	1075 (Nominal)	1650 (Maximum)			500.0 (Minimum)	1075 (Nominal)	1650 (Maximum)	
Phase	MAP 3 Amplitude Plus MV			Value	Phase	MAP 4 Amplitude Plus MV			Value
Master				954.5	Master				611.0
	500.0 (Minimum)	1075 (Nominal)	1650 (Maximum)			500.0 (Minimum)	1075 (Nominal)	1650 (Maximum)	
Phase	MAP 5 Amplitude Plus MV			Value	Phase	MAP 6 Amplitude Plus MV			Value
Master				812.5	Master				931.0
	500.0 (Minimum)	1075 (Nominal)	1650 (Maximum)			500.0 (Minimum)	1075 (Nominal)	1650 (Maximum)	
Phase	MAP 7 Amplitude Plus MV			Value	Phase	MAP 8 Amplitude Plus MV			Value
Master				795.9	Master				830.0
	500.0 (Minimum)	1075 (Nominal)	1650 (Maximum)			500.0 (Minimum)	1075 (Nominal)	1650 (Maximum)	
Phase	CBL Amplitude Plus MV			Value					
Master				1269					
	1000 (Minimum)	1350 (Nominal)	1700 (Maximum)						
Master: 7–Sep–2012 16:30									

Company: **ENCANA OIL & GAS (USA) INC**

**Schlumberger**

Well: **SHIDELER 30–3A (O19EB)**

Field: **MAMM CREEK**

County: **GARFIELD**

State: **COLORADO**

**SLIM CEMENT MAPPING LOG**

**CBL – VDL**

**GR–CCL**