

## SGU 8505A-24 L24 496 USIT Log and Initial Cement Job Information

Denzin, Nathan <Nathan.Denzin@encana.com>  
To: "david.andrews@state.co.us" <david.andrews@state.co.us>

Thu, Aug 8, 2013 at 2:25 PM

COGCC Document No. 2055818

SGU 8505A-24 L24 496, API#05045211770000

Hole Size – 14-3/4”

Casing Size – 9-5/8” with 1.9” parasite tubing

Casing Setting Depth – 3324 ft landing depth

No Stage Tool Was Used


Lift Pressure – Please see surface pressure vs time graph below.

Pressure To Bump Plug – 1200 psi

1378 sacks of LiteFil (11 ppg and 2.12 ft<sup>3</sup>/sack) Lead

251 sacks of LiteFil (12.5 ppg and 2.11 ft<sup>3</sup>/sack) Tail

We Did Not See Cement Returns At Surface.

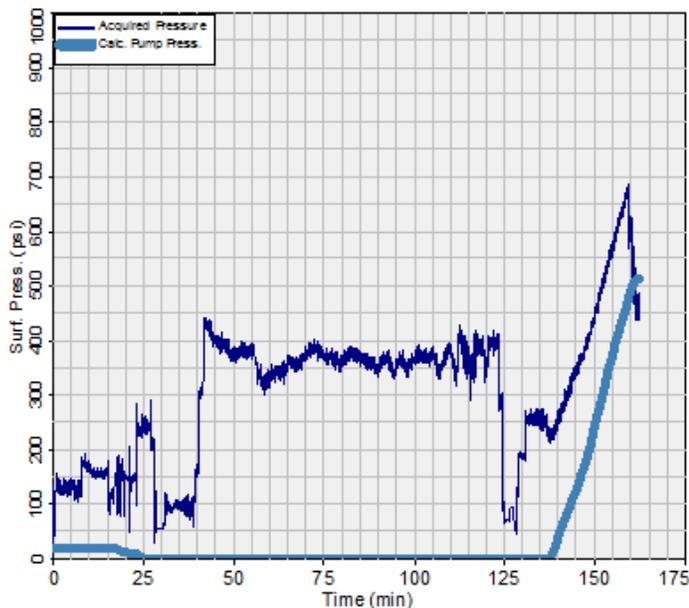

Regards,

Nate Denzin  
**Encana Oil & Gas (USA) Inc.**  
North Piceance Drilling Engineer  
Tel: 720-876-3476  
Fax: 720-876-6329  
Cell: 303-882-9394  
Email: [nathan.denzin@encana.com](mailto:nathan.denzin@encana.com)

This email communication and any files transmitted with it may contain confidential and or proprietary information and is provided for the use of the intended recipient only. Any review, retransmission or dissemination of this information by anyone other than the intended recipient is prohibited. If you receive this email in error, please contact the sender and delete this communication and any copies immediately. Thank you.