



Weatherford®

6 3/4 in. & 4 3/4 in. WeatherfordM/LWD™
Spectral Gamma Ray & Resistivity
5 in. MEASURED DEPTH
RECORDED DATA
FINAL PRINT

Company: Anadarko
Well: Cannon 14C-10HZ
Field: Wattenburg
Rig: Xtreme 23
County: Weld

Location		Other Services: Spectral Azimuthal Gamma Ray, Directional, and Temperature	
Latitude: 40.158633° N	X = 3,204,555 ft	Mag Decl: 8.60°	
Longitude: 104.768138° W	Y = 1,301,477 ft	Mag Dip: 66.78°	
COMPANY WELL FIELD RIG COUNTY API #		Anadarko Cannon 14C-10HZ Wattenburg Xtreme 23 Weld STATE Colorado	
05-123-36696-00			

Permanent Datum: <u>Mean Sea Level</u>				K.B. Top Drive	
Log Measured From:	<u>Drill Floor</u>	Elev:	<u>4965 ft</u>	above perm. datum	
Depth Reference:	<u>Drillers Tally</u>	Total Depth:	<u>12035 ft</u>	Elevation	
Depth Logged:	<u>6760 ft</u>	to <u>12035 ft</u>	Runs:	<u>2</u>	
Date Logged:	<u>24-Jun-13</u>	to <u>28-Jun-13</u>	Spud Date:	<u>22-Jun-13</u>	
Borehole Record			Casing Record		
Hole Size	From	To	Size	Weight	From To
8.750 in.	895 ft	7885 ft	9.625 in.	57.0 lb/ft	Surface 967 ft
6.125 in.	7885 ft	12035 ft	7.000 in.	26.0 lb/ft	Surface 7875 ft
Borehole Deviation Record			Mud Record		
Hole Size	Min. Inc.	Max. Inc.	Type	Weight	From To
8.750 in.	0.30°	82.07°	WBM	8.50 - 10.25 ppq	895 ft 12035 ft
6.125 in.	88.58°	92.47°			

All interpretations of log data are opinions based on inferences from electrical or other measurements. Weatherford International does not guarantee the accuracy or correctness of any interpretation or recommendation and we shall not be liable or responsible for any loss, cost, damages or expenses incurred or sustained by anyone resulting from any interpretation or recommendation made by any of our employees or agents.

RUN SUMMARY							
M/LWD Run Number		1	2				
Bit Size	in.	8.750	6.125				
Bit Type		PDC	PDC				
Bit TFA	sq.in.	1.610	1.856				
Bit Start Depth	ft	895	7885				
Bit End Depth	ft	7885	12035				
Top Log Interval	ft	6760	7840				
Bottom Log Interval	ft	7885	12035				
Begin Log Time	hrs	02:29	17:18				
Begin Log Date	DD-MMM-YY	24-Jun-13	26-Jun-13				
End Log Time	hrs	23:14	15:15				
End Log Date	DD-MMM-YY	24-Jun-13	28-Jun-13				
Drill or Wipe		Drill	Drill				
Flow Rate	gal/min	562	297				
Max AV / CV @ MWD	ft/min	444 / 339	487 / 343				
Min Inc @ Depth	deg @ ft	0.30 @ 5999	88.58 @ 9317				
Max Inc @ Depth	deg @ ft	82.07 @ 7825	92.47 @ 8206				
MUD DATA							
Depth	ft	7885	12035				
Fluid Type		WBM	WBM				
Mud Weight	ppg	10.25	10.10				
Plastic Viscosity	cP	10	11				
Solids / Sand	%	8.70 / 0.50	8.70 / 0.75				
NaCl Equiv. Chlorides	ppm	1700	1700				
pH		8.8	9.4				
Oil:Water Ratio	% Vol	1.1 : 98.9	3.3 : 96.7				
Rm @ Temperature	ohm-m @ deg F	na	1.930 @ 64				
Rmc @ Temperature	ohm-m @ deg F	na	1.623 @ 64				
Rmf @ Temperature	ohm-m @ deg F	na	1.712 @ 64				
KCl	% Vol	0	0				
Client Representative		J. Tettleton	J. Tettleton				
WeatherfordLWD Engineer		J. Jackson	J. Evers				

EQUIPMENT SUMMARY

M/LWD Run Number	1	2			
BTR / CDS Serial Number	44702 / 44736	na			
Battery Serial Number	403716787	na			
Gamma Ray Serial Number	2978	na			
CMS Serial Number	1592	na			
Pulser Serial Number	18705	na			
SAGR Serial Number	na	NW131111JB4.75-M2			
HEL Serial Number	na	NW131377PDBBI4.75-M1			
MFR Serial Number	na	NW131378RBBK4.75-M1			
Sensor to Bit Offsets / Acquisition Rates					
Directional	ft / sec	56.64 / RT	56.06 / RT		
Gamma Ray	ft / sec	42.43 / 16	41.38 / 5		
Resistivity	ft / sec	na	84.29 / 5		
Other Information					
Total BHA Length	ft	3335.03	6801.00		
BHA Assembly Type		Steerable	Steerable		
Stabilizer Location	ft	na	33.48		
Stabilizer Location	ft	na	102.09		
Run Circulating Time	hr	57.96	40.57		
Run Drilling Time	hr	37.98	18.26		

MUD SUMMARY

Date and Time	Run	Bit Depth	Mud Weight	% K	Rm @ Temp	Rmf @ Temp	Rmc @ Temp	BHCT
24 June 13 @ 23:14	01	7885 ft	10.25 ppg	0	na	na	na	178 F
28 June 13 @ 15:15	02	12035 ft	10.10 ppg	0	1.930 ohm-m @ 64 F	1.712 ohm-m @ 64 F	1.623 ohm-m @ 64 F	223 F

M/LWD RUN REMARKS

Run Number: 1 :: REAL-TIME DATA LOG

WFT Services Provided:

Recorded and Real Time Logging: Gamma Ray and Temperature.

Directional Services: On demand Inclination and Azimuth.

Borehole and Environmental Correction:

Hole Size: 8.750 in.

Gamma Ray: Hole size, mudweight, Collar O.D., Collar I.D. and K1 factor.

Mud Weight: 8.50 ppg

Collar O.D.: 6.750 in.

K1 Factor: 3.179

Collar I.D.: 3.250 in.

Run Number: 2 :: RECORDED DATA LOG

WFT Services Provided:

Recorded and Real Time Logging: Spectral Gamma Ray, Resistivity, and Temperature.

Directional Services: On demand Inclination and Azimuth.

Borehole and Environmental Correction:

Hole Size: 6.125 in.

Gamma Ray: Corrected for mud weight, hole size and KCl concentration.

Mud Weight: 9.80 ppg

Resistivities: Corrected for borehole temperature, hole size, drilling fluid resistivity
and dielectric correction.

Borehole Temperature: 214° F

Drilling Fluid Resistivity: 0.619 ohm-m @ 214° F

KCl Concentration: 0%

M/LWD LOG COMMENTS

Comment No. 1-1

RECORDED DATA LOG

Start of MWD Drilling Run 01

Weatherford International provided 6 3/4 in. Directional, Gamma Ray, and Temperature for Run 01.

Run 01 started formation logging June 24, 2013 at 02:29 at 6760 MD / 6625 TVD. Weatherford International logged the 8.750 in. borehole.

The WBM at the start of drilling was 8.50 ppg.

Comment No. 1-2

End of MWD Drilling Run 01

Run 01 ended drilling formation June 24, 2013 at 23:14 at 7885 MD / 7415 TVD.

The WBM at the end of drilling was 10.25 ppg.

Comment No. 2-1

RECORDED DATA LOG

Start of LWD Drilling Run 02

Weatherford International provided 4 3/4 in. Directional, Resistivity, Spectral Azimuthal Gamma Ray, and Temperature for Run 02.

Run 02 started formation drilling June 26, 2013 at 17:18 at 7885 MD / 7415 TVD. Weatherford International logged the 6.125 in. borehole.

The WBM at the start of drilling was 9.70 ppg.

Comment No. 2-2





End of LWD Drilling Run 02

Run 02 ended drilling formation June 28, 2013 at 15:15 at 12035 MD / 7412 TVD.

The WBM at the end of drilling was 10.10 ppg.



Curve Specifications				
Curve Type	Mnemonic	Units	Comments	Corrections
Rate of Penetration	ROP	fph	Rate of Penetration 3.0 ft window 0.5 ft Exponential Smoothing	None
Gamma Ray	GR	AAPI	Gamma Ray 3.0 ft window 0.5 ft Exponential Smoothing	See LWD Run Remarks
Gamma Ray Up	GR UP	AAPI	Azimuthal Gamma Ray 3.0 ft window 0.5 ft Exponential Smoothing	
Gamma Ray Down	GR DN	AAPI	Azimuthal Gamma Ray 3.0 ft window 0.5 ft Exponential Smoothing	
Deep Phase Resistivity	RPD2	ohm-m	2 MHz Deep Phase Resistivity 3.0 ft window 0.5 ft Exponential Smoothing	
Deep Attenuation Resistivity	RAD2	ohm-m	2 MHz Deep Attenuation Resistivity 3.0 ft window 0.5 ft Exponential Smoothing	
Deep Attenuation Resistivity	RAD4	ohm-m	400 kHz Deep Attenuation Resistivity 3.0 ft window 0.5 ft Exponential Smoothing	
Shallow Phase Resistivity	RPS2	ohm-m	2 MHz Shallow Phase Resistivity 3.0 ft window 0.5 ft Exponential Smoothing	
Uranium Total	SGUT	ppm	Uranium Concentration 3.0 ft window 0.5 ft Exponential Smoothing	
Thorium Total	SGTT	ppm	Thorium Concentration 3.0 ft window 0.5 ft Exponential Smoothing	
Potassium Total	SGKT	%	Potassium Concentration 3.0 ft window 0.5 ft Exponential Smoothing	


5 Inch - Measured Depth

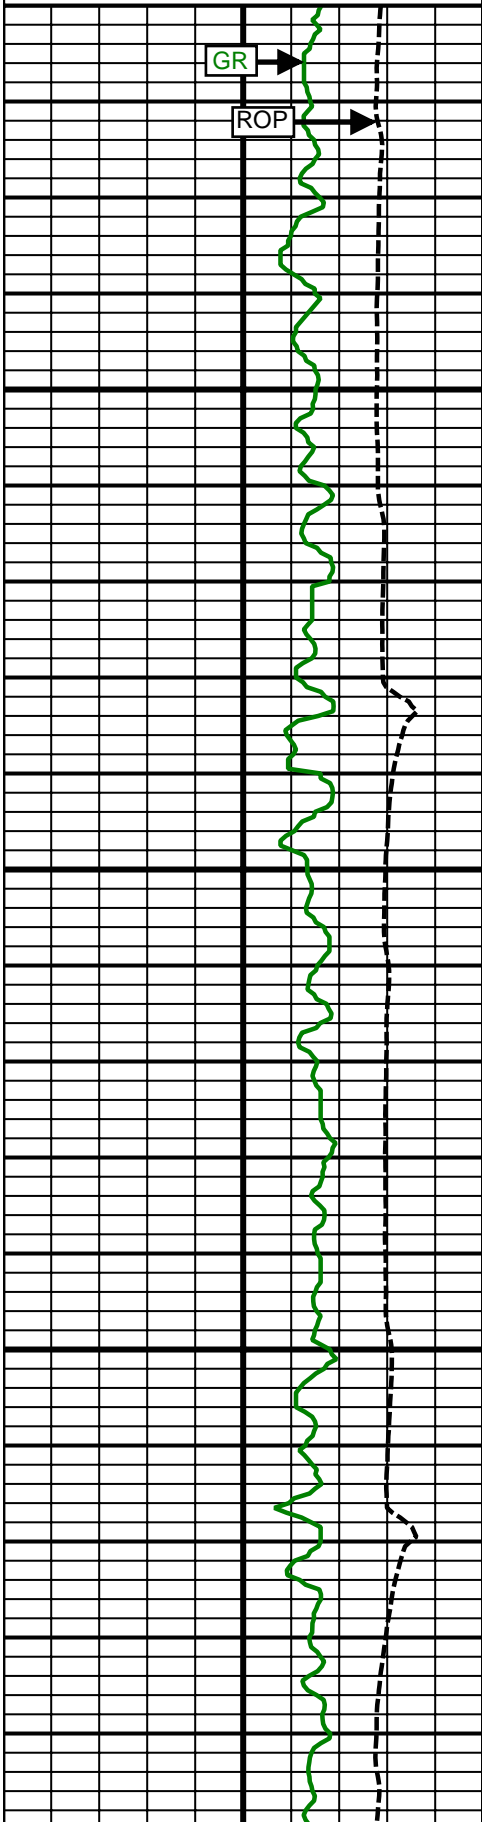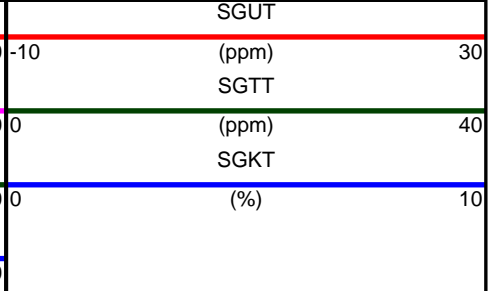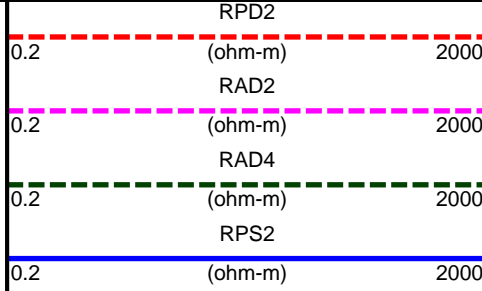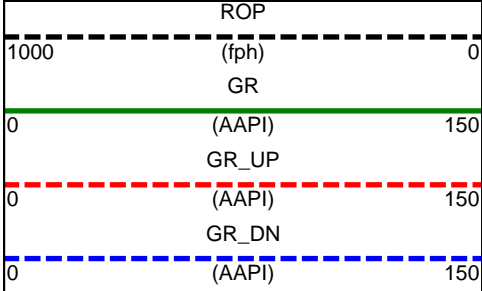

6800 MD


6900 MD

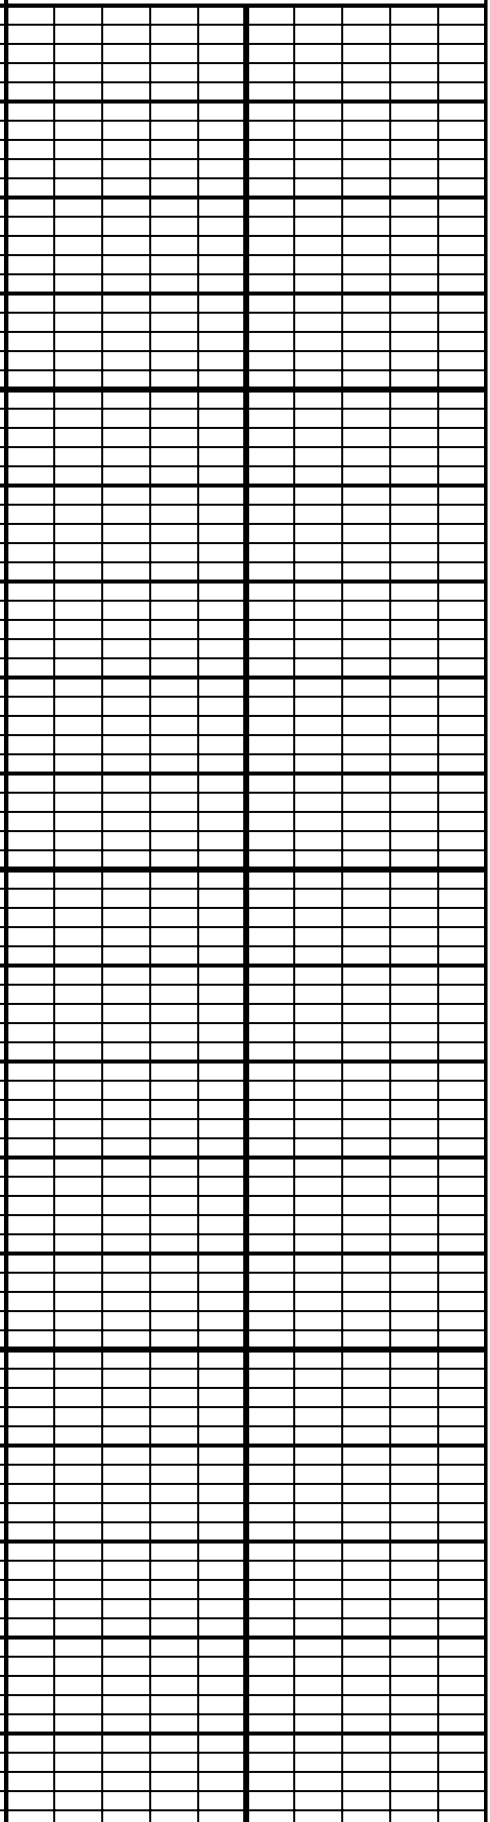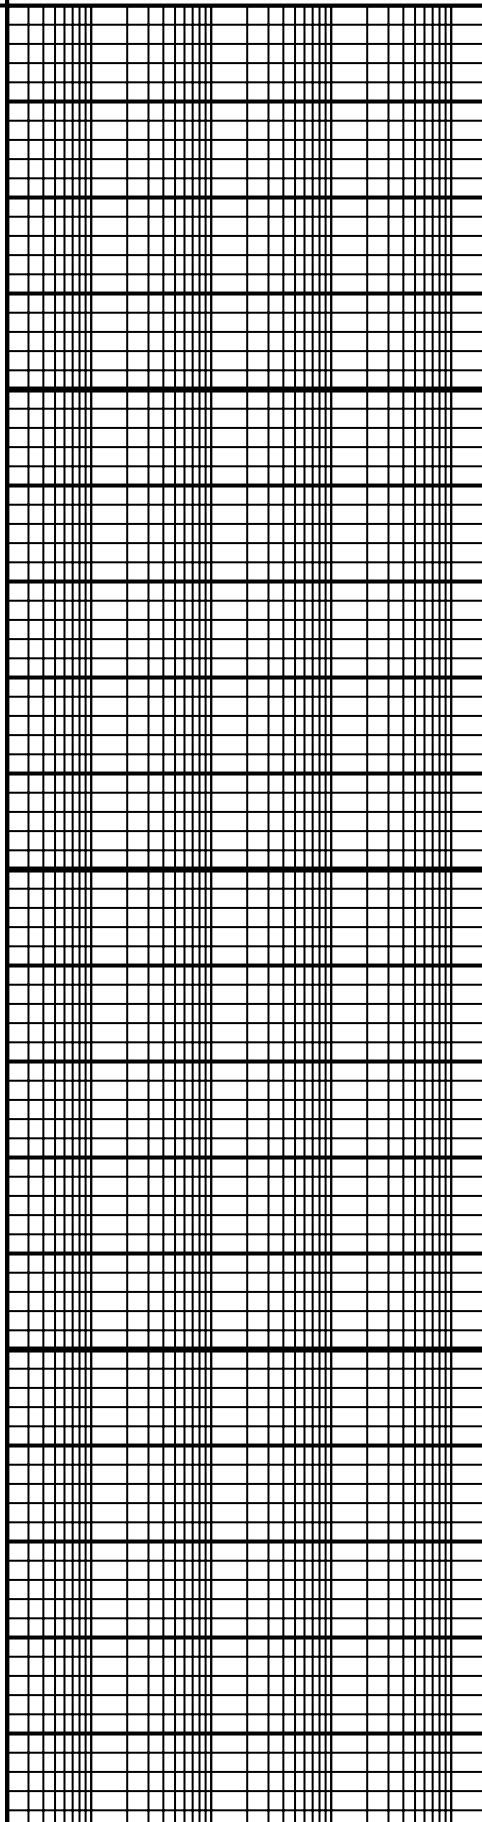

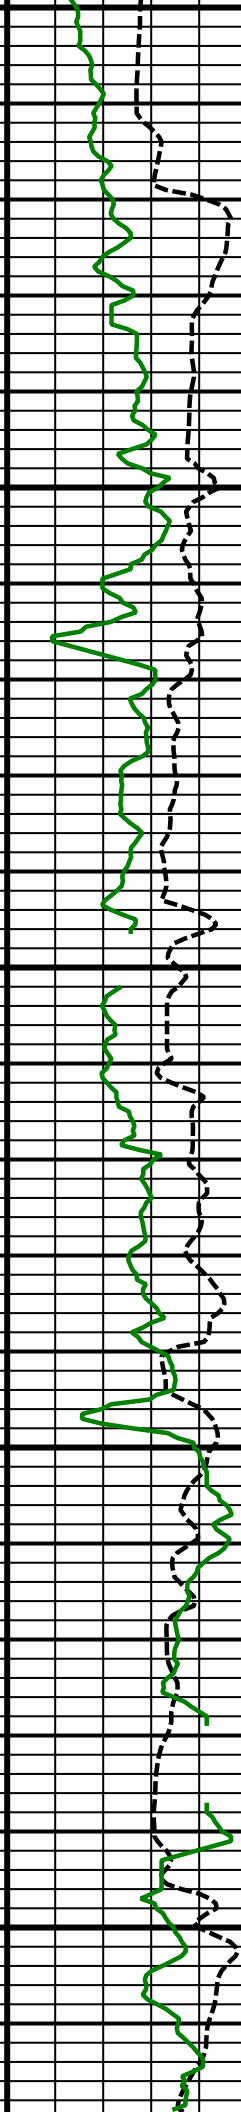


7000
MD

7100
MD

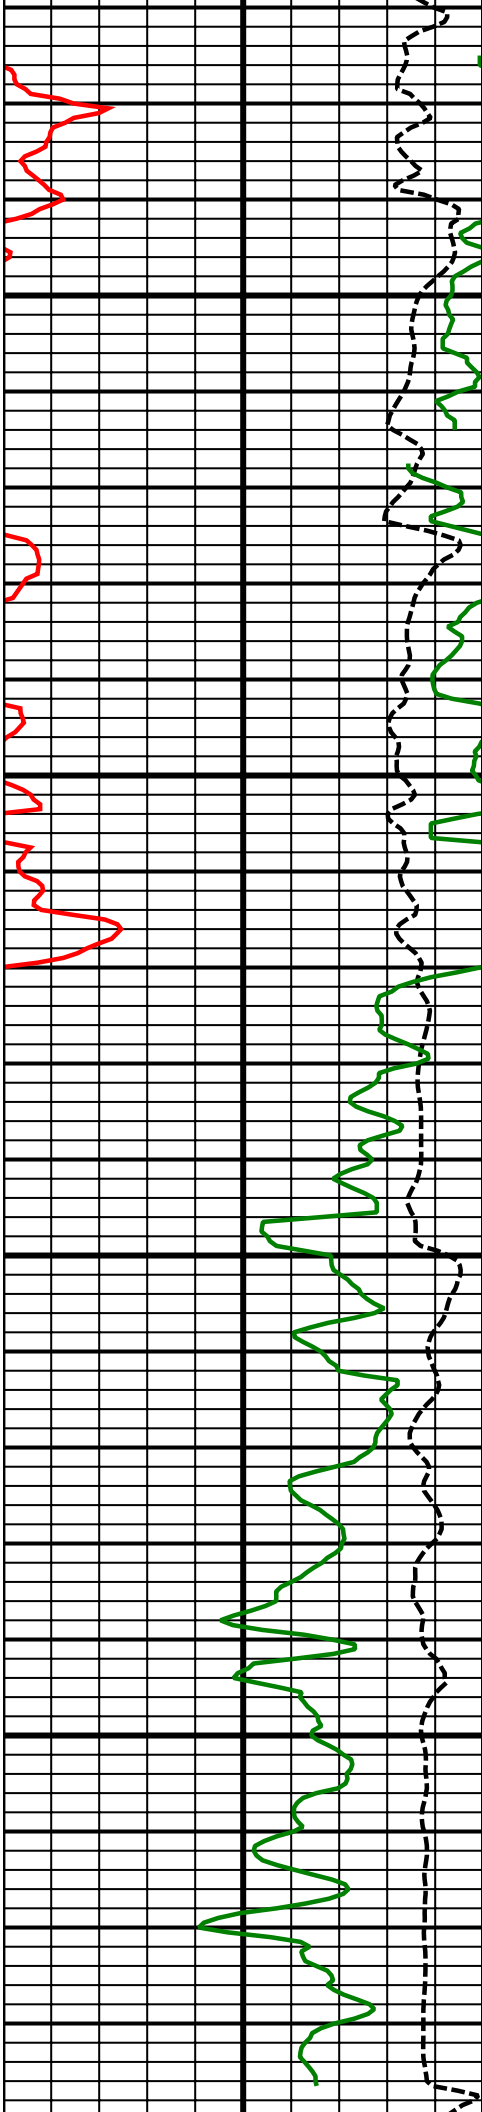

7200
MD


7300
MD

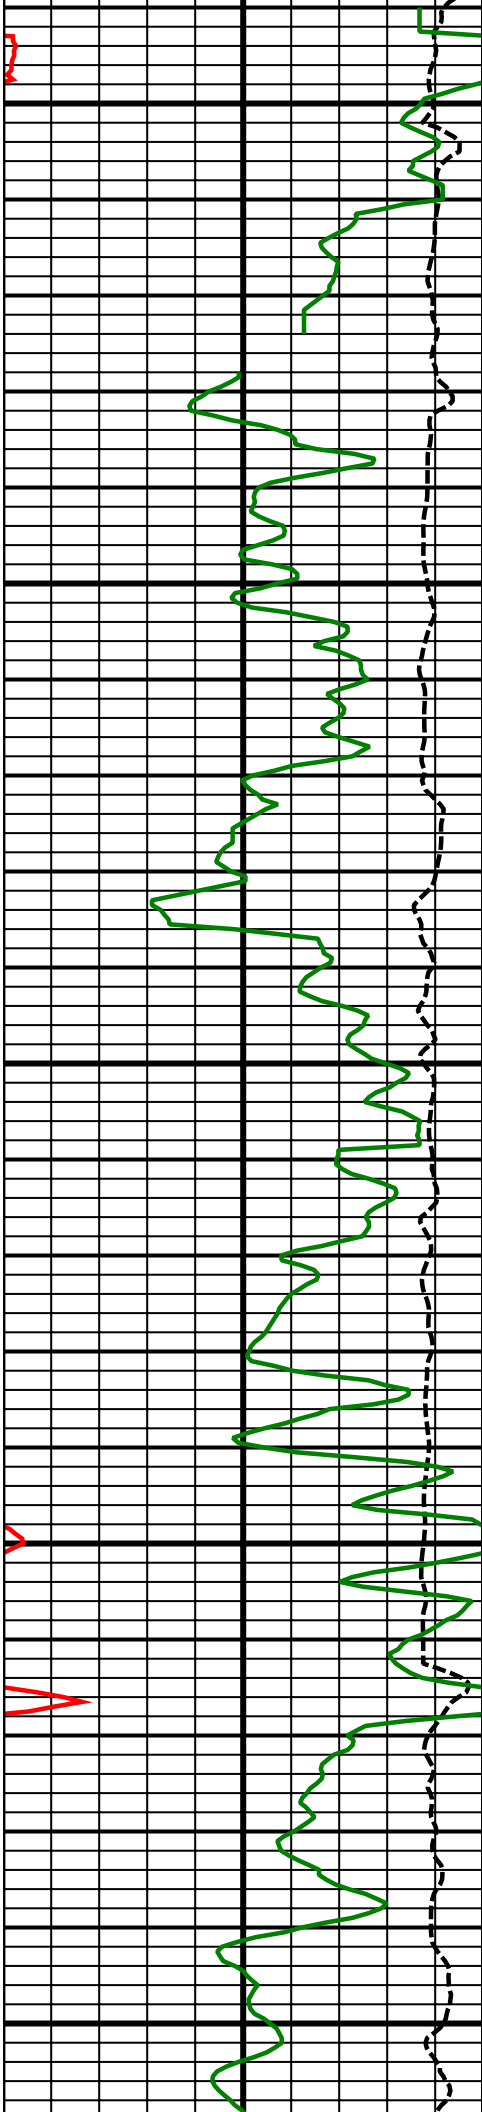

7400
MD


7500
MD

7600
MD

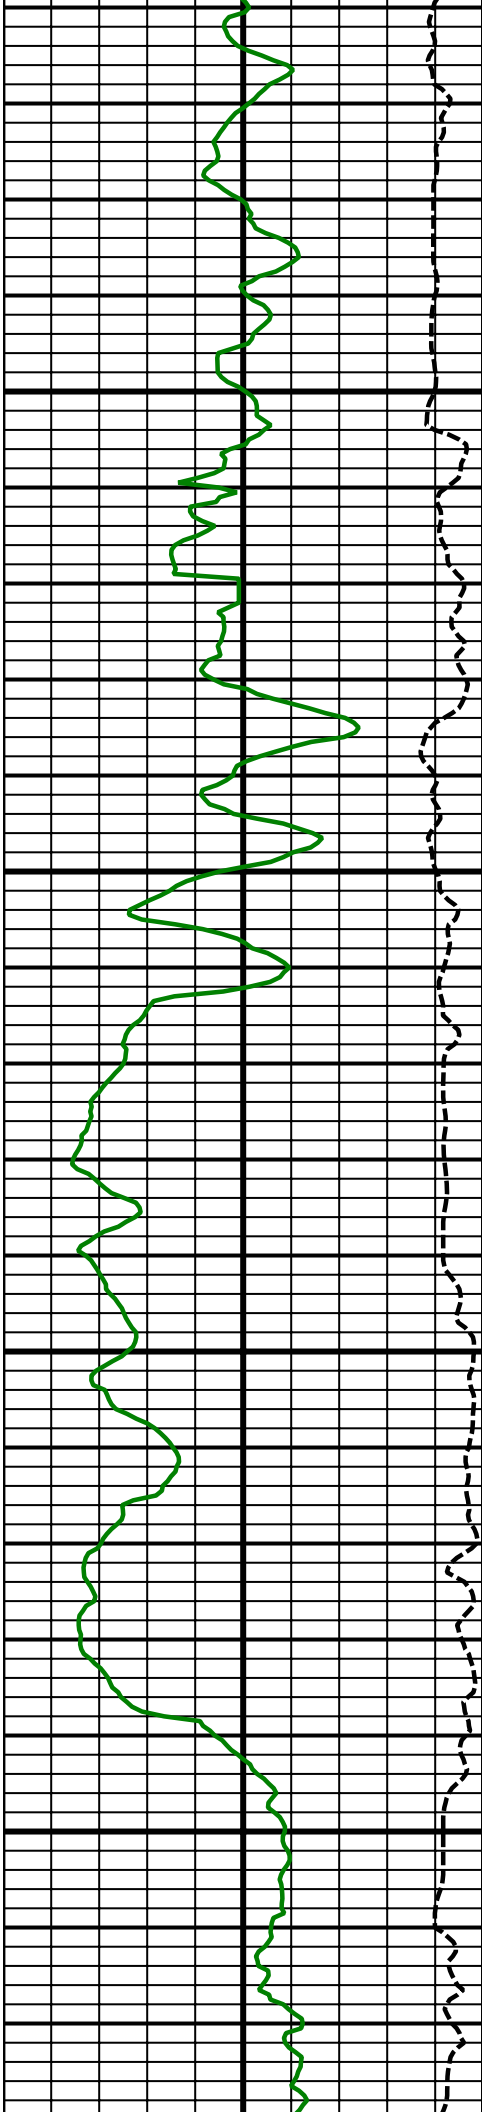

7700
MD


7800
MD

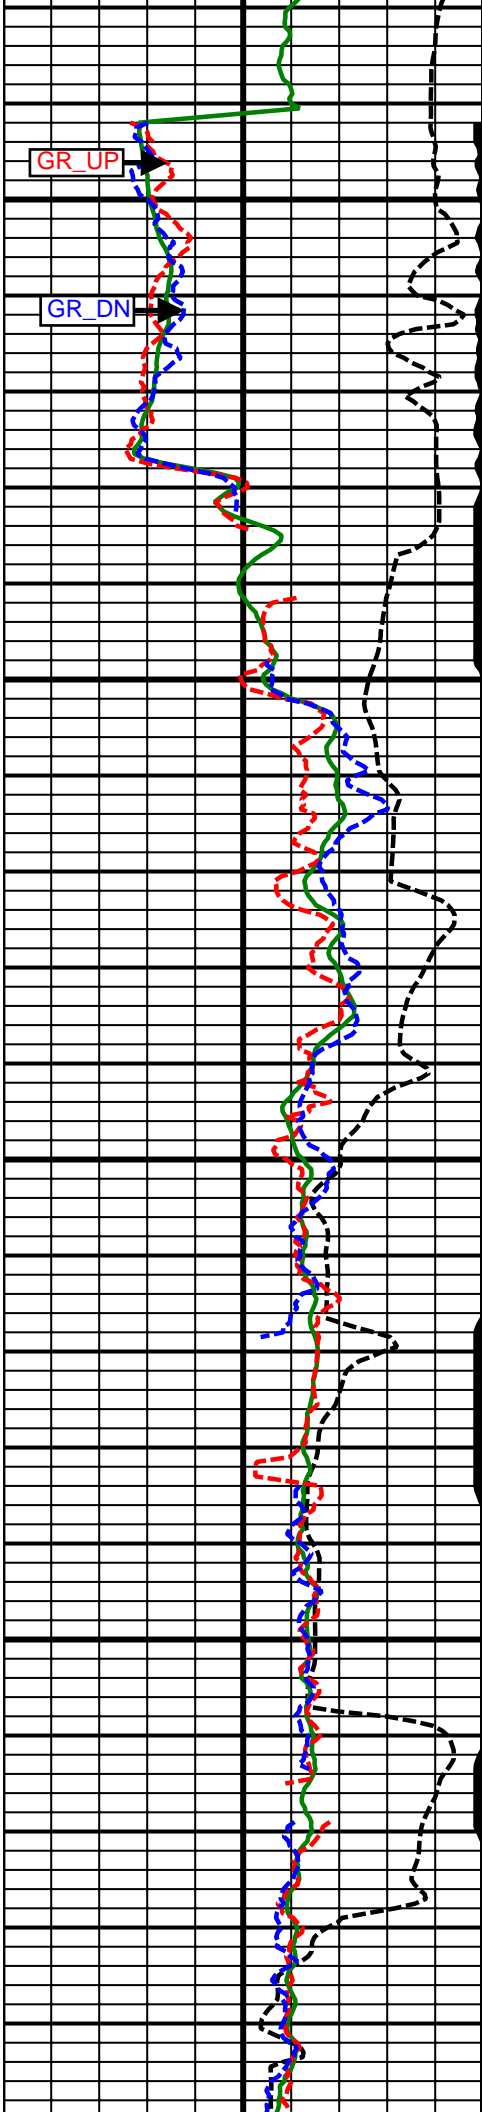

Logged
Behind
Casing

7900
MD

8000
MD

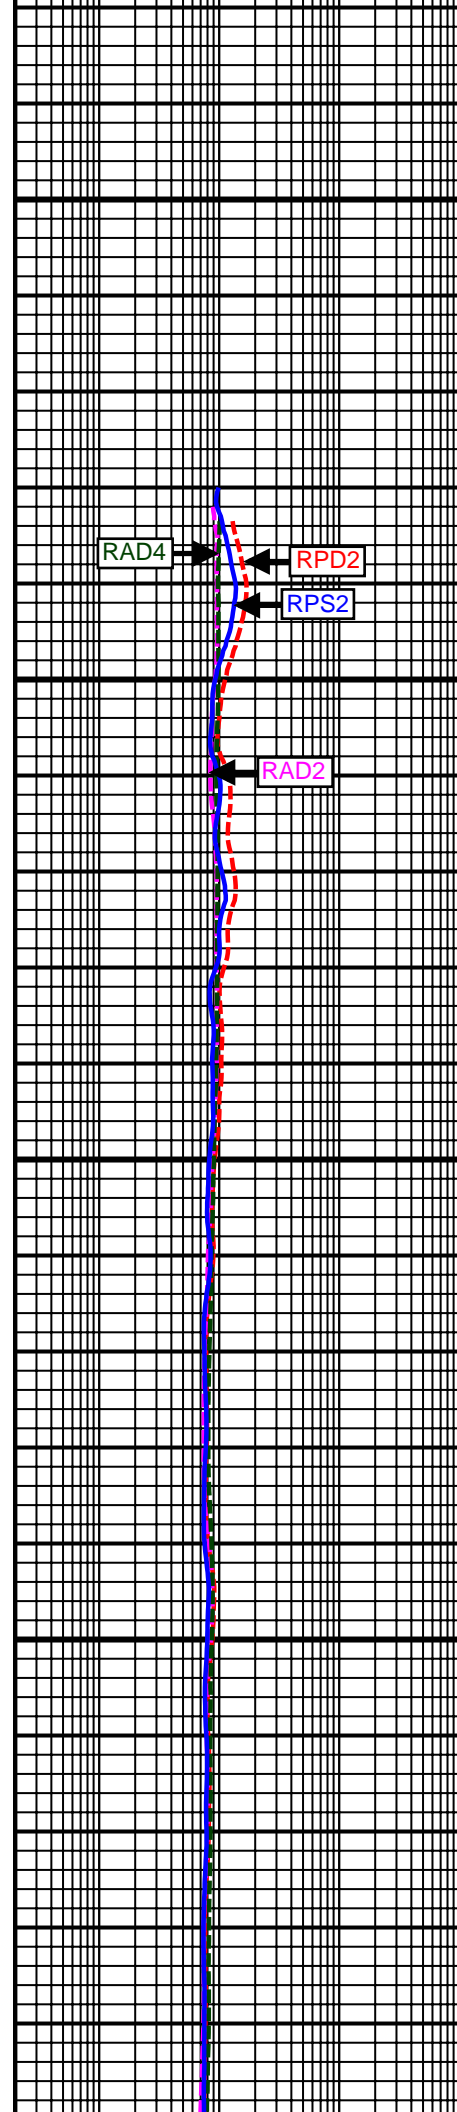


RAD4

RPD2

RPS2


RAD2

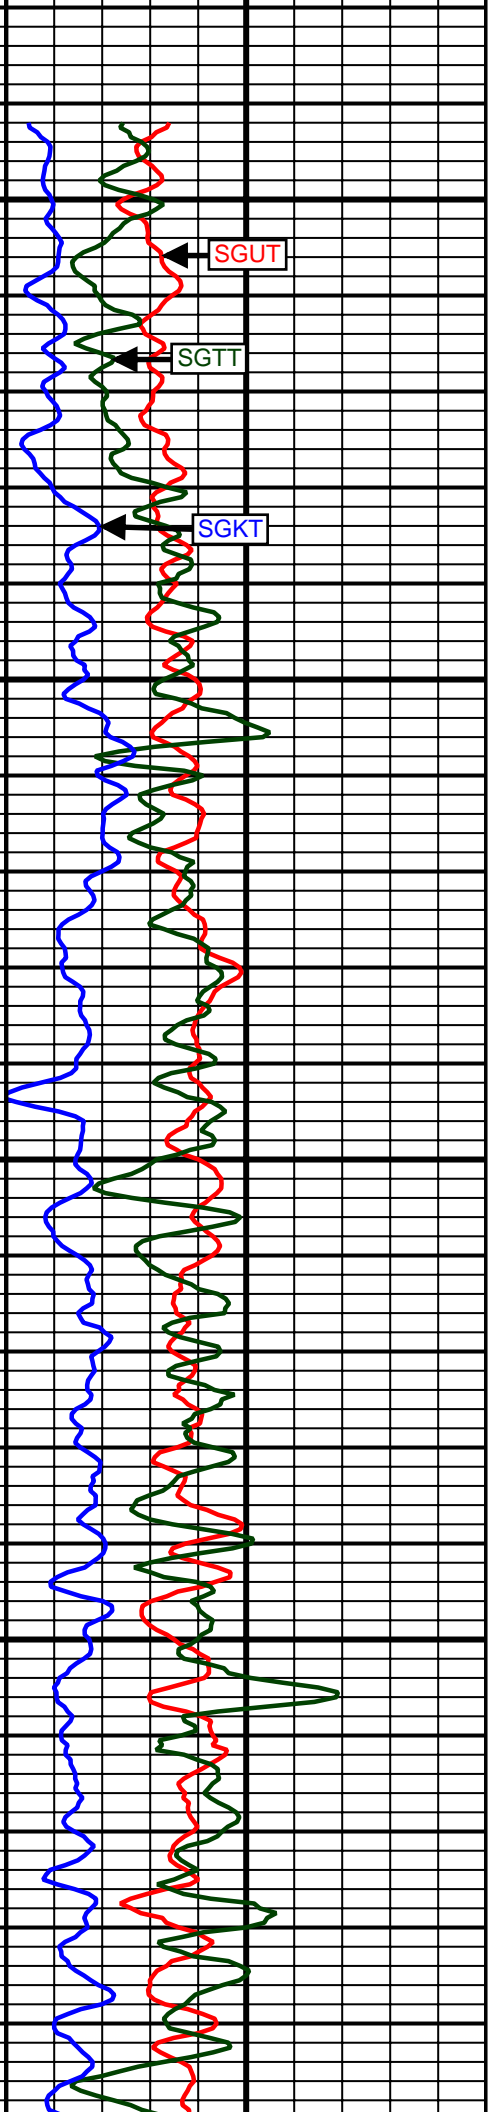

SGUT


SGTI


SGKT

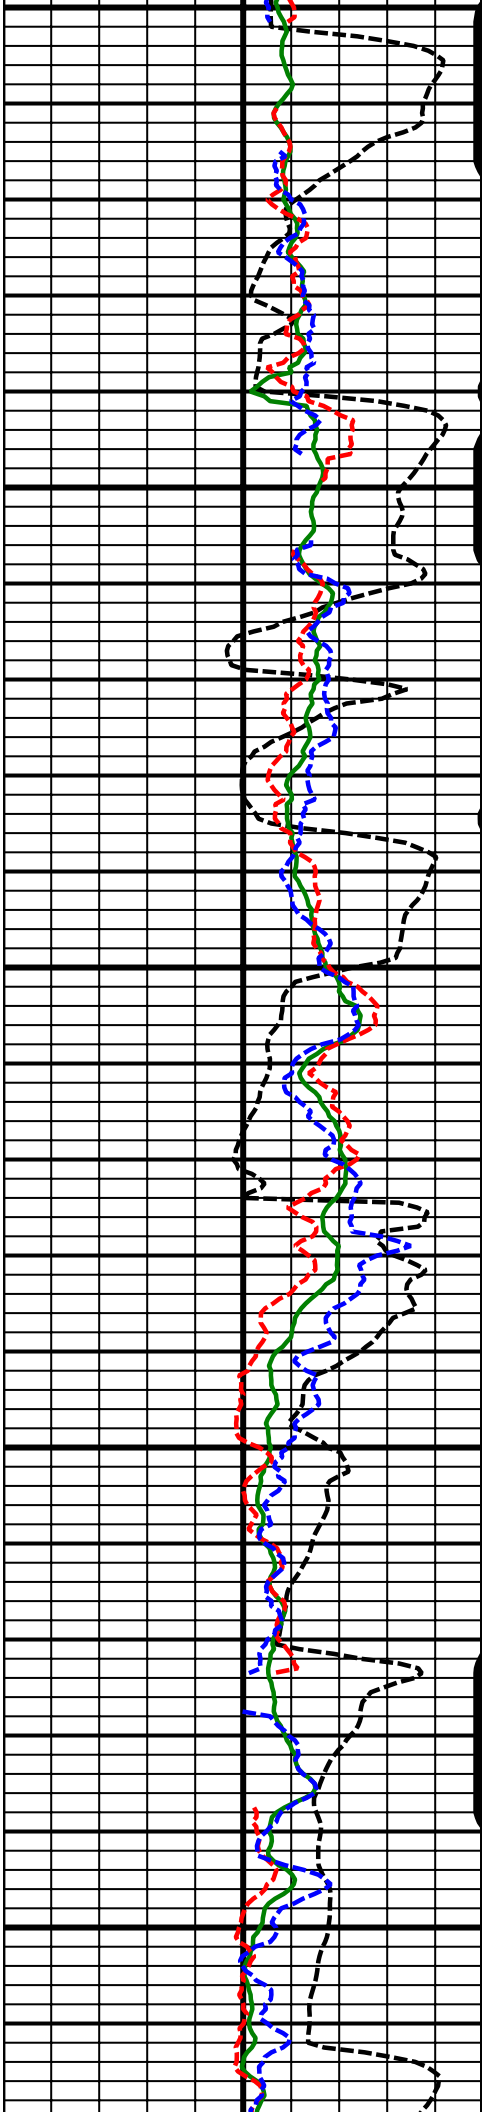

8100
MD



8200
MD

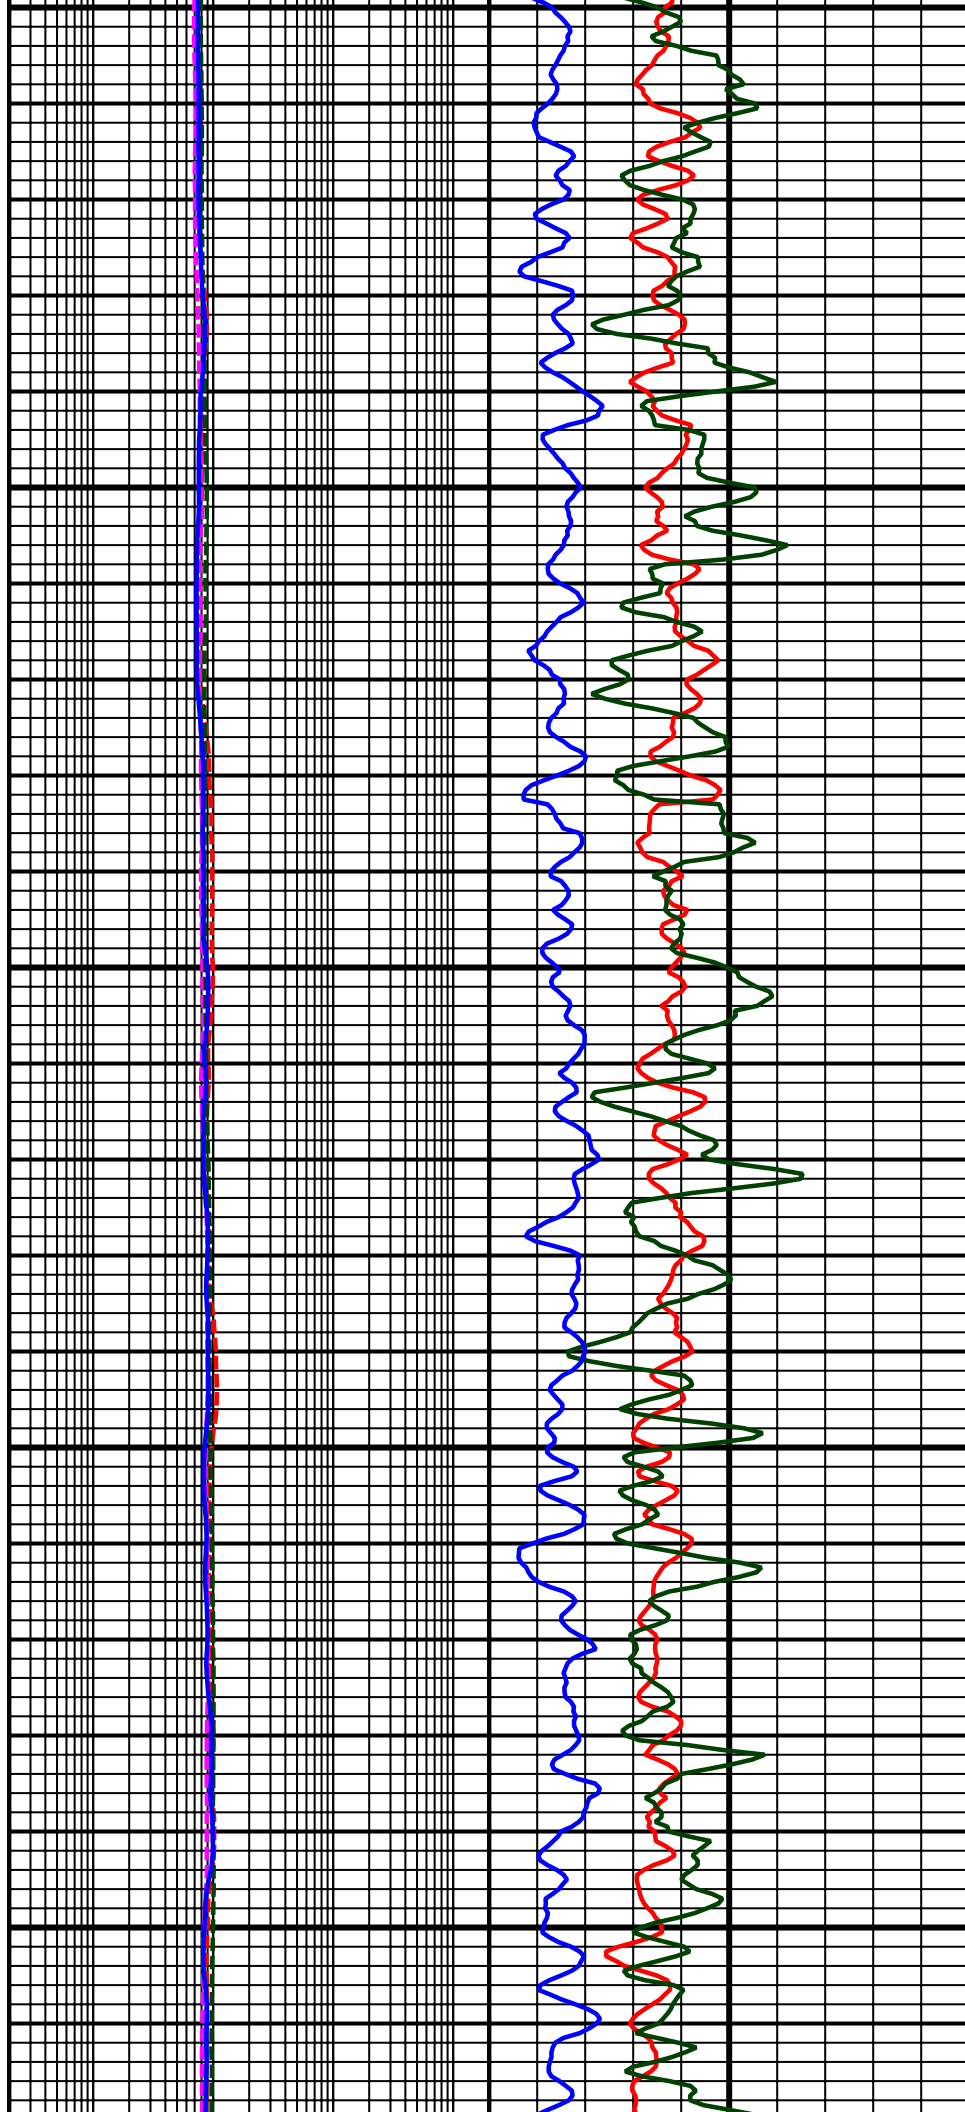


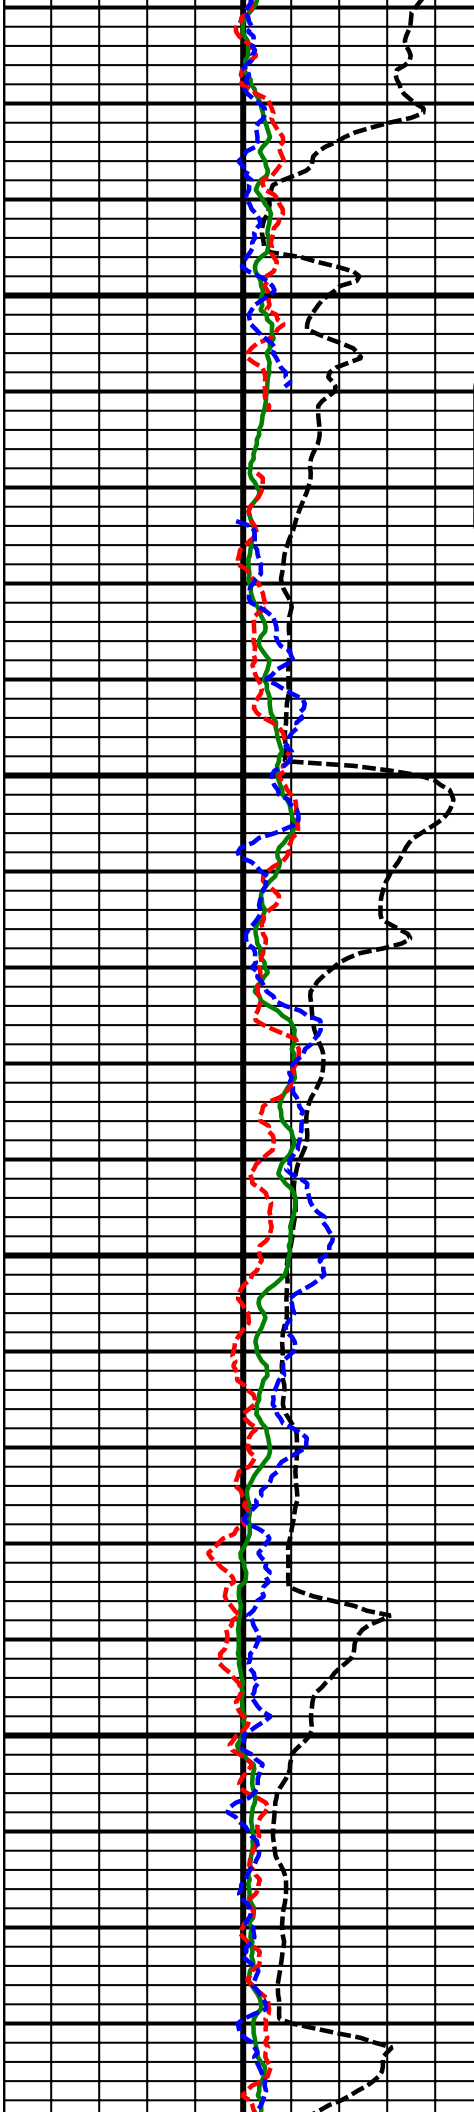

8300
MD

8400
MD

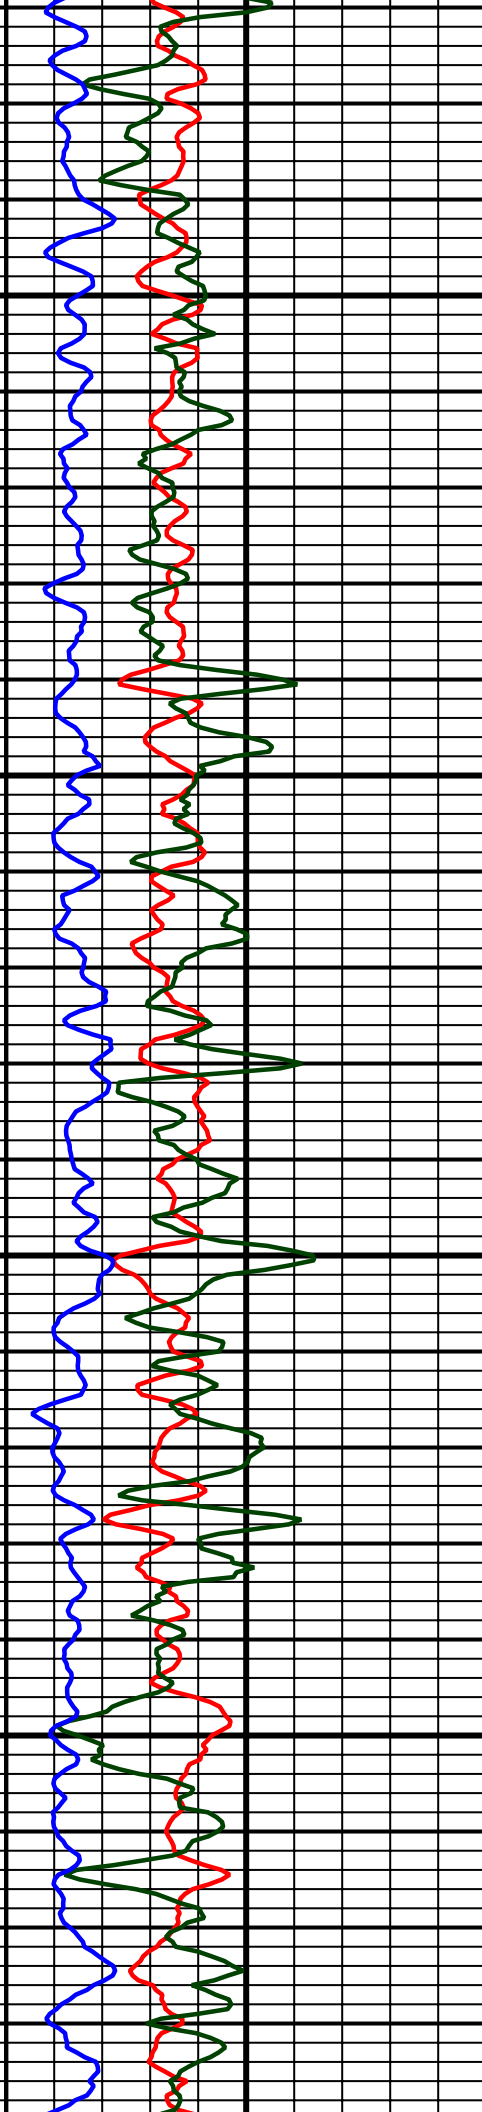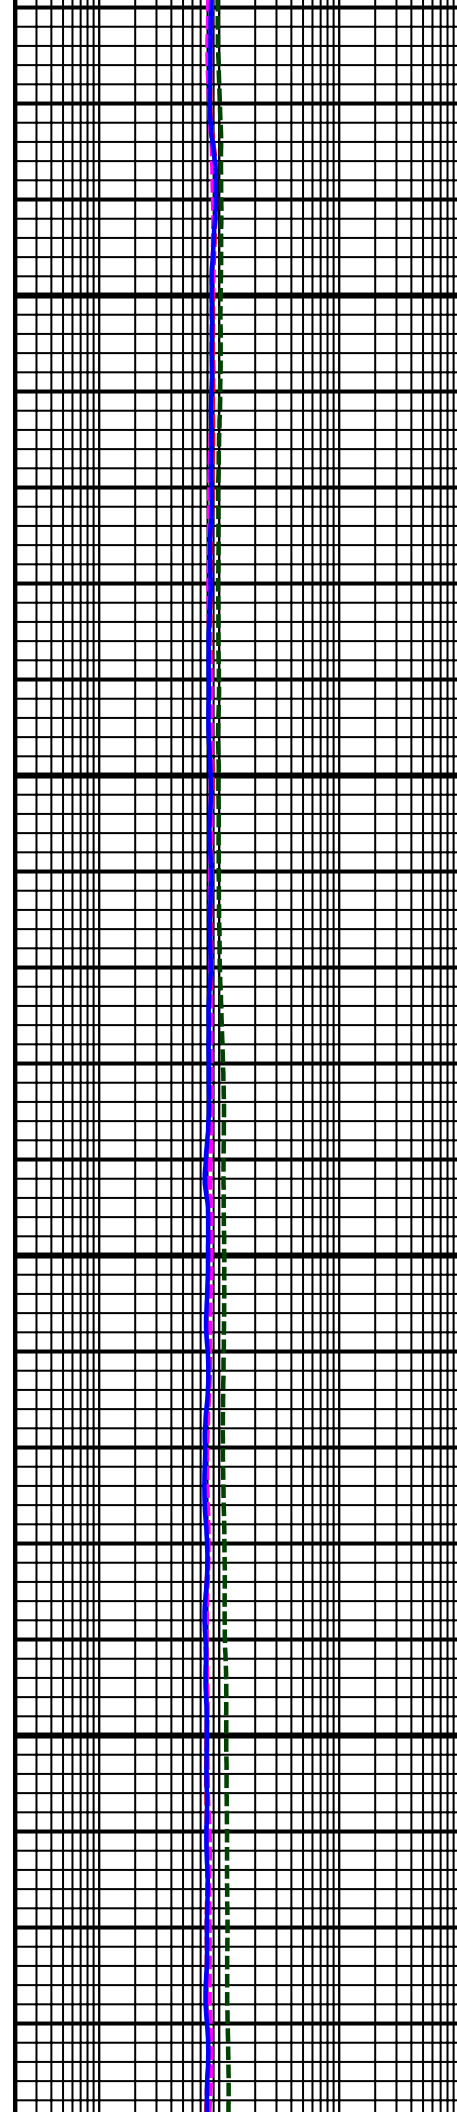


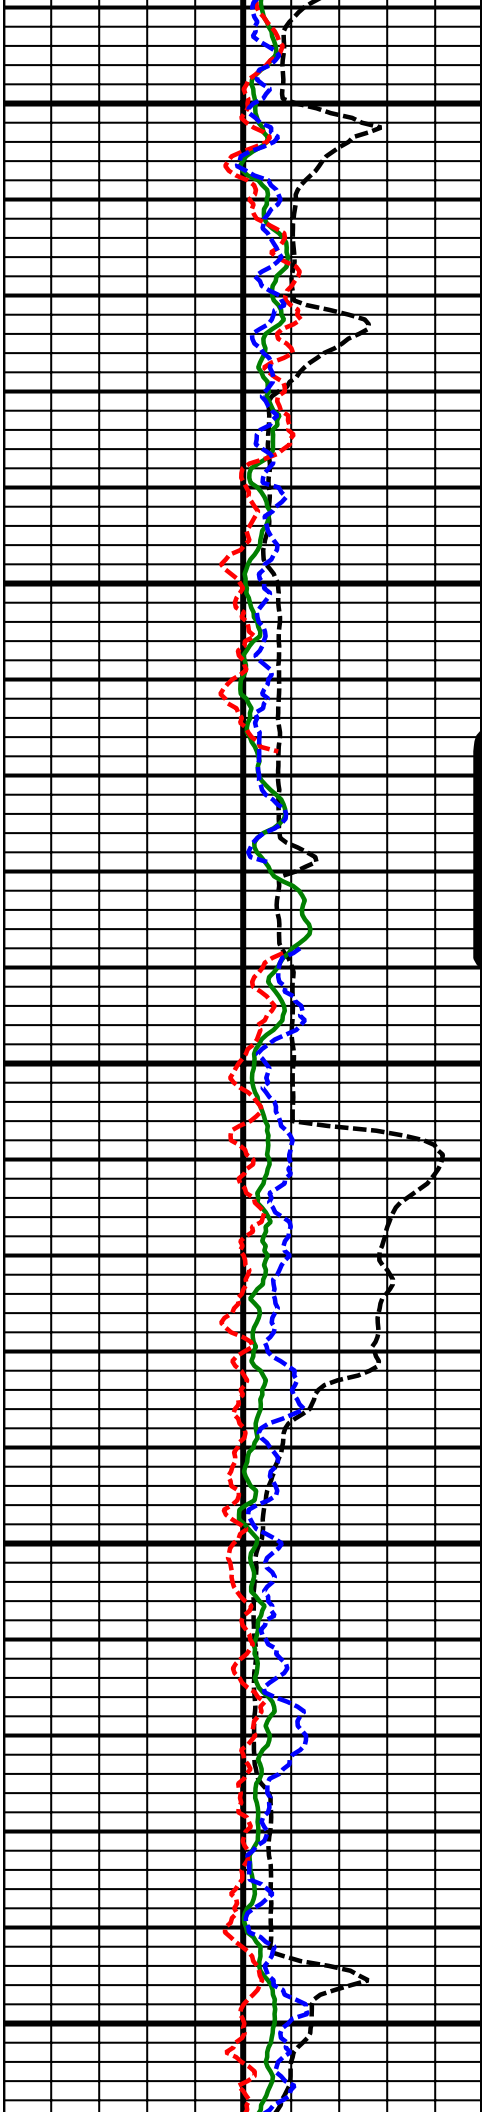


8500
MD

8600
MD



8700
MD

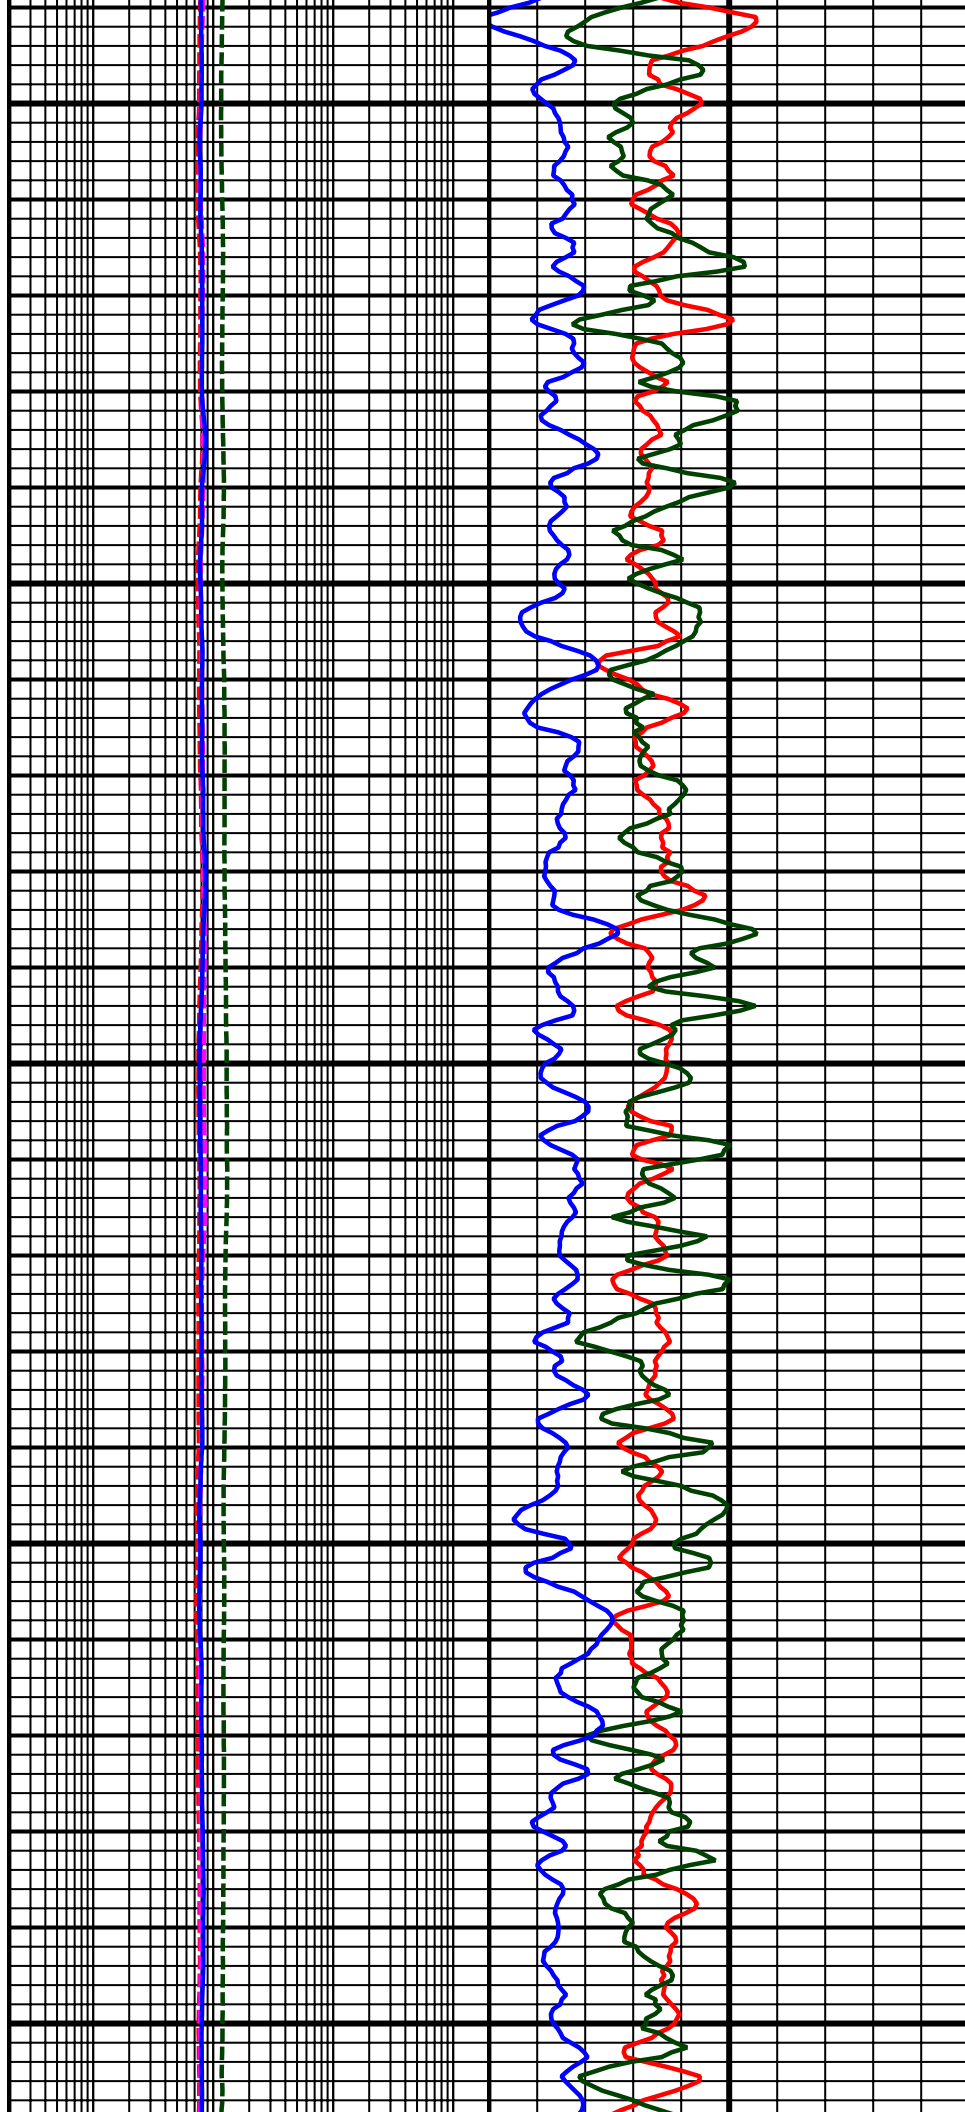


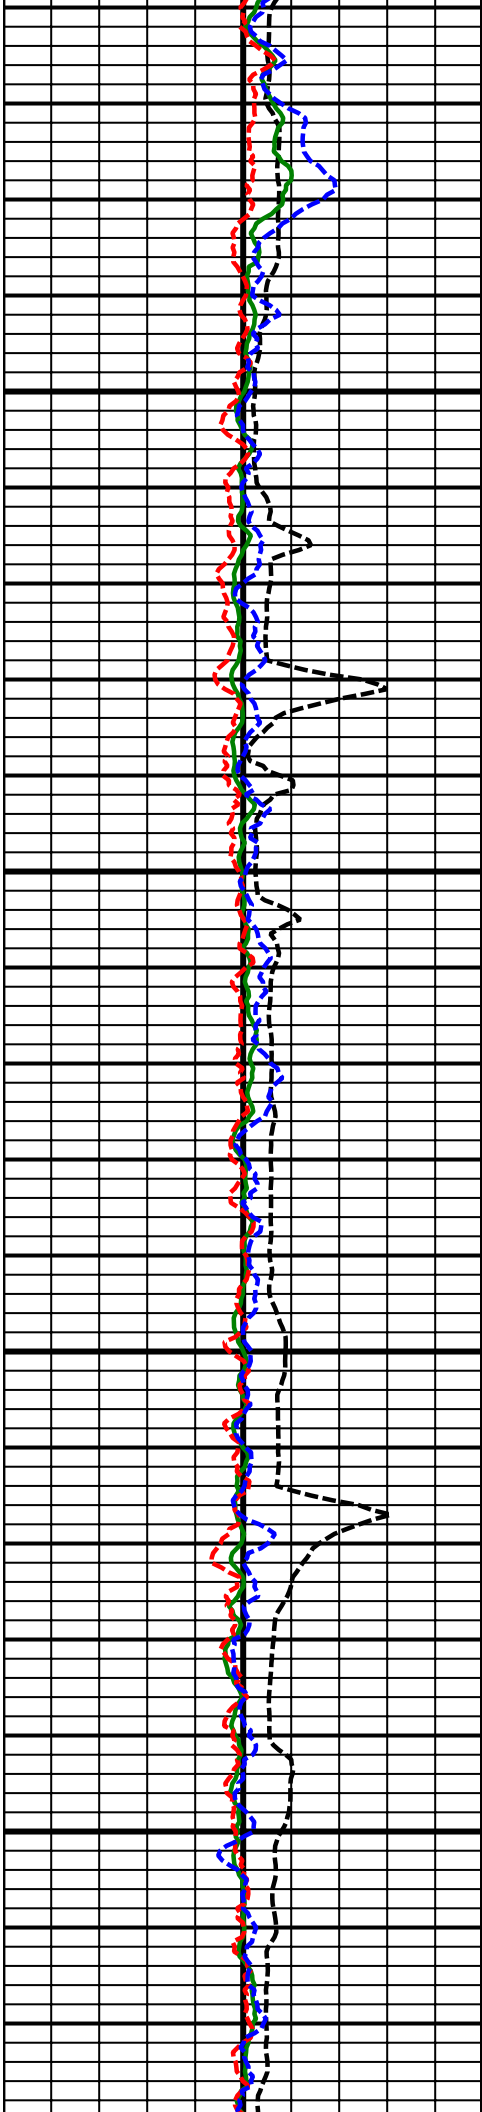

8800
MD



8900
MD

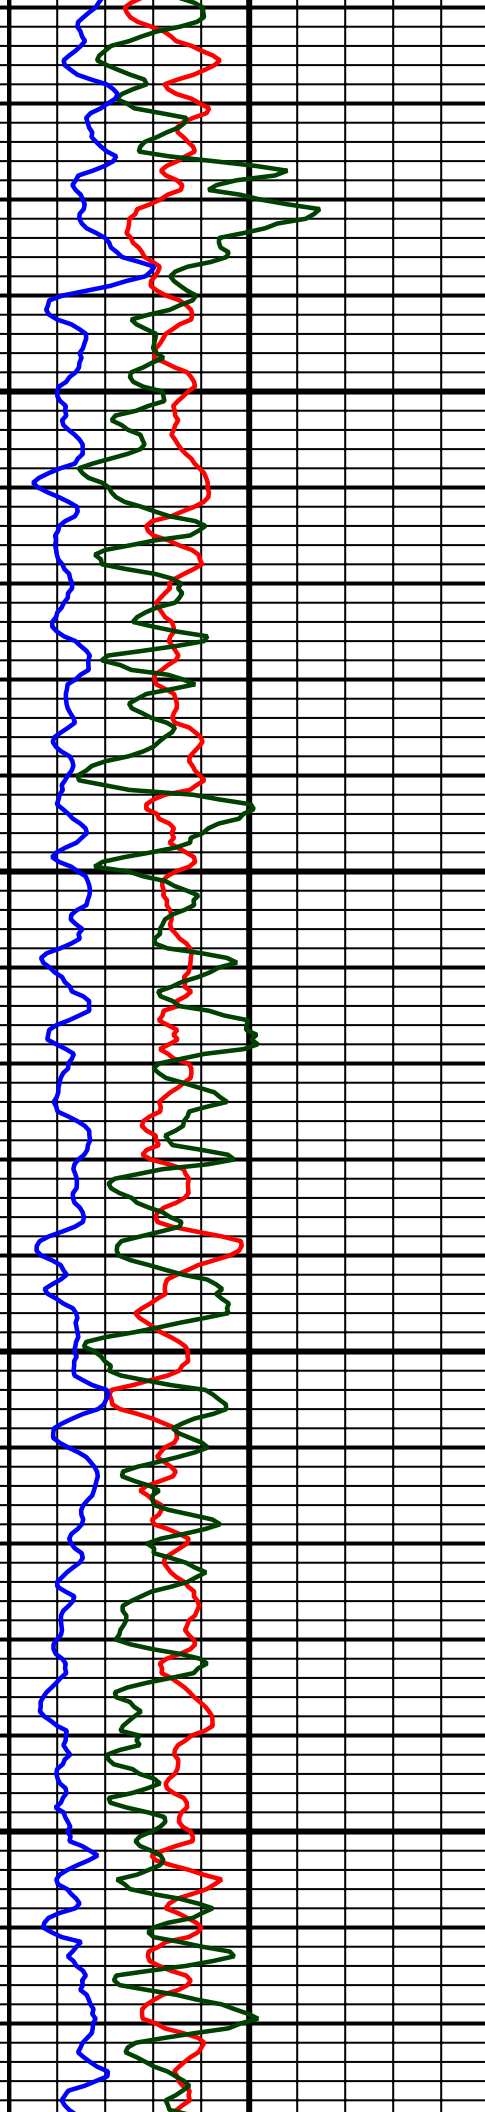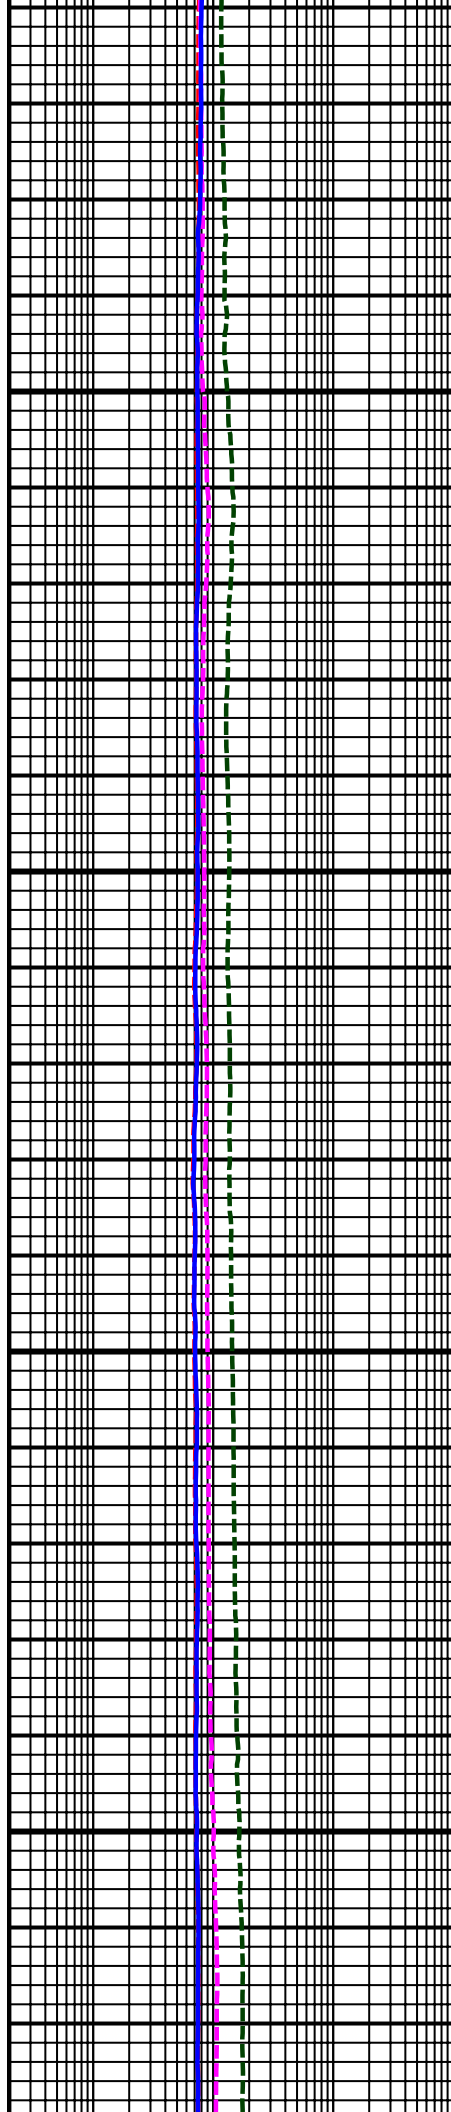


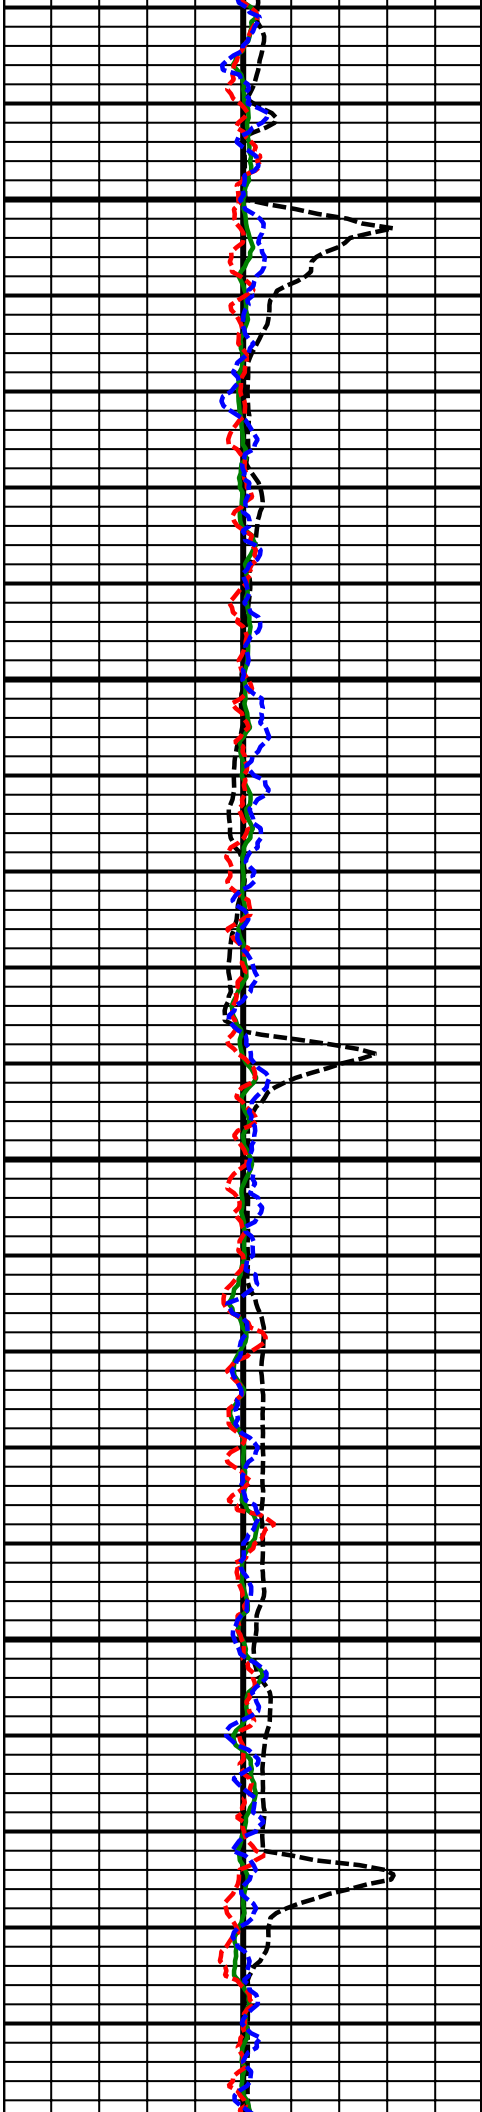

9000
MD



9100
MD

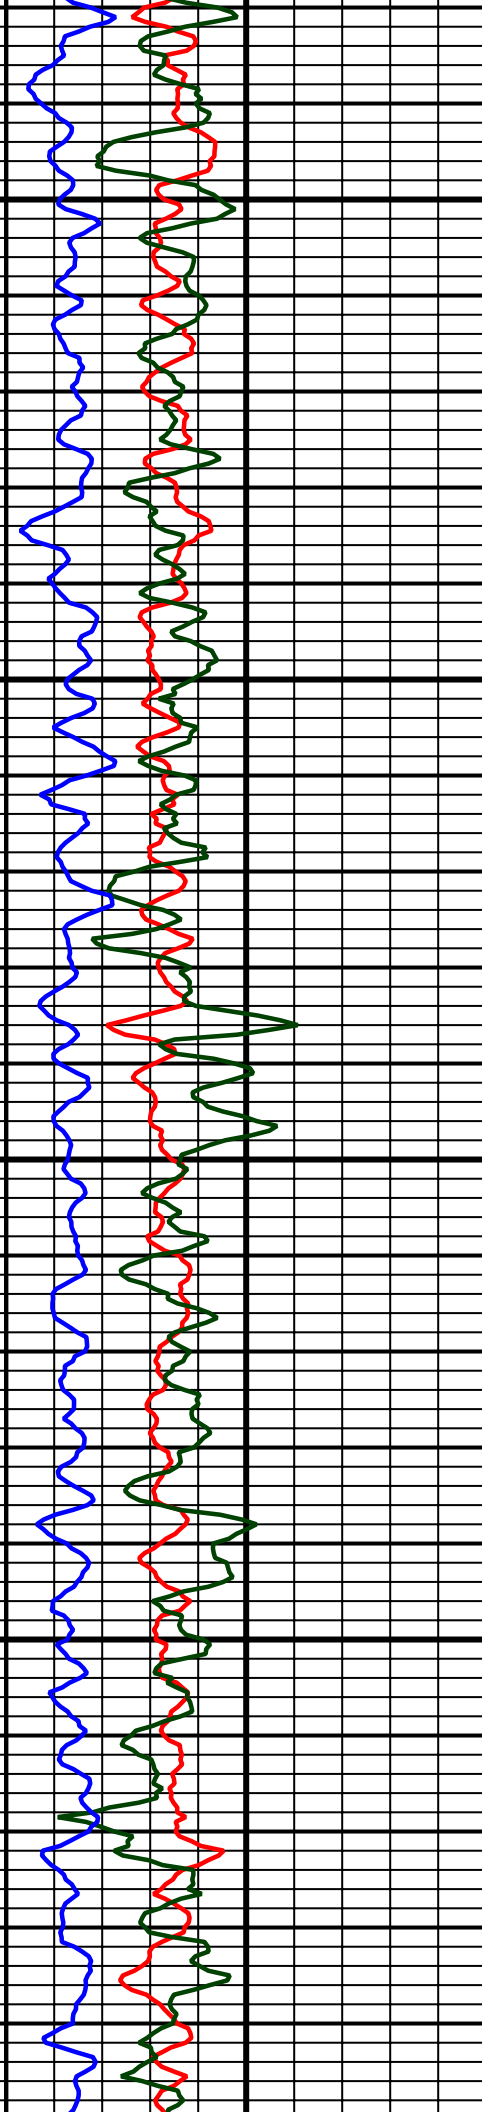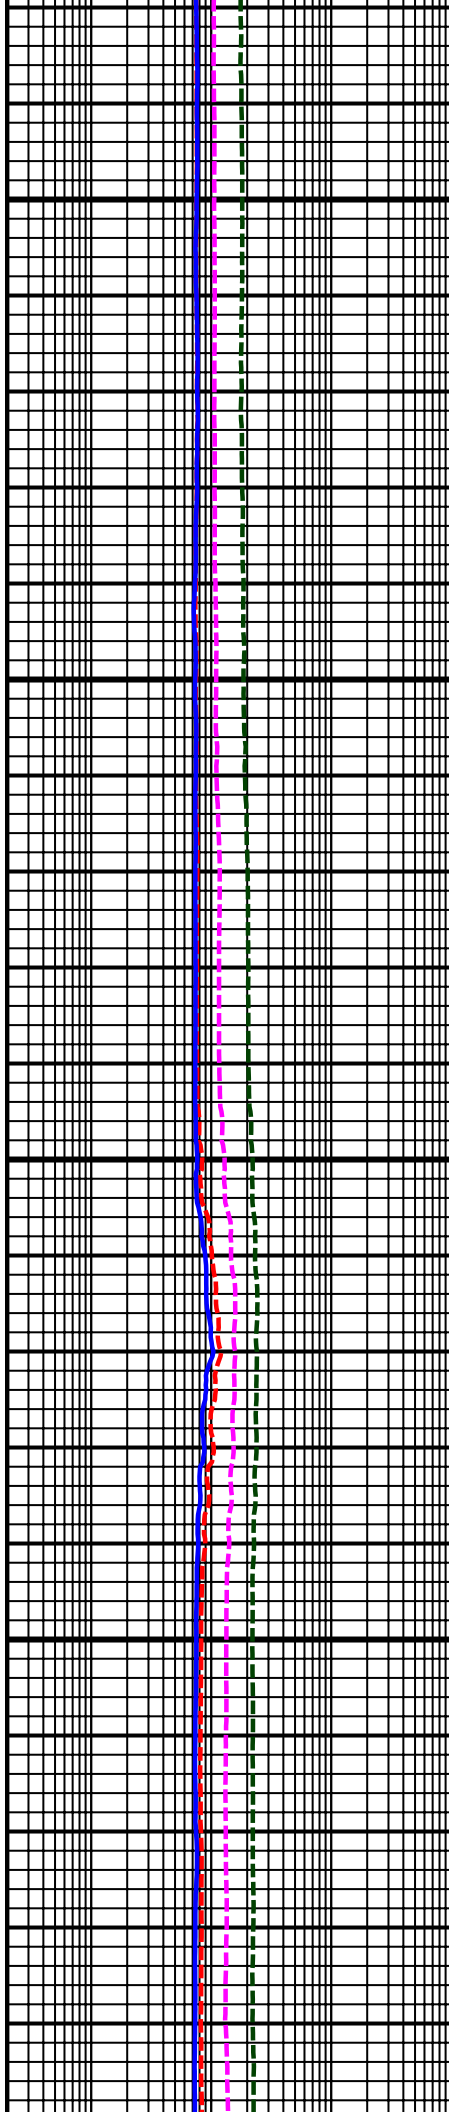


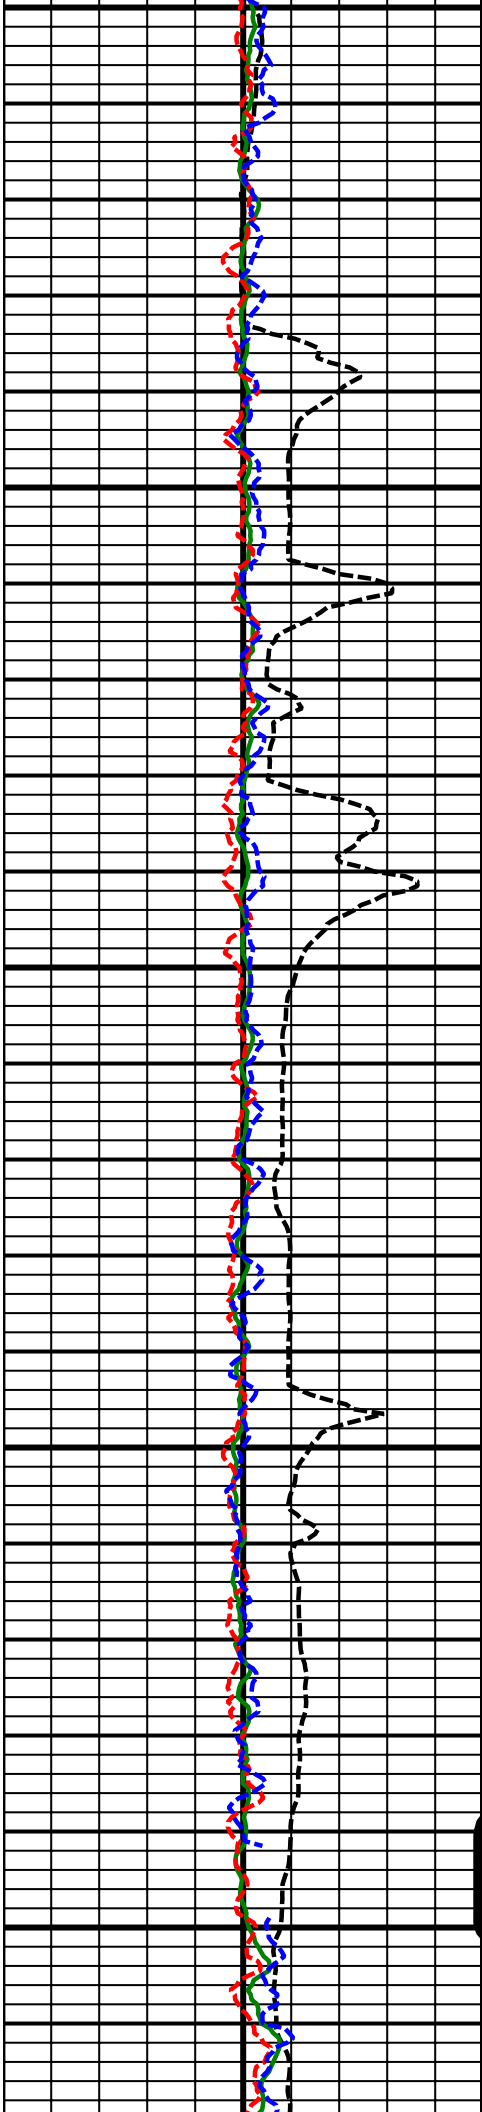

9200
MD



9300
MD

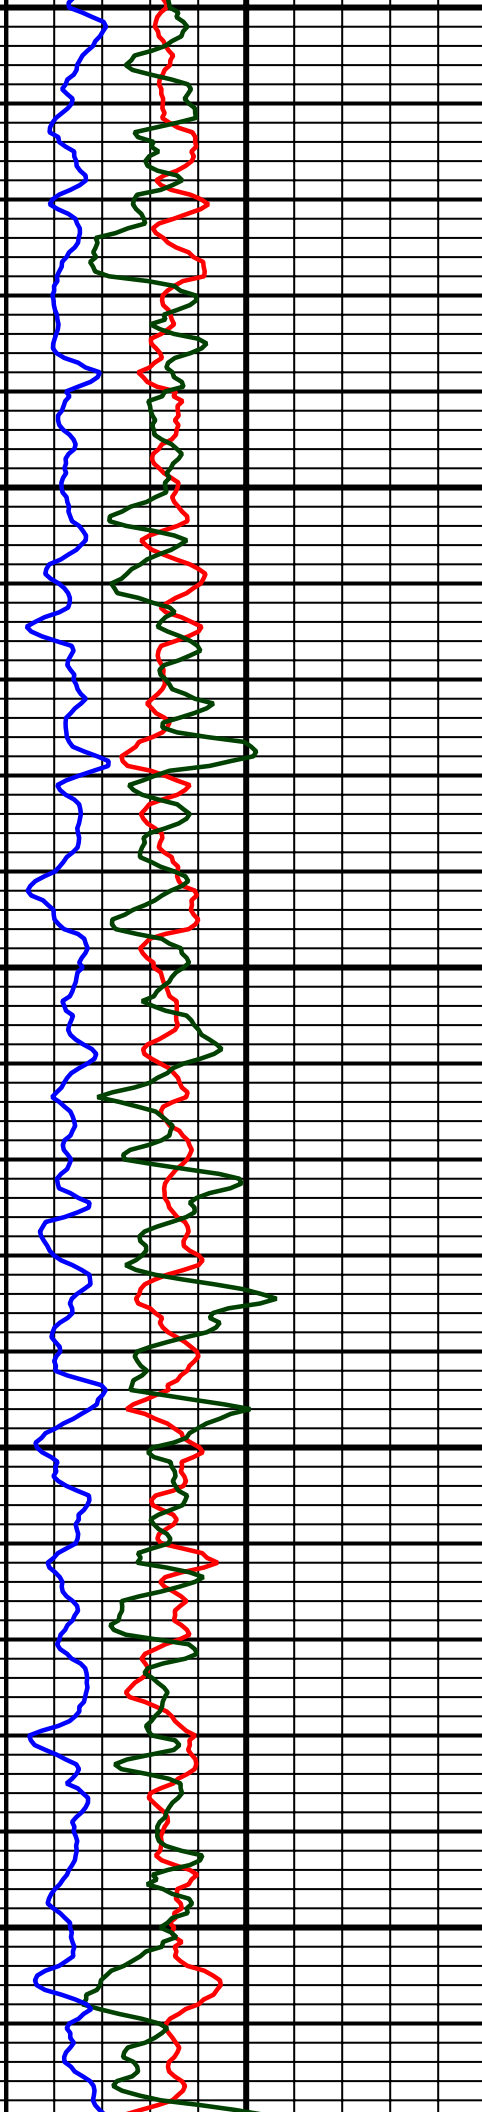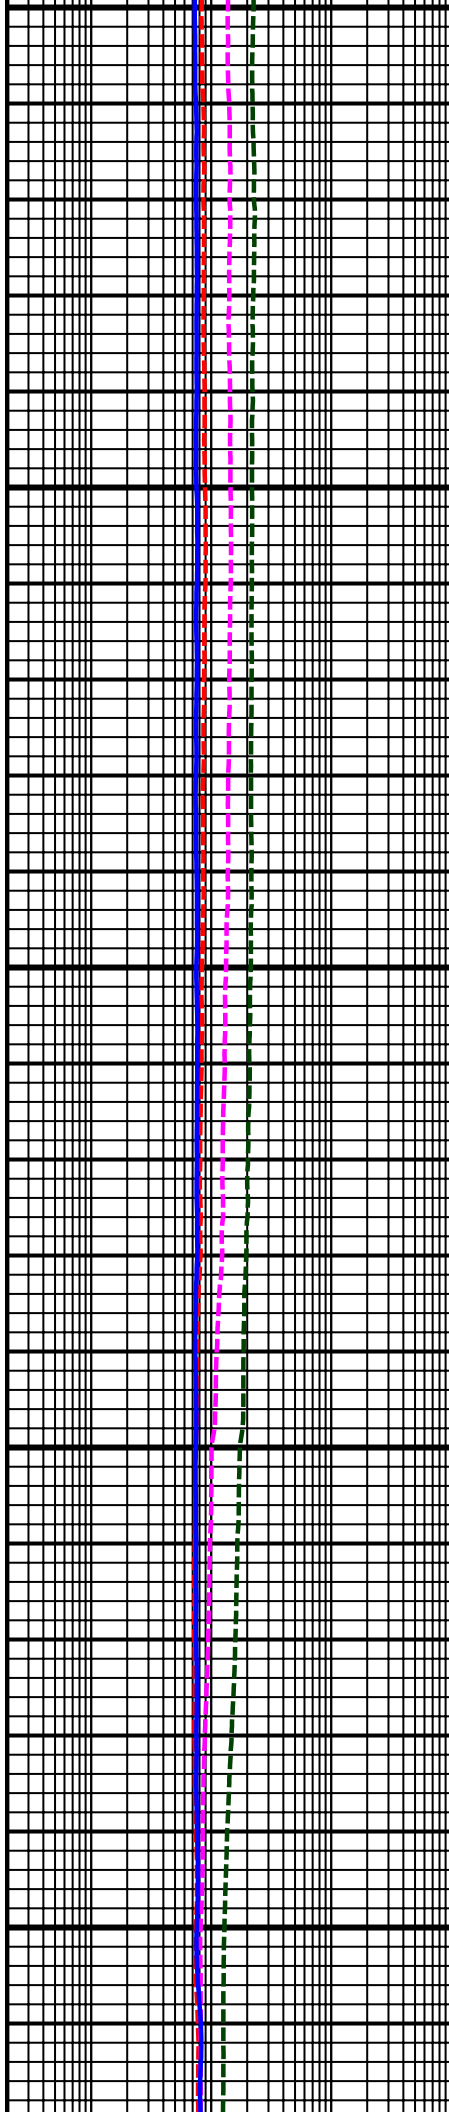


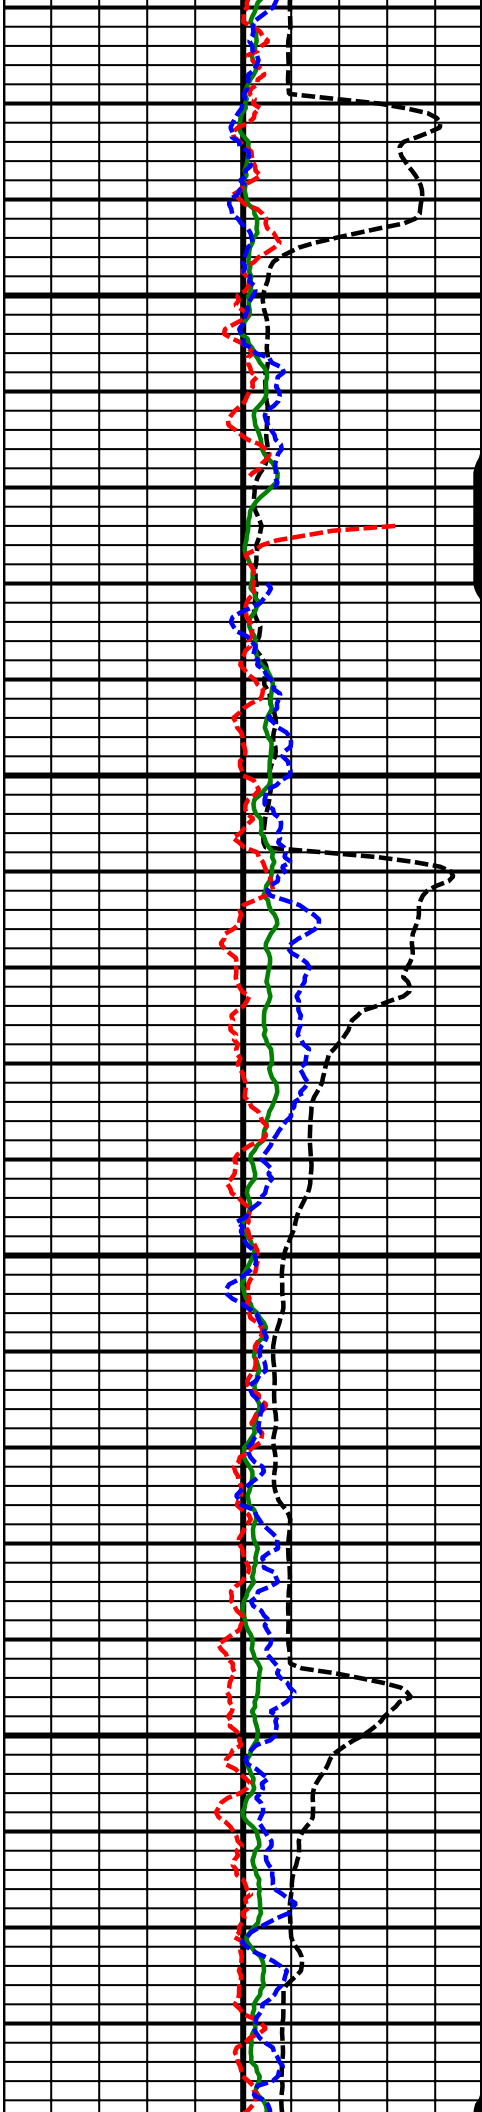

9400
MD

9500
MD

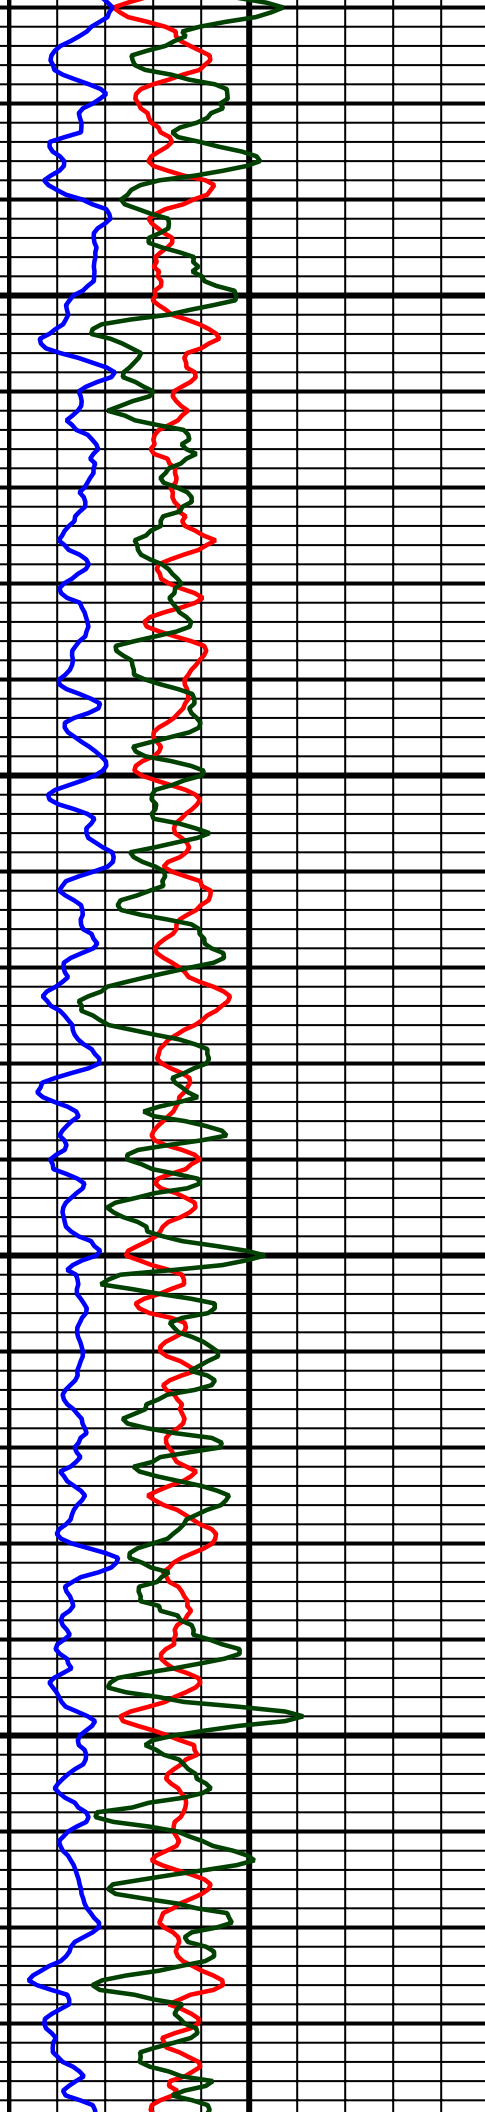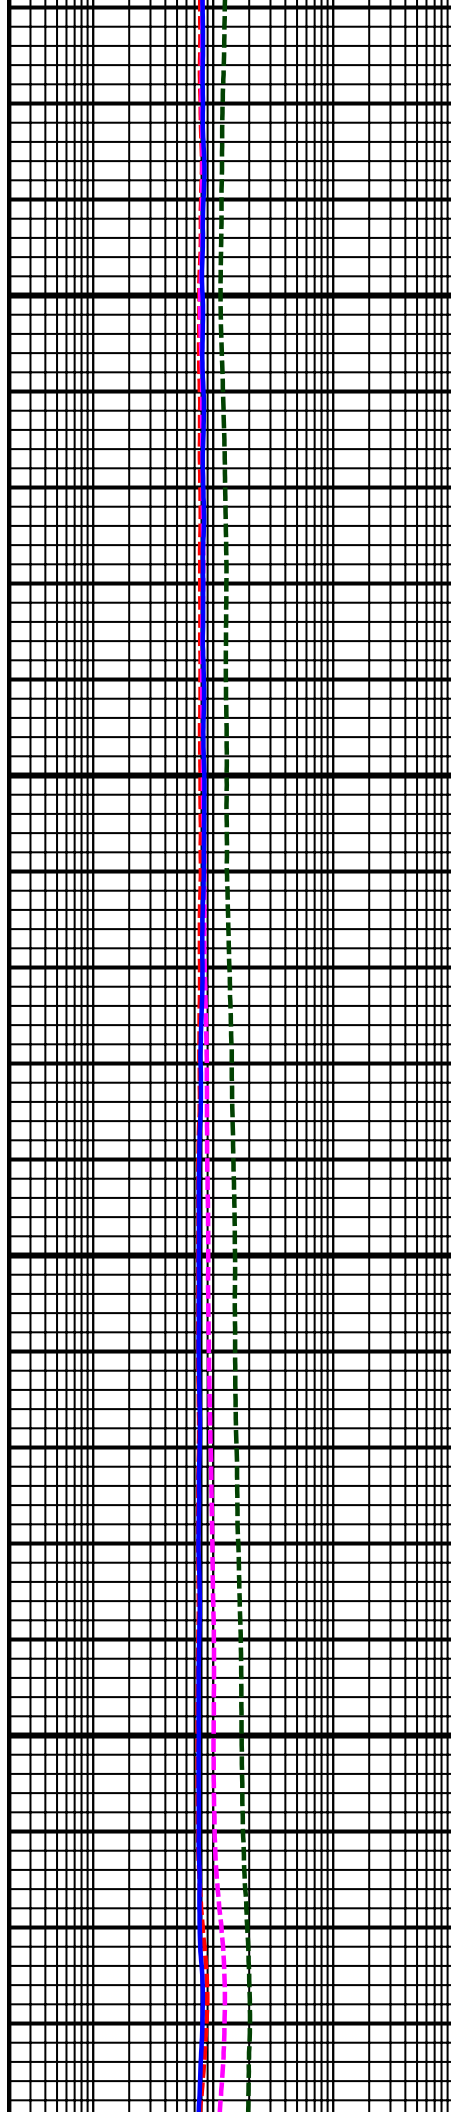


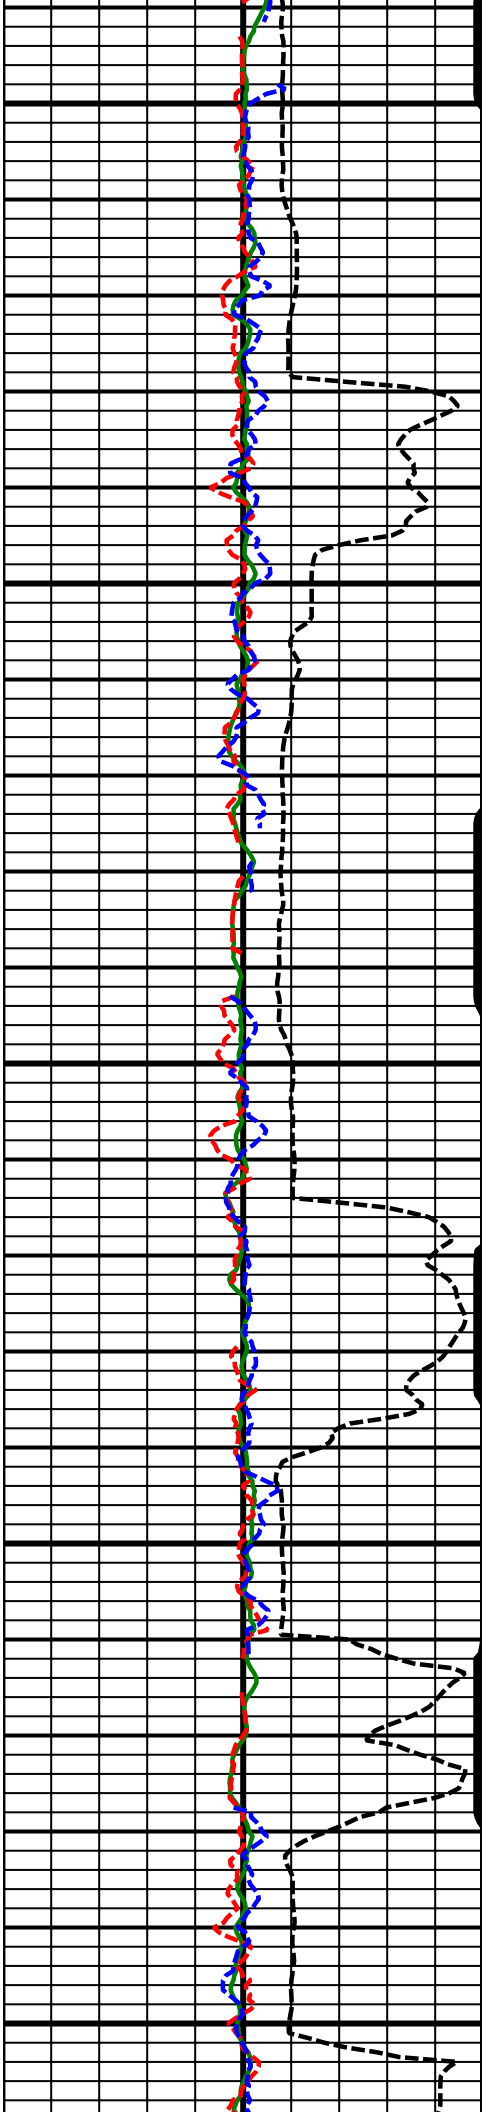


9600
MD

9700
MD



9800
MD

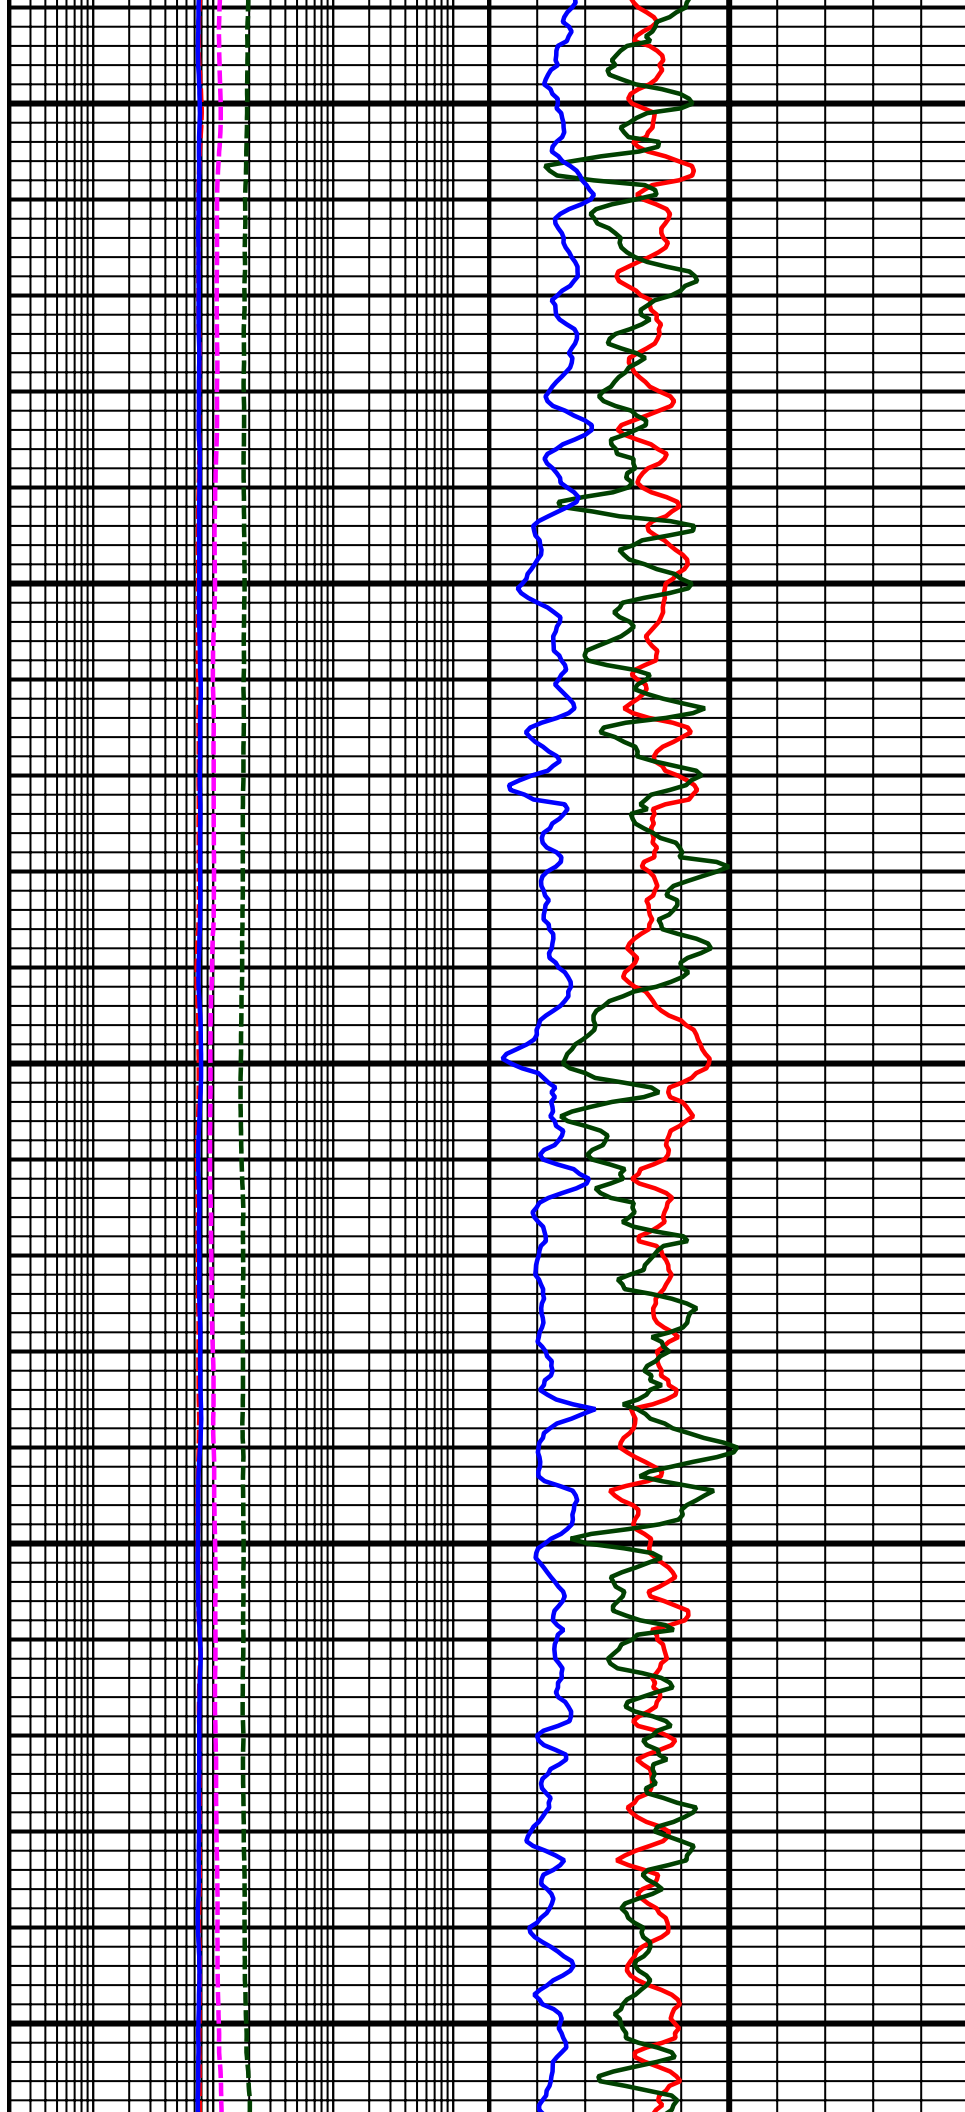


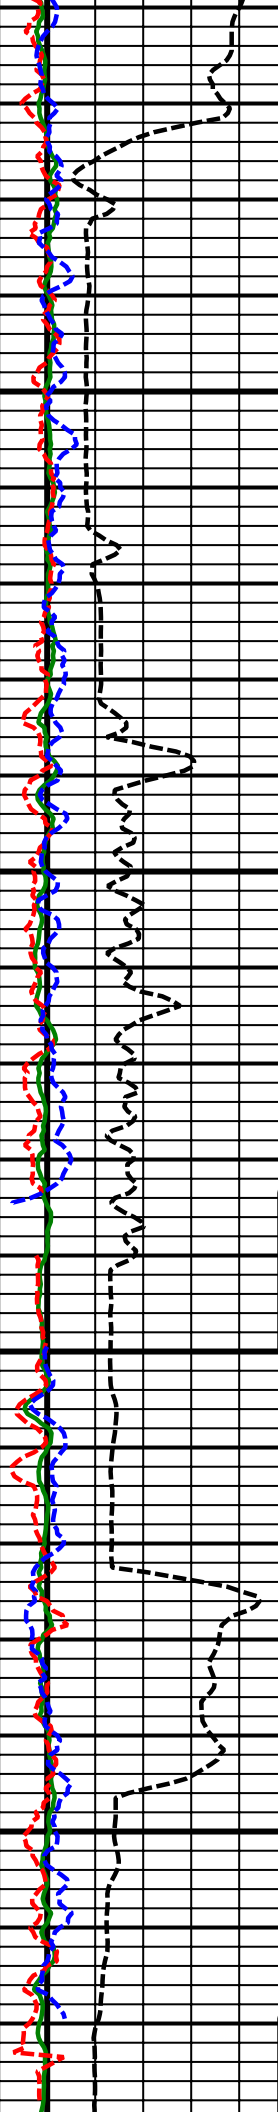

9900
MD


10000
MD

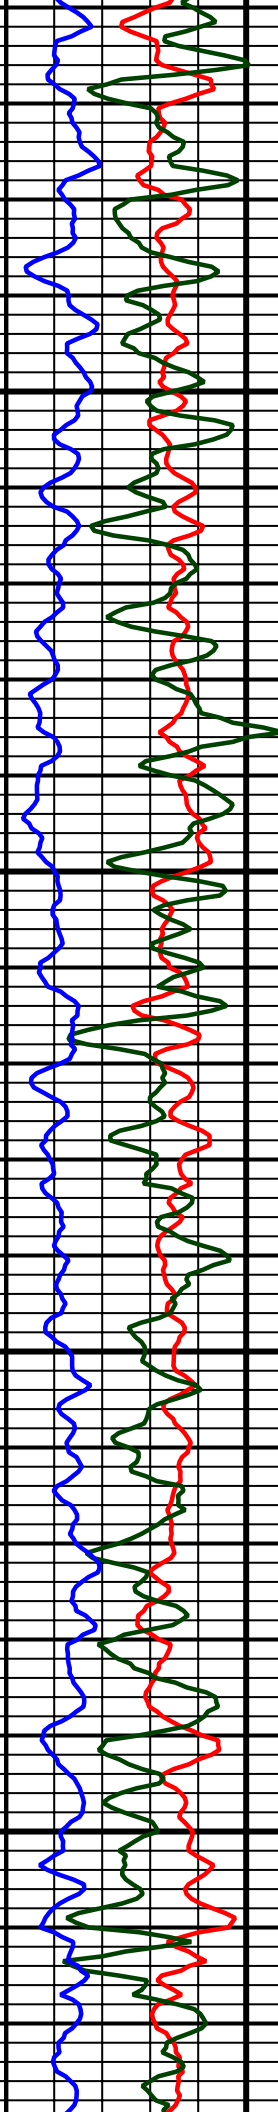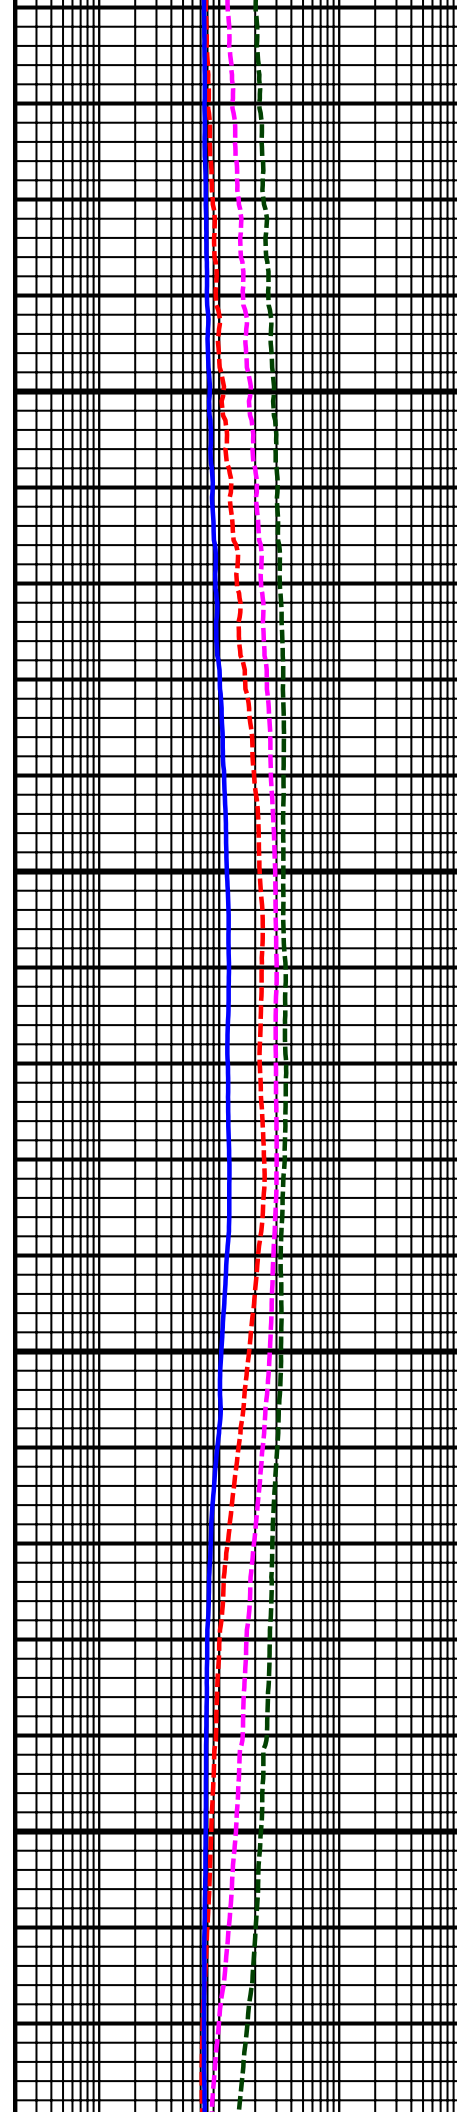


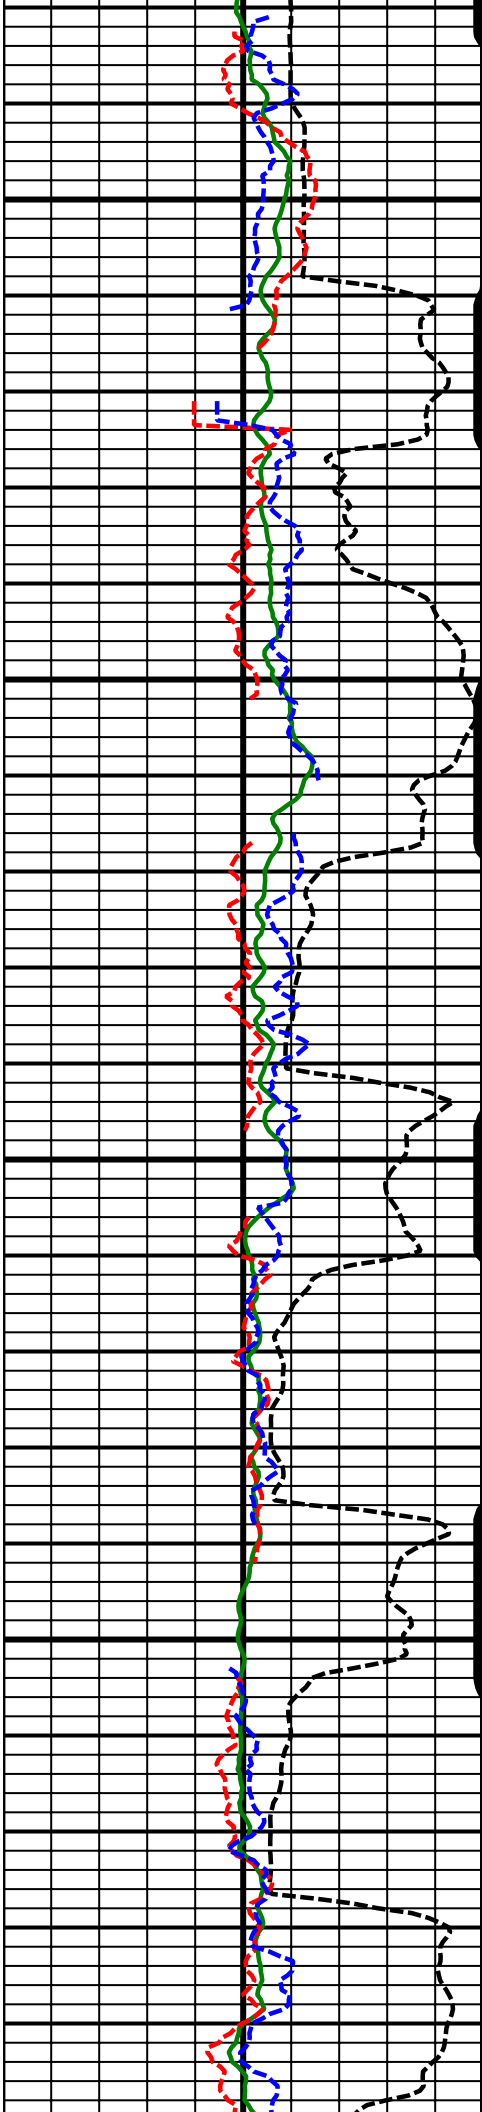

10100
MD


10200
MD

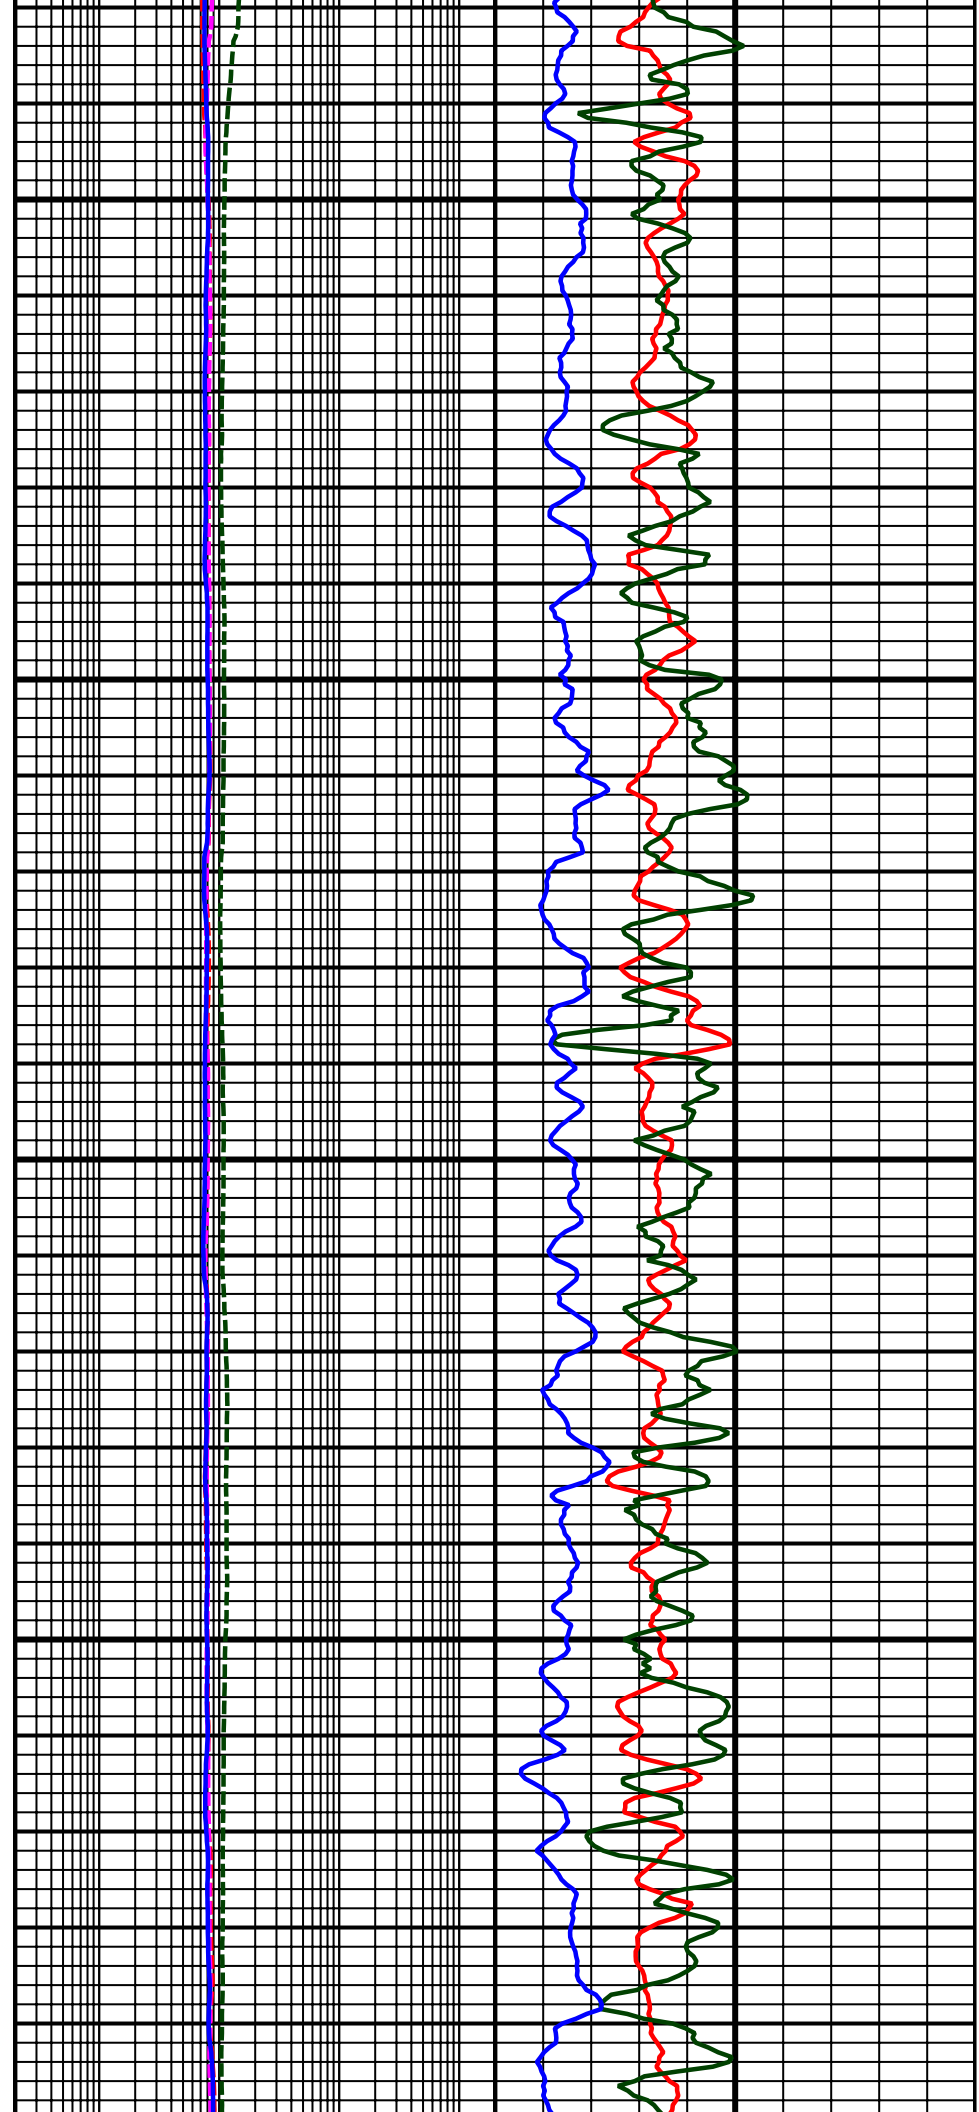


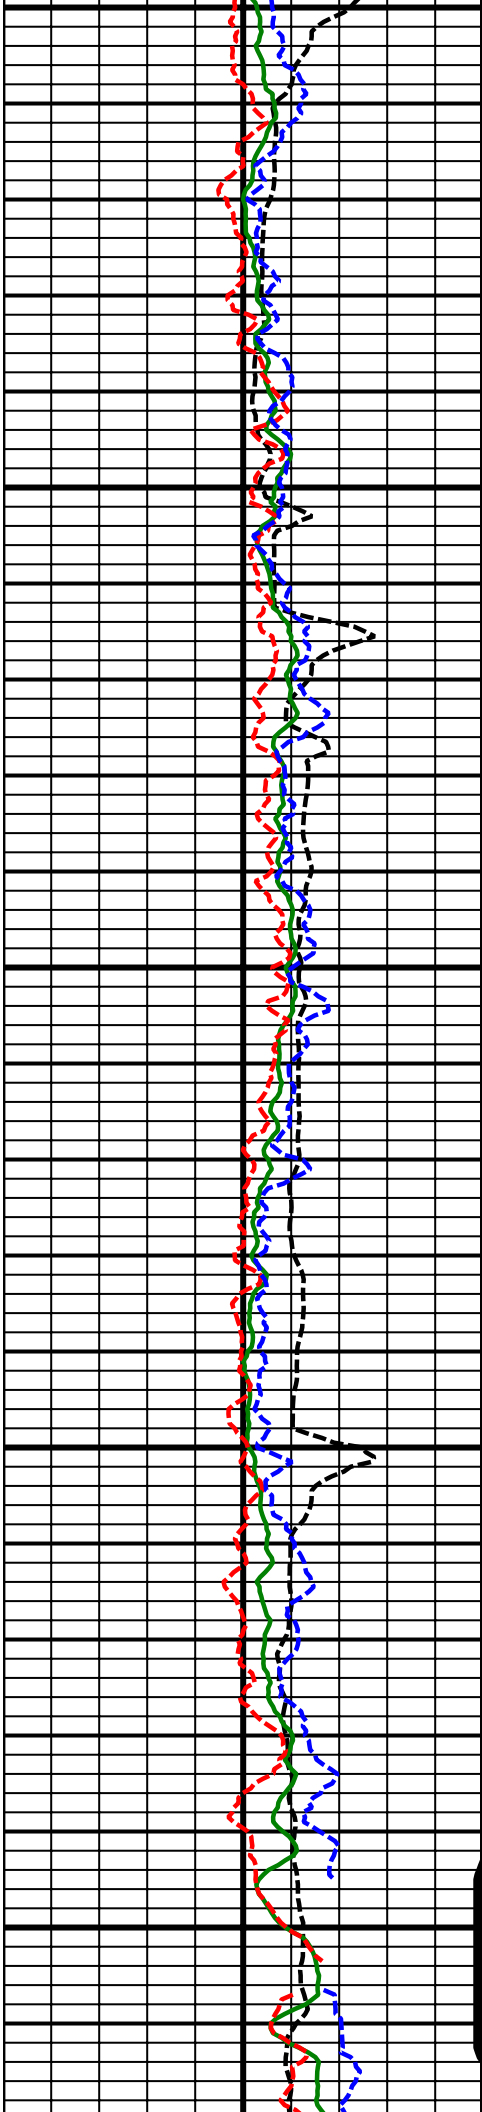

10300
MD



10400
MD

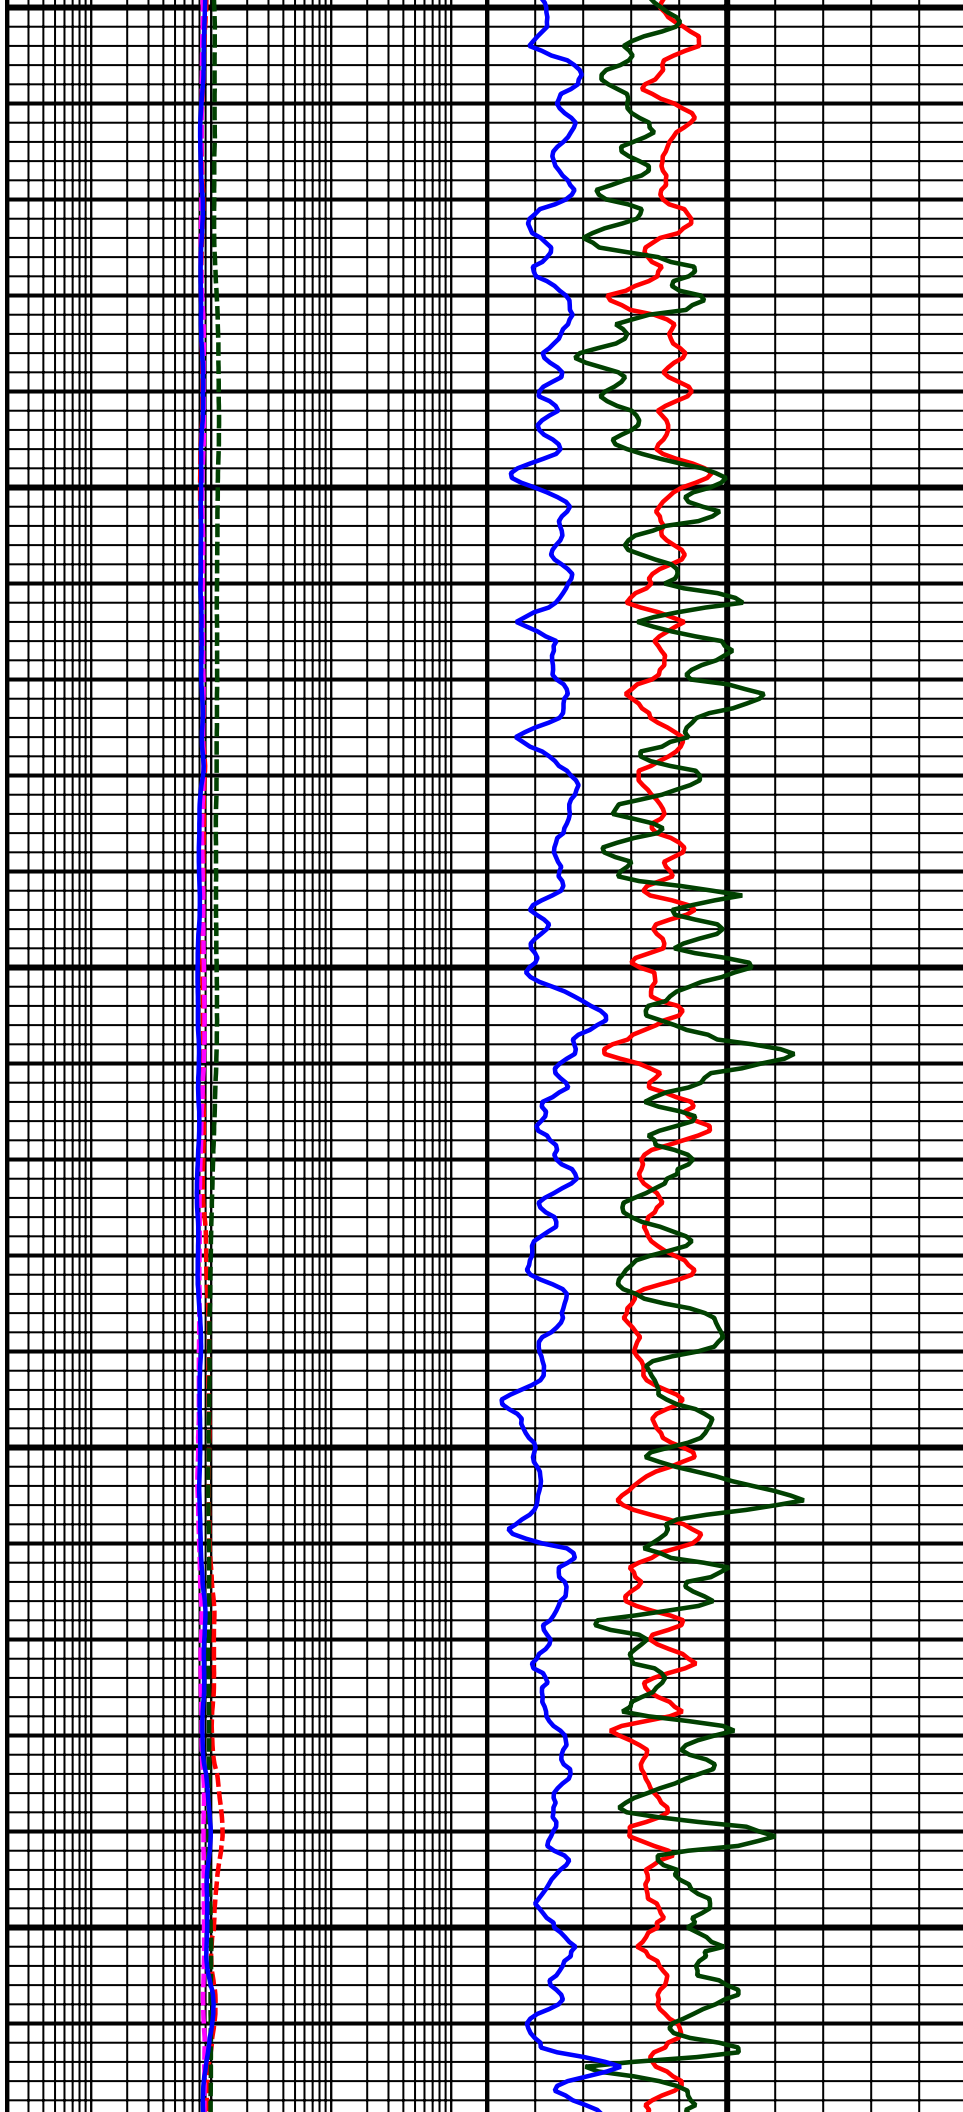


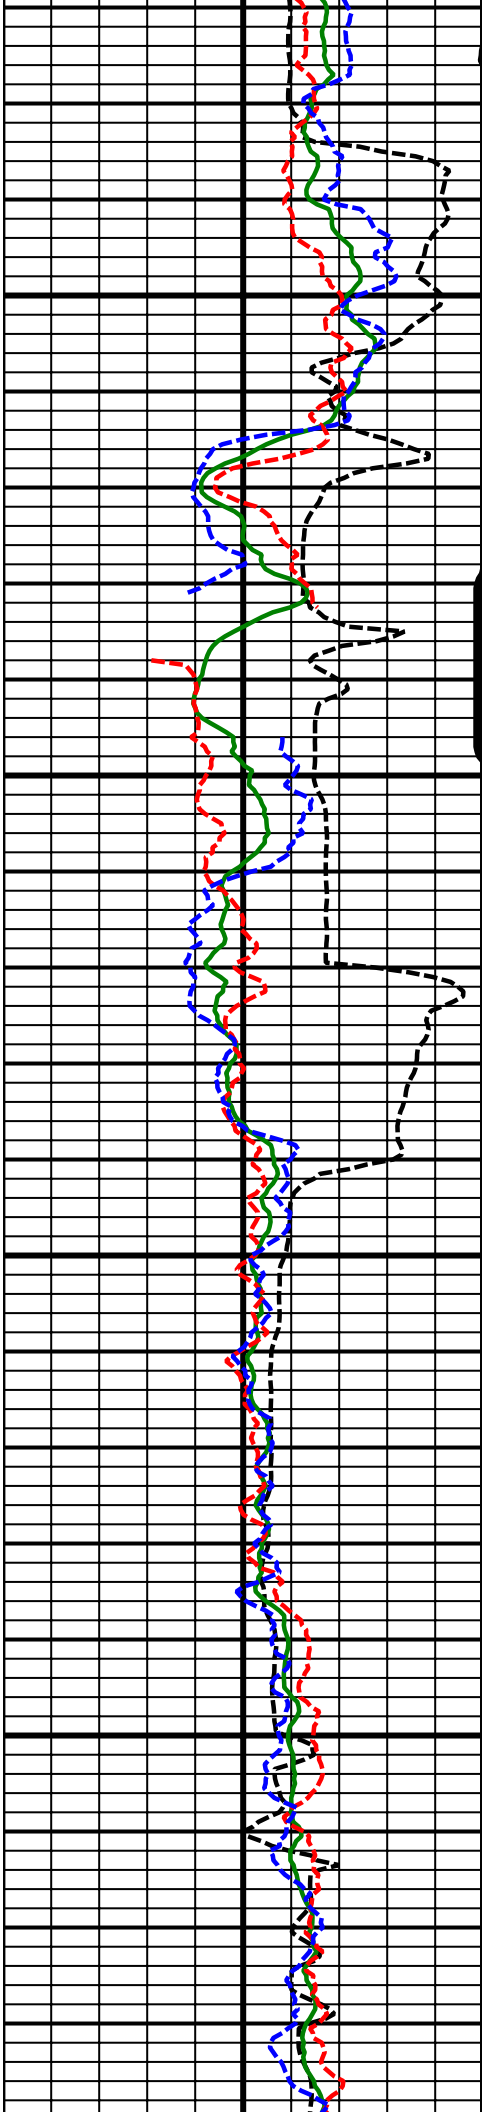

10500
MD

10600
MD

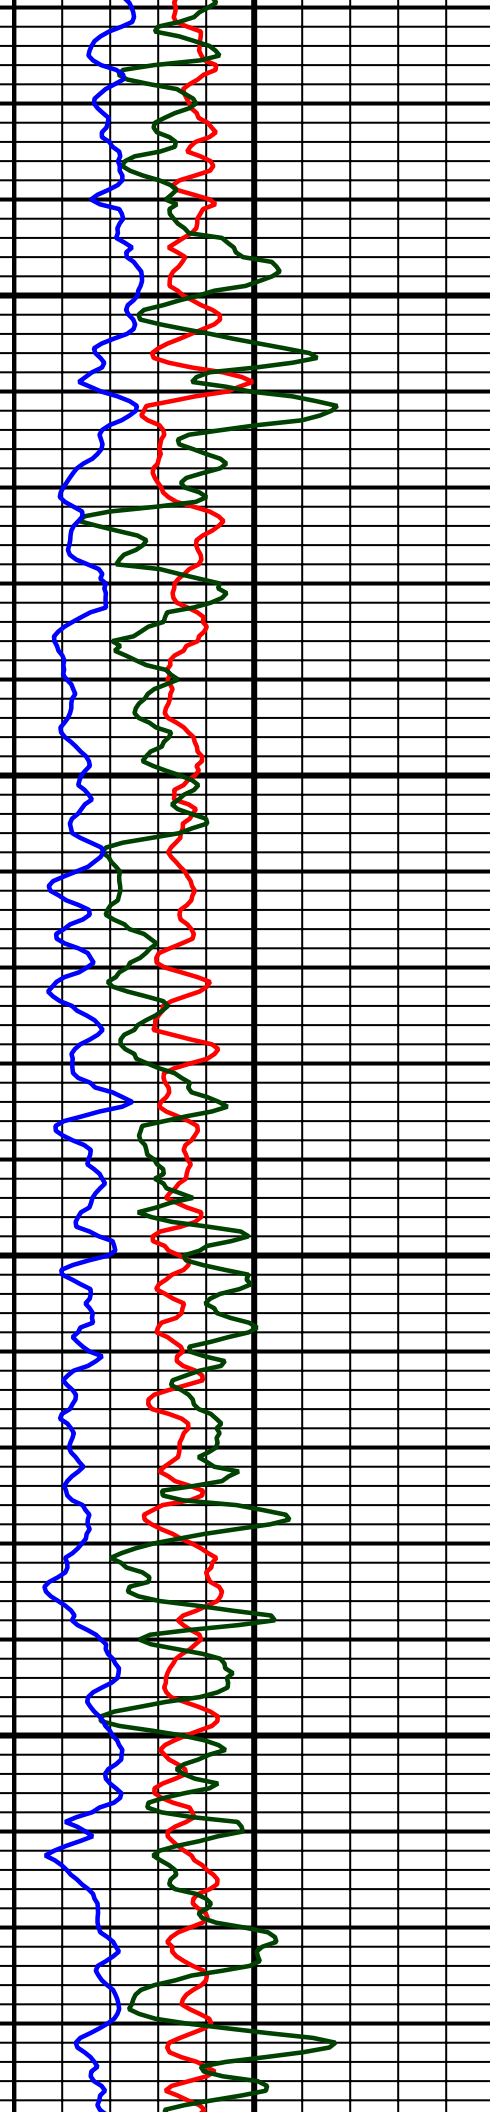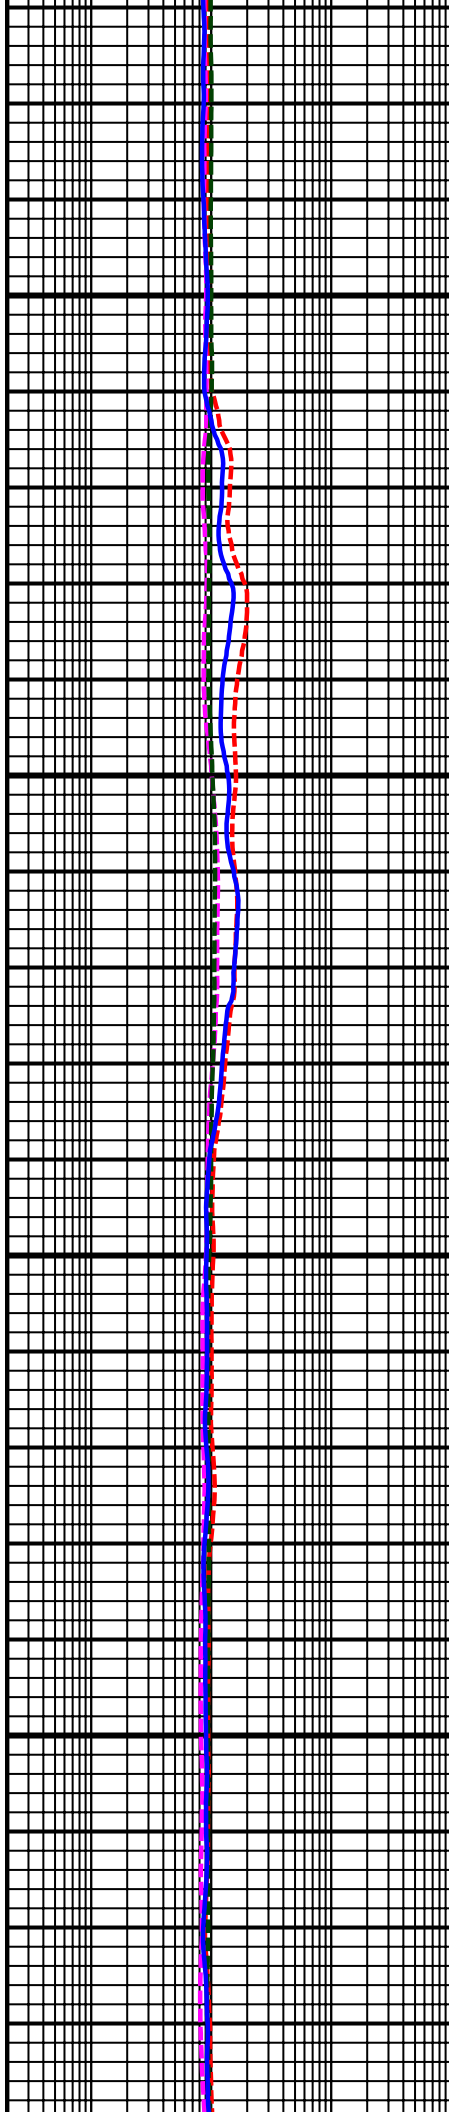


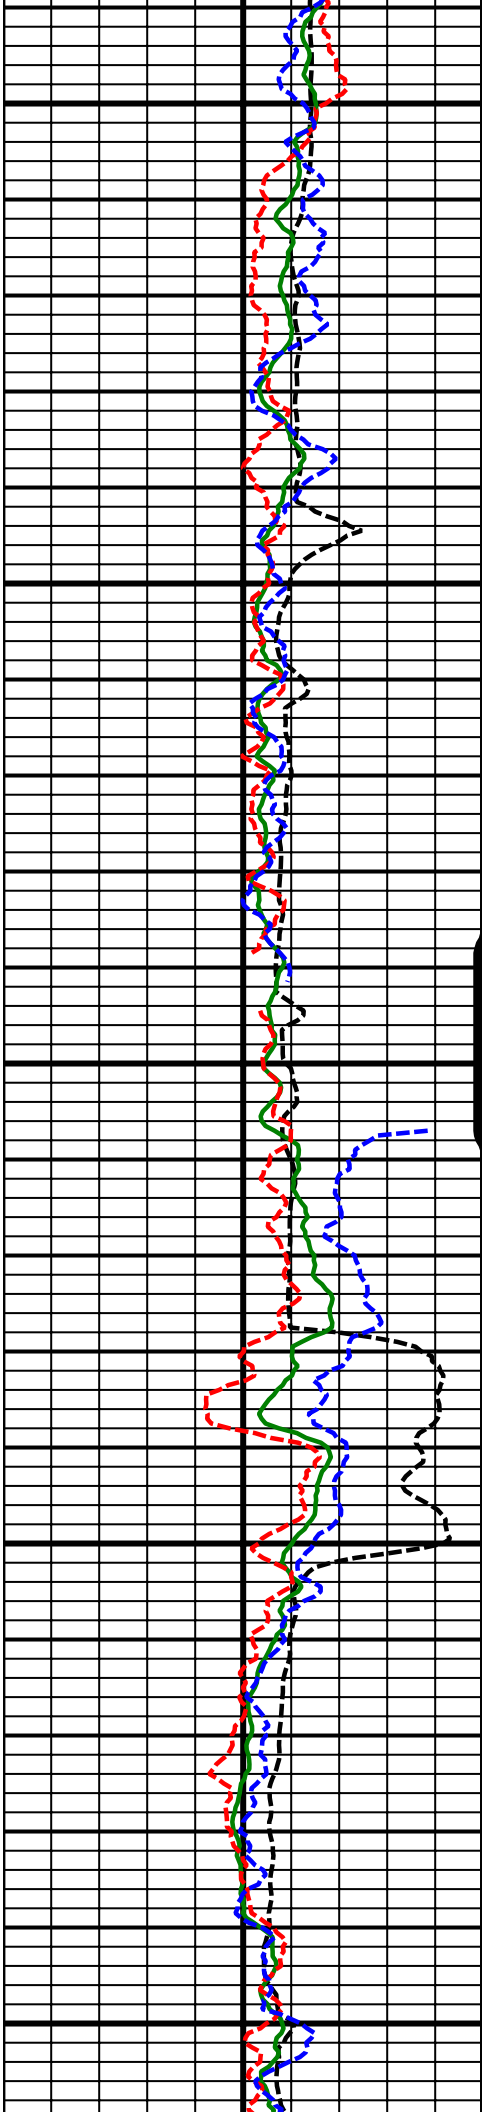


10700
MD

10800
MD



10900
MD

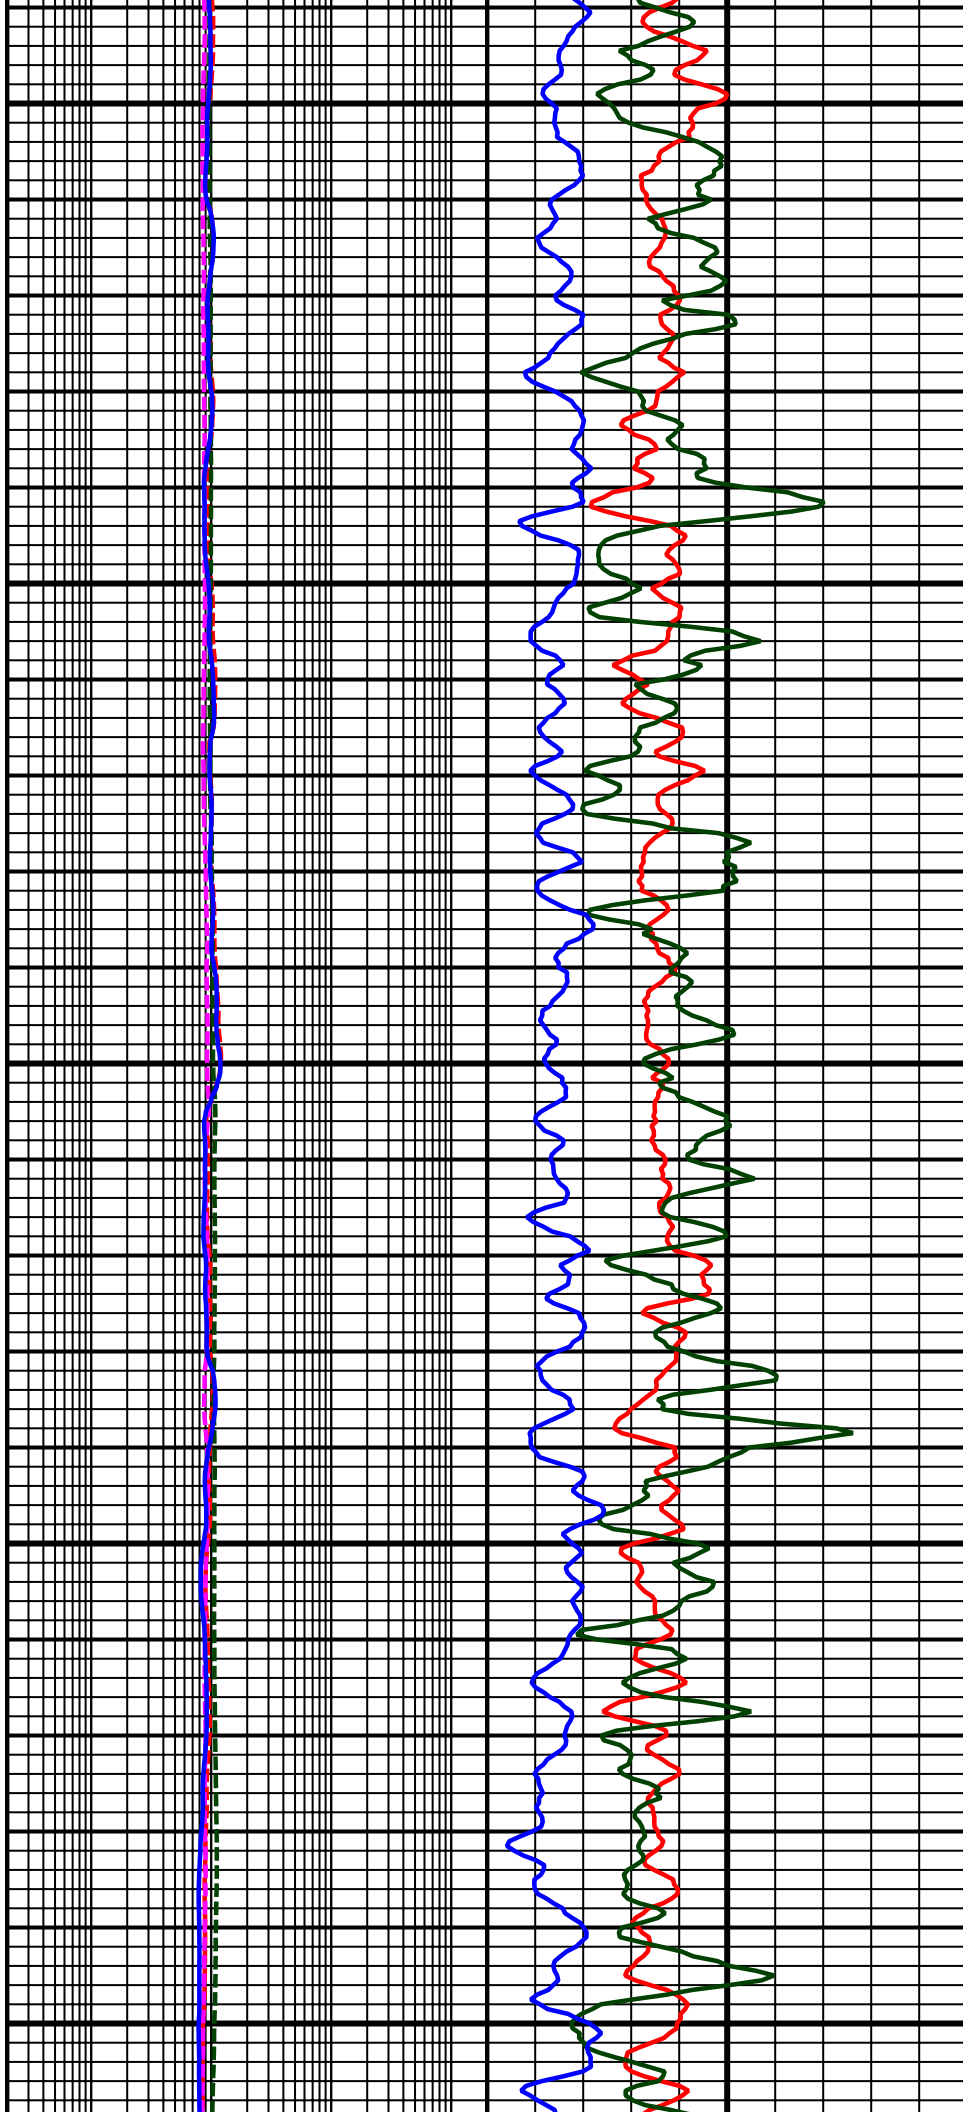


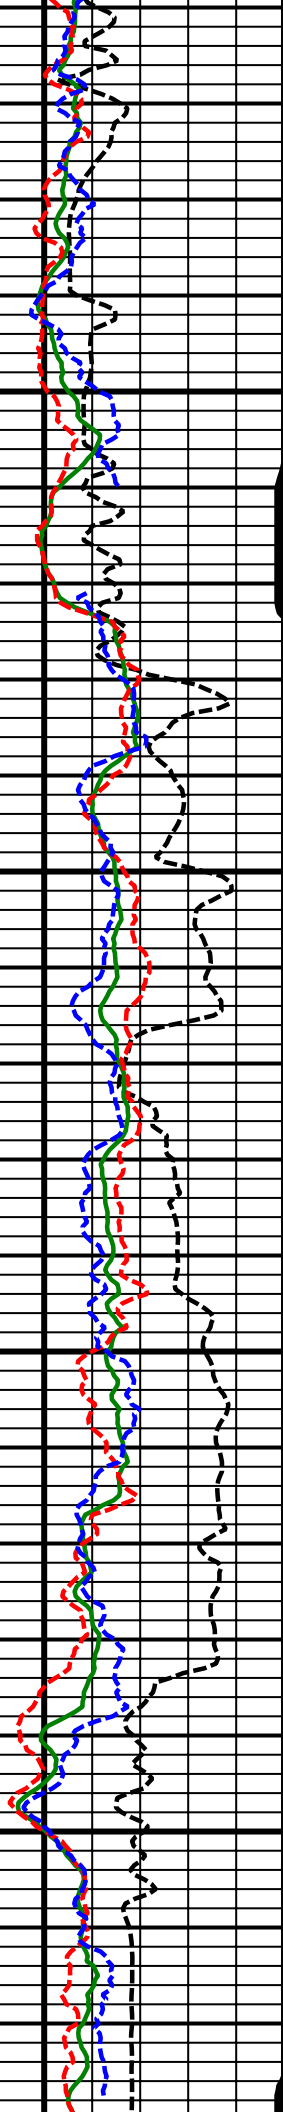

11000
MD



11100
MD

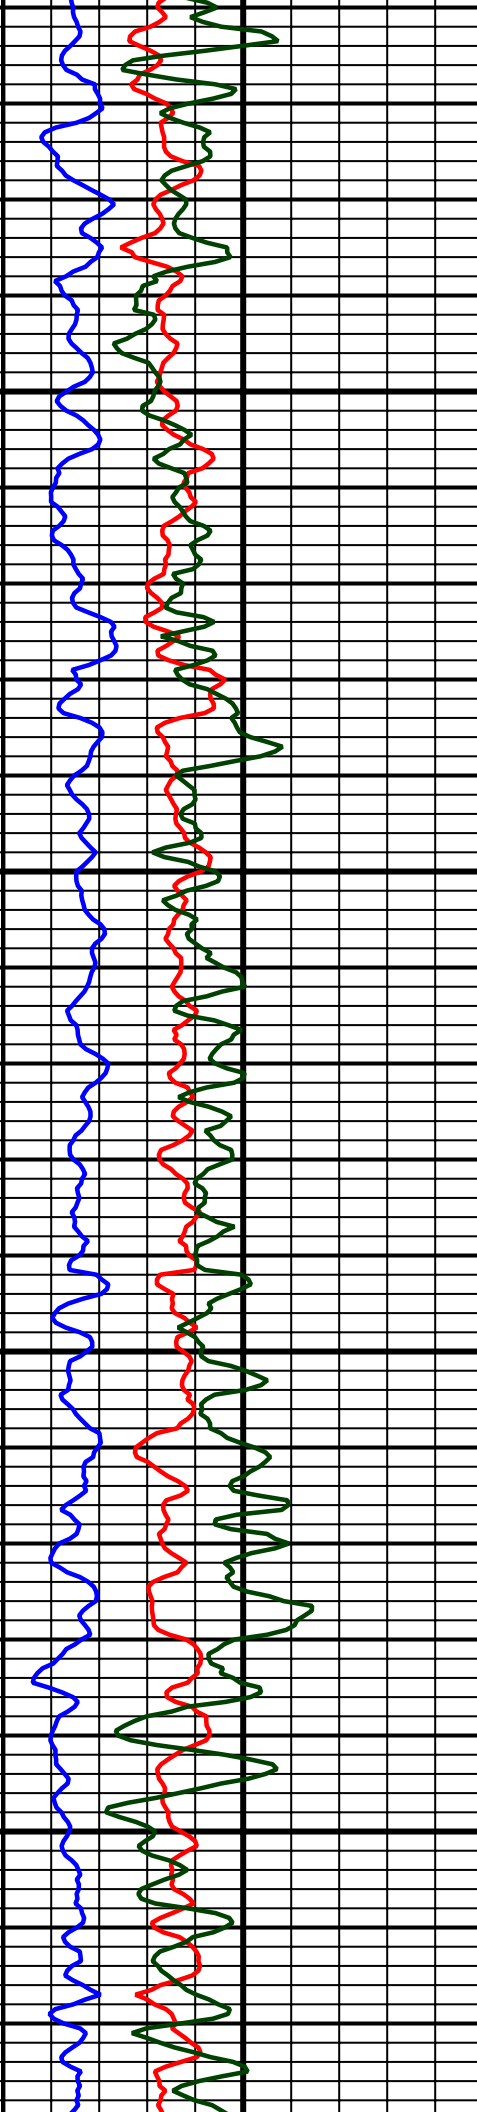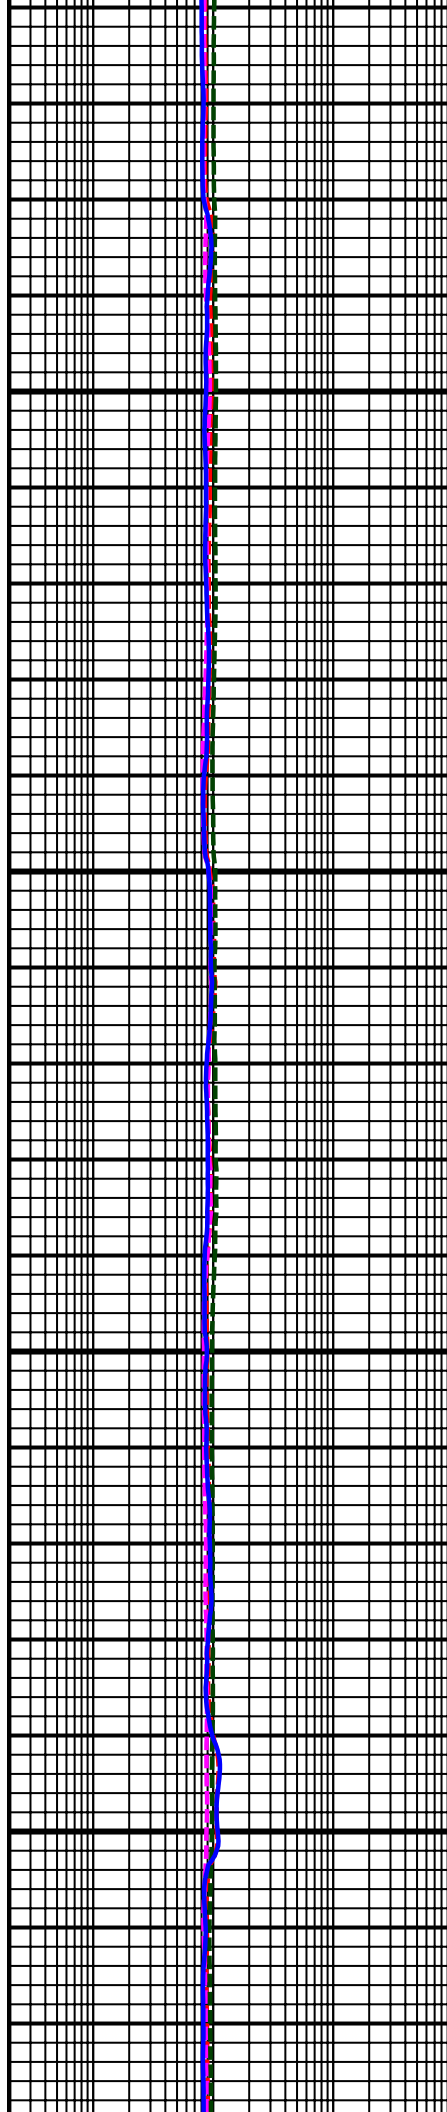


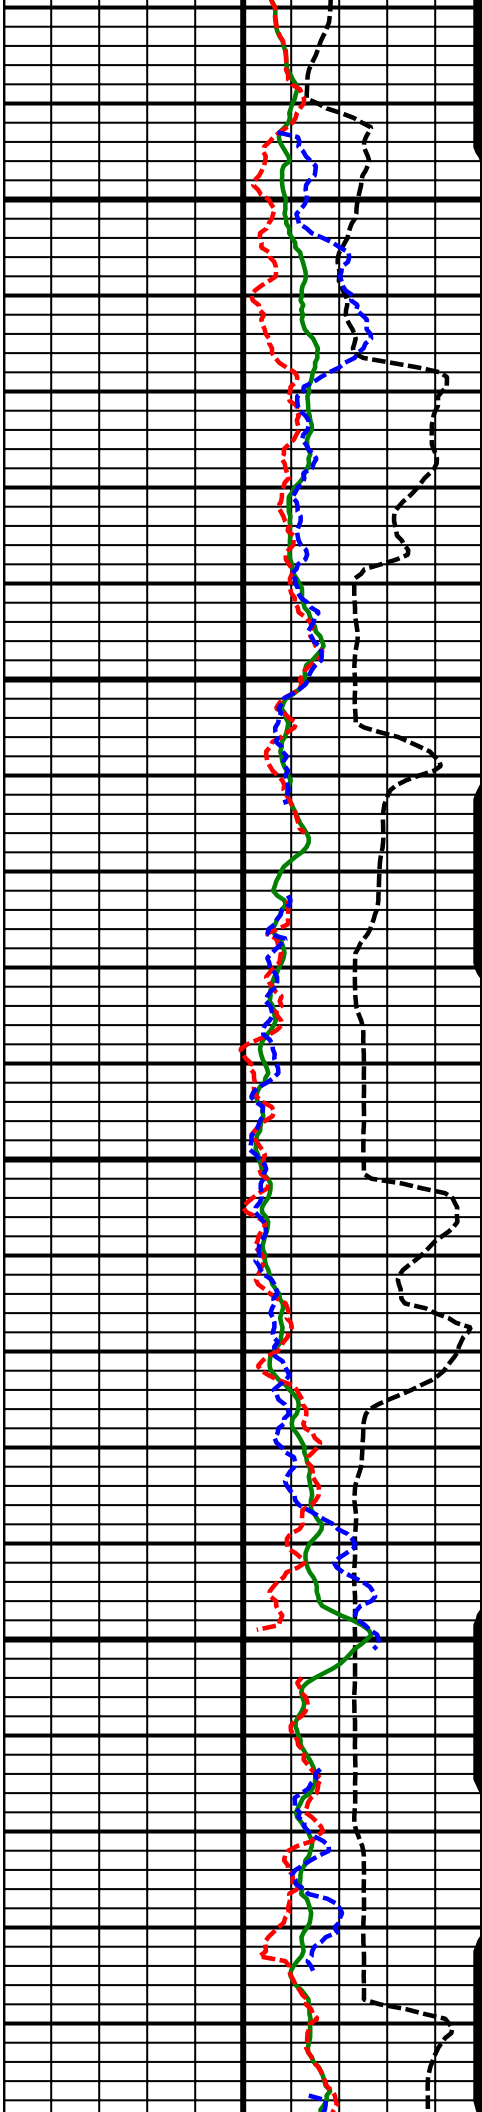

11200
MD



11300
MD

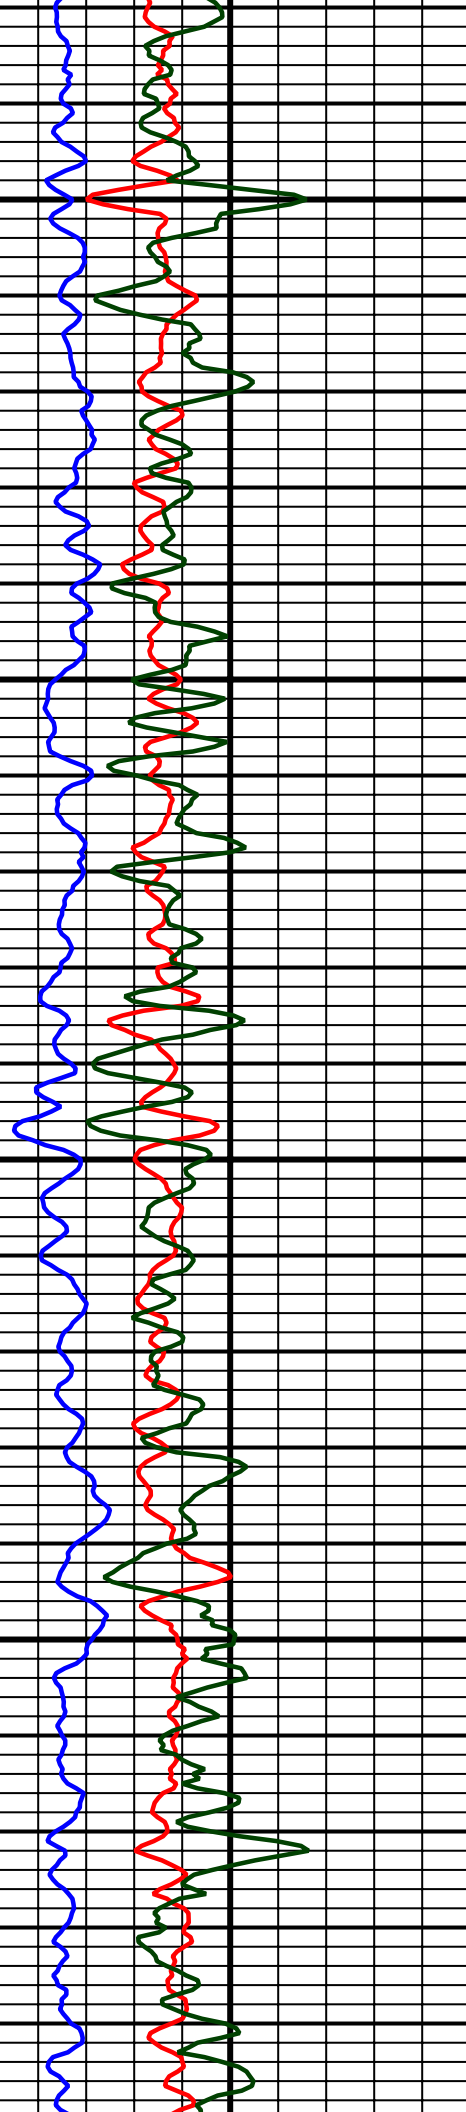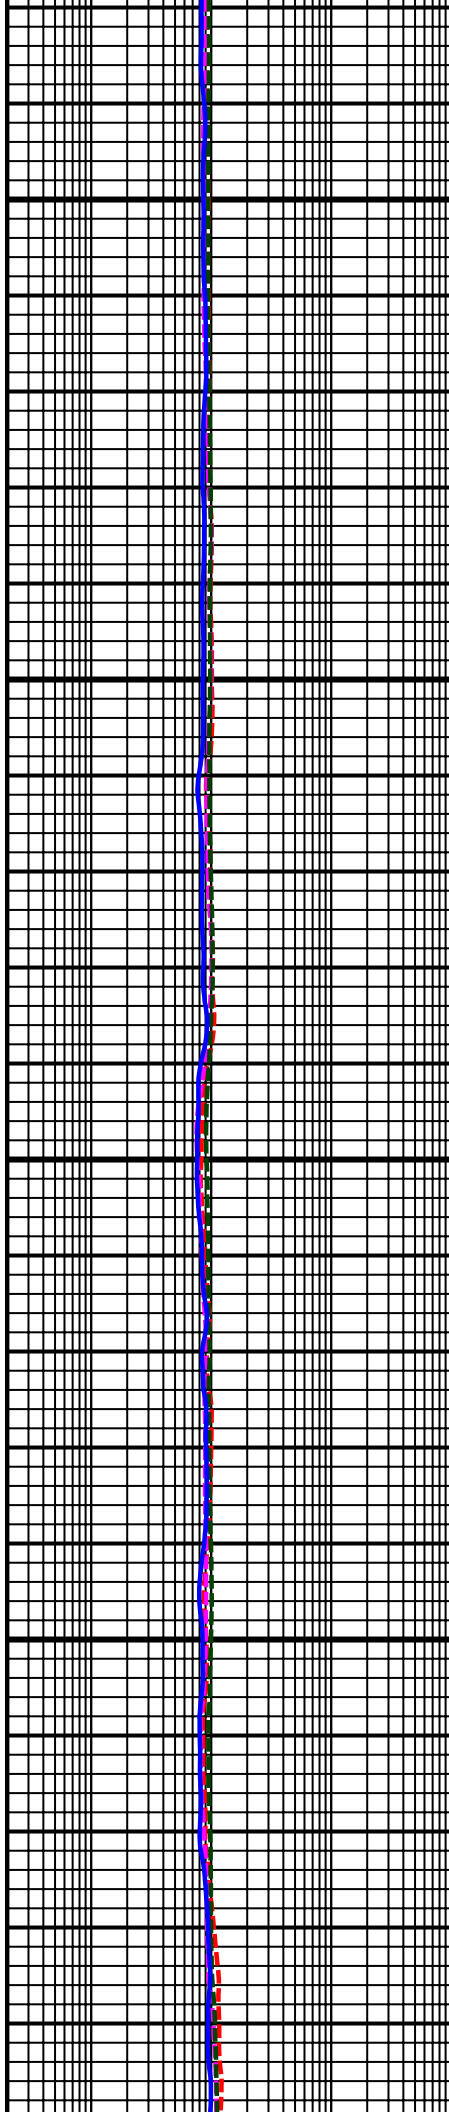


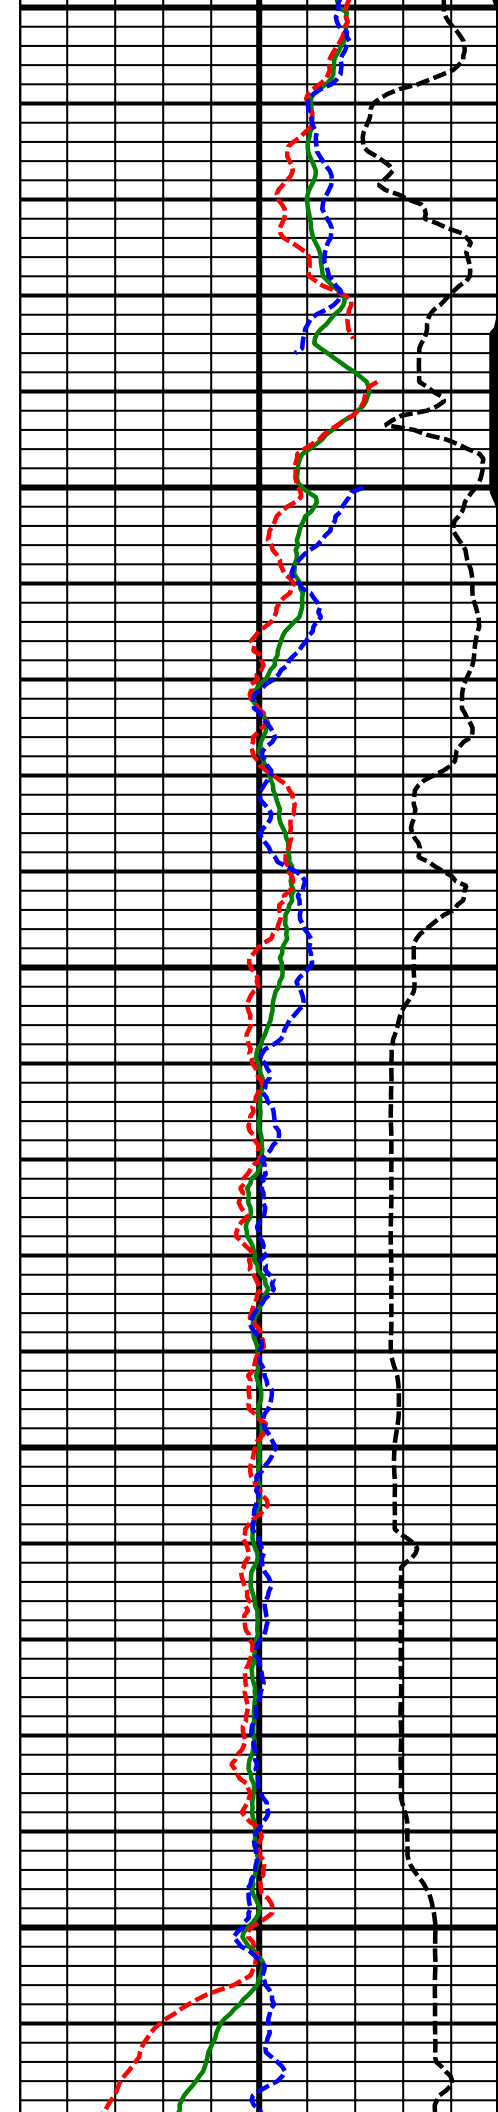

11400
MD


11500
MD

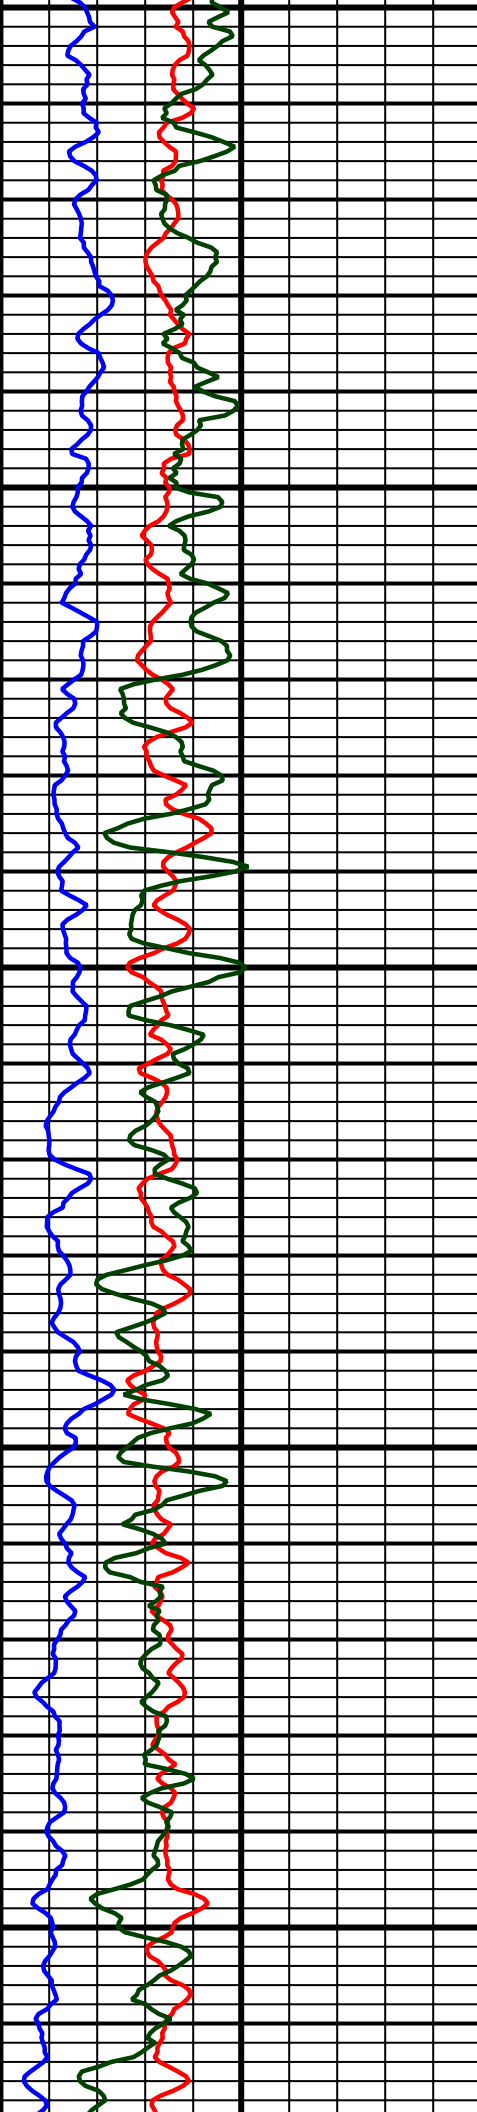
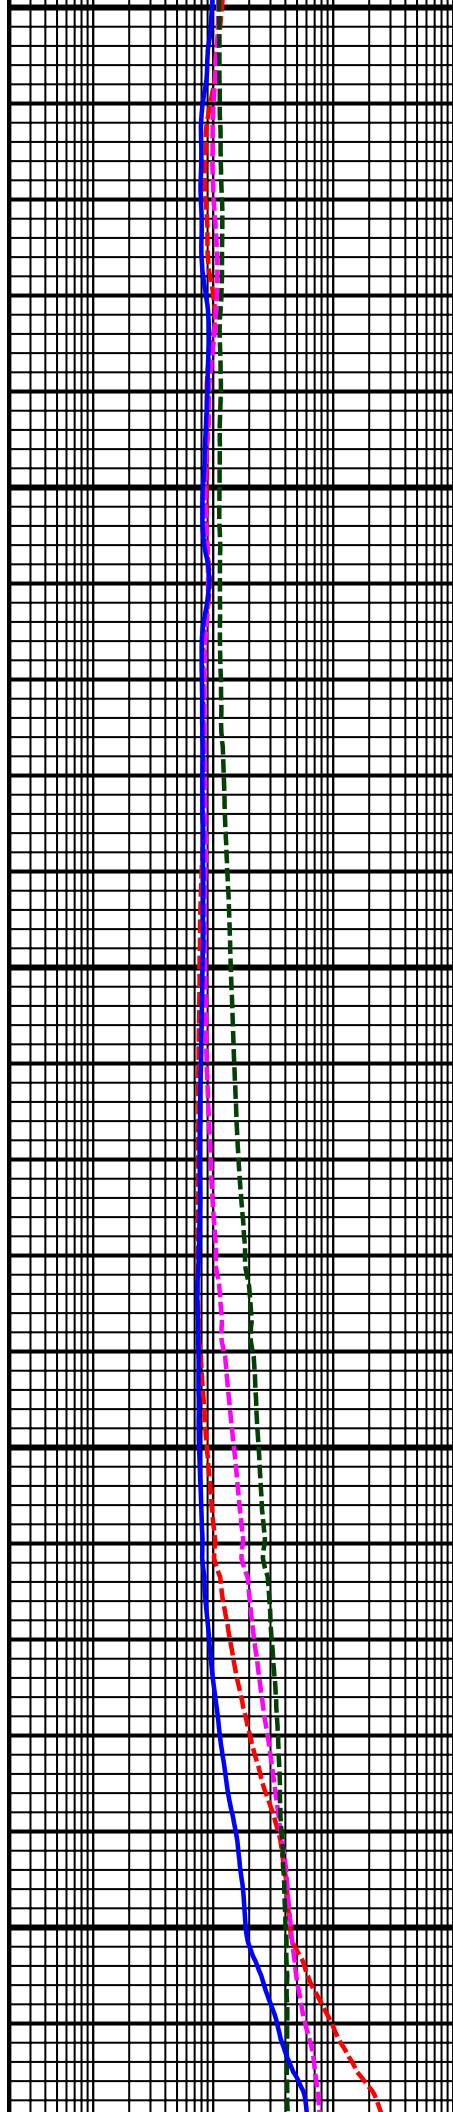







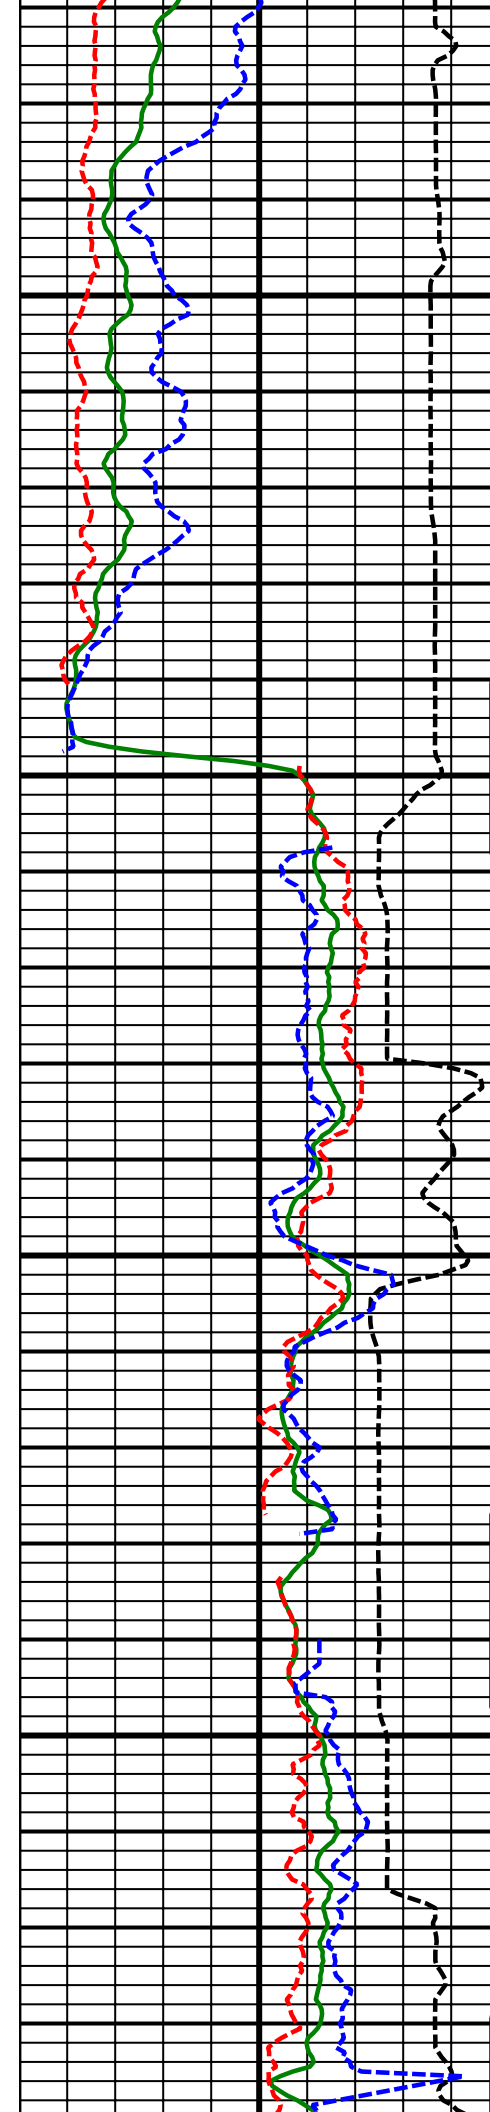


11600
MD

11700
MD

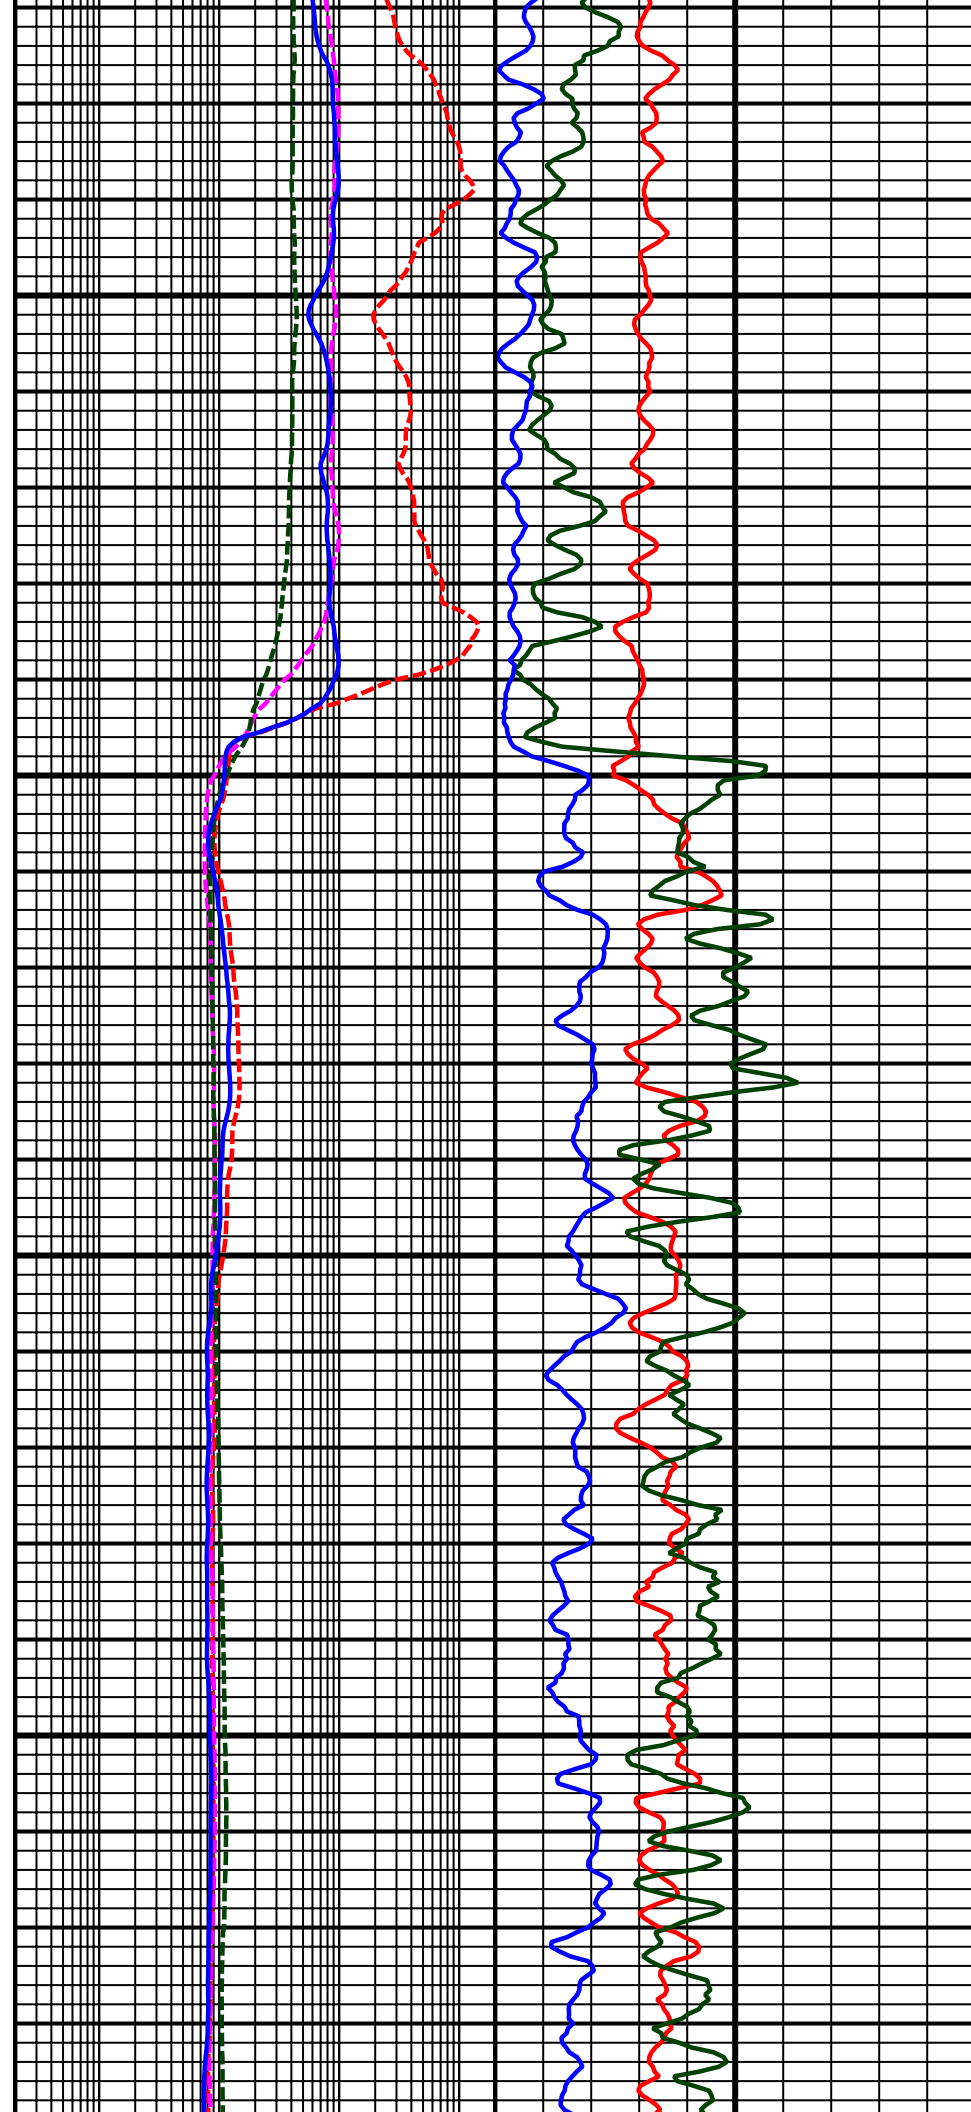

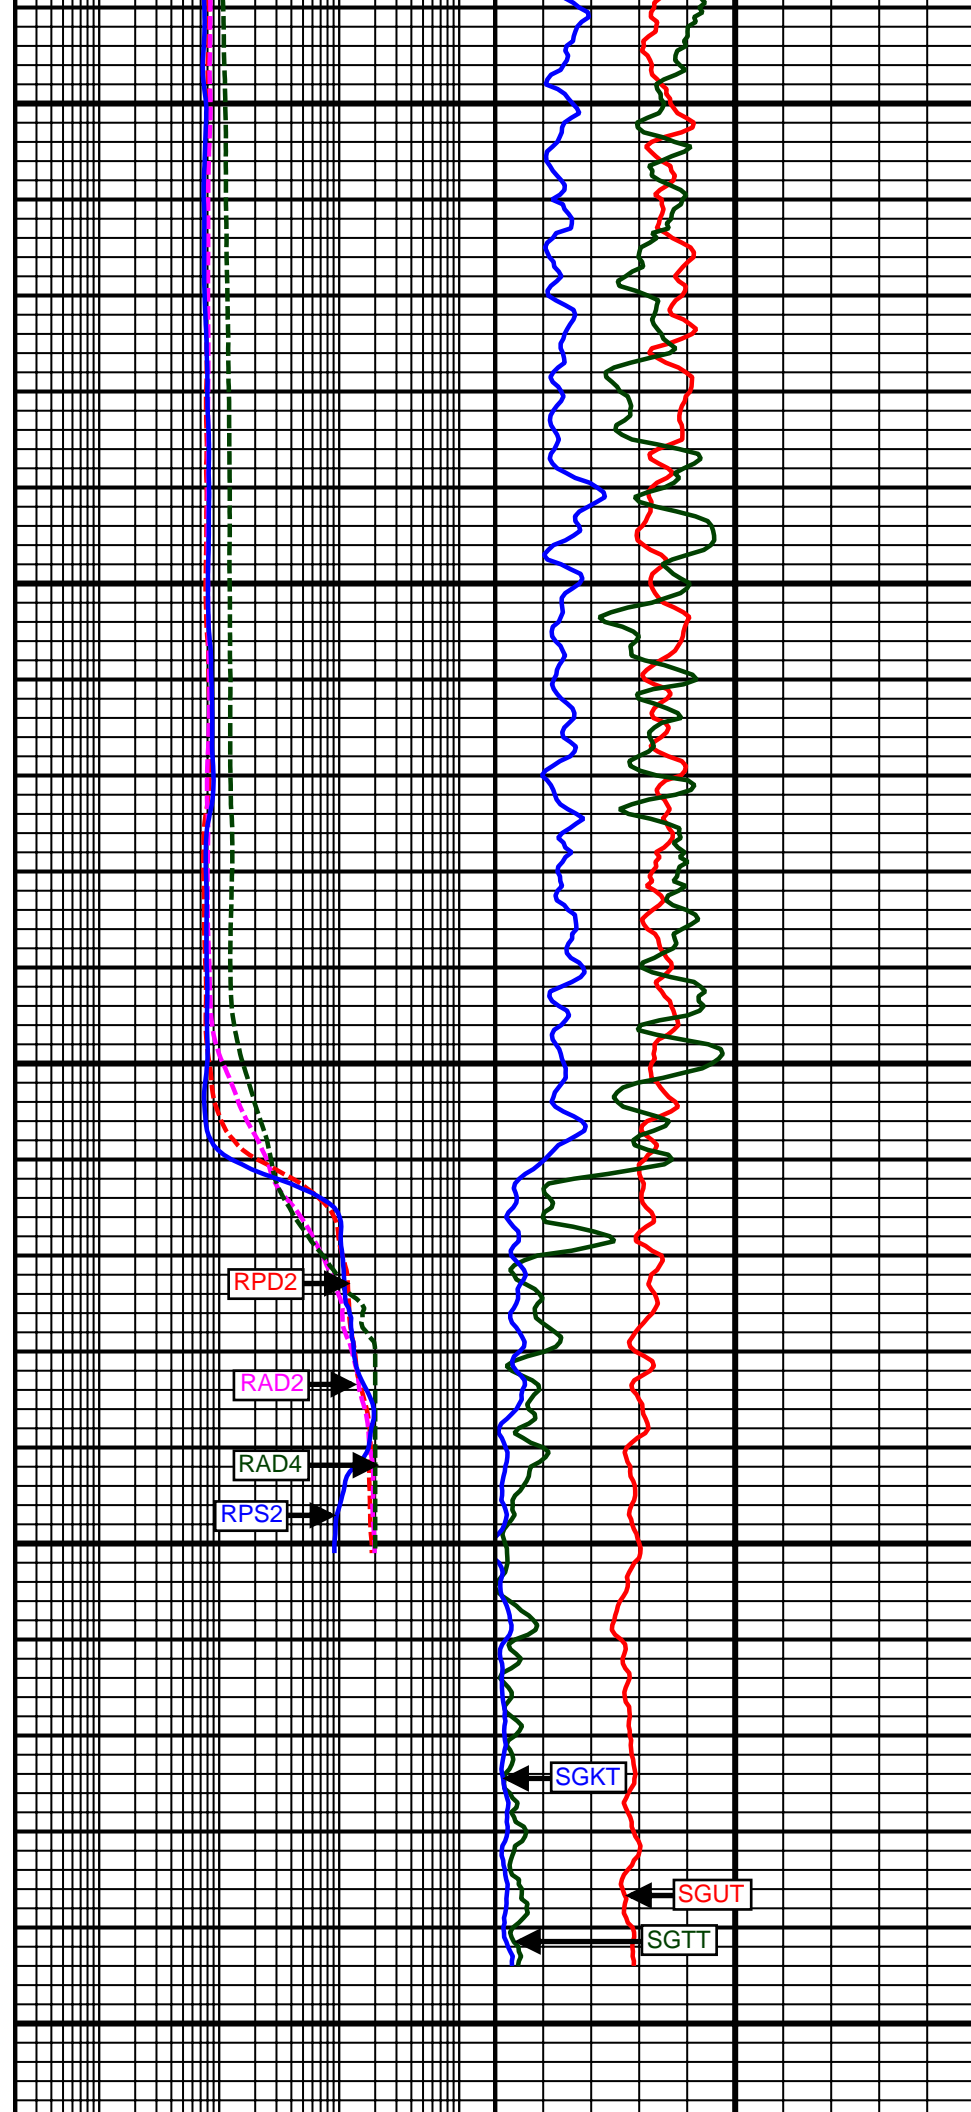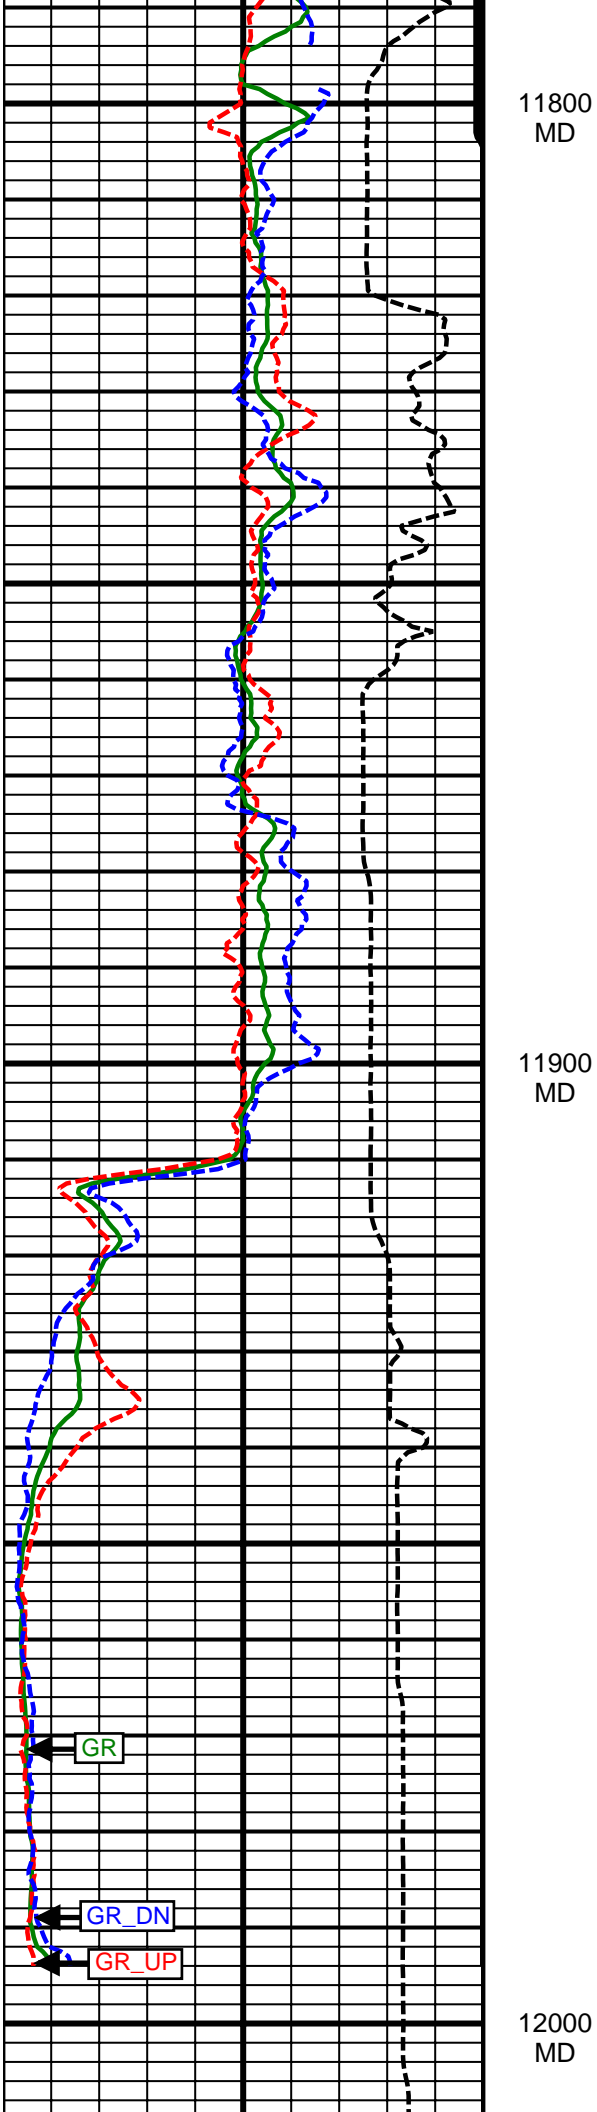

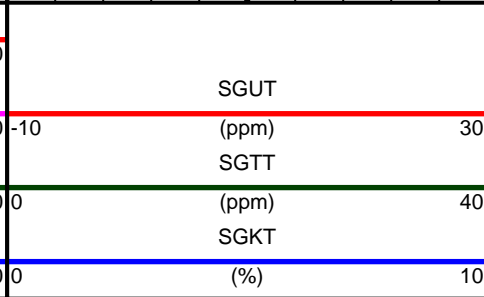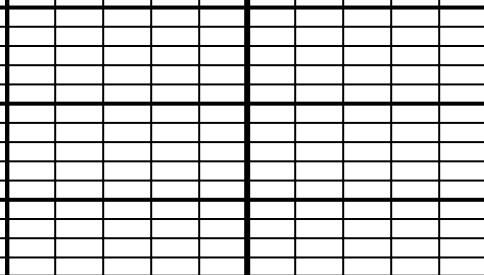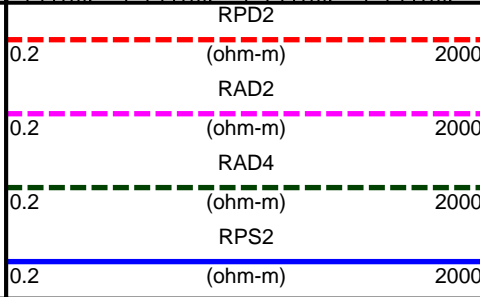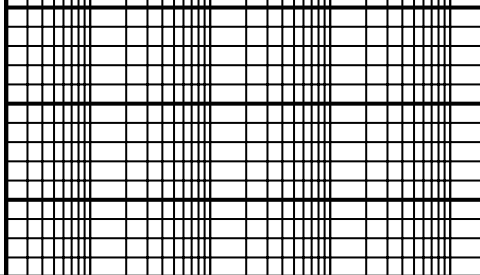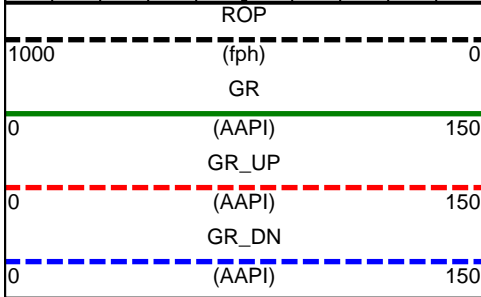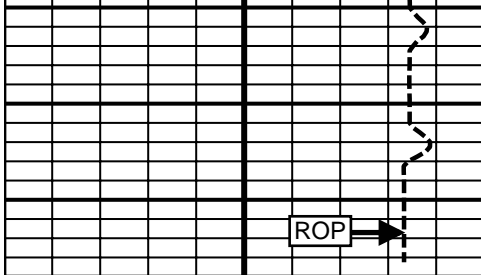

SURVEY						
Survey Calculation Method: Minimum Curvature						
Magnetic Reference	Target Direction	Total Magnetic Field	Magnetic Dip Angle	Magnetic Declination	Grid Convergence	Total Correction
True North	179.66 deg	52724 nT	66.78 deg	8.60 deg	0.00 deg	8.60 deg
Survey Tie-On	Depth	INC	AZ	TVD	NS	EW
	895.00 ft	0.27 deg	324.33 deg	895.00 ft	0.89 ft	-1.43 ft

Well Head							
Depth (ft)	Inc (deg)	Azm (deg)	TVD (ft)	NS (ft)	EW (ft)	VSect (ft)	Dogleg (deg/100ft)
1070.00	0.31	329.50	1070.00	1.63	-1.91	-1.64	0.03
1163.00	2.60	70.00	1162.97	2.57	-0.06	-2.57	2.88
1255.00	3.68	66.28	1254.83	4.47	4.61	-4.45	1.19
1349.00	5.95	64.54	1348.49	7.78	11.77	-7.71	2.42
1441.00	7.22	70.22	1439.88	11.79	21.52	-11.66	1.55
1534.00	8.66	76.27	1531.99	15.43	33.82	-15.23	1.79
1627.00	10.30	82.61	1623.72	18.16	48.87	-17.87	2.09
1719.00	10.82	71.62	1714.17	21.94	65.22	-21.55	2.26
1812.00	11.56	67.19	1805.40	28.31	82.09	-27.82	1.22
1904.00	12.87	59.38	1895.32	37.10	99.41	-36.51	2.29
1999.00	14.15	58.04	1987.69	48.63	118.37	-47.93	1.39
2089.00	14.46	58.06	2074.90	60.40	137.24	-59.59	0.34
2180.00	14.94	58.52	2162.92	72.54	156.88	-71.61	0.54
2271.00	15.76	58.99	2250.68	85.03	177.48	-83.98	0.91
2362.00	16.76	58.94	2338.04	98.17	199.31	-96.98	1.10
2452.00	16.30	56.00	2424.32	111.93	220.90	-110.61	1.06
2543.00	16.54	60.29	2511.61	125.49	242.73	-124.04	1.36
2634.00	17.00	63.97	2598.74	137.74	265.94	-136.16	1.27
2725.00	17.49	68.16	2685.65	148.67	290.59	-146.94	1.47
2816.00	16.87	65.96	2772.59	159.14	315.34	-157.26	0.99
2906.00	17.29	70.49	2858.63	168.92	339.87	-166.90	1.55
2997.00	19.25	74.43	2945.04	177.47	367.07	-175.29	2.54
3058.00	19.81	73.64	3002.53	183.08	386.68	-180.78	1.01
3149.00	22.54	70.54	3087.38	193.23	417.93	-190.75	3.24
3268.00	21.98	69.67	3197.51	208.57	460.31	-205.83	0.55
3354.00	20.77	70.38	3277.59	219.28	489.77	-216.37	1.44
3439.00	22.59	69.05	3356.58	230.18	519.22	-227.10	2.22
3525.00	22.39	63.90	3436.05	243.29	549.35	-240.03	2.30
3610.00	20.48	60.55	3515.17	257.73	576.84	-254.30	2.67
3695.00	20.08	60.65	3594.90	272.19	602.51	-268.61	0.47
3781.00	20.25	58.64	3675.63	287.17	628.09	-283.44	0.83
3866.00	18.88	56.38	3755.72	302.44	652.10	-298.57	1.84
3952.00	17.30	54.73	3837.47	317.53	674.13	-313.53	1.93
4037.00	16.89	57.86	3918.71	331.40	694.91	-327.27	1.18
4122.00	15.73	59.31	4000.29	343.85	715.27	-339.60	1.45
4208.00	14.81	57.94	4083.25	355.63	734.61	-351.27	1.15
4293.00	14.36	58.36	4165.51	366.93	752.79	-362.46	0.54
4379.00	13.23	60.64	4249.03	377.35	770.45	-372.77	1.46
4464.00	10.07	59.75	4332.27	385.87	785.35	-381.20	3.72
4550.00	7.58	54.91	4417.25	392.91	796.49	-388.18	3.02
4635.00	6.53	51.97	4501.60	399.12	804.88	-394.33	1.31
4720.00	5.79	57.77	4586.11	404.38	812.32	-399.55	1.14

4806.00	5.50	58.47	4671.69	408.85	819.50	-403.98	0.35
4891.00	4.35	62.44	4756.38	412.47	825.83	-407.56	1.41
4977.00	2.26	69.62	4842.23	414.57	830.31	-409.64	2.47
5062.00	1.55	99.98	4927.19	414.95	833.01	-410.00	1.42
5148.00	1.01	183.04	5013.17	414.00	834.12	-409.04	2.03
5233.00	0.66	178.64	5098.16	412.76	834.09	-407.80	0.42
5318.00	0.84	167.34	5183.15	411.66	834.24	-406.70	0.27
5403.00	0.70	153.76	5268.15	410.59	834.60	-405.63	0.27
5489.00	0.49	166.35	5354.14	409.76	834.92	-404.80	0.29
5574.00	0.49	217.89	5439.14	409.12	834.79	-404.16	0.50
5659.00	1.05	244.77	5524.13	408.50	833.86	-403.54	0.77
5829.00	1.41	238.53	5694.09	406.74	830.67	-401.81	0.23
5999.00	0.30	266.87	5864.07	405.63	828.44	-400.70	0.68
6170.00	0.99	278.63	6035.06	405.83	826.53	-400.91	0.41
6341.00	0.97	281.33	6206.03	406.33	823.65	-401.44	0.03
6512.00	0.98	304.14	6377.01	407.44	821.02	-402.56	0.23
6683.00	1.19	307.92	6547.98	409.35	818.41	-404.48	0.13
6853.00	1.16	326.86	6717.94	411.87	816.08	-407.02	0.23
6939.00	1.14	324.55	6803.93	413.30	815.10	-408.46	0.06
7024.00	8.14	208.25	6888.65	408.68	811.76	-403.85	10.24
7110.00	16.32	189.96	6972.66	391.38	806.78	-386.59	10.41
7195.00	26.49	185.57	7051.70	360.67	802.86	-355.90	12.10
7281.00	34.19	183.91	7125.86	317.40	799.35	-312.66	9.01
7366.00	40.61	179.05	7193.37	265.85	798.17	-261.11	8.31
7452.00	48.49	177.94	7254.61	205.59	799.80	-200.84	9.21
7537.00	57.22	179.00	7305.89	137.93	801.57	-133.17	10.32
7623.00	65.02	178.42	7347.39	62.70	803.28	-57.93	9.09
7708.00	70.32	178.74	7379.67	-15.87	805.22	20.65	6.25
7794.00	78.01	178.23	7403.12	-98.52	807.41	103.31	8.96
7825.00	82.07	178.44	7408.48	-129.03	808.30	133.82	13.11
7949.00	88.70	178.88	7418.45	-252.53	811.19	257.33	5.36
8035.00	89.26	178.09	7419.99	-338.48	813.46	343.30	1.13
8120.00	91.29	178.67	7419.58	-423.44	815.86	428.27	2.48
8206.00	92.47	179.31	7416.76	-509.38	817.38	514.22	1.56
8291.00	89.69	178.59	7415.15	-594.34	818.94	599.19	3.38
8377.00	90.55	177.50	7414.97	-680.29	821.87	685.15	1.61
8462.00	90.49	177.45	7414.20	-765.20	825.61	770.09	0.09
8548.00	90.12	176.72	7413.74	-851.09	829.99	856.00	0.95
8633.00	89.94	179.38	7413.70	-936.03	832.88	940.96	3.14
8719.00	90.25	180.15	7413.56	-1022.03	833.23	1026.96	0.97
8804.00	90.12	179.85	7413.28	-1107.03	833.23	1111.96	0.38
8889.00	90.06	179.94	7413.15	-1192.03	833.39	1196.95	0.13
8975.00	90.18	180.07	7412.97	-1278.03	833.38	1282.95	0.21
9060.00	89.94	179.56	7412.88	-1363.03	833.66	1367.95	0.66
9146.00	89.82	179.25	7413.06	-1449.02	834.55	1453.95	0.39
9231.00	89.51	179.68	7413.56	-1534.02	835.34	1538.95	0.62
9317.00	88.58	179.41	7414.99	-1620.00	836.02	1624.94	1.13
9402.00	89.75	179.49	7416.23	-1704.99	836.84	1709.92	1.38
9488.00	90.49	181.20	7416.05	-1790.98	836.32	1795.91	2.17
9573.00	89.82	181.06	7415.82	-1875.97	834.65	1880.89	0.81
9658.00	89.38	181.90	7416.41	-1960.93	832.45	1965.84	1.12
9744.00	89.82	180.74	7417.01	-2046.91	830.47	2051.80	1.44
9829.00	91.11	180.19	7416.32	-2131.90	829.78	2136.79	1.65
9915.00	89.32	178.85	7416.00	-2217.89	830.50	2222.78	2.60
10000.00	89.45	177.78	7416.91	-2302.85	833.00	2307.75	1.27
10086.00	90.49	177.41	7416.96	-2388.77	836.61	2393.69	1.28
10171.00	89.57	179.45	7416.91	-2473.73	838.94	2478.67	2.63
10257.00	89.63	181.02	7417.51	-2559.73	838.58	2564.66	1.83
10342.00	89.20	180.72	7418.38	-2644.71	837.29	2649.64	0.62
10427.00	88.83	181.43	7419.84	-2729.68	835.70	2734.60	0.94
10513.00	89.38	180.31	7421.19	-2815.66	834.39	2820.56	1.45

10598.00	91.11	180.59	7420.82	-2900.66	833.73	2905.55	2.06
10684.00	90.62	180.64	7419.52	-2986.64	832.80	2991.53	0.57
10769.00	90.55	182.40	7418.66	-3071.60	830.55	3076.48	2.07
10854.00	90.18	181.02	7418.12	-3156.56	828.01	3161.42	1.68
10940.00	89.44	180.94	7418.40	-3242.55	826.54	3247.40	0.87
11025.00	90.31	179.50	7418.59	-3327.54	826.22	3332.39	1.98
11111.00	89.45	180.26	7418.77	-3413.54	826.40	3418.39	1.33
11196.00	89.88	178.29	7419.26	-3498.53	827.47	3503.38	2.37
11281.00	89.32	177.71	7419.86	-3583.48	830.44	3588.34	0.95
11367.00	89.63	178.66	7420.64	-3669.43	833.16	3674.31	1.16
11452.00	91.97	178.21	7419.46	-3754.38	835.48	3759.27	2.80
11538.00	90.99	177.97	7417.24	-3840.30	838.35	3845.21	1.17
11623.00	89.57	177.56	7416.82	-3925.24	841.66	3930.16	1.74
11708.00	89.57	178.58	7417.46	-4010.18	844.53	4015.12	1.20
11794.00	90.86	179.06	7417.14	-4096.16	846.30	4101.11	1.60
11879.00	91.59	178.20	7415.32	-4181.12	848.33	4186.08	1.33
11977.00	90.88	178.20	7413.21	-4279.05	851.41	4284.02	0.72
Projected to Total Depth:							
12035.00	90.88	178.20	7412.32	-4337.01	853.23	4342.00	0.00

Weatherford surveys from 1070 ft MD to 11977 ft MD.

TD at 12035 ft MD.

The total correction is 8.60 deg relative to True North.



Weatherford®

Final Print

COMPANY	<u>Anadarko</u>		
WELL	<u>Cannon 14C-10HZ</u>		
FIELD	<u>Wattenburg</u>		
RIG	<u>Xtreme 23</u>		
LOC.	<u>Colorado</u>	COUNTY	<u>Weld</u>