

NOBLE ENERGY INC.
REINICK 01
SENE 9-4N-64W
1650' FNL & 1050' FEL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/8/2014

API: 05-123-11316
 COGCC #


GL Elev: 4690'
 KB Elev: 4700'

Spud Date: 11/1/1983

Surface Casing :
 8 5/8" 24# @ 419'
 Cement: 450 sx
 TOC: Surface

TOC @ 6194'

Production Casing :
 4 1/2" 10.5# @ 7430'
 Cement: 250 sx
 TD: 11/9/1983

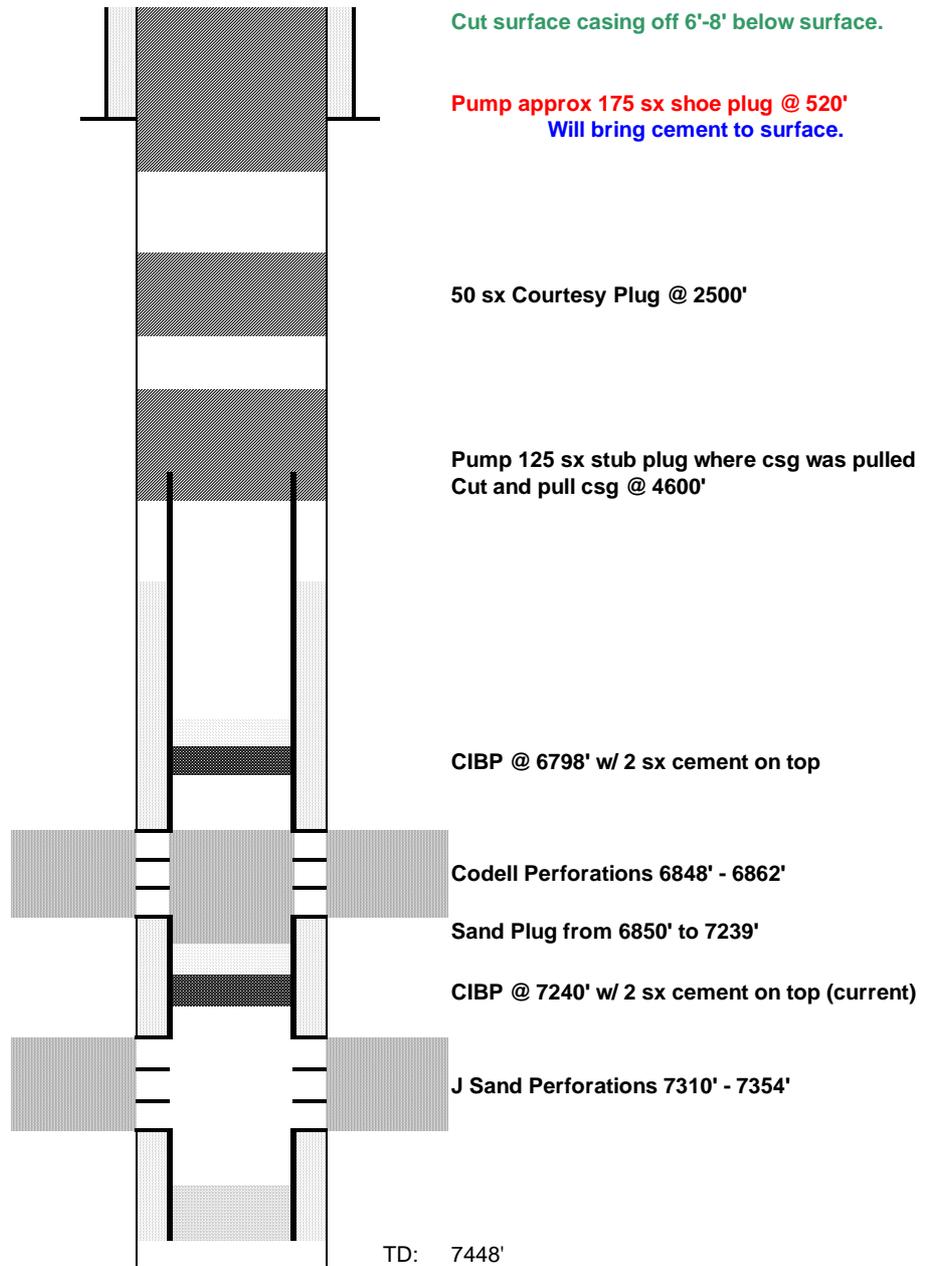

Cut surface casing off 6'-8' below surface.

Pump approx 175 sx shoe plug @ 520'
 Will bring cement to surface.

50 sx Courtesy Plug @ 2500'

Pump 125 sx stub plug where csg was pulled
 Cut and pull csg @ 4600'

CIBP @ 6798' w/ 2 sx cement on top

Codell Perforations 6848' - 6862'

Sand Plug from 6850' to 7239'

CIBP @ 7240' w/ 2 sx cement on top (current)

J Sand Perforations 7310' - 7354'

TD: 7448'