

DRILLING PROGRAM

BILL BARRETT CORPORATION

GGU Federal 43D-29-691

NWSE, 1833' FSL, 2090' FEL, Sec. 29, T6S-R91W (surface hole)

NESE, 2416' FSL, 664' FEL, Sec. 29, T6S-R91W (bottom hole)

Garfield County, Colorado

1 - 2. Estimated Tops of Geological Markers and Formations Expected to Contain Water, Oil and Gas and Other Minerals

Formation	Depth – MD	Depth – TVD
Mesaverde*	3690'	3400'
Price Coal	4517'	4180'
Top of Gas	5224'	4880'
Rollins*	6324'	5980'
TD	7624'	7280'

PROSPECTIVE PAY

***Members of the Williams Fork & Iles formations are primary objectives for oil/gas.**


3. BOP and Pressure Containment Data

Depth Intervals	BOP Equipment
0 – 765'	No pressure control required
765' – TD	11" 3000# Ram Type BOP 11" 3000# Annular BOP
<ul style="list-style-type: none"> - Drilling spool to accommodate choke and kill lines; - Ancillary equipment and choke manifold rated at 3,000#. All BOP and BOPE tests will be in accordance with the requirements of onshore Order No. 2; - The BLM and the Colorado Oil and Gas Conservation Commission will be notified 24 hours in advance of all BOP pressure tests. - BOP hand wheels may be underneath the sub-structure of the rig if the drilling rig used is set up to operate most efficiently in this manner. 	

4. Casing Program

<u>Hole Size</u>	<u>SETTING DEPTH</u> <u>(FROM) (TO)</u>		<u>Casing Size</u>	<u>Casing Weight</u>	<u>Casing Grade</u>	<u>Thread</u>	<u>Condition</u>
12 ¼"	surface	765'	9 5/8"	36#	J or K 55	ST&C	New
7 7/8" & 8 3/4"	surface	7624'	4 ½"	11.6#	P-110 or N-80	LT&C	New
				11.6#		LT&C	New

Note: BBC will use one of two options of production casing noted above. 7 7/8" hole size will begin at the point the bit is changed (approximately 5250').

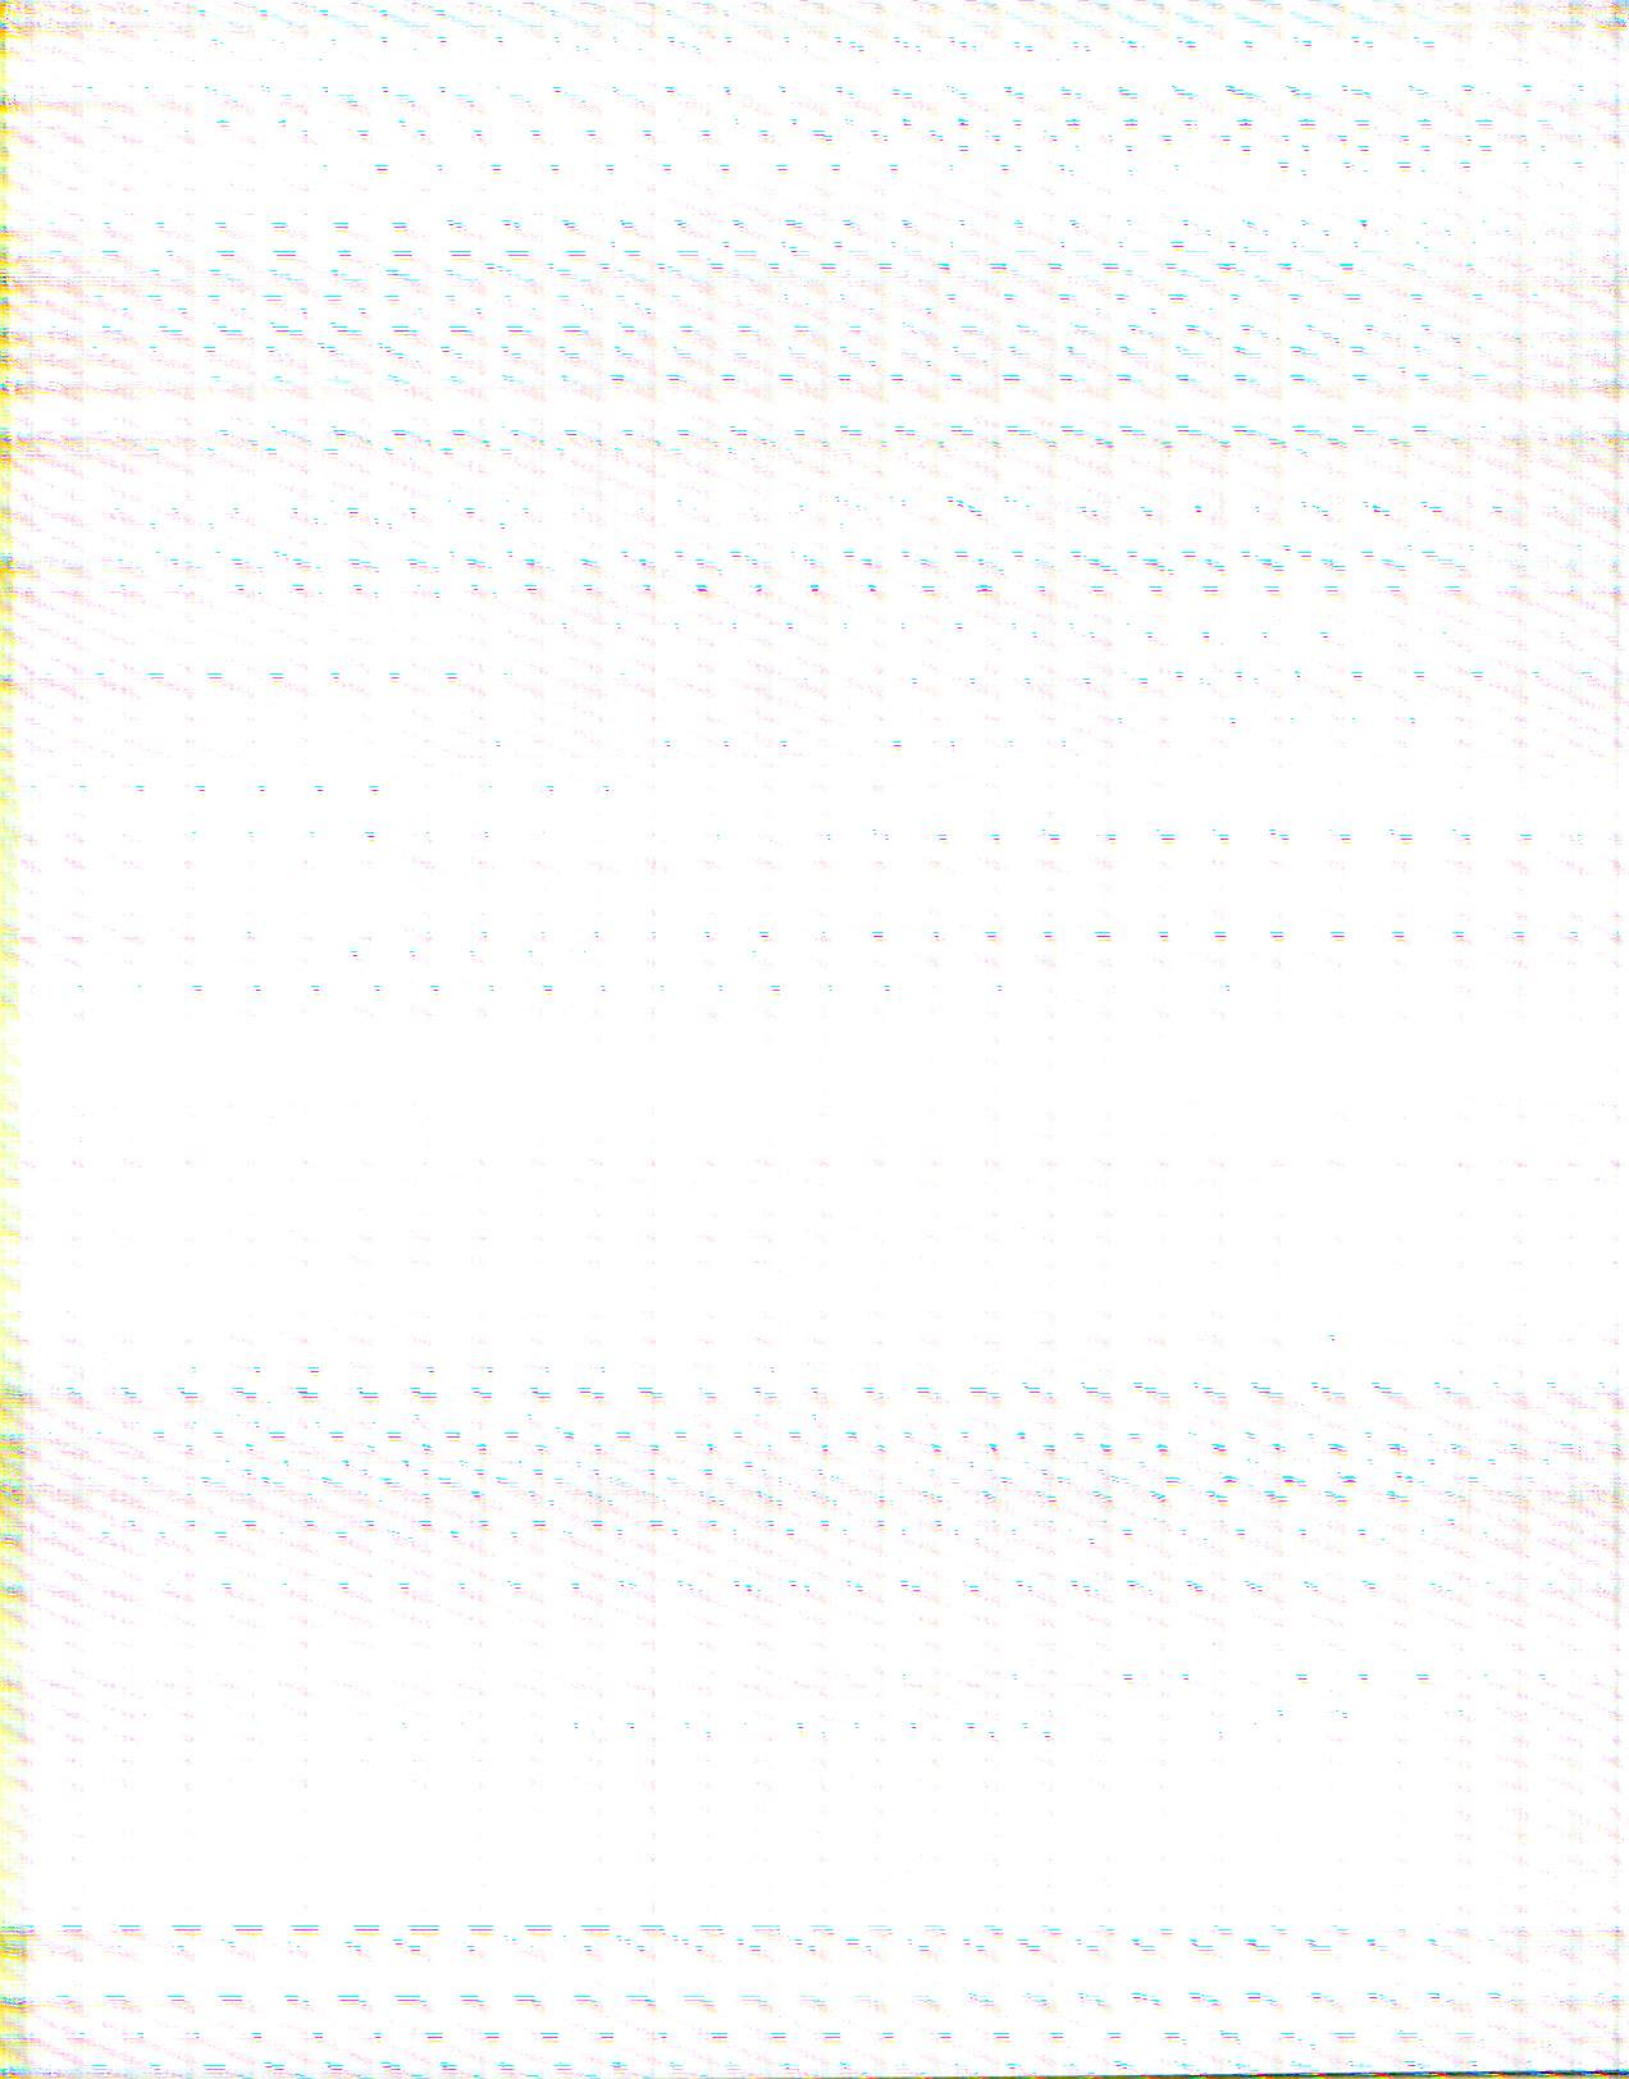

5. **Cementing Program**

9 5/8" Surface Casing	Lead with approximately 120 sx Versacem Cement System with additives mixed at 12.3 ppg (yield = 2.35 ft ³ /sx) and tail with approximately 120 sx Swiftcem Cement System with additives mixed at 14.2 ppg (yield = 1.39 ft ³ /sx), circulated to surface with 75% excess
4 1/2" Production Casing	Cement with approximately 900 sx Halcem Cement System with additives mixed at 13.1 ppg (yield = 1.51 ft ³ /sx), circulated to surface with 15% excess
Note: Actual volumes to be calculated from caliper log.	

6. **Mud Program**

<u>Interval</u>	<u>Weight</u>	<u>Viscosity</u>	<u>Fluid Loss (API filtrate)</u>	<u>Remarks</u>
0 – 40'	8.4 – 9.3	29 – 48	--	Native Spud Mud
40' – 765'	8.4 – 9.3	29 – 48	12 ml or less	Freshwater drilling fluid system
765 – TD	9.2 – 9.9	36 – 56	8 ml or less	LSND/DAP
Note: Sufficient mud materials to maintain mud properties, control lost circulation and to contain "kicks" will be available at wellsite.				

7. **Testing, Logging and Core Programs**

Cores	None anticipated;
Testing	None anticipated;
Surveys	Run every 1000' and on trips, full directional surveys
Logging	DIL-GR-SP, FDC-CNL-GR-CAL-Pe-Microlog, all TD to surface.

8. **Anticipated Abnormal Pressures or Temperatures**

No abnormal pressures or temperatures or other hazards are anticipated.

Maximum anticipated bottom hole pressure equals approximately 3748 psi* and maximum anticipated surface pressure equals approximately 2146 psi** (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

*Max Mud Wt x 0.052 x TD = A (bottom hole pressure)

**Maximum surface pressure = A – (0.22 x TD)

9. **Auxiliary Equipment**

- Upper kelly cock; lower Kelly cock will be installed while drilling
- Inside BOP or stab-in valve (available on rig floor)
- Safety valve(s) and subs to fit all string connections in use
- Mud monitoring will be visually observed

Bill Barrett Corporation
Drilling Program
GGU Fed 43D-29-691
Garfield County, Colorado

10. Drilling Schedule

Location Construction: August 1, 2010
Spud: August 15, 2010
Duration: 7 to 12 days drilling time
 7 to 10 days completion time (each well)
 (note: completion activities would not necessarily begin immediately
 upon the completion of drilling operations)

