

NOBLE ENERGY INC.
MOSIER 23-13F
SWSW 23-4N-66W
623' FSL & 670' FWL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
6/30/2014

API: 05-123-16331
 COGCC #

GL Elev: 4732'
 KB Elev: 4742'


Spud Date: 11/6/1992

Surface Casing :
 8 5/8" 23# @ 512'
 Cement: 360 sx
 TOC: Surface

Production Casing Cement from 3990' to 4942'

TOC @ 6136'

Production Casing :
 4 1/2" 11.6# @ 7355'
 Cement: 350 sx + 200 sx
 TD: 11/12/1992

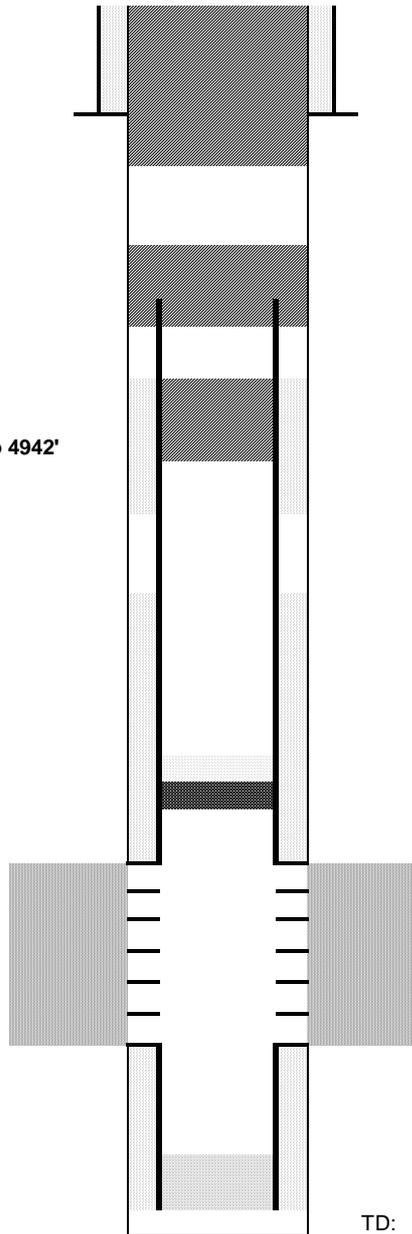

Cut surface casing off 6'-8' below surface.

Pump approx 250 sx stub/shoe plug @ 620'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

40 sx Balance Plug @ 4400'

CIBP @ 6858' w/ 2 sx cement on top

Niobrara Perforations 6908' - 7096'

Codell Perforations 7212' - 7226'

TD: 7355'