


Bayswater Exploration & Production, LLC

Well Name: **Kaiser D-10HN**

Surface Location: Kaiser 10-D Pad Sec.10-T6N-R65W
 North American Datum 1983 , US State Plane 1983 , Colorado Northern Zone
 Ground Elevation: 4801.0
 +N/-S +E/-W Northing Easting Latitude Longitude Slot
 0.0 0.0 1428790.33 3238769.73 40.507257 -104.641318
 Original Well Elev WELL @ 4823.5ft (Original Well Elev)

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
SHL 451'FNL & 410'FEL	1.0	0.0	0.0	Point
BHL 1130'FNL & 465'FWL	7041.0	-663.7	-4427.4	Point

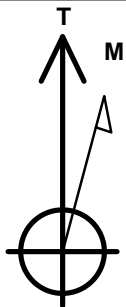

Azimuths to True North
 Magnetic North: 8.42°



Magnetic Field
 Strength: 52902.1snT
 Dip Angle: 67.06°
 Date: 4/14/2014
 Model: IGRF2010

Kaiser 10-D Pad Sec.10-T6N-R65W
 Kaiser D-10HN
 Plan #1 (4-14-14)
 7:13, April 30 2014

ANNOTATIONS

TVD	MD	Annotation
1000.0	1000.0	KOP - Start Build 2.00
5521.7	5581.5	Start Drop -2.00
6557.9	6620.0	KOP #2 - Start Build 11.00
7070.9	7347.3	Start 75.0 hold at 7347.3 MD
7083.9	7422.3	Start Build 5.00
7041.0	11697.7	TD at 11697.7

South(-)/North(+) (1700 ft/in)

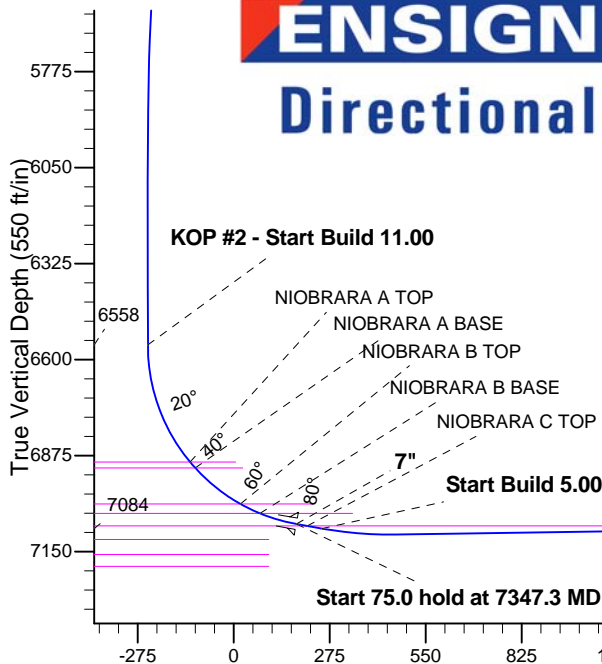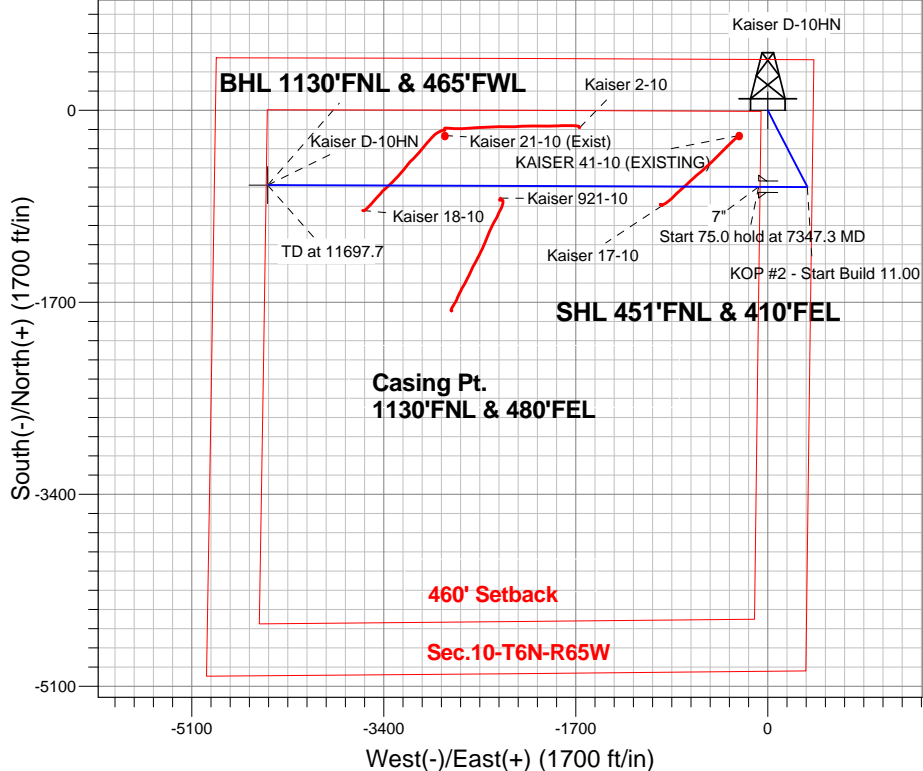

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	1000.0	0.00	0.00	1000.0	0.0	0.0	0.00	0.00	0.0	
3	1480.6	9.61	152.71	1478.3	-35.7	18.4	2.00	152.71	-12.9	
4	5581.5	9.61	152.71	5521.7	-644.3	332.4	0.00	0.00	-233.2	
5	6062.1	0.00	0.00	6000.0	-680.0	350.8	2.00	180.00	-246.1	
6	6620.0	0.00	0.00	6557.9	-680.0	350.8	0.00	0.00	-246.1	
7	7347.3	80.00	270.19	7070.9	-678.5	-79.6	11.00	270.19	179.3	
8	7422.3	80.00	270.19	7083.9	-678.3	-153.5	0.00	0.00	252.3	
9	7639.3	90.85	270.19	7101.2	-677.6	-369.5	5.00	0.00	465.8	
10	11697.7	90.85	270.19	7041.0	-663.7	-4427.4	0.00	0.00	4476.9	BHL 1130'FNL & 465'FWL

Vertical Section at 261.47° (550 ft/in)



Bayswater Exploration & Production, LLC

SEC.10-T6N-R65W

Kaiser 10-D Pad Sec.10-T6N-R65W

Kaiser D-10HN

Wellbore #1

Plan: Plan #1 (4-14-14)

Standard Planning Report

30 April, 2014



BAYSWATER
EXPLORATION & PRODUCTION, LLC

Database:	Landmark	Local Co-ordinate Reference:	Well Kaiser D-10HN
Company:	Bayswater Exploration & Production, LLC	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Project:	SEC.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	North Reference:	True
Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 (4-14-14)		

Project	SEC.10-T6N-R65W		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		Using Well Reference Point
Map Zone:	Colorado Northern Zone		Using geodetic scale factor

Site	Kaiser 10-D Pad Sec.10-T6N-R65W				
Site Position:		Northing:	1,428,828.36 ft	Latitude:	40.507362
From:	Lat/Long	Easting:	3,238,745.72 ft	Longitude:	-104.641403
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	0.55 °

Well	Kaiser D-10HN					
Well Position	+N-S	-38.3 ft	Northing:	1,428,790.33 ft	Latitude:	40.507257
	+E-W	23.6 ft	Easting:	3,238,769.73 ft	Longitude:	-104.641318
Position Uncertainty		0.0 ft	Wellhead Elevation:	ft	Ground Level:	4,801.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	4/14/2014	8.43	67.06	52,902

Design	Plan #1 (4-14-14)			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	261.47

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,480.6	9.61	152.71	1,478.3	-35.7	18.4	2.00	2.00	0.00	152.71	
5,581.5	9.61	152.71	5,521.7	-644.3	332.4	0.00	0.00	0.00	0.00	
6,062.1	0.00	0.00	6,000.0	-680.0	350.8	2.00	-2.00	0.00	180.00	
6,620.0	0.00	0.00	6,557.9	-680.0	350.8	0.00	0.00	0.00	0.00	
7,347.3	80.00	270.19	7,070.9	-678.5	-79.6	11.00	11.00	0.00	270.19	
7,422.3	80.00	270.19	7,083.9	-678.3	-153.5	0.00	0.00	0.00	0.00	
7,639.3	90.85	270.19	7,101.2	-677.6	-369.5	5.00	5.00	0.00	0.00	
11,697.7	90.85	270.19	7,041.0	-663.7	-4,427.4	0.00	0.00	0.00	0.00	BHL 1130'FNL & 46

Database:	Landmark	Local Co-ordinate Reference:	Well Kaiser D-10HN
Company:	Bayswater Exploration & Production, LLC	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Project:	SEC.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	North Reference:	True
Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 (4-14-14)		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
1.0	0.00	0.00	1.0	0.0	0.0	0.0	0.00	0.00	0.00
SHL 451'FNL & 410'FEL									
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
KOP - Start Build 2.00									
1,100.0	2.00	152.71	1,100.0	-1.6	0.8	-0.6	2.00	2.00	0.00
1,200.0	4.00	152.71	1,199.8	-6.2	3.2	-2.2	2.00	2.00	0.00
1,300.0	6.00	152.71	1,299.5	-13.9	7.2	-5.0	2.00	2.00	0.00
1,400.0	8.00	152.71	1,398.7	-24.8	12.8	-9.0	2.00	2.00	0.00
1,480.6	9.61	152.71	1,478.3	-35.7	18.4	-12.9	2.00	2.00	0.00
1,500.0	9.61	152.71	1,497.5	-38.6	19.9	-14.0	0.00	0.00	0.00
1,600.0	9.61	152.71	1,596.1	-53.5	27.6	-19.3	0.00	0.00	0.00
1,700.0	9.61	152.71	1,694.7	-68.3	35.2	-24.7	0.00	0.00	0.00
1,800.0	9.61	152.71	1,793.3	-83.1	42.9	-30.1	0.00	0.00	0.00
1,900.0	9.61	152.71	1,891.9	-98.0	50.5	-35.5	0.00	0.00	0.00
2,000.0	9.61	152.71	1,990.5	-112.8	58.2	-40.8	0.00	0.00	0.00
2,100.0	9.61	152.71	2,089.1	-127.7	65.9	-46.2	0.00	0.00	0.00
2,200.0	9.61	152.71	2,187.7	-142.5	73.5	-51.6	0.00	0.00	0.00
2,300.0	9.61	152.71	2,286.2	-157.3	81.2	-56.9	0.00	0.00	0.00
2,400.0	9.61	152.71	2,384.8	-172.2	88.8	-62.3	0.00	0.00	0.00
2,500.0	9.61	152.71	2,483.4	-187.0	96.5	-67.7	0.00	0.00	0.00
2,600.0	9.61	152.71	2,582.0	-201.8	104.1	-73.1	0.00	0.00	0.00
2,700.0	9.61	152.71	2,680.6	-216.7	111.8	-78.4	0.00	0.00	0.00
2,800.0	9.61	152.71	2,779.2	-231.5	119.4	-83.8	0.00	0.00	0.00
2,900.0	9.61	152.71	2,877.8	-246.4	127.1	-89.2	0.00	0.00	0.00
3,000.0	9.61	152.71	2,976.4	-261.2	134.7	-94.5	0.00	0.00	0.00
3,100.0	9.61	152.71	3,075.0	-276.0	142.4	-99.9	0.00	0.00	0.00
3,200.0	9.61	152.71	3,173.6	-290.9	150.1	-105.3	0.00	0.00	0.00
3,300.0	9.61	152.71	3,272.2	-305.7	157.7	-110.6	0.00	0.00	0.00
3,400.0	9.61	152.71	3,370.8	-320.6	165.4	-116.0	0.00	0.00	0.00
3,500.0	9.61	152.71	3,469.4	-335.4	173.0	-121.4	0.00	0.00	0.00
3,600.0	9.61	152.71	3,568.0	-350.2	180.7	-126.8	0.00	0.00	0.00
3,700.0	9.61	152.71	3,666.6	-365.1	188.3	-132.1	0.00	0.00	0.00
3,800.0	9.61	152.71	3,765.2	-379.9	196.0	-137.5	0.00	0.00	0.00
3,833.8	9.61	152.71	3,798.5	-384.9	198.6	-139.3	0.00	0.00	0.00
PARKMAN									
3,900.0	9.61	152.71	3,863.8	-394.7	203.6	-142.9	0.00	0.00	0.00
4,000.0	9.61	152.71	3,962.4	-409.6	211.3	-148.2	0.00	0.00	0.00
4,100.0	9.61	152.71	4,061.0	-424.4	219.0	-153.6	0.00	0.00	0.00
4,200.0	9.61	152.71	4,159.6	-439.3	226.6	-159.0	0.00	0.00	0.00
4,300.0	9.61	152.71	4,258.2	-454.1	234.3	-164.3	0.00	0.00	0.00
4,400.0	9.61	152.71	4,356.8	-468.9	241.9	-169.7	0.00	0.00	0.00
4,500.0	9.61	152.71	4,455.4	-483.8	249.6	-175.1	0.00	0.00	0.00
4,600.0	9.61	152.71	4,554.0	-498.6	257.2	-180.5	0.00	0.00	0.00

Database:	Landmark	Local Co-ordinate Reference:	Well Kaiser D-10HN
Company:	Bayswater Exploration & Production, LLC	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Project:	SEC.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	North Reference:	True
Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 (4-14-14)		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,645.2	9.61	152.71	4,598.5	-505.3	260.7	-182.9	0.00	0.00	0.00
SUSSEX									
4,700.0	9.61	152.71	4,652.6	-513.5	264.9	-185.8	0.00	0.00	0.00
4,800.0	9.61	152.71	4,751.2	-528.3	272.5	-191.2	0.00	0.00	0.00
4,900.0	9.61	152.71	4,849.7	-543.1	280.2	-196.6	0.00	0.00	0.00
5,000.0	9.61	152.71	4,948.3	-558.0	287.8	-201.9	0.00	0.00	0.00
5,100.0	9.61	152.71	5,046.9	-572.8	295.5	-207.3	0.00	0.00	0.00
5,162.4	9.61	152.71	5,108.5	-582.1	300.3	-210.7	0.00	0.00	0.00
SHANNON									
5,200.0	9.61	152.71	5,145.5	-587.7	303.2	-212.7	0.00	0.00	0.00
5,300.0	9.61	152.71	5,244.1	-602.5	310.8	-218.1	0.00	0.00	0.00
5,400.0	9.61	152.71	5,342.7	-617.3	318.5	-223.4	0.00	0.00	0.00
5,500.0	9.61	152.71	5,441.3	-632.2	326.1	-228.8	0.00	0.00	0.00
5,581.5	9.61	152.71	5,521.7	-644.3	332.4	-233.2	0.00	0.00	0.00
Start Drop -2.00									
5,600.0	9.24	152.71	5,539.9	-647.0	333.8	-234.1	2.00	-2.00	0.00
5,700.0	7.24	152.71	5,638.9	-659.7	340.3	-238.8	2.00	-2.00	0.00
5,800.0	5.24	152.71	5,738.3	-669.4	345.3	-242.3	2.00	-2.00	0.00
5,900.0	3.24	152.71	5,838.0	-675.9	348.7	-244.6	2.00	-2.00	0.00
6,000.0	1.24	152.71	5,937.9	-679.4	350.5	-245.9	2.00	-2.00	0.00
6,062.1	0.00	0.00	6,000.0	-680.0	350.8	-246.1	2.00	-2.00	0.00
6,100.0	0.00	0.00	6,037.9	-680.0	350.8	-246.1	0.00	0.00	0.00
6,200.0	0.00	0.00	6,137.9	-680.0	350.8	-246.1	0.00	0.00	0.00
6,300.0	0.00	0.00	6,237.9	-680.0	350.8	-246.1	0.00	0.00	0.00
6,400.0	0.00	0.00	6,337.9	-680.0	350.8	-246.1	0.00	0.00	0.00
6,500.0	0.00	0.00	6,437.9	-680.0	350.8	-246.1	0.00	0.00	0.00
6,600.0	0.00	0.00	6,537.9	-680.0	350.8	-246.1	0.00	0.00	0.00
6,620.0	0.00	0.00	6,557.9	-680.0	350.8	-246.1	0.00	0.00	0.00
KOP #2 - Start Build 11.00									
6,700.0	8.80	270.19	6,637.6	-680.0	344.7	-240.0	11.00	11.00	0.00
6,800.0	19.80	270.19	6,734.4	-679.9	320.0	-215.7	11.00	11.00	0.00
6,900.0	30.80	270.19	6,824.6	-679.8	277.3	-173.5	11.00	11.00	0.00
6,984.6	40.11	270.19	6,893.5	-679.6	228.3	-125.0	11.00	11.00	0.00
NIOBRARA A TOP									
7,000.0	41.80	270.19	6,905.1	-679.5	218.2	-115.1	11.00	11.00	0.00
7,007.3	42.60	270.19	6,910.5	-679.5	213.3	-110.2	11.00	11.00	0.00
NIOBRARA A BASE									
7,100.0	52.80	270.19	6,972.8	-679.3	144.9	-42.5	11.00	11.00	0.00
7,174.5	61.00	270.19	7,013.5	-679.1	82.5	19.1	11.00	11.00	0.00
NIOBRARA B TOP									
7,200.0	63.80	270.19	7,025.3	-679.0	59.9	41.4	11.00	11.00	0.00
7,237.2	67.89	270.19	7,040.5	-678.9	26.0	74.9	11.00	11.00	0.00
NIOBRARA B BASE									
7,300.0	74.80	270.19	7,060.6	-678.7	-33.5	133.7	11.00	11.00	0.00
7,347.3	80.00	270.19	7,070.9	-678.5	-79.6	179.4	11.00	11.00	0.00
Start 75.0 hold at 7347.3 MD - 7"									
7,379.5	80.00	270.19	7,076.5	-678.4	-111.4	210.7	0.00	0.00	0.00
NIOBRARA C TOP									
7,400.0	80.00	270.19	7,080.1	-678.4	-131.5	230.7	0.00	0.00	0.00
7,422.3	80.00	270.19	7,083.9	-678.3	-153.5	252.4	0.00	0.00	0.00
Start Build 5.00									
7,500.0	83.89	270.19	7,094.8	-678.0	-230.4	328.4	5.00	5.00	0.00
7,600.0	88.89	270.19	7,101.1	-677.7	-330.2	427.0	5.00	5.00	0.00

Database:	Landmark	Local Co-ordinate Reference:	Well Kaiser D-10HN
Company:	Bayswater Exploration & Production, LLC	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Project:	SEC.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	North Reference:	True
Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 (4-14-14)		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
7,639.3	90.85	270.19	7,101.2	-677.6	-369.5	465.8	5.00	5.00	0.00
7,700.0	90.85	270.19	7,100.3	-677.3	-430.2	525.8	0.00	0.00	0.00
7,800.0	90.85	270.19	7,098.8	-677.0	-530.2	624.7	0.00	0.00	0.00
7,900.0	90.85	270.19	7,097.3	-676.7	-630.2	723.5	0.00	0.00	0.00
8,000.0	90.85	270.19	7,095.9	-676.3	-730.1	822.3	0.00	0.00	0.00
8,100.0	90.85	270.19	7,094.4	-676.0	-830.1	921.2	0.00	0.00	0.00
8,200.0	90.85	270.19	7,092.9	-675.6	-930.1	1,020.0	0.00	0.00	0.00
8,300.0	90.85	270.19	7,091.4	-675.3	-1,030.1	1,118.8	0.00	0.00	0.00
8,400.0	90.85	270.19	7,089.9	-675.0	-1,130.1	1,217.7	0.00	0.00	0.00
8,500.0	90.85	270.19	7,088.4	-674.6	-1,230.1	1,316.5	0.00	0.00	0.00
8,600.0	90.85	270.19	7,087.0	-674.3	-1,330.1	1,415.3	0.00	0.00	0.00
8,700.0	90.85	270.19	7,085.5	-673.9	-1,430.1	1,514.2	0.00	0.00	0.00
8,800.0	90.85	270.19	7,084.0	-673.6	-1,530.0	1,613.0	0.00	0.00	0.00
8,900.0	90.85	270.19	7,082.5	-673.3	-1,630.0	1,711.8	0.00	0.00	0.00
9,000.0	90.85	270.19	7,081.0	-672.9	-1,730.0	1,810.7	0.00	0.00	0.00
9,100.0	90.85	270.19	7,079.5	-672.6	-1,830.0	1,909.5	0.00	0.00	0.00
9,200.0	90.85	270.19	7,078.1	-672.2	-1,930.0	2,008.3	0.00	0.00	0.00
9,300.0	90.85	270.19	7,076.6	-671.9	-2,030.0	2,107.2	0.00	0.00	0.00
9,400.0	90.85	270.19	7,075.1	-671.6	-2,130.0	2,206.0	0.00	0.00	0.00
9,500.0	90.85	270.19	7,073.6	-671.2	-2,230.0	2,304.8	0.00	0.00	0.00
9,600.0	90.85	270.19	7,072.1	-670.9	-2,330.0	2,403.7	0.00	0.00	0.00
9,700.0	90.85	270.19	7,070.6	-670.5	-2,429.9	2,502.5	0.00	0.00	0.00
9,800.0	90.85	270.19	7,069.2	-670.2	-2,529.9	2,601.3	0.00	0.00	0.00
9,900.0	90.85	270.19	7,067.7	-669.9	-2,629.9	2,700.2	0.00	0.00	0.00
10,000.0	90.85	270.19	7,066.2	-669.5	-2,729.9	2,799.0	0.00	0.00	0.00
10,100.0	90.85	270.19	7,064.7	-669.2	-2,829.9	2,897.8	0.00	0.00	0.00
10,200.0	90.85	270.19	7,063.2	-668.8	-2,929.9	2,996.7	0.00	0.00	0.00
10,300.0	90.85	270.19	7,061.7	-668.5	-3,029.9	3,095.5	0.00	0.00	0.00
10,400.0	90.85	270.19	7,060.3	-668.2	-3,129.9	3,194.3	0.00	0.00	0.00
10,500.0	90.85	270.19	7,058.8	-667.8	-3,229.8	3,293.2	0.00	0.00	0.00
10,600.0	90.85	270.19	7,057.3	-667.5	-3,329.8	3,392.0	0.00	0.00	0.00
10,700.0	90.85	270.19	7,055.8	-667.1	-3,429.8	3,490.8	0.00	0.00	0.00
10,800.0	90.85	270.19	7,054.3	-666.8	-3,529.8	3,589.7	0.00	0.00	0.00
10,900.0	90.85	270.19	7,052.8	-666.5	-3,629.8	3,688.5	0.00	0.00	0.00
11,000.0	90.85	270.19	7,051.4	-666.1	-3,729.8	3,787.3	0.00	0.00	0.00
11,100.0	90.85	270.19	7,049.9	-665.8	-3,829.8	3,886.2	0.00	0.00	0.00
11,200.0	90.85	270.19	7,048.4	-665.4	-3,929.8	3,985.0	0.00	0.00	0.00
11,300.0	90.85	270.19	7,046.9	-665.1	-4,029.8	4,083.8	0.00	0.00	0.00
11,400.0	90.85	270.19	7,045.4	-664.8	-4,129.7	4,182.7	0.00	0.00	0.00
11,500.0	90.85	270.19	7,043.9	-664.4	-4,229.7	4,281.5	0.00	0.00	0.00
11,600.0	90.85	270.19	7,042.4	-664.1	-4,329.7	4,380.3	0.00	0.00	0.00
11,697.7	90.85	270.19	7,041.0	-663.7	-4,427.4	4,476.9	0.00	0.00	0.00
TD at 11697.7 - BHL 1130'FNL & 465'FWL									

Casing Points					
Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (")	Hole Diameter (")	
7,347.3	7,070.9	7"	7	7-1/2	

Database:	Landmark	Local Co-ordinate Reference:	Well Kaiser D-10HN
Company:	Bayswater Exploration & Production, LLC	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Project:	SEC.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	North Reference:	True
Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 (4-14-14)		

Formations						
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)	
3,833.8	3,798.5	PARKMAN		0.00		
4,645.2	4,598.5	SUSSEX		0.00		
5,162.4	5,108.5	SHANNON		0.00		
6,984.6	6,893.5	NIOBRARA A TOP		0.00		
7,007.3	6,910.5	NIOBRARA A BASE		0.00		
7,174.5	7,013.5	NIOBRARA B TOP		0.00		
7,237.2	7,040.5	NIOBRARA B BASE		0.00		
7,379.5	7,076.5	NIOBRARA C TOP		0.00		
	7,115.5	NIOBRARA C BASE		0.00		
	7,158.5	FORT HAYS		0.00		
	7,192.5	CODELL		0.00		

Plan Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates			
		+N/-S (ft)	+E/-W (ft)	Comment	
1,000.0	1,000.0	0.0	0.0	KOP - Start Build 2.00	
5,581.5	5,521.7	-644.3	332.4	Start Drop -2.00	
6,620.0	6,557.9	-680.0	350.8	KOP #2 - Start Build 11.00	
7,347.3	7,070.9	-678.5	-79.6	Start 75.0 hold at 7347.3 MD	
7,422.3	7,083.9	-678.3	-153.5	Start Build 5.00	
11,697.7	7,041.0	-663.7	-4,427.4	TD at 11697.7	



Bayswater Exploration & Production, LLC

SEC.10-T6N-R65W

Kaiser 10-D Pad Sec.10-T6N-R65W

Kaiser D-10HN

Wellbore #1

Plan #1 (4-14-14)

Anticollision Report

30 April, 2014



BAYSWATER
EXPLORATION & PRODUCTION, LLC

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Reference	Plan #1 (4-14-14)		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	MD Interval 100.0ft	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum center-center distance of 1,000.0ft	Error Surface:	Elliptical Conic
Warning Levels Evaluated at:	2.00 Sigma		

Survey Tool Program	Date 4/30/2014			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
0.0	11,697.7	Plan #1 (4-14-14) (Wellbore #1)	MWD	MWD - Standard

Summary						
Site Name	Reference Measured Depth (ft)	Offset Measured Depth (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Separation Factor	Warning
Kaiser 10-D Pad Sec.10-T6N-R65W						
Kaiser A-10HN - Wellbore #1 - Plan #1 (4-14-14)	1,000.0	1,000.0	45.0	40.7	10.529	CC, ES
Kaiser A-10HN - Wellbore #1 - Plan #1 (4-14-14)	11,697.7	11,622.2	990.0	730.2	3.811	SF
Kaiser B-10HC - Wellbore #1 - Plan #1 (4-14-14)	1,000.0	1,000.0	30.0	25.8	7.031	CC, ES
Kaiser B-10HC - Wellbore #1 - Plan #1 (4-14-14)	11,697.7	11,720.2	667.4	409.9	2.592	SF
Kaiser C-10HN - Wellbore #1 - Plan #1 (4-14-14)	1,000.0	1,000.0	15.1	10.8	3.533	CC, ES
Kaiser C-10HN - Wellbore #1 - Plan #1 (4-14-14)	11,697.7	11,631.0	330.1	70.2	1.270	Level 3, SF
Kaiser E-10HN - Wellbore #1 - Plan #1 (4-14-14)	800.0	800.0	14.9	11.6	4.431	CC, ES
Kaiser E-10HN - Wellbore #1 - Plan #1 (4-14-14)	11,697.7	11,740.9	330.9	71.8	1.277	Level 3, SF
Kaiser F-10HN - Wellbore #1 - Plan#1 (4-14-14)	600.0	600.0	29.9	27.4	12.087	CC, ES
Kaiser F-10HN - Wellbore #1 - Plan#1 (4-14-14)	11,697.7	11,786.9	661.3	401.8	2.549	SF
Kaiser G-10HN - Wellbore #1 - Plan#1 (4-14-14)	400.0	400.0	45.0	43.4	28.580	CC, ES
Kaiser G-10HN - Wellbore #1 - Plan#1 (4-14-14)	11,697.7	11,792.5	990.1	730.8	3.818	SF
Kaiser H-10HC - Wellbore #1 - Plan #1 (4-14-14)	200.0	200.0	59.9	59.2	88.844	CC, ES
Kaiser H-10HC - Wellbore #1 - Plan #1 (4-14-14)	6,100.0	5,991.4	964.9	914.1	18.999	SF
Kaiser 17-10 Pad Sec.10-T6N-R65W						
Kaiser 17-10 - Wellbore #1 - Wellbore #1	8,210.6	7,183.3	163.6	108.9	2.993	CC, ES, SF
KAISER 41-10 (EXISTING) - Wellbore #1 - EXISTING	1,739.8	1,714.4	328.4	320.8	42.977	CC
KAISER 41-10 (EXISTING) - Wellbore #1 - EXISTING	1,800.0	1,773.8	328.6	320.6	41.238	ES
KAISER 41-10 (EXISTING) - Wellbore #1 - EXISTING	7,600.0	7,081.6	459.3	421.9	12.279	SF
Kaiser 2-10 Pad Sec.10-T6N-R65W						
Kaiser 18-10 - Wellbore #1 - Wellbore #1	10,851.4	7,140.2	222.9	96.4	1.762	CC, ES, SF
Kaiser 2-10 - Wellbore #1 - Wellbore #1	8,938.6	7,210.8	520.0	439.5	6.453	CC, ES
Kaiser 2-10 - Wellbore #1 - Wellbore #1	9,000.0	7,208.9	523.7	441.4	6.369	SF
Kaiser 21-10 (Exist) - Wellbore #1 - Wellbore #1	10,128.1	7,028.8	444.5	217.5	1.958	CC, ES, SF
Kaiser Pad Sec.10-T6N-R65W						
Kaiser 921-10 - Wellbore #1 - Wellbore #1	9,638.0	7,172.1	115.4	24.7	1.272	Level 3, CC, ES, SF

Offset Design		Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser A-10HN - Wellbore #1 - Plan #1 (4-14-14)										Offset Site Error:		0.0 ft
Survey Program:		0-MWD										Offset Well Error:		0.0 ft
Reference		Offset		Semi Major Axis			Distance							
Measured Depth	Vertical Depth	Measured Depth	Vertical Depth	Reference	Offset	Highside Toolface	Offset Wellbore Centre		Between Centres	Between Ellipses	Minimum Separation	Separation Factor	Warning	
(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(°)	+N/-S (ft)	+E/-W (ft)	(ft)	(ft)	(ft)			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser A-10HN - Wellbore #1 - Plan #1 (4-14-14)													Offset Site Error:	0.0 ft
Survey Program: 0-MWD													Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Tooface (")	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
0.0	0.0	0.0	0.0	0.0	0.0	-31.71	38.2	-23.6	45.0					
100.0	100.0	100.0	100.0	0.1	0.1	-31.71	38.2	-23.6	45.0	44.7	0.22	200.046		
200.0	200.0	200.0	200.0	0.3	0.3	-31.71	38.2	-23.6	45.0	44.3	0.67	66.682		
300.0	300.0	300.0	300.0	0.6	0.6	-31.71	38.2	-23.6	45.0	43.8	1.12	40.009		
400.0	400.0	400.0	400.0	0.8	0.8	-31.71	38.2	-23.6	45.0	43.4	1.57	28.578		
500.0	500.0	500.0	500.0	1.0	1.0	-31.71	38.2	-23.6	45.0	42.9	2.02	22.227		
600.0	600.0	600.0	600.0	1.2	1.2	-31.71	38.2	-23.6	45.0	42.5	2.47	18.186		
700.0	700.0	700.0	700.0	1.5	1.5	-31.71	38.2	-23.6	45.0	42.0	2.92	15.388		
800.0	800.0	800.0	800.0	1.7	1.7	-31.71	38.2	-23.6	45.0	41.6	3.37	13.336		
900.0	900.0	900.0	900.0	1.9	1.9	-31.71	38.2	-23.6	45.0	41.1	3.82	11.767		
1,000.0	1,000.0	1,000.0	1,000.0	2.1	2.1	-31.71	38.2	-23.6	45.0	40.7	4.27	10.529 CC, ES		
1,100.0	1,100.0	1,100.0	1,100.0	2.3	2.4	175.74	38.2	-23.6	46.7	42.0	4.69	9.953		
1,200.0	1,199.8	1,199.8	1,199.8	2.5	2.6	176.16	38.2	-23.6	51.9	46.8	5.09	10.199		
1,300.0	1,299.5	1,299.5	1,299.5	2.7	2.8	176.70	38.2	-23.6	60.6	55.1	5.49	11.039		
1,400.0	1,398.7	1,398.7	1,398.7	2.9	3.0	177.24	38.2	-23.6	72.8	66.9	5.89	12.352		
1,500.0	1,497.5	1,497.5	1,497.5	3.2	3.3	177.72	38.2	-23.6	88.4	82.1	6.30	14.029		
1,600.0	1,596.1	1,596.1	1,596.1	3.5	3.5	178.08	38.2	-23.6	105.0	98.3	6.72	15.620		
1,700.0	1,694.7	1,694.4	1,694.4	3.8	3.7	179.08	39.1	-22.3	121.8	114.7	7.15	17.037		
1,800.0	1,793.3	1,792.4	1,792.2	4.1	3.9	-178.76	41.7	-18.2	139.0	131.4	7.58	18.337		
1,900.0	1,891.9	1,889.8	1,889.3	4.4	4.1	-175.87	46.1	-11.3	156.8	148.8	8.02	19.549		
2,000.0	1,990.5	1,986.7	1,985.5	4.8	4.3	-172.52	52.2	-1.7	175.7	167.2	8.48	20.705		
2,100.0	2,089.1	2,084.2	2,082.3	5.1	4.6	-169.48	59.0	8.9	195.3	186.3	8.97	21.777		
2,200.0	2,187.7	2,181.8	2,179.0	5.5	4.8	-167.00	65.7	19.5	215.3	205.8	9.46	22.751		
2,300.0	2,286.2	2,279.4	2,275.8	5.8	5.1	-164.94	72.5	30.0	235.7	225.7	9.97	23.631		
2,400.0	2,384.8	2,377.0	2,372.6	6.2	5.4	-163.21	79.2	40.6	256.3	245.8	10.49	24.428		
2,500.0	2,483.4	2,474.6	2,469.3	6.6	5.6	-161.73	86.0	51.2	277.1	266.1	11.02	25.147		
2,600.0	2,582.0	2,572.1	2,566.1	6.9	5.9	-160.46	92.7	61.8	298.0	286.5	11.55	25.797		
2,700.0	2,680.6	2,669.7	2,662.9	7.3	6.2	-159.36	99.5	72.4	319.1	307.0	12.09	26.388		
2,800.0	2,779.2	2,767.3	2,759.6	7.7	6.5	-158.40	106.3	83.0	340.3	327.7	12.64	26.924		
2,900.0	2,877.8	2,864.9	2,856.4	8.1	6.8	-157.54	113.0	93.5	361.6	348.4	13.19	27.414		
3,000.0	2,976.4	2,962.5	2,953.2	8.5	7.0	-156.78	119.8	104.1	382.9	369.1	13.74	27.861		
3,100.0	3,075.0	3,060.0	3,050.0	8.8	7.3	-156.11	126.5	114.7	404.3	390.0	14.30	28.271		
3,200.0	3,173.6	3,157.6	3,146.7	9.2	7.6	-155.50	133.3	125.3	425.7	410.9	14.86	28.648		
3,300.0	3,272.2	3,255.2	3,243.5	9.6	7.9	-154.94	140.0	135.9	447.2	431.8	15.42	28.996		
3,400.0	3,370.8	3,352.8	3,340.3	10.0	8.2	-154.44	146.8	146.5	468.7	452.7	15.99	29.317		
3,500.0	3,469.4	3,450.4	3,437.0	10.4	8.5	-153.99	153.5	157.1	490.2	473.7	16.55	29.614		
3,600.0	3,568.0	3,547.9	3,533.8	10.8	8.8	-153.57	160.3	167.6	511.8	494.7	17.12	29.890		
3,700.0	3,666.6	3,645.5	3,630.6	11.2	9.1	-153.18	167.0	178.2	533.4	515.7	17.69	30.147		
3,800.0	3,765.2	3,743.1	3,727.3	11.5	9.4	-152.83	173.8	188.8	555.0	536.8	18.27	30.386		
3,900.0	3,863.8	3,840.7	3,824.1	11.9	9.7	-152.50	180.5	199.4	576.7	557.8	18.84	30.610		
4,000.0	3,962.4	3,938.3	3,920.9	12.3	10.0	-152.19	187.3	210.0	598.3	578.9	19.41	30.819		
4,100.0	4,061.0	4,035.8	4,017.6	12.7	10.4	-151.91	194.0	220.6	620.0	600.0	19.99	31.015		
4,200.0	4,159.6	4,133.4	4,114.4	13.1	10.7	-151.65	200.8	231.1	641.7	621.1	20.57	31.200		
4,300.0	4,258.2	4,231.0	4,211.2	13.5	11.0	-151.40	207.5	241.7	663.3	642.2	21.14	31.373		
4,400.0	4,356.8	4,328.6	4,308.0	13.9	11.3	-151.17	214.3	252.3	685.0	663.3	21.72	31.537		
4,500.0	4,455.4	4,426.2	4,404.7	14.3	11.6	-150.95	221.0	262.9	706.8	684.5	22.30	31.691		
4,600.0	4,554.0	4,523.7	4,501.5	14.7	11.9	-150.75	227.8	273.5	728.5	705.6	22.88	31.837		
4,700.0	4,652.6	4,621.3	4,598.3	15.0	12.2	-150.55	234.5	284.1	750.2	726.8	23.46	31.975		
4,800.0	4,751.2	4,718.9	4,695.0	15.4	12.5	-150.37	241.3	294.7	772.0	747.9	24.04	32.106		
4,900.0	4,849.7	4,816.5	4,791.8	15.8	12.8	-150.20	248.0	305.2	793.7	769.1	24.63	32.230		
5,000.0	4,948.3	4,914.1	4,888.6	16.2	13.1	-150.04	254.8	315.8	815.4	790.2	25.21	32.348		
5,100.0	5,046.9	5,011.6	4,985.3	16.6	13.5	-149.88	261.6	326.4	837.2	811.4	25.79	32.461		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
5,200.0	5,145.5	5,109.2	5,082.1	17.0	13.8	-149.74	268.3	337.0	859.0	832.6	26.38	32.567	
5,300.0	5,244.1	5,217.1	5,189.2	17.4	14.1	-149.62	275.5	348.2	880.5	853.5	26.96	32.662	
5,400.0	5,342.7	5,336.5	5,308.1	17.8	14.3	-149.72	281.1	357.0	899.9	872.4	27.48	32.747	
5,500.0	5,441.3	5,456.8	5,428.2	18.2	14.6	-150.07	284.1	361.7	917.0	889.1	27.96	32.792	
5,600.0	5,539.9	5,568.5	5,539.9	18.6	14.7	-150.63	284.5	362.5	931.9	903.5	28.42	32.796	
5,700.0	5,638.9	5,667.5	5,638.9	18.8	14.9	-151.18	284.5	362.5	944.5	915.6	28.86	32.727	
5,800.0	5,738.3	5,766.9	5,738.3	19.1	15.1	-151.58	284.5	362.5	954.1	924.8	29.28	32.584	
5,900.0	5,838.0	5,866.6	5,838.0	19.3	15.3	-151.85	284.5	362.5	960.6	930.9	29.67	32.374	
6,000.0	5,937.9	5,966.5	5,937.9	19.4	15.5	-151.99	284.5	362.5	964.0	934.0	30.03	32.100	
6,100.0	6,037.9	6,066.5	6,037.9	19.5	15.6	0.69	284.5	362.5	964.6	932.1	32.57	29.617	
6,200.0	6,137.9	6,166.5	6,137.9	19.7	15.8	0.69	284.5	362.5	964.6	931.7	32.90	29.319	
6,300.0	6,237.9	6,266.5	6,237.9	19.8	16.0	0.69	284.5	362.5	964.6	931.4	33.24	29.024	
6,400.0	6,337.9	6,366.5	6,337.9	19.9	16.2	0.69	284.5	362.5	964.6	931.0	33.57	28.733	
6,500.0	6,437.9	6,466.5	6,437.9	20.1	16.4	0.69	284.5	362.5	964.6	930.7	33.91	28.446	
6,600.0	6,537.9	6,566.5	6,538.0	20.2	16.6	0.67	284.6	362.1	964.6	930.4	34.25	28.167	
6,613.9	6,551.9	6,580.6	6,552.0	20.2	16.6	90.44	284.6	361.4	964.6	932.4	32.21	29.949	
6,700.0	6,637.6	6,666.3	6,636.7	20.3	16.7	90.05	284.7	349.0	964.7	932.3	32.37	29.801	
6,800.0	6,734.4	6,764.5	6,729.7	20.3	16.7	89.61	284.9	317.9	964.8	932.5	32.37	29.805	
6,900.0	6,824.6	6,861.5	6,814.3	20.3	16.6	89.18	285.3	270.6	965.2	932.9	32.28	29.900	
7,000.0	6,905.1	6,957.3	6,887.8	20.2	16.5	88.78	285.9	209.4	965.6	933.4	32.26	29.930	
7,100.0	6,972.8	7,052.3	6,948.3	20.1	16.6	88.42	286.5	136.4	966.2	933.6	32.54	29.689	
7,200.0	7,025.3	7,146.4	6,994.3	20.0	16.9	88.12	287.2	54.4	966.8	933.4	33.35	28.988	
7,300.0	7,060.6	7,240.0	7,024.7	19.9	17.5	87.89	288.0	-33.9	967.4	932.5	34.83	27.772	
7,400.0	7,080.1	7,337.5	7,042.8	19.8	18.6	87.81	288.8	-129.7	967.9	930.9	37.05	26.127	
7,500.0	7,094.8	7,434.6	7,056.5	20.2	20.1	87.76	289.7	-225.9	968.5	928.6	39.89	24.276	
7,600.0	7,101.1	7,531.4	7,062.2	21.9	21.7	87.70	290.5	-322.4	969.0	925.8	43.18	22.440	
7,700.0	7,100.3	7,630.5	7,061.9	23.8	23.6	87.73	291.4	-421.5	969.5	922.6	46.94	20.652	
7,800.0	7,098.8	7,730.5	7,061.4	25.9	25.6	87.78	292.2	-521.5	970.0	919.0	51.05	19.001	
7,900.0	7,097.3	7,830.5	7,060.9	28.1	27.8	87.84	293.1	-621.5	970.5	915.1	55.42	17.511	
8,000.0	7,095.9	7,930.5	7,060.3	30.4	30.1	87.90	294.0	-721.5	971.0	911.0	60.00	16.183	
8,100.0	7,094.4	8,030.5	7,059.8	32.8	32.5	87.96	294.9	-821.5	971.5	906.7	64.75	15.004	
8,200.0	7,092.9	8,130.5	7,059.3	35.2	34.9	88.01	295.7	-921.5	972.0	902.4	69.62	13.960	
8,300.0	7,091.4	8,230.5	7,058.8	37.7	37.4	88.07	296.6	-1,021.5	972.5	897.9	74.61	13.035	
8,400.0	7,089.9	8,330.5	7,058.2	40.2	39.9	88.13	297.5	-1,121.5	973.0	893.3	79.67	12.212	
8,500.0	7,088.4	8,430.5	7,057.7	42.8	42.5	88.19	298.3	-1,221.5	973.5	888.7	84.81	11.478	
8,600.0	7,087.0	8,530.5	7,057.2	45.3	45.1	88.24	299.2	-1,321.4	974.0	884.0	90.01	10.821	
8,700.0	7,085.5	8,630.5	7,056.7	48.0	47.7	88.30	300.1	-1,421.4	974.5	879.2	95.25	10.231	
8,800.0	7,084.0	8,730.5	7,056.1	50.6	50.3	88.36	300.9	-1,521.4	975.0	874.4	100.54	9.698	
8,900.0	7,082.5	8,830.4	7,055.6	53.2	53.0	88.42	301.8	-1,621.4	975.5	869.6	105.86	9.215	
9,000.0	7,081.0	8,930.4	7,055.1	55.9	55.7	88.47	302.7	-1,721.4	976.0	864.8	111.21	8.776	
9,100.0	7,079.5	9,030.4	7,054.6	58.6	58.4	88.53	303.6	-1,821.4	976.5	859.9	116.58	8.376	
9,200.0	7,078.1	9,130.4	7,054.0	61.3	61.1	88.59	304.4	-1,921.4	977.0	855.0	121.98	8.009	
9,300.0	7,076.6	9,230.4	7,053.5	64.0	63.8	88.64	305.3	-2,021.4	977.5	850.1	127.40	7.673	
9,400.0	7,075.1	9,330.4	7,053.0	66.7	66.5	88.70	306.2	-2,121.4	978.0	845.2	132.84	7.362	
9,500.0	7,073.6	9,430.4	7,052.5	69.4	69.2	88.76	307.0	-2,221.3	978.5	840.2	138.29	7.076	
9,600.0	7,072.1	9,530.4	7,052.0	72.1	71.9	88.82	307.9	-2,321.3	979.0	835.3	143.75	6.810	
9,700.0	7,070.6	9,630.4	7,051.4	74.9	74.7	88.87	308.8	-2,421.3	979.5	830.3	149.23	6.564	
9,800.0	7,069.2	9,730.4	7,050.9	77.6	77.4	88.93	309.6	-2,521.3	980.0	825.3	154.72	6.334	
9,900.0	7,067.7	9,830.4	7,050.4	80.3	80.2	88.99	310.5	-2,621.3	980.6	820.3	160.21	6.120	
10,000.0	7,066.2	9,930.4	7,049.9	83.1	82.9	89.04	311.4	-2,721.3	981.1	815.4	165.72	5.920	
10,100.0	7,064.7	10,030.4	7,049.3	85.8	85.7	89.10	312.3	-2,821.3	981.6	810.4	171.23	5.733	
10,200.0	7,063.2	10,130.4	7,048.8	88.6	88.4	89.15	313.1	-2,921.3	982.1	805.4	176.75	5.556	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser A-10HN - Wellbore #1 - Plan #1 (4-14-14)												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
10,300.0	7,061.7	10,230.4	7,048.3	91.3	91.2	89.21	314.0	-3,021.3	982.6	800.3	182.28	5.391	
10,400.0	7,060.3	10,330.4	7,047.8	94.1	93.9	89.27	314.9	-3,121.2	983.1	795.3	187.81	5.235	
10,500.0	7,058.8	10,430.3	7,047.2	96.9	96.7	89.32	315.7	-3,221.2	983.7	790.3	193.35	5.088	
10,600.0	7,057.3	10,530.3	7,046.7	99.6	99.5	89.38	316.6	-3,321.2	984.2	785.3	198.89	4.948	
10,700.0	7,055.8	10,630.3	7,046.2	102.4	102.3	89.44	317.5	-3,421.2	984.7	780.3	204.43	4.817	
10,800.0	7,054.3	10,730.3	7,045.7	105.2	105.0	89.49	318.3	-3,521.2	985.2	775.2	209.98	4.692	
10,900.0	7,052.8	10,830.3	7,045.1	107.9	107.8	89.55	319.2	-3,621.2	985.7	770.2	215.54	4.573	
11,000.0	7,051.4	10,930.3	7,044.6	110.7	110.6	89.60	320.1	-3,721.2	986.3	765.2	221.10	4.461	
11,100.0	7,049.9	11,030.3	7,044.1	113.5	113.4	89.66	320.9	-3,821.2	986.8	760.1	226.66	4.354	
11,200.0	7,048.4	11,130.3	7,043.6	116.3	116.1	89.72	321.8	-3,921.2	987.3	755.1	232.22	4.252	
11,300.0	7,046.9	11,230.3	7,043.1	119.0	118.9	89.77	322.7	-4,021.1	987.8	750.0	237.79	4.154	
11,400.0	7,045.4	11,330.3	7,042.5	121.8	121.7	89.83	323.6	-4,121.1	988.4	745.0	243.36	4.061	
11,500.0	7,043.9	11,430.3	7,042.0	124.6	124.5	89.88	324.4	-4,221.1	988.9	740.0	248.93	3.973	
11,600.0	7,042.4	11,530.3	7,041.5	127.4	127.3	89.94	325.3	-4,321.1	989.4	734.9	254.50	3.888	
11,697.7	7,041.0	11,622.2	7,041.0	130.1	129.8	89.99	326.1	-4,413.1	990.0	730.2	259.79	3.811 SF	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser B-10HC - Wellbore #1 - Plan #1 (4-14-14)													Offset Site Error:	0.0 ft
Survey Program: 0-MWD													Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Tooface (")	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
0.0	0.0	0.0	0.0	0.0	0.0	-31.86	25.5	-15.9	30.0					
100.0	100.0	100.0	100.0	0.1	0.1	-31.86	25.5	-15.9	30.0	29.8	0.22	133.591		
200.0	200.0	200.0	200.0	0.3	0.3	-31.86	25.5	-15.9	30.0	29.4	0.67	44.530		
300.0	300.0	300.0	300.0	0.6	0.6	-31.86	25.5	-15.9	30.0	28.9	1.12	26.718		
400.0	400.0	400.0	400.0	0.8	0.8	-31.86	25.5	-15.9	30.0	28.5	1.57	19.084		
500.0	500.0	500.0	500.0	1.0	1.0	-31.86	25.5	-15.9	30.0	28.0	2.02	14.843		
600.0	600.0	600.0	600.0	1.2	1.2	-31.86	25.5	-15.9	30.0	27.6	2.47	12.145		
700.0	700.0	700.0	700.0	1.5	1.5	-31.86	25.5	-15.9	30.0	27.1	2.92	10.276		
800.0	800.0	800.0	800.0	1.7	1.7	-31.86	25.5	-15.9	30.0	26.7	3.37	8.906		
900.0	900.0	900.0	900.0	1.9	1.9	-31.86	25.5	-15.9	30.0	26.2	3.82	7.858		
1,000.0	1,000.0	1,000.0	1,000.0	2.1	2.1	-31.86	25.5	-15.9	30.0	25.8	4.27	7.031 CC, ES		
1,100.0	1,100.0	1,100.0	1,100.0	2.3	2.4	175.67	25.5	-15.9	31.8	27.1	4.69	6.770		
1,200.0	1,199.8	1,199.8	1,199.8	2.5	2.6	176.28	25.5	-15.9	37.0	31.9	5.09	7.265		
1,300.0	1,299.5	1,299.5	1,299.5	2.7	2.8	176.98	25.5	-15.9	45.7	40.2	5.49	8.320		
1,400.0	1,398.7	1,398.7	1,398.7	2.9	3.0	177.60	25.5	-15.9	57.9	52.0	5.89	9.819		
1,500.0	1,497.5	1,498.9	1,498.9	3.2	3.2	179.21	25.3	-14.2	72.4	66.2	6.28	11.528		
1,600.0	1,596.1	1,599.4	1,599.3	3.5	3.4	-177.76	24.7	-9.0	86.3	79.6	6.69	12.903		
1,700.0	1,694.7	1,700.1	1,699.5	3.8	3.7	-173.80	23.6	-0.3	98.6	91.5	7.11	13.864		
1,800.0	1,793.3	1,800.0	1,798.7	4.1	3.9	-169.27	22.2	11.5	110.0	102.5	7.57	14.536		
1,900.0	1,891.9	1,899.0	1,897.0	4.4	4.1	-165.41	20.7	23.6	121.8	113.7	8.05	15.126		
2,000.0	1,990.5	1,998.0	1,995.2	4.8	4.4	-162.24	19.2	35.7	134.0	125.4	8.55	15.662		
2,100.0	2,089.1	2,097.0	2,093.5	5.1	4.6	-159.61	17.7	47.9	146.5	137.5	9.08	16.142		
2,200.0	2,187.7	2,196.0	2,191.7	5.5	4.9	-157.39	16.2	60.0	159.3	149.7	9.62	16.568		
2,300.0	2,286.2	2,295.0	2,290.0	5.8	5.2	-155.50	14.7	72.1	172.3	162.2	10.17	16.946		
2,400.0	2,384.8	2,394.0	2,388.2	6.2	5.5	-153.88	13.3	84.3	185.5	174.8	10.74	17.281		
2,500.0	2,483.4	2,493.0	2,486.5	6.6	5.7	-152.47	11.8	96.4	198.8	187.5	11.31	17.578		
2,600.0	2,582.0	2,592.0	2,584.7	6.9	6.0	-151.24	10.3	108.5	212.2	200.3	11.89	17.843		
2,700.0	2,680.6	2,691.0	2,682.9	7.3	6.3	-150.16	8.8	120.7	225.7	213.2	12.48	18.080		
2,800.0	2,779.2	2,790.0	2,781.2	7.7	6.6	-149.20	7.3	132.8	239.2	226.1	13.08	18.292		
2,900.0	2,877.8	2,889.0	2,879.4	8.1	6.9	-148.34	5.8	144.9	252.8	239.2	13.68	18.483		
3,000.0	2,976.4	2,988.0	2,977.7	8.5	7.2	-147.57	4.4	157.0	266.5	252.2	14.29	18.655		
3,100.0	3,075.0	3,087.0	3,075.9	8.8	7.5	-146.88	2.9	169.2	280.2	265.3	14.90	18.811		
3,200.0	3,173.6	3,186.0	3,174.2	9.2	7.8	-146.25	1.4	181.3	293.9	278.4	15.51	18.952		
3,300.0	3,272.2	3,285.0	3,272.4	9.6	8.1	-145.67	-0.1	193.4	307.7	291.6	16.13	19.082		
3,400.0	3,370.8	3,384.0	3,370.7	10.0	8.4	-145.15	-1.6	205.6	321.5	304.7	16.74	19.200		
3,500.0	3,469.4	3,483.0	3,468.9	10.4	8.7	-144.67	-3.1	217.7	335.3	317.9	17.37	19.308		
3,600.0	3,568.0	3,582.0	3,567.1	10.8	9.0	-144.22	-4.6	229.8	349.2	331.2	17.99	19.408		
3,700.0	3,666.6	3,681.0	3,665.4	11.2	9.3	-143.81	-6.0	242.0	363.0	344.4	18.62	19.500		
3,800.0	3,765.2	3,780.0	3,763.6	11.5	9.7	-143.43	-7.5	254.1	376.9	357.7	19.24	19.585		
3,900.0	3,863.8	3,879.0	3,861.9	11.9	10.0	-143.08	-9.0	266.2	390.8	370.9	19.87	19.664		
4,000.0	3,962.4	3,978.0	3,960.1	12.3	10.3	-142.75	-10.5	278.4	404.7	384.2	20.50	19.738		
4,100.0	4,061.0	4,077.0	4,058.4	12.7	10.6	-142.44	-12.0	290.5	418.6	397.5	21.14	19.806		
4,200.0	4,159.6	4,176.0	4,156.6	13.1	10.9	-142.16	-13.5	302.6	432.5	410.8	21.77	19.870		
4,300.0	4,258.2	4,275.1	4,254.9	13.5	11.2	-141.89	-14.9	314.8	446.5	424.1	22.40	19.930		
4,400.0	4,356.8	4,374.1	4,353.1	13.9	11.5	-141.64	-16.4	326.9	460.4	437.4	23.04	19.986		
4,500.0	4,455.4	4,473.1	4,451.4	14.3	11.8	-141.40	-17.9	339.0	474.4	450.7	23.67	20.040		
4,600.0	4,554.0	4,573.3	4,551.1	14.7	12.1	-141.40	-19.2	349.4	488.2	464.0	24.22	20.160		
4,700.0	4,652.6	4,673.4	4,650.9	15.0	12.3	-141.80	-20.0	356.3	501.8	477.1	24.70	20.316		
4,800.0	4,751.2	4,773.3	4,750.7	15.4	12.5	-142.57	-20.4	359.7	515.3	490.2	25.13	20.505		
4,900.0	4,849.7	4,872.3	4,849.7	15.8	12.6	-143.63	-20.5	360.1	528.7	503.2	25.52	20.720		
5,000.0	4,948.3	4,970.9	4,948.3	16.2	12.8	-144.67	-20.5	360.1	542.3	516.4	25.91	20.932		
5,100.0	5,046.9	5,069.5	5,046.9	16.6	13.0	-145.66	-20.5	360.1	556.1	529.8	26.30	21.142		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
5,200.0	5,145.5	5,168.1	5,145.5	17.0	13.1	-146.60	-20.5	360.1	570.0	543.3	26.70	21.351	
5,300.0	5,244.1	5,266.7	5,244.1	17.4	13.3	-147.50	-20.5	360.1	584.1	557.0	27.09	21.559	
5,400.0	5,342.7	5,365.3	5,342.7	17.8	13.5	-148.36	-20.5	360.1	598.3	570.8	27.49	21.764	
5,500.0	5,441.3	5,463.9	5,441.3	18.2	13.7	-149.17	-20.5	360.1	612.6	584.7	27.89	21.968	
5,600.0	5,539.9	5,562.5	5,539.9	18.6	13.9	-149.98	-20.5	360.1	627.0	598.7	28.29	22.164	
5,700.0	5,638.9	5,661.5	5,638.9	18.8	14.1	-150.74	-20.5	360.1	639.5	610.8	28.67	22.305	
5,800.0	5,738.3	5,760.9	5,738.3	19.1	14.2	-151.30	-20.5	360.1	649.0	620.0	29.04	22.350	
5,900.0	5,838.0	5,860.6	5,838.0	19.3	14.4	-151.67	-20.5	360.1	655.5	626.1	29.39	22.305	
6,000.0	5,937.9	5,960.5	5,937.9	19.4	14.6	-151.87	-20.5	360.1	659.0	629.3	29.72	22.172	
6,100.0	6,037.9	6,060.5	6,037.9	19.5	14.8	0.81	-20.5	360.1	659.6	627.9	31.65	20.837	
6,200.0	6,137.9	6,160.5	6,137.9	19.7	15.0	0.81	-20.5	360.1	659.6	627.6	31.99	20.616	
6,300.0	6,237.9	6,260.5	6,237.9	19.8	15.2	0.81	-20.5	360.1	659.6	627.2	32.33	20.398	
6,400.0	6,337.9	6,360.5	6,337.9	19.9	15.4	0.81	-20.5	360.1	659.6	626.9	32.68	20.184	
6,500.0	6,437.9	6,460.5	6,437.9	20.1	15.6	0.81	-20.5	360.1	659.6	626.5	33.02	19.972	
6,600.0	6,537.9	6,560.5	6,537.9	20.2	15.8	0.81	-20.5	360.1	659.6	626.2	33.37	19.764	
6,700.0	6,637.6	6,660.6	6,638.1	20.3	16.0	91.12	-20.5	359.9	659.7	627.4	32.22	20.476	
6,800.0	6,734.4	6,763.6	6,740.0	20.3	16.1	92.13	-20.4	346.2	660.0	627.6	32.42	20.358	
6,900.0	6,824.6	6,869.2	6,839.6	20.3	16.1	93.07	-20.3	311.8	660.5	628.1	32.44	20.362	
7,000.0	6,905.1	6,977.1	6,932.1	20.2	16.1	93.90	-20.1	256.7	661.1	628.7	32.41	20.397	
7,100.0	6,972.8	7,047.7	7,012.7	20.1	16.2	94.58	-19.9	182.0	661.7	629.1	32.58	20.307	
7,200.0	7,025.3	7,100.0	7,076.7	20.0	16.5	95.09	-19.5	90.6	662.2	628.9	33.27	19.905	
7,300.0	7,060.6	7,132.1	7,120.1	19.9	17.3	95.38	-19.2	-13.6	662.5	627.7	34.75	19.065	
7,400.0	7,080.1	7,149.1	7,141.9	19.8	18.5	95.44	-18.8	-118.3	662.6	625.6	37.00	17.906	
7,500.0	7,094.8	7,163.4	7,157.4	20.2	20.0	95.45	-18.4	-221.4	662.6	622.7	39.92	16.597	
7,600.0	7,101.1	7,169.9	7,163.8	21.9	21.8	95.43	-18.1	-327.0	662.6	619.2	43.38	15.273	
7,619.6	7,101.4	7,169.9	7,163.9	22.2	22.1	95.41	-18.0	-347.7	662.6	618.4	44.13	15.016	
7,700.0	7,100.3	7,163.4	7,163.4	23.8	23.7	95.46	-17.7	-428.2	662.6	615.4	47.19	14.041	
7,800.0	7,098.8	7,162.8	7,162.8	25.9	25.8	95.54	-17.4	-528.2	662.7	611.4	51.29	12.920	
7,900.0	7,097.3	7,162.1	7,162.1	28.1	28.0	95.61	-17.0	-628.2	662.8	607.2	55.65	11.910	
8,000.0	7,095.9	7,161.5	7,161.5	30.4	30.3	95.69	-16.7	-728.2	662.9	602.7	60.22	11.009	
8,100.0	7,094.4	7,160.9	7,160.9	32.8	32.6	95.76	-16.3	-828.2	663.0	598.1	64.94	10.210	
8,200.0	7,092.9	7,160.3	7,160.3	35.2	35.1	95.84	-15.9	-928.2	663.1	593.3	69.79	9.502	
8,300.0	7,091.4	7,159.7	7,159.7	37.7	37.6	95.91	-15.6	-1,028.2	663.2	588.5	74.74	8.874	
8,400.0	7,089.9	7,159.1	7,159.1	40.2	40.1	95.99	-15.2	-1,128.2	663.3	583.6	79.78	8.315	
8,500.0	7,088.4	7,158.5	7,158.5	42.8	42.7	96.06	-14.9	-1,228.2	663.5	578.6	84.88	7.817	
8,600.0	7,087.0	7,157.9	7,157.9	45.3	45.3	96.14	-14.5	-1,328.2	663.6	573.5	90.04	7.370	
8,700.0	7,085.5	7,157.3	7,157.3	48.0	47.9	96.21	-14.2	-1,428.2	663.7	568.4	95.24	6.968	
8,800.0	7,084.0	7,156.7	7,156.7	50.6	50.6	96.28	-13.8	-1,528.2	663.8	563.3	100.48	6.606	
8,900.0	7,082.5	7,156.0	7,156.0	53.2	53.2	96.36	-13.5	-1,628.2	663.9	558.1	105.76	6.277	
9,000.0	7,081.0	7,155.4	7,155.4	55.9	55.9	96.43	-13.1	-1,728.1	664.0	552.9	111.06	5.979	
9,100.0	7,079.5	7,154.8	7,154.8	58.6	58.6	96.51	-12.8	-1,828.1	664.1	547.7	116.39	5.706	
9,200.0	7,078.1	7,154.2	7,154.2	61.3	61.3	96.58	-12.4	-1,928.1	664.2	542.5	121.73	5.456	
9,300.0	7,076.6	7,153.6	7,153.6	64.0	64.0	96.66	-12.1	-2,028.1	664.3	537.2	127.10	5.227	
9,400.0	7,075.1	7,153.0	7,153.0	66.7	66.7	96.73	-11.7	-2,128.1	664.4	532.0	132.48	5.015	
9,500.0	7,073.6	7,152.4	7,152.4	69.4	69.4	96.81	-11.3	-2,228.1	664.6	526.7	137.87	4.820	
9,600.0	7,072.1	7,151.8	7,151.8	72.1	72.2	96.88	-11.0	-2,328.1	664.7	521.4	143.28	4.639	
9,700.0	7,070.6	7,151.2	7,151.2	74.9	74.9	96.96	-10.6	-2,428.1	664.8	516.1	148.69	4.471	
9,800.0	7,069.2	7,150.5	7,150.5	77.6	77.6	97.03	-10.3	-2,528.1	664.9	510.8	154.12	4.314	
9,900.0	7,067.7	7,149.9	7,149.9	80.3	80.4	97.11	-9.9	-2,628.1	665.0	505.5	159.55	4.168	
10,000.0	7,066.2	7,149.3	7,149.3	83.1	83.1	97.18	-9.6	-2,728.1	665.2	500.2	164.98	4.032	
10,100.0	7,064.7	7,148.7	7,148.7	85.8	85.9	97.25	-9.2	-2,828.1	665.3	494.9	170.43	3.904	
10,200.0	7,063.2	7,148.1	7,148.1	88.6	88.6	97.33	-8.9	-2,928.1	665.4	489.5	175.87	3.783	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser B-10HC - Wellbore #1 - Plan #1 (4-14-14)												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
10,300.0	7,061.7	10,330.3	7,147.5	91.3	91.4	97.40	-8.5	-3,028.1	665.5	484.2	181.33	3.670	
10,400.0	7,060.3	10,430.3	7,146.9	94.1	94.2	97.48	-8.2	-3,128.1	665.7	478.9	186.78	3.564	
10,500.0	7,058.8	10,530.3	7,146.3	96.9	96.9	97.55	-7.8	-3,228.1	665.8	473.5	192.24	3.463	
10,600.0	7,057.3	10,630.3	7,145.7	99.6	99.7	97.63	-7.5	-3,328.0	665.9	468.2	197.70	3.368	
10,700.0	7,055.8	10,730.3	7,145.0	102.4	102.5	97.70	-7.1	-3,428.0	666.0	462.9	203.17	3.278	
10,800.0	7,054.3	10,830.3	7,144.4	105.2	105.3	97.77	-6.8	-3,528.0	666.2	457.5	208.64	3.193	
10,900.0	7,052.8	10,930.3	7,143.8	107.9	108.0	97.85	-6.4	-3,628.0	666.3	452.2	214.10	3.112	
11,000.0	7,051.4	11,030.3	7,143.2	110.7	110.8	97.92	-6.0	-3,728.0	666.4	446.9	219.57	3.035	
11,100.0	7,049.9	11,130.3	7,142.6	113.5	113.6	98.00	-5.7	-3,828.0	666.6	441.5	225.04	2.962	
11,200.0	7,048.4	11,230.3	7,142.0	116.3	116.4	98.07	-5.3	-3,928.0	666.7	436.2	230.52	2.892	
11,300.0	7,046.9	11,330.3	7,141.4	119.0	119.1	98.15	-5.0	-4,028.0	666.8	430.9	235.99	2.826	
11,400.0	7,045.4	11,430.3	7,140.8	121.8	121.9	98.22	-4.6	-4,128.0	667.0	425.5	241.46	2.762	
11,500.0	7,043.9	11,530.3	7,140.2	124.6	124.7	98.29	-4.3	-4,228.0	667.1	420.2	246.93	2.702	
11,600.0	7,042.4	11,630.3	7,139.5	127.4	127.5	98.37	-3.9	-4,328.0	667.3	414.9	252.40	2.644	
11,649.2	7,041.7	11,679.4	7,139.2	128.8	128.9	98.40	-3.8	-4,377.1	667.3	412.2	255.09	2.616	
11,697.7	7,041.0	11,720.2	7,139.0	130.1	130.0	98.43	-3.6	-4,417.8	667.4	409.9	257.54	2.592 SF	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser C-10HN - Wellbore #1 - Plan #1 (4-14-14)													Offset Site Error:	0.0 ft
Survey Program: 0-MWD													Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
0.0	0.0	0.0	0.0	0.0	0.0	-32.31	12.8	-8.1	15.1	15.1	0.00	N/A		
100.0	100.0	100.0	100.0	0.1	0.1	-32.31	12.8	-8.1	15.1	14.9	0.22	67.124		
200.0	200.0	200.0	200.0	0.3	0.3	-32.31	12.8	-8.1	15.1	14.4	0.67	22.375		
300.0	300.0	300.0	300.0	0.6	0.6	-32.31	12.8	-8.1	15.1	14.0	1.12	13.425		
400.0	400.0	400.0	400.0	0.8	0.8	-32.31	12.8	-8.1	15.1	13.5	1.57	9.589		
500.0	500.0	500.0	500.0	1.0	1.0	-32.31	12.8	-8.1	15.1	13.1	2.02	7.458		
600.0	600.0	600.0	600.0	1.2	1.2	-32.31	12.8	-8.1	15.1	12.6	2.47	6.102		
700.0	700.0	700.0	700.0	1.5	1.5	-32.31	12.8	-8.1	15.1	12.2	2.92	5.163		
800.0	800.0	800.0	800.0	1.7	1.7	-32.31	12.8	-8.1	15.1	11.7	3.37	4.475		
900.0	900.0	900.0	900.0	1.9	1.9	-32.31	12.8	-8.1	15.1	11.3	3.82	3.948		
1,000.0	1,000.0	1,000.0	1,000.0	2.1	2.1	-32.31	12.8	-8.1	15.1	10.8	4.27	3.533 CC, ES		
1,100.0	1,100.0	1,100.0	1,100.0	2.3	2.4	175.50	12.8	-8.1	16.8	12.1	4.69	3.586		
1,200.0	1,199.8	1,199.8	1,199.8	2.5	2.6	176.56	12.8	-8.1	22.0	17.0	5.09	4.331		
1,300.0	1,299.5	1,300.5	1,300.4	2.7	2.8	178.45	11.5	-6.8	29.1	23.6	5.47	5.317		
1,400.0	1,398.7	1,401.3	1,401.1	2.9	3.0	-178.68	7.8	-3.1	36.3	30.4	5.83	6.225		
1,500.0	1,497.5	1,502.3	1,501.7	3.2	3.2	-175.35	1.5	3.2	43.7	37.5	6.20	7.042		
1,600.0	1,596.1	1,603.6	1,602.3	3.5	3.4	-171.41	-7.3	12.0	49.1	42.5	6.62	7.420		
1,700.0	1,694.7	1,703.5	1,701.2	3.8	3.6	-167.33	-17.3	22.0	53.1	46.0	7.06	7.520		
1,800.0	1,793.3	1,803.4	1,800.0	4.1	3.9	-163.84	-27.3	32.0	57.3	49.8	7.53	7.612		
1,900.0	1,891.9	1,903.2	1,898.9	4.4	4.2	-160.83	-37.3	42.0	61.7	53.7	8.02	7.693		
2,000.0	1,990.5	2,003.1	1,997.7	4.8	4.5	-158.23	-47.3	52.0	66.2	57.7	8.54	7.761		
2,100.0	2,089.1	2,102.9	2,096.6	5.1	4.8	-155.96	-57.3	62.0	70.9	61.8	9.07	7.817		
2,200.0	2,187.7	2,202.8	2,195.4	5.5	5.1	-153.98	-67.2	72.0	75.7	66.0	9.62	7.863		
2,300.0	2,286.2	2,302.6	2,294.3	5.8	5.4	-152.23	-77.2	82.0	80.5	70.3	10.19	7.899		
2,400.0	2,384.8	2,402.5	2,393.1	6.2	5.7	-150.69	-87.2	92.0	85.4	74.6	10.77	7.927		
2,500.0	2,483.4	2,502.3	2,492.0	6.6	6.0	-149.31	-97.2	102.0	90.4	79.0	11.37	7.949		
2,600.0	2,582.0	2,602.2	2,590.8	6.9	6.3	-148.08	-107.2	112.0	95.4	83.4	11.97	7.966		
2,700.0	2,680.6	2,702.0	2,689.7	7.3	6.7	-146.97	-117.2	122.0	100.4	87.8	12.59	7.979		
2,800.0	2,779.2	2,801.9	2,788.5	7.7	7.0	-145.96	-127.2	132.0	105.5	92.3	13.21	7.989		
2,900.0	2,877.8	2,901.8	2,887.4	8.1	7.3	-145.05	-137.2	142.0	110.6	96.8	13.84	7.995		
3,000.0	2,976.4	3,001.6	2,986.2	8.5	7.7	-144.22	-147.1	152.0	115.8	101.3	14.47	8.000		
3,100.0	3,075.0	3,101.5	3,085.1	8.8	8.0	-143.46	-157.1	162.0	120.9	105.8	15.11	8.003		
3,200.0	3,173.6	3,201.3	3,183.9	9.2	8.3	-142.76	-167.1	172.0	126.1	110.3	15.75	8.005		
3,300.0	3,272.2	3,301.2	3,282.8	9.6	8.7	-142.12	-177.1	182.0	131.3	114.9	16.40	8.005		
3,400.0	3,370.8	3,401.0	3,381.6	10.0	9.0	-141.53	-187.1	192.0	136.5	119.5	17.05	8.005		
3,500.0	3,469.4	3,500.9	3,480.5	10.4	9.4	-140.98	-197.1	201.9	141.7	124.0	17.71	8.004		
3,600.0	3,568.0	3,600.7	3,579.3	10.8	9.7	-140.47	-207.1	211.9	147.0	128.6	18.37	8.003		
3,700.0	3,666.6	3,700.6	3,678.2	11.2	10.1	-139.99	-217.1	221.9	152.2	133.2	19.03	8.001		
3,800.0	3,765.2	3,800.4	3,777.0	11.5	10.4	-139.55	-227.1	231.9	157.5	137.8	19.69	7.999		
3,900.0	3,863.8	3,900.3	3,875.8	11.9	10.7	-139.13	-237.0	241.9	162.7	142.4	20.35	7.996		
4,000.0	3,962.4	4,000.2	3,974.7	12.3	11.1	-138.74	-247.0	251.9	168.0	147.0	21.02	7.994		
4,100.0	4,061.0	4,100.0	4,073.5	12.7	11.4	-138.38	-257.0	261.9	173.3	151.6	21.69	7.991		
4,200.0	4,159.6	4,199.9	4,172.4	13.1	11.8	-138.04	-267.0	271.9	178.6	156.2	22.36	7.988		
4,300.0	4,258.2	4,299.7	4,271.2	13.5	12.1	-137.71	-277.0	281.9	183.9	160.8	23.03	7.985		
4,400.0	4,356.8	4,399.6	4,370.1	13.9	12.5	-137.41	-287.0	291.9	189.2	165.5	23.70	7.982		
4,500.0	4,455.4	4,499.4	4,468.9	14.3	12.8	-137.12	-297.0	301.9	194.5	170.1	24.37	7.979		
4,600.0	4,554.0	4,599.3	4,567.8	14.7	13.2	-136.84	-307.0	311.9	199.8	174.7	25.05	7.976		
4,700.0	4,652.6	4,699.1	4,666.6	15.0	13.5	-136.58	-316.9	321.9	205.1	179.4	25.72	7.973		
4,800.0	4,751.2	4,799.0	4,765.5	15.4	13.9	-136.34	-326.9	331.9	210.4	184.0	26.40	7.970		
4,900.0	4,849.7	4,896.4	4,862.0	15.8	14.2	-136.30	-336.1	341.1	216.1	189.1	27.02	8.001		
5,000.0	4,948.3	4,992.5	4,957.6	16.2	14.4	-136.96	-343.0	348.0	223.4	196.0	27.47	8.133		
5,100.0	5,046.9	5,088.1	5,053.0	16.6	14.6	-138.26	-347.6	352.6	232.4	204.6	27.81	8.357		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
5,200.0	5,145.5	5,183.1	5,147.9	17.0	14.7	-140.10	-349.9	354.9	243.3	215.3	28.05	8.675	
5,300.0	5,244.1	5,279.3	5,244.1	17.4	14.9	-142.33	-350.2	355.2	256.1	227.9	28.21	9.080	
5,400.0	5,342.7	5,377.9	5,342.7	17.8	15.0	-144.49	-350.2	355.2	269.6	241.2	28.37	9.503	
5,500.0	5,441.3	5,476.5	5,441.3	18.2	15.2	-146.44	-350.2	355.2	283.4	254.9	28.56	9.925	
5,600.0	5,539.9	5,575.1	5,539.9	18.6	15.3	-148.24	-350.2	355.2	297.5	268.7	28.76	10.344	
5,700.0	5,638.9	5,674.0	5,638.9	18.8	15.5	-149.75	-350.2	355.2	309.8	280.8	28.96	10.697	
5,800.0	5,738.3	5,773.4	5,738.3	19.1	15.7	-150.83	-350.2	355.2	319.3	290.1	29.19	10.936	
5,900.0	5,838.0	5,873.2	5,838.0	19.3	15.8	-151.52	-350.2	355.2	325.7	296.3	29.45	11.061	
6,000.0	5,937.9	5,973.1	5,937.9	19.4	16.0	-151.88	-350.2	355.2	329.2	299.5	29.72	11.077	
6,100.0	6,037.9	6,073.1	6,037.9	19.5	16.1	0.77	-350.2	355.2	329.8	296.6	33.22	9.926	
6,200.0	6,137.9	6,173.1	6,137.9	19.7	16.3	0.77	-350.2	355.2	329.8	296.3	33.53	9.836	
6,300.0	6,237.9	6,273.1	6,237.9	19.8	16.5	0.77	-350.2	355.2	329.8	295.9	33.83	9.747	
6,400.0	6,337.9	6,373.1	6,337.9	19.9	16.6	0.77	-350.2	355.2	329.8	295.6	34.14	9.658	
6,500.0	6,437.9	6,473.1	6,437.9	20.1	16.8	0.77	-350.2	355.2	329.8	295.3	34.46	9.571	
6,600.0	6,537.9	6,573.2	6,538.0	20.2	17.0	0.71	-350.2	354.9	329.8	295.0	34.78	9.482	
6,651.1	6,588.9	6,624.4	6,589.0	20.2	17.0	90.10	-350.2	350.5	329.8	297.9	31.82	10.363	
6,700.0	6,637.6	6,672.9	6,636.7	20.3	17.0	89.28	-350.2	341.8	329.8	298.0	31.81	10.369	
6,800.0	6,734.4	6,771.1	6,729.7	20.3	17.0	88.02	-350.1	310.7	330.0	298.3	31.68	10.417	
6,900.0	6,824.6	6,868.1	6,814.3	20.3	17.0	86.83	-349.9	263.4	330.3	298.8	31.49	10.488	
7,000.0	6,905.1	6,964.0	6,887.8	20.2	16.9	85.77	-349.7	202.1	330.7	299.3	31.43	10.522	
7,100.0	6,972.8	7,058.9	6,948.3	20.1	16.9	84.86	-349.5	129.2	331.1	299.4	31.70	10.444	
7,200.0	7,025.3	7,153.0	6,994.3	20.0	16.9	84.13	-349.2	47.2	331.5	299.0	32.53	10.192	
7,300.0	7,060.6	7,246.6	7,024.7	19.9	17.3	83.61	-348.9	-41.2	331.9	297.8	34.03	9.750	
7,400.0	7,080.1	7,344.1	7,042.8	19.8	18.3	83.45	-348.5	-137.0	332.0	295.7	36.29	9.146	
7,500.0	7,094.8	7,441.3	7,056.5	20.2	19.8	83.35	-348.2	-233.1	332.0	292.9	39.17	8.478	
7,600.0	7,101.1	7,538.0	7,062.2	21.9	21.4	83.27	-347.9	-329.7	332.1	289.6	42.46	7.822	
7,700.0	7,100.3	7,637.2	7,061.9	23.8	23.4	83.36	-347.5	-428.8	332.0	285.8	46.24	7.181	
7,800.0	7,098.8	7,737.2	7,061.4	25.9	25.5	83.53	-347.2	-528.8	331.9	281.6	50.37	6.590	
7,900.0	7,097.3	7,837.1	7,060.9	28.1	27.7	83.69	-346.8	-628.8	331.8	277.1	54.77	6.059	
8,000.0	7,095.9	7,937.1	7,060.3	30.4	30.0	83.85	-346.5	-728.8	331.7	272.4	59.38	5.587	
8,100.0	7,094.4	8,037.1	7,059.8	32.8	32.4	84.02	-346.1	-828.8	331.6	267.5	64.15	5.170	
8,200.0	7,092.9	8,137.1	7,059.3	35.2	34.9	84.18	-345.8	-928.8	331.6	262.5	69.04	4.802	
8,300.0	7,091.4	8,237.1	7,058.8	37.7	37.4	84.35	-345.4	-1,028.8	331.5	257.4	74.05	4.477	
8,400.0	7,089.9	8,337.1	7,058.2	40.2	39.9	84.52	-345.1	-1,128.8	331.4	252.2	79.13	4.188	
8,500.0	7,088.4	8,437.1	7,057.7	42.8	42.5	84.68	-344.8	-1,228.8	331.3	247.0	84.29	3.930	
8,600.0	7,087.0	8,537.1	7,057.2	45.3	45.1	84.85	-344.4	-1,328.8	331.2	241.7	89.51	3.701	
8,700.0	7,085.5	8,637.1	7,056.7	48.0	47.7	85.01	-344.1	-1,428.8	331.1	236.4	94.77	3.494	
8,800.0	7,084.0	8,737.1	7,056.2	50.6	50.4	85.18	-343.7	-1,528.8	331.1	231.0	100.07	3.308	
8,900.0	7,082.5	8,837.1	7,055.6	53.2	53.0	85.34	-343.4	-1,628.7	331.0	225.6	105.42	3.140	
9,000.0	7,081.0	8,937.1	7,055.1	55.9	55.7	85.51	-343.0	-1,728.7	330.9	220.1	110.79	2.987	
9,100.0	7,079.5	9,037.1	7,054.6	58.6	58.4	85.67	-342.7	-1,828.7	330.9	214.7	116.18	2.848	
9,200.0	7,078.1	9,137.1	7,054.1	61.3	61.1	85.84	-342.3	-1,928.7	330.8	209.2	121.60	2.720	
9,300.0	7,076.6	9,237.1	7,053.5	64.0	63.8	86.01	-342.0	-2,028.7	330.7	203.7	127.04	2.603	
9,400.0	7,075.1	9,337.1	7,053.0	66.7	66.5	86.17	-341.6	-2,128.7	330.7	198.2	132.50	2.496	
9,500.0	7,073.6	9,437.1	7,052.5	69.4	69.3	86.34	-341.3	-2,228.7	330.6	192.6	137.97	2.396	
9,600.0	7,072.1	9,537.1	7,052.0	72.1	72.0	86.50	-340.9	-2,328.7	330.6	187.1	143.46	2.304	
9,700.0	7,070.6	9,637.1	7,051.4	74.9	74.7	86.67	-340.6	-2,428.7	330.5	181.6	148.96	2.219	
9,800.0	7,069.2	9,737.1	7,050.9	77.6	77.5	86.84	-340.2	-2,528.7	330.5	176.0	154.47	2.139	
9,900.0	7,067.7	9,837.1	7,050.4	80.3	80.2	87.00	-339.9	-2,628.7	330.4	170.4	159.98	2.065	
10,000.0	7,066.2	9,937.1	7,049.9	83.1	83.0	87.17	-339.6	-2,728.7	330.4	164.9	165.51	1.996	
10,100.0	7,064.7	10,037.0	7,049.3	85.8	85.7	87.34	-339.2	-2,828.7	330.3	159.3	171.05	1.931	
10,200.0	7,063.2	10,137.0	7,048.8	88.6	88.5	87.50	-338.9	-2,928.7	330.3	153.7	176.59	1.870	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser C-10HN - Wellbore #1 - Plan #1 (4-14-14)												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
10,300.0	7,061.7	10,237.0	7,048.3	91.3	91.3	87.67	-338.5	-3,028.7	330.3	148.1	182.14	1.813	
10,400.0	7,060.3	10,337.0	7,047.8	94.1	94.0	87.83	-338.2	-3,128.7	330.2	142.5	187.69	1.759	
10,500.0	7,058.8	10,437.0	7,047.3	96.9	96.8	88.00	-337.8	-3,228.6	330.2	137.0	193.25	1.709	
10,600.0	7,057.3	10,537.0	7,046.7	99.6	99.6	88.17	-337.5	-3,328.6	330.2	131.4	198.81	1.661	
10,700.0	7,055.8	10,637.0	7,046.2	102.4	102.3	88.33	-337.1	-3,428.6	330.2	125.8	204.37	1.615	
10,800.0	7,054.3	10,737.0	7,045.7	105.2	105.1	88.50	-336.8	-3,528.6	330.1	120.2	209.94	1.573	
10,900.0	7,052.8	10,837.0	7,045.2	107.9	107.9	88.67	-336.4	-3,628.6	330.1	114.6	215.52	1.532	
11,000.0	7,051.4	10,937.0	7,044.6	110.7	110.7	88.83	-336.1	-3,728.6	330.1	109.0	221.09	1.493	Level 3
11,100.0	7,049.9	11,037.0	7,044.1	113.5	113.4	89.00	-335.7	-3,828.6	330.1	103.4	226.66	1.456	Level 3
11,200.0	7,048.4	11,137.0	7,043.6	116.3	116.2	89.17	-335.4	-3,928.6	330.1	97.8	232.24	1.421	Level 3
11,300.0	7,046.9	11,237.0	7,043.1	119.0	119.0	89.33	-335.0	-4,028.6	330.1	92.3	237.82	1.388	Level 3
11,400.0	7,045.4	11,337.0	7,042.5	121.8	121.8	89.50	-334.7	-4,128.6	330.1	86.7	243.40	1.356	Level 3
11,459.4	7,044.5	11,396.4	7,042.2	123.5	123.4	89.60	-334.5	-4,188.0	330.1	83.4	246.72	1.338	Level 3
11,500.0	7,043.9	11,437.0	7,042.0	124.6	124.6	89.67	-334.4	-4,228.6	330.1	81.1	248.98	1.326	Level 3
11,600.0	7,042.4	11,537.0	7,041.5	127.4	127.4	89.83	-334.0	-4,328.6	330.1	75.5	254.56	1.297	Level 3
11,658.1	7,041.6	11,595.0	7,041.2	129.0	129.0	89.93	-333.8	-4,386.6	330.1	72.3	257.80	1.280	Level 3
11,697.7	7,041.0	11,631.0	7,041.0	130.1	130.0	89.99	-333.7	-4,422.6	330.1	70.2	259.91	1.270	Level 3, SF

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	
0.0	0.0	0.0	0.0	0.0	0.0	148.59	-12.8	7.8	14.9	14.9	0.00	N/A	
100.0	100.0	100.0	100.0	0.1	0.1	148.59	-12.8	7.8	14.9	14.7	0.22	66.471	
200.0	200.0	200.0	200.0	0.3	0.3	148.59	-12.8	7.8	14.9	14.3	0.67	22.157	
300.0	300.0	300.0	300.0	0.6	0.6	148.59	-12.8	7.8	14.9	13.8	1.12	13.294	
400.0	400.0	400.0	400.0	0.8	0.8	148.59	-12.8	7.8	14.9	13.4	1.57	9.496	
500.0	500.0	500.0	500.0	1.0	1.0	148.59	-12.8	7.8	14.9	12.9	2.02	7.386	
600.0	600.0	600.0	600.0	1.2	1.2	148.59	-12.8	7.8	14.9	12.5	2.47	6.043	
700.0	700.0	700.0	700.0	1.5	1.5	148.59	-12.8	7.8	14.9	12.0	2.92	5.113	
800.0	800.0	800.0	800.0	1.7	1.7	148.59	-12.8	7.8	14.9	11.6	3.37	4.431 CC, ES	
900.0	900.0	899.5	899.4	1.9	1.9	149.74	-14.4	8.4	16.6	12.9	3.79	4.388	
1,000.0	1,000.0	998.7	998.5	2.1	2.1	152.11	-19.2	10.2	21.8	17.6	4.20	5.187	
1,100.0	1,100.0	1,097.6	1,097.0	2.3	2.3	1.65	-27.2	13.1	28.6	24.1	4.58	6.251	
1,200.0	1,199.8	1,196.2	1,195.0	2.5	2.5	3.70	-38.4	17.2	35.5	30.5	4.95	7.168	
1,300.0	1,299.5	1,294.6	1,292.2	2.7	2.7	5.65	-52.7	22.5	42.3	37.0	5.33	7.940	
1,400.0	1,398.7	1,394.3	1,390.3	2.9	3.0	7.58	-69.1	28.6	47.8	42.1	5.72	8.360	
1,500.0	1,497.5	1,494.3	1,488.7	3.2	3.4	9.74	-85.6	34.6	50.0	43.9	6.13	8.161	
1,600.0	1,596.1	1,594.2	1,587.1	3.5	3.7	11.98	-102.1	40.7	51.2	44.6	6.58	7.784	
1,700.0	1,694.7	1,694.2	1,685.5	3.8	4.1	14.12	-118.6	46.8	52.4	45.4	7.04	7.448	
1,800.0	1,793.3	1,794.2	1,783.9	4.1	4.4	16.15	-135.1	52.9	53.7	46.2	7.51	7.148	
1,900.0	1,891.9	1,894.1	1,882.4	4.4	4.8	18.09	-151.6	59.0	55.1	47.1	8.01	6.876	
2,000.0	1,990.5	1,994.1	1,980.8	4.8	5.2	19.93	-168.1	65.0	56.5	48.0	8.52	6.631	
2,100.0	2,089.1	2,094.1	2,079.2	5.1	5.6	21.68	-184.5	71.1	58.0	48.9	9.05	6.408	
2,200.0	2,187.7	2,194.1	2,177.6	5.5	5.9	23.34	-201.0	77.2	59.5	49.9	9.59	6.205	
2,300.0	2,286.2	2,294.0	2,276.0	5.8	6.3	24.91	-217.5	83.3	61.1	50.9	10.15	6.019	
2,400.0	2,384.8	2,394.0	2,374.4	6.2	6.7	26.41	-234.0	89.3	62.7	52.0	10.72	5.849	
2,500.0	2,483.4	2,494.0	2,472.9	6.6	7.1	27.83	-250.5	95.4	64.4	53.1	11.31	5.692	
2,600.0	2,582.0	2,594.0	2,571.3	6.9	7.5	29.17	-267.0	101.5	66.1	54.2	11.91	5.548	
2,700.0	2,680.6	2,693.9	2,669.7	7.3	7.9	30.45	-283.5	107.6	67.8	55.3	12.52	5.415	
2,800.0	2,779.2	2,793.9	2,768.1	7.7	8.3	31.67	-300.0	113.7	69.6	56.4	13.15	5.293	
2,900.0	2,877.8	2,893.9	2,866.5	8.1	8.7	32.82	-316.5	119.7	71.4	57.6	13.78	5.180	
3,000.0	2,976.4	2,993.9	2,965.0	8.5	9.1	33.92	-332.9	125.8	73.2	58.8	14.43	5.075	
3,100.0	3,075.0	3,093.8	3,063.4	8.8	9.5	34.96	-349.4	131.9	75.1	60.0	15.08	4.977	
3,200.0	3,173.6	3,193.8	3,161.8	9.2	9.9	35.95	-365.9	138.0	76.9	61.2	15.74	4.887	
3,300.0	3,272.2	3,293.8	3,260.2	9.6	10.3	36.90	-382.4	144.0	78.8	62.4	16.41	4.803	
3,400.0	3,370.8	3,393.8	3,358.6	10.0	10.7	37.80	-398.9	150.1	80.7	63.6	17.09	4.725	
3,500.0	3,469.4	3,493.7	3,457.0	10.4	11.1	38.66	-415.4	156.2	82.7	64.9	17.77	4.652	
3,600.0	3,568.0	3,593.7	3,555.5	10.8	11.5	39.47	-431.9	162.3	84.6	66.2	18.46	4.584	
3,700.0	3,666.6	3,693.7	3,653.9	11.2	11.9	40.26	-448.4	168.3	86.6	67.4	19.16	4.520	
3,800.0	3,765.2	3,793.6	3,752.3	11.5	12.3	41.00	-464.9	174.4	88.6	68.7	19.86	4.461	
3,900.0	3,863.8	3,893.6	3,850.7	11.9	12.7	41.72	-481.3	180.5	90.6	70.0	20.56	4.405	
4,000.0	3,962.4	3,993.6	3,949.1	12.3	13.1	42.40	-497.8	186.6	92.6	71.3	21.27	4.353	
4,100.0	4,061.0	4,093.6	4,047.5	12.7	13.5	43.05	-514.3	192.7	94.6	72.6	21.98	4.304	
4,200.0	4,159.6	4,193.5	4,146.0	13.1	13.9	43.68	-530.8	198.7	96.7	74.0	22.70	4.258	
4,300.0	4,258.2	4,293.5	4,244.4	13.5	14.4	44.28	-547.3	204.8	98.7	75.3	23.42	4.214	
4,400.0	4,356.8	4,393.5	4,342.8	13.9	14.8	44.86	-563.8	210.9	100.8	76.6	24.14	4.174	
4,500.0	4,455.4	4,493.5	4,441.2	14.3	15.2	45.41	-580.3	217.0	102.8	78.0	24.87	4.135	
4,600.0	4,554.0	4,593.4	4,539.6	14.7	15.6	45.94	-596.8	223.0	104.9	79.3	25.60	4.098	
4,700.0	4,652.6	4,693.4	4,638.0	15.0	16.0	46.45	-613.2	229.1	107.0	80.7	26.33	4.064	
4,800.0	4,751.2	4,793.4	4,736.5	15.4	16.4	46.94	-629.7	235.2	109.1	82.0	27.06	4.031	
4,900.0	4,849.7	4,893.4	4,834.9	15.8	16.8	47.42	-646.2	241.3	111.2	83.4	27.79	4.000	
5,000.0	4,948.3	4,993.3	4,933.3	16.2	17.2	47.87	-662.7	247.4	113.3	84.8	28.53	3.971	
5,100.0	5,046.9	5,093.3	5,031.7	16.6	17.6	48.31	-679.2	253.4	115.4	86.1	29.27	3.943	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
5,200.0	5,145.5	5,193.3	5,130.1	17.0	18.0	48.73	-695.7	259.5	117.5	87.5	30.01	3.916	
5,300.0	5,244.1	5,293.3	5,228.5	17.4	18.4	49.14	-712.2	265.6	119.7	88.9	30.75	3.891	
5,400.0	5,342.7	5,393.2	5,327.0	17.8	18.8	49.53	-728.7	271.7	121.8	90.3	31.49	3.867	
5,500.0	5,441.3	5,493.2	5,425.4	18.2	19.2	49.91	-745.2	277.7	123.9	91.7	32.24	3.844	
5,600.0	5,539.9	5,593.2	5,523.8	18.6	19.6	50.26	-761.6	283.8	126.1	93.1	32.97	3.825	
5,700.0	5,638.9	5,693.1	5,622.2	18.8	20.0	49.86	-778.1	289.9	129.8	96.3	33.46	3.879	
5,800.0	5,738.3	5,792.8	5,720.4	19.1	20.5	48.39	-794.6	296.0	135.8	102.1	33.69	4.030	
5,900.0	5,838.0	5,892.3	5,818.3	19.3	20.9	46.08	-811.0	302.0	144.3	110.6	33.69	4.282	
6,000.0	5,937.9	5,991.4	5,915.8	19.4	21.3	43.19	-827.3	308.0	155.5	122.0	33.50	4.641	
6,100.0	6,037.9	6,089.9	6,012.8	19.5	21.7	-167.33	-843.6	314.0	169.5	132.1	37.40	4.533	
6,200.0	6,137.9	6,188.4	6,109.7	19.7	22.1	-170.28	-859.8	320.0	184.6	146.1	38.47	4.798	
6,300.0	6,237.9	6,286.8	6,206.6	19.8	22.5	-172.79	-876.0	326.0	200.1	160.6	39.43	5.074	
6,400.0	6,337.9	6,385.2	6,303.5	19.9	22.9	-174.93	-892.3	332.0	215.9	175.6	40.32	5.354	
6,500.0	6,437.9	6,483.7	6,400.4	20.1	23.3	-176.78	-908.5	338.0	231.9	190.8	41.14	5.638	
6,600.0	6,537.9	6,582.1	6,497.4	20.2	23.7	-178.39	-924.7	343.9	248.2	206.3	41.91	5.922	
6,700.0	6,637.6	6,681.0	6,594.8	20.3	24.0	-89.41	-941.0	347.7	264.5	231.2	33.32	7.940	
6,800.0	6,734.4	6,782.5	6,694.0	20.3	24.3	-90.21	-957.0	334.6	280.4	247.1	33.31	8.418	
6,900.0	6,824.6	6,887.0	6,791.6	20.3	24.4	-90.86	-972.1	301.2	295.1	262.0	33.18	8.895	
7,000.0	6,905.1	6,964.4	6,883.1	20.2	24.5	-91.41	-985.5	247.0	308.0	275.0	33.06	9.317	
7,100.0	6,972.8	7,104.7	6,963.8	20.1	24.5	-91.87	-996.4	172.8	318.5	285.3	33.19	9.595	
7,200.0	7,025.3	7,217.5	7,028.5	20.0	24.5	-92.25	-1,004.1	81.1	325.8	292.0	33.85	9.624	
7,300.0	7,060.6	7,332.0	7,072.9	19.9	24.5	-92.54	-1,008.1	-24.2	329.7	294.4	35.29	9.343	
7,400.0	7,080.1	7,440.2	7,095.2	19.8	24.5	-92.66	-1,008.3	-130.0	330.3	292.8	37.50	8.808	
7,500.0	7,094.8	7,541.1	7,110.6	20.2	24.6	-92.75	-1,008.0	-229.7	330.3	290.0	40.29	8.199	
7,600.0	7,101.1	7,642.6	7,117.6	21.9	25.1	-92.86	-1,007.6	-330.9	330.4	286.8	43.57	7.582	
7,700.0	7,100.3	7,743.2	7,117.1	23.8	26.2	-92.91	-1,007.3	-431.5	330.4	283.1	47.28	6.988	
7,800.0	7,098.8	7,843.2	7,115.7	25.9	27.8	-92.94	-1,007.0	-531.5	330.4	279.1	51.32	6.438	
7,900.0	7,097.3	7,943.2	7,114.4	28.1	29.7	-92.96	-1,006.6	-631.5	330.4	274.8	55.64	5.938	
8,000.0	7,095.9	8,043.2	7,113.1	30.4	31.8	-92.99	-1,006.3	-731.5	330.4	270.2	60.17	5.491	
8,100.0	7,094.4	8,143.2	7,111.8	32.8	34.0	-93.02	-1,005.9	-831.5	330.4	265.5	64.87	5.093	
8,200.0	7,092.9	8,243.2	7,110.4	35.2	36.3	-93.05	-1,005.6	-931.5	330.4	260.7	69.71	4.740	
8,300.0	7,091.4	8,343.2	7,109.1	37.7	38.7	-93.07	-1,005.3	-1,031.5	330.4	255.8	74.65	4.426	
8,400.0	7,089.9	8,443.2	7,107.8	40.2	41.2	-93.10	-1,004.9	-1,131.4	330.5	250.8	79.68	4.147	
8,500.0	7,088.4	8,543.2	7,106.5	42.8	43.7	-93.13	-1,004.6	-1,231.4	330.5	245.7	84.79	3.898	
8,600.0	7,087.0	8,643.2	7,105.1	45.3	46.2	-93.15	-1,004.3	-1,331.4	330.5	240.5	89.95	3.674	
8,700.0	7,085.5	8,743.2	7,103.8	48.0	48.8	-93.18	-1,003.9	-1,431.4	330.5	235.3	95.17	3.473	
8,800.0	7,084.0	8,843.2	7,102.5	50.6	51.3	-93.21	-1,003.6	-1,531.4	330.5	230.1	100.43	3.291	
8,900.0	7,082.5	8,943.2	7,101.2	53.2	54.0	-93.24	-1,003.2	-1,631.4	330.5	224.8	105.72	3.126	
9,000.0	7,081.0	9,043.2	7,099.8	55.9	56.6	-93.26	-1,002.9	-1,731.4	330.5	219.5	111.04	2.977	
9,100.0	7,079.5	9,143.2	7,098.5	58.6	59.2	-93.29	-1,002.6	-1,831.4	330.5	214.1	116.39	2.840	
9,200.0	7,078.1	9,243.2	7,097.2	61.3	61.9	-93.32	-1,002.2	-1,931.4	330.6	208.8	121.77	2.715	
9,300.0	7,076.6	9,343.2	7,095.9	64.0	64.6	-93.34	-1,001.9	-2,031.4	330.6	203.4	127.16	2.600	
9,400.0	7,075.1	9,443.2	7,094.5	66.7	67.2	-93.37	-1,001.6	-2,131.3	330.6	198.0	132.57	2.494	
9,500.0	7,073.6	9,543.2	7,093.2	69.4	69.9	-93.40	-1,001.2	-2,231.3	330.6	192.6	138.00	2.396	
9,600.0	7,072.1	9,643.2	7,091.9	72.1	72.6	-93.43	-1,000.9	-2,331.3	330.6	187.2	143.44	2.305	
9,700.0	7,070.6	9,743.2	7,090.5	74.9	75.3	-93.45	-1,000.6	-2,431.3	330.6	181.7	148.89	2.221	
9,800.0	7,069.2	9,843.2	7,089.2	77.6	78.1	-93.48	-1,000.2	-2,531.3	330.6	176.3	154.35	2.142	
9,900.0	7,067.7	9,943.2	7,087.9	80.3	80.8	-93.51	-999.9	-2,631.3	330.6	170.8	159.83	2.069	
10,000.0	7,066.2	10,043.2	7,086.6	83.1	83.5	-93.53	-999.5	-2,731.3	330.7	165.3	165.31	2.000	
10,100.0	7,064.7	10,143.2	7,085.2	85.8	86.2	-93.56	-999.2	-2,831.3	330.7	159.9	170.80	1.936	
10,200.0	7,063.2	10,243.2	7,083.9	88.6	89.0	-93.59	-998.9	-2,931.3	330.7	154.4	176.29	1.876	
10,300.0	7,061.7	10,343.2	7,082.6	91.3	91.7	-93.62	-998.5	-3,031.3	330.7	148.9	181.80	1.819	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser E-10HN - Wellbore #1 - Plan #1 (4-14-14)												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference	Offset	Semi Major Axis		Distance									
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
10,400.0	7,060.3	10,443.2	7,081.3	94.1	94.5	-93.64	-998.2	-3,131.3	330.7	143.4	187.30	1.766	
10,500.0	7,058.8	10,543.2	7,079.9	96.9	97.2	-93.67	-997.9	-3,231.2	330.7	137.9	192.82	1.715	
10,600.0	7,057.3	10,643.2	7,078.6	99.6	100.0	-93.70	-997.5	-3,331.2	330.7	132.4	198.34	1.668	
10,700.0	7,055.8	10,743.2	7,077.3	102.4	102.7	-93.72	-997.2	-3,431.2	330.7	126.9	203.86	1.622	
10,800.0	7,054.3	10,843.2	7,076.0	105.2	105.5	-93.75	-996.9	-3,531.2	330.8	121.4	209.38	1.580	
10,900.0	7,052.8	10,943.2	7,074.6	107.9	108.2	-93.78	-996.5	-3,631.2	330.8	115.9	214.92	1.539	
11,000.0	7,051.4	11,043.2	7,073.3	110.7	111.0	-93.81	-996.2	-3,731.2	330.8	110.3	220.45	1.501	
11,100.0	7,049.9	11,143.2	7,072.0	113.5	113.8	-93.83	-995.8	-3,831.2	330.8	104.8	225.98	1.464	Level 3
11,200.0	7,048.4	11,243.2	7,070.7	116.3	116.5	-93.86	-995.5	-3,931.2	330.8	99.3	231.52	1.429	Level 3
11,300.0	7,046.9	11,343.2	7,069.3	119.0	119.3	-93.89	-995.2	-4,031.2	330.8	93.8	237.07	1.396	Level 3
11,400.0	7,045.4	11,443.2	7,068.0	121.8	122.1	-93.91	-994.8	-4,131.2	330.8	88.2	242.61	1.364	Level 3
11,500.0	7,043.9	11,543.2	7,066.7	124.6	124.9	-93.94	-994.5	-4,231.1	330.9	82.7	248.16	1.333	Level 3
11,600.0	7,042.4	11,643.2	7,065.3	127.4	127.6	-93.97	-994.2	-4,331.1	330.9	77.2	253.70	1.304	Level 3
11,697.7	7,041.0	11,740.9	7,064.0	130.1	130.3	-93.99	-993.8	-4,428.8	330.9	71.8	259.13	1.277	Level 3, SF

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.0	0.0	0.0	0.0	0.0	0.0	148.59	-25.5	15.6	29.9				
100.0	100.0	100.0	100.0	0.1	0.1	148.59	-25.5	15.6	29.9	29.7	0.22	132.958	
200.0	200.0	200.0	200.0	0.3	0.3	148.59	-25.5	15.6	29.9	29.2	0.67	44.319	
300.0	300.0	300.0	300.0	0.6	0.6	148.59	-25.5	15.6	29.9	28.8	1.12	26.592	
400.0	400.0	400.0	400.0	0.8	0.8	148.59	-25.5	15.6	29.9	28.3	1.57	18.994	
500.0	500.0	500.0	500.0	1.0	1.0	148.59	-25.5	15.6	29.9	27.9	2.02	14.773	
600.0	600.0	600.0	600.0	1.2	1.2	148.59	-25.5	15.6	29.9	27.4	2.47	12.087 CC, ES	
700.0	700.0	699.0	698.9	1.5	1.4	149.47	-27.2	16.0	31.5	28.7	2.89	10.901	
800.0	800.0	797.7	797.5	1.7	1.6	151.60	-32.1	17.3	36.6	33.3	3.30	11.069	
900.0	900.0	896.0	895.4	1.9	1.8	154.09	-40.3	19.6	45.0	41.3	3.73	12.075	
1,000.0	1,000.0	993.5	992.3	2.1	2.1	156.33	-51.6	22.6	56.8	52.7	4.16	13.663	
1,100.0	1,100.0	1,090.5	1,088.1	2.3	2.3	5.52	-65.9	26.5	70.3	65.8	4.56	15.437	
1,200.0	1,199.8	1,186.9	1,182.8	2.5	2.6	7.27	-83.4	31.2	83.8	78.9	4.94	16.952	
1,300.0	1,299.5	1,284.7	1,278.3	2.7	3.0	8.95	-103.7	36.7	96.8	91.4	5.35	18.096	
1,400.0	1,398.7	1,384.2	1,375.4	2.9	3.4	10.59	-124.6	42.3	106.7	100.9	5.76	18.524	
1,500.0	1,497.5	1,483.9	1,472.7	3.2	3.8	12.31	-145.7	48.0	113.4	107.2	6.19	18.310	
1,600.0	1,596.1	1,583.7	1,570.1	3.5	4.3	13.99	-166.7	53.7	119.1	112.4	6.66	17.882	
1,700.0	1,694.7	1,683.5	1,667.4	3.8	4.7	15.51	-187.7	59.3	124.9	117.7	7.14	17.491	
1,800.0	1,793.3	1,783.2	1,764.8	4.1	5.2	16.90	-208.8	65.0	130.7	123.1	7.63	17.125	
1,900.0	1,891.9	1,883.0	1,862.2	4.4	5.6	18.17	-229.8	70.7	136.6	128.5	8.14	16.788	
2,000.0	1,990.5	1,982.8	1,959.6	4.8	6.1	19.34	-250.9	76.4	142.6	134.0	8.66	16.475	
2,100.0	2,089.1	2,082.6	2,056.9	5.1	6.5	20.41	-271.9	82.1	148.7	139.5	9.19	16.184	
2,200.0	2,187.7	2,182.4	2,154.3	5.5	7.0	21.39	-293.0	87.7	154.8	145.0	9.73	15.914	
2,300.0	2,286.2	2,282.1	2,251.7	5.8	7.5	22.30	-314.0	93.4	160.9	150.6	10.27	15.663	
2,400.0	2,384.8	2,381.9	2,349.0	6.2	7.9	23.15	-335.0	99.1	167.1	156.2	10.83	15.428	
2,500.0	2,483.4	2,481.7	2,446.4	6.6	8.4	23.93	-356.1	104.8	173.3	161.9	11.39	15.209	
2,600.0	2,582.0	2,581.5	2,543.8	6.9	8.9	24.66	-377.1	110.4	179.5	167.6	11.96	15.004	
2,700.0	2,680.6	2,681.3	2,641.2	7.3	9.3	25.34	-398.2	116.1	185.8	173.2	12.54	14.813	
2,800.0	2,779.2	2,781.0	2,738.5	7.7	9.8	25.98	-419.2	121.8	192.1	178.9	13.13	14.633	
2,900.0	2,877.8	2,880.8	2,835.9	8.1	10.3	26.57	-440.3	127.5	198.4	184.7	13.71	14.465	
3,000.0	2,976.4	2,980.6	2,933.3	8.5	10.8	27.13	-461.3	133.1	204.7	190.4	14.31	14.307	
3,100.0	3,075.0	3,080.4	3,030.6	8.8	11.2	27.66	-482.3	138.8	211.0	196.1	14.91	14.158	
3,200.0	3,173.6	3,180.2	3,128.0	9.2	11.7	28.15	-503.4	144.5	217.4	201.9	15.51	14.018	
3,300.0	3,272.2	3,279.9	3,225.4	9.6	12.2	28.62	-524.4	150.2	223.8	207.7	16.12	13.887	
3,400.0	3,370.8	3,379.7	3,322.8	10.0	12.6	29.06	-545.5	155.8	230.2	213.5	16.73	13.762	
3,500.0	3,469.4	3,479.5	3,420.1	10.4	13.1	29.48	-566.5	161.5	236.6	219.2	17.34	13.645	
3,600.0	3,568.0	3,579.3	3,517.5	10.8	13.6	29.87	-587.6	167.2	243.0	225.0	17.96	13.534	
3,700.0	3,666.6	3,679.1	3,614.9	11.2	14.1	30.25	-608.6	172.9	249.4	230.9	18.57	13.428	
3,800.0	3,765.2	3,778.9	3,712.2	11.5	14.5	30.60	-629.6	178.6	255.9	236.7	19.20	13.329	
3,900.0	3,863.8	3,878.6	3,809.6	11.9	15.0	30.94	-650.7	184.2	262.3	242.5	19.82	13.234	
4,000.0	3,962.4	3,978.4	3,907.0	12.3	15.5	31.26	-671.7	189.9	268.8	248.3	20.45	13.144	
4,100.0	4,061.0	4,078.2	4,004.4	12.7	16.0	31.57	-692.8	195.6	275.2	254.2	21.08	13.059	
4,200.0	4,159.6	4,178.0	4,101.7	13.1	16.4	31.86	-713.8	201.3	281.7	260.0	21.71	12.978	
4,300.0	4,258.2	4,277.8	4,199.1	13.5	16.9	32.14	-734.8	206.9	288.2	265.8	22.34	12.900	
4,400.0	4,356.8	4,377.5	4,296.5	13.9	17.4	32.41	-755.9	212.6	294.7	271.7	22.97	12.826	
4,500.0	4,455.4	4,477.3	4,393.8	14.3	17.9	32.66	-776.9	218.3	301.2	277.6	23.61	12.756	
4,600.0	4,554.0	4,577.1	4,491.2	14.7	18.3	32.91	-798.0	224.0	307.7	283.4	24.25	12.689	
4,700.0	4,652.6	4,676.9	4,588.6	15.0	18.8	33.14	-819.0	229.6	314.2	289.3	24.89	12.624	
4,800.0	4,751.2	4,776.7	4,685.9	15.4	19.3	33.37	-840.1	235.3	320.7	295.1	25.53	12.563	
4,900.0	4,849.7	4,876.4	4,783.3	15.8	19.8	33.59	-861.1	241.0	327.2	301.0	26.17	12.504	
5,000.0	4,948.3	4,976.2	4,880.7	16.2	20.3	33.79	-882.1	246.7	333.7	306.9	26.81	12.447	
5,100.0	5,046.9	5,076.0	4,978.1	16.6	20.7	33.99	-903.2	252.4	340.2	312.8	27.45	12.393	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	
5,200.0	5,145.5	5,175.8	5,075.4	17.0	21.2	34.19	-924.2	258.0	346.7	318.7	28.10	12.341	
5,300.0	5,244.1	5,275.6	5,172.8	17.4	21.7	34.37	-945.3	263.7	353.3	324.5	28.74	12.291	
5,400.0	5,342.7	5,375.3	5,270.2	17.8	22.2	34.55	-966.3	269.4	359.8	330.4	29.39	12.243	
5,500.0	5,441.3	5,475.1	5,367.5	18.2	22.6	34.72	-987.4	275.1	366.3	336.3	30.04	12.197	
5,600.0	5,539.9	5,574.9	5,464.9	18.6	23.1	34.90	-1,008.4	280.7	372.9	342.3	30.68	12.156	
5,700.0	5,638.9	5,674.5	5,562.1	18.8	23.6	34.95	-1,029.4	286.4	381.4	350.2	31.21	12.223	
5,800.0	5,738.3	5,773.8	5,659.1	19.1	24.1	34.74	-1,050.4	292.1	392.8	361.1	31.64	12.416	
5,900.0	5,838.0	5,872.7	5,755.6	19.3	24.5	34.31	-1,071.2	297.7	407.0	375.0	31.97	12.730	
6,000.0	5,937.9	5,971.1	5,851.5	19.4	25.0	33.68	-1,091.9	303.3	424.1	391.9	32.22	13.162	
6,100.0	6,037.9	6,068.8	5,946.9	19.5	25.5	-174.46	-1,112.6	308.8	444.0	401.4	42.63	10.414	
6,200.0	6,137.9	6,166.4	6,042.1	19.7	25.9	-175.41	-1,133.1	314.4	464.6	421.2	43.38	10.709	
6,300.0	6,237.9	6,264.0	6,137.4	19.8	26.4	-176.27	-1,153.7	319.9	485.3	441.1	44.11	11.001	
6,400.0	6,337.9	6,361.6	6,232.6	19.9	26.9	-177.07	-1,174.3	325.5	506.0	461.2	44.83	11.288	
6,500.0	6,437.9	6,459.1	6,327.8	20.1	27.3	-177.80	-1,194.9	331.0	526.9	481.4	45.54	11.570	
6,600.0	6,537.9	6,556.7	6,423.0	20.2	27.8	-178.48	-1,215.5	336.6	547.8	501.6	46.24	11.848	
6,700.0	6,637.6	6,653.7	6,517.6	20.3	28.3	-88.04	-1,235.9	342.1	568.7	534.4	34.32	16.571	
6,800.0	6,734.4	6,753.2	6,614.8	20.3	28.7	-88.32	-1,256.7	343.1	589.5	555.0	34.51	17.082	
6,900.0	6,824.6	6,860.4	6,718.0	20.3	29.0	-88.76	-1,277.9	323.9	609.4	574.9	34.47	17.679	
7,000.0	6,905.1	6,975.2	6,821.8	20.2	29.2	-89.26	-1,298.3	279.9	627.4	593.1	34.35	18.266	
7,100.0	6,972.8	7,098.2	6,920.0	20.1	29.3	-89.79	-1,316.3	208.5	642.4	608.0	34.36	18.695	
7,200.0	7,025.3	7,229.1	7,003.5	20.0	29.4	-90.28	-1,330.1	109.1	653.3	618.4	34.87	18.736	
7,300.0	7,060.6	7,366.0	7,062.4	19.9	29.4	-90.65	-1,337.6	-13.8	659.2	622.9	36.26	18.182	
7,400.0	7,080.1	7,487.7	7,088.9	19.8	29.5	-90.77	-1,338.3	-132.4	660.0	621.5	38.50	17.142	
7,500.0	7,094.8	7,588.1	7,104.5	20.2	29.6	-90.84	-1,338.0	-231.6	660.0	618.8	41.23	16.010	
7,502.6	7,095.1	7,590.8	7,104.8	20.3	29.6	-90.84	-1,338.0	-234.3	660.0	618.7	41.31	15.979	
7,600.0	7,101.1	7,688.9	7,111.9	21.9	29.9	-90.93	-1,337.6	-332.1	660.0	615.6	44.47	14.843	
7,700.0	7,100.3	7,789.3	7,111.9	23.8	30.4	-91.00	-1,337.3	-432.5	660.1	611.9	48.12	13.717	
7,800.0	7,098.8	7,889.3	7,111.0	25.9	31.3	-91.06	-1,337.0	-532.5	660.1	608.0	52.12	12.665	
7,900.0	7,097.3	7,989.3	7,110.2	28.1	32.5	-91.12	-1,336.6	-632.5	660.1	603.7	56.39	11.705	
8,000.0	7,095.9	8,089.3	7,109.4	30.4	34.2	-91.18	-1,336.3	-732.5	660.1	599.2	60.89	10.842	
8,100.0	7,094.4	8,189.3	7,108.6	32.8	36.0	-91.23	-1,336.0	-832.5	660.1	594.6	65.55	10.070	
8,200.0	7,092.9	8,289.3	7,107.8	35.2	38.1	-91.29	-1,335.6	-932.4	660.1	589.8	70.35	9.383	
8,300.0	7,091.4	8,389.3	7,106.9	37.7	40.3	-91.35	-1,335.3	-1,032.4	660.2	584.9	75.27	8.771	
8,400.0	7,089.9	8,489.3	7,106.1	40.2	42.6	-91.41	-1,335.0	-1,132.4	660.2	579.9	80.28	8.224	
8,500.0	7,088.4	8,589.3	7,105.3	42.8	45.0	-91.46	-1,334.6	-1,232.4	660.2	574.9	85.36	7.734	
8,600.0	7,087.0	8,689.3	7,104.5	45.3	47.4	-91.52	-1,334.3	-1,332.4	660.2	569.7	90.50	7.295	
8,700.0	7,085.5	8,789.3	7,103.6	48.0	49.9	-91.58	-1,333.9	-1,432.4	660.3	564.6	95.70	6.899	
8,800.0	7,084.0	8,889.3	7,102.8	50.6	52.4	-91.64	-1,333.6	-1,532.4	660.3	559.3	100.94	6.541	
8,900.0	7,082.5	8,989.3	7,102.0	53.2	55.0	-91.69	-1,333.3	-1,632.4	660.3	554.1	106.22	6.216	
9,000.0	7,081.0	9,089.3	7,101.2	55.9	57.5	-91.75	-1,332.9	-1,732.4	660.3	548.8	111.53	5.921	
9,100.0	7,079.5	9,189.3	7,100.4	58.6	60.1	-91.81	-1,332.6	-1,832.4	660.4	543.5	116.87	5.650	
9,200.0	7,078.1	9,289.3	7,099.5	61.3	62.7	-91.87	-1,332.3	-1,932.4	660.4	538.2	122.23	5.403	
9,300.0	7,076.6	9,389.3	7,098.7	64.0	65.4	-91.92	-1,331.9	-2,032.4	660.4	532.8	127.62	5.175	
9,400.0	7,075.1	9,489.3	7,097.9	66.7	68.0	-91.98	-1,331.6	-2,132.4	660.4	527.4	133.02	4.965	
9,500.0	7,073.6	9,589.3	7,097.1	69.4	70.7	-92.04	-1,331.3	-2,232.4	660.5	522.0	138.44	4.771	
9,600.0	7,072.1	9,689.3	7,096.3	72.1	73.4	-92.10	-1,330.9	-2,332.4	660.5	516.6	143.87	4.591	
9,700.0	7,070.6	9,789.3	7,095.4	74.9	76.0	-92.15	-1,330.6	-2,432.4	660.5	511.2	149.32	4.424	
9,800.0	7,069.2	9,889.3	7,094.6	77.6	78.7	-92.21	-1,330.3	-2,532.3	660.6	505.8	154.77	4.268	
9,900.0	7,067.7	9,989.3	7,093.8	80.3	81.4	-92.27	-1,329.9	-2,632.3	660.6	500.4	160.24	4.123	
10,000.0	7,066.2	10,089.3	7,093.0	83.1	84.1	-92.33	-1,329.6	-2,732.3	660.6	494.9	165.71	3.987	
10,100.0	7,064.7	10,189.3	7,092.2	85.8	86.8	-92.38	-1,329.3	-2,832.3	660.7	489.5	171.20	3.859	
10,200.0	7,063.2	10,289.3	7,091.3	88.6	89.6	-92.44	-1,328.9	-2,932.3	660.7	484.0	176.69	3.739	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser F-10HN - Wellbore #1 - Plan#1 (4-14-14)												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
10,300.0	7,061.7	10,389.3	7,090.5	91.3	92.3	-92.50	-1,328.6	-3,032.3	660.7	478.5	182.18	3.627	
10,400.0	7,060.3	10,489.3	7,089.7	94.1	95.0	-92.55	-1,328.3	-3,132.3	660.8	473.1	187.69	3.521	
10,500.0	7,058.8	10,589.2	7,088.9	96.9	97.8	-92.61	-1,327.9	-3,232.3	660.8	467.6	193.19	3.420	
10,600.0	7,057.3	10,689.2	7,088.1	99.6	100.5	-92.67	-1,327.6	-3,332.3	660.8	462.1	198.71	3.326	
10,700.0	7,055.8	10,789.2	7,087.2	102.4	103.2	-92.73	-1,327.3	-3,432.3	660.9	456.6	204.22	3.236	
10,800.0	7,054.3	10,889.2	7,086.4	105.2	106.0	-92.78	-1,326.9	-3,532.3	660.9	451.2	209.75	3.151	
10,900.0	7,052.8	10,989.2	7,085.6	107.9	108.7	-92.84	-1,326.6	-3,632.3	660.9	445.7	215.27	3.070	
11,000.0	7,051.4	11,089.2	7,084.8	110.7	111.5	-92.90	-1,326.2	-3,732.3	661.0	440.2	220.80	2.994	
11,100.0	7,049.9	11,189.2	7,084.0	113.5	114.2	-92.96	-1,325.9	-3,832.3	661.0	434.7	226.33	2.921	
11,200.0	7,048.4	11,289.2	7,083.1	116.3	117.0	-93.01	-1,325.6	-3,932.3	661.1	429.2	231.86	2.851	
11,300.0	7,046.9	11,389.2	7,082.3	119.0	119.7	-93.07	-1,325.2	-4,032.3	661.1	423.7	237.40	2.785	
11,400.0	7,045.4	11,489.2	7,081.5	121.8	122.5	-93.13	-1,324.9	-4,132.3	661.1	418.2	242.93	2.721	
11,500.0	7,043.9	11,589.2	7,080.7	124.6	125.3	-93.19	-1,324.6	-4,232.2	661.2	412.7	248.47	2.661	
11,600.0	7,042.4	11,689.2	7,079.9	127.4	128.0	-93.24	-1,324.2	-4,332.2	661.2	407.2	254.02	2.603	
11,697.7	7,041.0	11,786.9	7,079.1	130.1	130.7	-93.30	-1,323.9	-4,429.9	661.3	401.8	259.43	2.549 SF	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser G-10HN - Wellbore #1 - Plan#1 (4-14-14)													Offset Site Error:	0.0 ft
Survey Program: 0-MWD													Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
0.0	0.0	0.0	0.0	0.0	0.0	148.29	-38.3	23.6	45.0					
100.0	100.0	100.0	100.0	0.1	0.1	148.29	-38.3	23.6	45.0	44.7	0.22	200.061		
200.0	200.0	200.0	200.0	0.3	0.3	148.29	-38.3	23.6	45.0	44.3	0.67	66.687		
300.0	300.0	300.0	300.0	0.6	0.6	148.29	-38.3	23.6	45.0	43.8	1.12	40.012		
400.0	400.0	400.0	400.0	0.8	0.8	148.29	-38.3	23.6	45.0	43.4	1.57	28.580 CC, ES		
500.0	500.0	498.5	498.5	1.0	1.0	149.00	-39.9	24.0	46.6	44.6	2.00	23.350		
600.0	600.0	596.8	596.6	1.2	1.2	150.85	-44.9	25.0	51.5	49.1	2.41	21.356		
700.0	700.0	694.6	694.1	1.5	1.4	153.26	-53.1	26.7	59.7	56.9	2.84	21.022		
800.0	800.0	791.7	790.5	1.7	1.6	155.68	-64.4	29.1	71.3	68.1	3.28	21.731		
900.0	900.0	888.0	885.6	1.9	1.9	157.83	-78.8	32.1	86.3	82.6	3.74	23.108		
1,000.0	1,000.0	983.1	979.1	2.1	2.3	159.60	-96.1	35.8	104.7	100.5	4.20	24.907		
1,100.0	1,100.0	1,077.3	1,071.0	2.3	2.6	8.37	-116.3	40.0	124.6	120.0	4.61	27.051		
1,200.0	1,199.8	1,171.6	1,162.3	2.5	3.1	9.78	-139.3	44.8	144.4	139.4	5.02	28.779		
1,300.0	1,299.5	1,269.9	1,257.2	2.7	3.6	11.14	-164.5	50.1	162.1	156.6	5.44	29.778		
1,400.0	1,398.7	1,368.8	1,352.6	2.9	4.1	12.47	-189.7	55.3	176.5	170.6	5.88	30.006		
1,500.0	1,497.5	1,468.0	1,448.5	3.2	4.6	13.86	-215.1	60.7	187.7	181.3	6.33	29.630		
1,600.0	1,596.1	1,567.4	1,544.4	3.5	5.1	15.21	-240.5	66.0	197.9	191.0	6.82	28.999		
1,700.0	1,694.7	1,666.8	1,640.3	3.8	5.6	16.43	-266.0	71.3	208.1	200.8	7.32	28.424		
1,800.0	1,793.3	1,766.2	1,736.2	4.1	6.2	17.54	-291.4	76.6	218.5	210.7	7.83	27.892		
1,900.0	1,891.9	1,865.5	1,832.1	4.4	6.7	18.54	-316.8	81.9	229.0	220.6	8.36	27.398		
2,000.0	1,990.5	1,964.9	1,928.1	4.8	7.3	19.46	-342.2	87.3	239.5	230.6	8.89	26.940		
2,100.0	2,089.1	2,064.3	2,024.0	5.1	7.8	20.30	-367.6	92.6	250.1	240.6	9.43	26.515		
2,200.0	2,187.7	2,163.7	2,119.9	5.5	8.3	21.07	-393.0	97.9	260.7	250.7	9.98	26.118		
2,300.0	2,286.2	2,263.0	2,215.8	5.8	8.9	21.78	-418.5	103.2	271.3	260.8	10.54	25.749		
2,400.0	2,384.8	2,362.4	2,311.8	6.2	9.4	22.44	-443.9	108.5	282.0	270.9	11.10	25.405		
2,500.0	2,483.4	2,461.8	2,407.7	6.6	10.0	23.05	-469.3	113.9	292.8	281.1	11.67	25.084		
2,600.0	2,582.0	2,561.2	2,503.6	6.9	10.5	23.62	-494.7	119.2	303.5	291.3	12.25	24.783		
2,700.0	2,680.6	2,660.5	2,599.5	7.3	11.1	24.14	-520.1	124.5	314.3	301.5	12.83	24.502		
2,800.0	2,779.2	2,759.9	2,695.5	7.7	11.6	24.64	-545.5	129.8	325.2	311.7	13.41	24.238		
2,900.0	2,877.8	2,859.3	2,791.4	8.1	12.1	25.10	-570.9	135.1	336.0	322.0	14.01	23.991		
3,000.0	2,976.4	2,958.7	2,887.3	8.5	12.7	25.53	-596.4	140.4	346.8	332.3	14.60	23.758		
3,100.0	3,075.0	3,058.0	2,983.2	8.8	13.2	25.93	-621.8	145.8	357.7	342.5	15.20	23.539		
3,200.0	3,173.6	3,157.4	3,079.1	9.2	13.8	26.32	-647.2	151.1	368.6	352.8	15.80	23.333		
3,300.0	3,272.2	3,256.8	3,175.1	9.6	14.3	26.68	-672.6	156.4	379.5	363.1	16.40	23.139		
3,400.0	3,370.8	3,356.2	3,271.0	10.0	14.9	27.02	-698.0	161.7	390.5	373.4	17.01	22.955		
3,500.0	3,469.4	3,455.6	3,366.9	10.4	15.4	27.34	-723.4	167.0	401.4	383.8	17.62	22.781		
3,600.0	3,568.0	3,554.9	3,462.8	10.8	16.0	27.64	-748.9	172.4	412.3	394.1	18.23	22.617		
3,700.0	3,666.6	3,654.3	3,558.8	11.2	16.5	27.93	-774.3	177.7	423.3	404.5	18.85	22.461		
3,800.0	3,765.2	3,753.7	3,654.7	11.5	17.1	28.20	-799.7	183.0	434.3	414.8	19.46	22.313		
3,900.0	3,863.8	3,853.1	3,750.6	11.9	17.6	28.46	-825.1	188.3	445.2	425.2	20.08	22.173		
4,000.0	3,962.4	3,952.4	3,846.5	12.3	18.2	28.71	-850.5	193.6	456.2	435.5	20.70	22.039		
4,100.0	4,061.0	4,051.8	3,942.5	12.7	18.7	28.95	-875.9	199.0	467.2	445.9	21.32	21.912		
4,200.0	4,159.6	4,151.2	4,038.4	13.1	19.3	29.17	-901.3	204.3	478.2	456.3	21.95	21.791		
4,300.0	4,258.2	4,250.6	4,134.3	13.5	19.8	29.39	-926.8	209.6	489.2	466.7	22.57	21.675		
4,400.0	4,356.8	4,349.9	4,230.2	13.9	20.3	29.59	-952.2	214.9	500.3	477.1	23.20	21.565		
4,500.0	4,455.4	4,449.3	4,326.2	14.3	20.9	29.79	-977.6	220.2	511.3	487.4	23.83	21.459		
4,600.0	4,554.0	4,548.7	4,422.1	14.7	21.4	29.98	-1,003.0	225.6	522.3	497.8	24.45	21.358		
4,700.0	4,652.6	4,648.1	4,518.0	15.0	22.0	30.16	-1,028.4	230.9	533.3	508.3	25.08	21.262		
4,800.0	4,751.2	4,747.4	4,613.9	15.4	22.5	30.33	-1,053.8	236.2	544.4	518.7	25.72	21.169		
4,900.0	4,849.7	4,846.8	4,709.8	15.8	23.1	30.50	-1,079.3	241.5	555.4	529.1	26.35	21.080		
5,000.0	4,948.3	4,946.2	4,805.8	16.2	23.6	30.66	-1,104.7	246.8	566.5	539.5	26.98	20.995		
5,100.0	5,046.9	5,045.6	4,901.7	16.6	24.2	30.81	-1,130.1	252.2	577.5	549.9	27.61	20.914		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	0.0 ft
Survey Program: 0-MWID												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	
5,200.0	5,145.5	5,144.9	4,997.6	17.0	24.7	30.96	-1,155.5	257.5	588.6	560.3	28.25	20.835	
5,300.0	5,244.1	5,244.3	5,093.5	17.4	25.3	31.10	-1,180.9	262.8	599.6	570.7	28.88	20.759	
5,400.0	5,342.7	5,343.7	5,189.5	17.8	25.8	31.24	-1,206.3	268.1	610.7	581.2	29.52	20.687	
5,500.0	5,441.3	5,443.1	5,285.4	18.2	26.4	31.37	-1,231.7	273.4	621.8	591.6	30.16	20.617	
5,600.0	5,539.9	5,542.4	5,381.3	18.6	26.9	31.52	-1,257.2	278.8	632.9	602.1	30.79	20.556	
5,700.0	5,638.9	5,641.6	5,477.0	18.8	27.5	31.67	-1,282.5	284.1	646.0	614.7	31.32	20.626	
5,800.0	5,738.3	5,740.3	5,572.3	19.1	28.0	31.69	-1,307.7	289.3	662.0	630.2	31.78	20.831	
5,900.0	5,838.0	5,838.4	5,667.0	19.3	28.6	31.60	-1,332.8	294.6	681.0	648.8	32.17	21.166	
6,000.0	5,937.9	5,935.8	5,761.0	19.4	29.1	31.40	-1,357.8	299.8	702.9	670.4	32.50	21.627	
6,100.0	6,037.9	6,032.5	5,854.3	19.5	29.6	-176.27	-1,382.5	305.0	727.5	680.3	47.20	15.413	
6,200.0	6,137.9	6,129.0	5,947.5	19.7	30.2	-176.80	-1,407.2	310.2	752.8	704.9	47.94	15.702	
6,300.0	6,237.9	6,225.5	6,040.7	19.8	30.7	-177.30	-1,431.9	315.3	778.1	729.4	48.68	15.985	
6,400.0	6,337.9	6,322.1	6,133.9	19.9	31.2	-177.76	-1,456.6	320.5	803.5	754.1	49.41	16.261	
6,500.0	6,437.9	6,418.6	6,227.0	20.1	31.8	-178.20	-1,481.2	325.7	828.9	778.8	50.14	16.532	
6,600.0	6,537.9	6,515.1	6,320.2	20.2	32.3	-178.61	-1,505.9	330.8	854.4	803.5	50.87	16.797	
6,700.0	6,637.6	6,611.0	6,412.8	20.3	32.8	-87.30	-1,530.4	336.0	879.7	844.4	35.33	24.900	
6,800.0	6,734.4	6,704.5	6,503.0	20.3	33.3	-86.34	-1,554.3	340.8	904.8	868.9	35.88	25.214	
6,900.0	6,824.6	6,812.0	6,606.6	20.3	33.8	-86.13	-1,581.1	333.2	929.1	893.0	36.05	25.773	
7,000.0	6,905.1	6,931.3	6,717.4	20.2	34.1	-86.16	-1,608.5	299.2	951.2	915.2	36.00	26.420	
7,100.0	6,972.8	7,064.8	6,829.2	20.1	34.4	-86.41	-1,634.4	231.8	969.8	933.8	35.95	26.977	
7,200.0	7,025.3	7,213.1	6,929.9	20.0	34.6	-86.77	-1,655.5	125.6	983.4	947.1	36.29	27.094	
7,300.0	7,060.6	7,373.4	7,001.9	19.9	34.7	-87.03	-1,667.3	-16.4	990.5	952.9	37.63	26.323	
7,400.0	7,080.1	7,504.2	7,030.1	19.8	34.7	-87.07	-1,668.4	-144.0	991.3	951.4	39.90	24.846	
7,489.3	7,092.9	7,590.8	7,043.5	20.0	34.8	-87.12	-1,668.1	-229.5	991.3	949.0	42.26	23.459	
7,500.0	7,094.8	7,600.0	7,044.6	20.2	34.8	-87.08	-1,668.0	-238.6	991.3	948.8	42.53	23.309	
7,600.0	7,101.1	7,696.7	7,051.5	21.9	35.0	-87.13	-1,667.7	-335.1	991.3	945.6	45.69	21.694	
7,700.0	7,100.3	7,794.9	7,051.5	23.8	35.4	-87.18	-1,667.3	-433.2	991.2	941.9	49.27	20.118	
7,800.0	7,098.8	7,894.9	7,050.7	25.9	36.0	-87.22	-1,667.0	-533.2	991.2	938.0	53.21	18.626	
7,900.0	7,097.3	7,994.9	7,049.9	28.1	36.7	-87.26	-1,666.7	-633.2	991.1	933.7	57.43	17.257	
8,000.0	7,095.9	8,094.8	7,049.1	30.4	37.8	-87.30	-1,666.3	-733.2	991.1	929.2	61.88	16.017	
8,100.0	7,094.4	8,194.8	7,048.3	32.8	39.2	-87.34	-1,666.0	-833.2	991.1	924.6	66.50	14.904	
8,200.0	7,092.9	8,294.8	7,047.6	35.2	40.8	-87.38	-1,665.6	-933.2	991.0	919.8	71.26	13.908	
8,300.0	7,091.4	8,394.8	7,046.8	37.7	42.7	-87.42	-1,665.3	-1,033.1	991.0	914.9	76.13	13.016	
8,400.0	7,089.9	8,494.8	7,046.0	40.2	44.7	-87.46	-1,664.9	-1,133.1	991.0	909.9	81.11	12.218	
8,500.0	7,088.4	8,594.8	7,045.2	42.8	46.9	-87.50	-1,664.6	-1,233.1	990.9	904.8	86.16	11.501	
8,600.0	7,087.0	8,694.8	7,044.4	45.3	49.1	-87.54	-1,664.3	-1,333.1	990.9	899.6	91.28	10.856	
8,700.0	7,085.5	8,794.8	7,043.6	48.0	51.5	-87.58	-1,663.9	-1,433.1	990.9	894.4	96.45	10.273	
8,800.0	7,084.0	8,894.8	7,042.8	50.6	53.9	-87.62	-1,663.6	-1,533.1	990.8	889.2	101.67	9.745	
8,900.0	7,082.5	8,994.8	7,042.1	53.2	56.3	-87.66	-1,663.2	-1,633.1	990.8	883.9	106.93	9.266	
9,000.0	7,081.0	9,094.8	7,041.3	55.9	58.8	-87.70	-1,662.9	-1,733.1	990.8	878.5	112.23	8.828	
9,100.0	7,079.5	9,194.8	7,040.5	58.6	61.3	-87.74	-1,662.5	-1,833.1	990.7	873.2	117.55	8.428	
9,200.0	7,078.1	9,294.8	7,039.7	61.3	63.9	-87.78	-1,662.2	-1,933.1	990.7	867.8	122.90	8.061	
9,300.0	7,076.6	9,394.8	7,038.9	64.0	66.5	-87.82	-1,661.9	-2,033.1	990.7	862.4	128.28	7.723	
9,400.0	7,075.1	9,494.8	7,038.1	66.7	69.1	-87.86	-1,661.5	-2,133.1	990.6	857.0	133.67	7.411	
9,500.0	7,073.6	9,594.8	7,037.3	69.4	71.7	-87.90	-1,661.2	-2,233.1	990.6	851.5	139.08	7.123	
9,600.0	7,072.1	9,694.8	7,036.6	72.1	74.3	-87.94	-1,660.8	-2,333.1	990.6	846.1	144.51	6.855	
9,700.0	7,070.6	9,794.8	7,035.8	74.9	76.9	-87.98	-1,660.5	-2,433.1	990.6	840.6	149.95	6.606	
9,800.0	7,069.2	9,894.8	7,035.0	77.6	79.6	-88.02	-1,660.1	-2,533.1	990.5	835.1	155.41	6.374	
9,900.0	7,067.7	9,994.8	7,034.2	80.3	82.3	-88.06	-1,659.8	-2,633.1	990.5	829.6	160.87	6.157	
10,000.0	7,066.2	10,094.8	7,033.4	83.1	84.9	-88.10	-1,659.5	-2,733.0	990.5	824.1	166.35	5.954	
10,100.0	7,064.7	10,194.8	7,032.6	85.8	87.6	-88.14	-1,659.1	-2,833.0	990.5	818.6	171.84	5.764	
10,200.0	7,063.2	10,294.8	7,031.9	88.6	90.3	-88.19	-1,658.8	-2,933.0	990.4	813.1	177.33	5.585	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser G-10HN - Wellbore #1 - Plan#1 (4-14-14)												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
10,300.0	7,061.7	10,394.8	7,031.1	91.3	93.0	-88.23	-1,658.4	-3,033.0	990.4	807.6	182.83	5.417	
10,400.0	7,060.3	10,494.8	7,030.3	94.1	95.7	-88.27	-1,658.1	-3,133.0	990.4	802.0	188.34	5.258	
10,500.0	7,058.8	10,594.8	7,029.5	96.9	98.4	-88.31	-1,657.7	-3,233.0	990.4	796.5	193.86	5.109	
10,600.0	7,057.3	10,694.8	7,028.7	99.6	101.2	-88.35	-1,657.4	-3,333.0	990.3	791.0	199.38	4.967	
10,700.0	7,055.8	10,794.8	7,027.9	102.4	103.9	-88.39	-1,657.1	-3,433.0	990.3	785.4	204.90	4.833	
10,800.0	7,054.3	10,894.8	7,027.1	105.2	106.6	-88.43	-1,656.7	-3,533.0	990.3	779.9	210.44	4.706	
10,900.0	7,052.8	10,994.8	7,026.4	107.9	109.3	-88.47	-1,656.4	-3,633.0	990.3	774.3	215.97	4.585	
11,000.0	7,051.4	11,094.8	7,025.6	110.7	112.1	-88.51	-1,656.0	-3,733.0	990.2	768.7	221.51	4.470	
11,100.0	7,049.9	11,194.8	7,024.8	113.5	114.8	-88.55	-1,655.7	-3,833.0	990.2	763.2	227.06	4.361	
11,200.0	7,048.4	11,294.8	7,024.0	116.3	117.6	-88.59	-1,655.3	-3,933.0	990.2	757.6	232.61	4.257	
11,300.0	7,046.9	11,394.8	7,023.2	119.0	120.3	-88.63	-1,655.0	-4,033.0	990.2	752.0	238.16	4.158	
11,400.0	7,045.4	11,494.8	7,022.4	121.8	123.1	-88.67	-1,654.7	-4,133.0	990.2	746.5	243.71	4.063	
11,500.0	7,043.9	11,594.8	7,021.6	124.6	125.8	-88.71	-1,654.3	-4,233.0	990.1	740.9	249.27	3.972	
11,600.0	7,042.4	11,694.8	7,020.9	127.4	128.6	-88.75	-1,654.0	-4,332.9	990.1	735.3	254.83	3.885	
11,697.7	7,041.0	11,792.5	7,020.1	130.1	130.4	-88.79	-1,653.6	-4,430.7	990.1	730.8	259.35	3.818 SF	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design													Offset Site Error:	0.0 ft
Survey Program: 0-MWD													Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
0.0	0.0	0.0	0.0	0.0	0.0	148.36	-51.0	31.4	59.9					
100.0	100.0	100.0	100.0	0.1	0.1	148.36	-51.0	31.4	59.9	59.7	0.22	266.532		
200.0	200.0	200.0	200.0	0.3	0.3	148.36	-51.0	31.4	59.9	59.2	0.67	88.844 CC, ES		
300.0	300.0	298.1	298.0	0.6	0.5	148.95	-52.7	31.7	61.5	60.4	1.10	55.963		
400.0	400.0	395.9	395.7	0.8	0.7	150.54	-57.6	32.5	66.3	64.8	1.53	43.364		
500.0	500.0	493.3	492.8	1.0	1.0	152.73	-65.8	33.9	74.4	72.4	1.97	37.685		
600.0	600.0	590.0	588.8	1.2	1.2	155.09	-77.1	35.8	85.8	83.4	2.43	35.330		
700.0	700.0	685.8	683.5	1.5	1.6	157.33	-91.5	38.2	100.6	97.7	2.89	34.764		
800.0	800.0	780.5	776.6	1.7	1.9	159.29	-108.8	41.1	118.7	115.3	3.37	35.228		
900.0	900.0	874.0	867.8	1.9	2.3	160.94	-128.8	44.5	140.1	136.2	3.86	36.307		
1,000.0	1,000.0	966.0	956.9	2.1	2.8	162.30	-151.4	48.3	164.7	160.3	4.36	37.756		
1,100.0	1,100.0	1,057.2	1,044.5	2.3	3.3	10.71	-176.5	52.5	190.7	186.0	4.75	40.165		
1,200.0	1,199.8	1,154.1	1,137.1	2.5	3.8	11.82	-204.5	57.2	214.9	209.7	5.18	41.478		
1,300.0	1,299.5	1,251.8	1,230.5	2.7	4.4	12.89	-232.8	62.0	235.9	230.3	5.63	41.904		
1,400.0	1,398.7	1,350.1	1,324.5	2.9	5.0	13.97	-261.2	66.8	253.6	247.5	6.08	41.682		
1,500.0	1,497.5	1,448.9	1,418.9	3.2	5.6	15.10	-289.7	71.6	268.1	261.6	6.56	40.859		
1,600.0	1,596.1	1,547.8	1,513.5	3.5	6.2	16.24	-318.3	76.4	281.7	274.6	7.07	39.868		
1,700.0	1,694.7	1,646.7	1,608.1	3.8	6.7	17.28	-346.9	81.2	295.4	287.8	7.58	38.961		
1,800.0	1,793.3	1,745.6	1,702.7	4.1	7.3	18.22	-375.5	86.0	309.1	301.0	8.11	38.131		
1,900.0	1,891.9	1,844.6	1,797.3	4.4	7.9	19.09	-404.1	90.8	322.9	314.3	8.64	37.368		
2,000.0	1,990.5	1,943.5	1,891.8	4.8	8.5	19.88	-432.7	95.6	336.8	327.7	9.19	36.665		
2,100.0	2,089.1	2,042.4	1,986.4	5.1	9.1	20.61	-461.3	100.4	350.8	341.0	9.74	36.017		
2,200.0	2,187.7	2,141.4	2,081.0	5.5	9.7	21.28	-489.9	105.2	364.8	354.5	10.30	35.418		
2,300.0	2,286.2	2,240.3	2,175.6	5.8	10.3	21.90	-518.5	110.0	378.8	368.0	10.87	34.863		
2,400.0	2,384.8	2,339.2	2,270.2	6.2	10.9	22.48	-547.1	114.9	392.9	381.5	11.44	34.349		
2,500.0	2,483.4	2,438.1	2,364.8	6.6	11.5	23.02	-575.7	119.7	407.1	395.0	12.02	33.870		
2,600.0	2,582.0	2,537.1	2,459.3	6.9	12.1	23.52	-604.3	124.5	421.2	408.6	12.60	33.424		
2,700.0	2,680.6	2,636.0	2,553.9	7.3	12.7	23.99	-632.9	129.3	435.4	422.2	13.19	33.008		
2,800.0	2,779.2	2,734.9	2,648.5	7.7	13.3	24.44	-661.5	134.1	449.6	435.8	13.78	32.619		
2,900.0	2,877.8	2,833.8	2,743.1	8.1	13.9	24.85	-690.1	138.9	463.9	449.5	14.38	32.255		
3,000.0	2,976.4	2,932.8	2,837.7	8.5	14.5	25.24	-718.7	143.7	478.1	463.1	14.98	31.914		
3,100.0	3,075.0	3,031.7	2,932.2	8.8	15.1	25.60	-747.3	148.5	492.4	476.8	15.59	31.593		
3,200.0	3,173.6	3,130.6	3,026.8	9.2	15.7	25.95	-775.8	153.3	506.7	490.5	16.19	31.292		
3,300.0	3,272.2	3,229.6	3,121.4	9.6	16.3	26.28	-804.4	158.1	521.0	504.2	16.80	31.008		
3,400.0	3,370.8	3,328.5	3,216.0	10.0	16.9	26.59	-833.0	162.9	535.4	517.9	17.42	30.740		
3,500.0	3,469.4	3,427.4	3,310.6	10.4	17.5	26.88	-861.6	167.7	549.7	531.7	18.03	30.487		
3,600.0	3,568.0	3,526.3	3,405.2	10.8	18.1	27.16	-890.2	172.6	564.1	545.4	18.65	30.247		
3,700.0	3,666.6	3,625.3	3,499.7	11.2	18.7	27.42	-918.8	177.4	578.4	559.2	19.27	30.021		
3,800.0	3,765.2	3,724.2	3,594.3	11.5	19.3	27.67	-947.4	182.2	592.8	572.9	19.89	29.806		
3,900.0	3,863.8	3,823.1	3,688.9	11.9	19.9	27.91	-976.0	187.0	607.2	586.7	20.51	29.602		
4,000.0	3,962.4	3,922.0	3,783.5	12.3	20.5	28.14	-1,004.6	191.8	621.6	600.5	21.14	29.407		
4,100.0	4,061.0	4,021.0	3,878.1	12.7	21.1	28.36	-1,033.2	196.6	636.1	614.3	21.77	29.223		
4,200.0	4,159.6	4,119.9	3,972.6	13.1	21.7	28.57	-1,061.8	201.4	650.5	628.1	22.39	29.047		
4,300.0	4,258.2	4,218.8	4,067.2	13.5	22.3	28.77	-1,090.4	206.2	664.9	641.9	23.02	28.879		
4,400.0	4,356.8	4,317.8	4,161.8	13.9	22.9	28.96	-1,119.0	211.0	679.3	655.7	23.65	28.719		
4,500.0	4,455.4	4,416.7	4,256.4	14.3	23.5	29.14	-1,147.6	215.8	693.8	669.5	24.29	28.566		
4,600.0	4,554.0	4,515.6	4,351.0	14.7	24.1	29.32	-1,176.2	220.6	708.2	683.3	24.92	28.420		
4,700.0	4,652.6	4,614.5	4,445.6	15.0	24.7	29.49	-1,204.8	225.5	722.7	697.2	25.56	28.280		
4,800.0	4,751.2	4,713.5	4,540.1	15.4	25.3	29.65	-1,233.4	230.3	737.2	711.0	26.19	28.146		
4,900.0	4,849.7	4,812.4	4,634.7	15.8	25.9	29.80	-1,262.0	235.1	751.6	724.8	26.83	28.018		
5,000.0	4,948.3	4,911.3	4,729.3	16.2	26.5	29.95	-1,290.6	239.9	766.1	738.7	27.47	27.894		
5,100.0	5,046.9	5,010.2	4,823.9	16.6	27.1	30.10	-1,319.1	244.7	780.6	752.5	28.10	27.776		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 10-D Pad Sec.10-T6N-R65W - Kaiser H-10HC - Wellbore #1 - Plan #1 (4-14-14)												Offset Site Error:	0.0 ft
Survey Program: 0-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
5,200.0	5,145.5	5,109.2	4,918.5	17.0	27.7	30.24	-1,347.7	249.5	795.1	766.3	28.74	27.662	
5,300.0	5,244.1	5,208.1	5,013.1	17.4	28.3	30.37	-1,376.3	254.3	809.6	780.2	29.38	27.553	
5,400.0	5,342.7	5,307.0	5,107.6	17.8	28.9	30.50	-1,404.9	259.1	824.1	794.1	30.02	27.447	
5,500.0	5,441.3	5,405.9	5,202.2	18.2	29.5	30.63	-1,433.5	263.9	838.6	807.9	30.67	27.346	
5,600.0	5,539.9	5,504.9	5,296.8	18.6	30.1	30.77	-1,462.1	268.7	853.1	821.8	31.30	27.258	
5,700.0	5,638.9	5,603.5	5,391.1	18.8	30.7	30.98	-1,490.6	273.5	869.7	837.8	31.83	27.323	
5,800.0	5,738.3	5,701.6	5,484.8	19.1	31.3	31.10	-1,519.0	278.3	889.1	856.8	32.30	27.527	
5,900.0	5,838.0	5,799.0	5,578.0	19.3	31.9	31.14	-1,547.1	283.0	911.5	878.8	32.71	27.866	
6,000.0	5,937.9	5,895.6	5,670.3	19.4	32.5	31.11	-1,575.1	287.7	936.9	903.8	33.06	28.336	
6,100.0	6,037.9	5,991.4	5,761.9	19.5	33.1	-176.38	-1,602.7	292.4	964.9	914.1	50.79	18.999 SF	
6,200.0	6,137.9	6,087.0	5,853.3	19.7	33.7	-176.76	-1,630.4	297.0	993.5	942.0	51.55	19.271	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	0.0 ft
Survey Program: 159-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.0	0.0	0.0	0.0	0.0	0.0	-130.75	-222.6	-258.3	341.6				
100.0	100.0	83.4	83.4	0.1	0.1	-130.68	-222.1	-258.3	340.7	340.5	0.21	1,641.939	
200.0	200.0	185.5	185.5	0.3	0.2	-130.43	-220.0	-258.3	339.4	338.8	0.57	592.424	
300.0	300.0	282.8	282.8	0.6	0.4	-130.23	-218.4	-258.2	338.2	337.2	1.00	339.229	
351.6	351.6	332.2	332.1	0.7	0.5	-130.21	-218.2	-258.2	338.0	336.8	1.21	278.631	
400.0	400.0	380.1	380.0	0.8	0.6	-130.23	-218.4	-258.1	338.1	336.7	1.42	237.819	
500.0	500.0	480.0	479.9	1.0	0.8	-130.29	-218.7	-258.0	338.2	336.4	1.86	182.117	
600.0	600.0	581.3	581.2	1.2	1.1	-130.38	-219.2	-257.7	338.3	336.0	2.30	147.227	
700.0	700.0	681.5	681.4	1.5	1.3	-130.50	-219.5	-256.9	337.9	335.2	2.74	123.394	
725.4	725.4	706.2	706.1	1.5	1.3	-130.55	-219.6	-256.7	337.9	335.0	2.85	118.596	
800.0	800.0	773.9	773.9	1.7	1.5	-130.70	-220.7	-256.6	338.6	335.4	3.16	107.168	
900.0	900.0	863.4	863.2	1.9	1.7	-130.90	-223.7	-258.2	342.0	338.4	3.57	95.705	
1,000.0	1,000.0	954.9	954.6	2.1	1.9	-131.05	-228.2	-262.0	348.4	344.4	4.00	87.160	
1,100.0	1,100.0	1,044.6	1,044.0	2.3	2.1	76.19	-233.9	-267.3	356.7	352.3	4.39	81.199	
1,200.0	1,199.8	1,133.4	1,132.1	2.5	2.3	76.57	-241.3	-274.7	367.2	362.5	4.77	76.977	
1,300.0	1,299.5	1,223.0	1,220.7	2.7	2.5	77.34	-250.4	-283.9	379.7	374.5	5.17	73.421	
1,400.0	1,398.7	1,310.5	1,307.1	2.9	2.8	78.48	-260.4	-294.8	394.1	388.5	5.60	70.422	
1,500.0	1,497.5	1,397.7	1,392.5	3.2	3.1	79.98	-271.7	-307.9	411.2	405.2	6.06	67.834	
1,600.0	1,596.1	1,488.1	1,480.7	3.5	3.5	81.69	-285.2	-322.2	430.4	423.8	6.57	65.467	
1,700.0	1,694.7	1,575.2	1,565.3	3.8	3.8	83.09	-299.7	-336.8	451.7	444.6	7.11	63.556	
1,800.0	1,793.3	1,659.3	1,646.4	4.1	4.2	84.25	-315.5	-352.5	476.0	468.3	7.66	62.152	
1,900.0	1,891.9	1,755.7	1,739.1	4.4	4.7	85.41	-334.5	-371.3	501.6	493.4	8.26	60.731	
2,000.0	1,990.5	1,857.4	1,836.9	4.8	5.2	86.41	-355.0	-390.2	526.9	518.1	8.88	59.365	
2,100.0	2,089.1	1,958.5	1,934.5	5.1	5.6	87.38	-374.3	-408.1	551.1	541.6	9.49	58.059	
2,200.0	2,187.7	2,051.3	2,024.1	5.5	6.0	88.32	-391.1	-425.3	575.7	565.5	10.10	56.970	
2,300.0	2,286.2	2,145.8	2,115.3	5.8	6.5	89.21	-408.2	-443.2	600.7	590.0	10.75	55.904	
2,400.0	2,384.8	2,243.0	2,209.0	6.2	7.0	90.07	-425.8	-462.1	626.3	614.9	11.40	54.932	
2,500.0	2,483.4	2,338.9	2,301.6	6.6	7.4	90.78	-443.5	-479.7	651.3	639.2	12.06	54.008	
2,600.0	2,582.0	2,428.5	2,387.8	6.9	7.9	91.40	-460.6	-497.3	677.7	665.0	12.71	53.333	
2,700.0	2,680.6	2,529.7	2,485.4	7.3	8.4	92.12	-478.9	-517.2	703.7	690.4	13.39	52.571	
2,800.0	2,779.2	2,626.3	2,578.4	7.7	8.8	92.80	-495.9	-536.1	729.8	715.7	14.06	51.921	
2,900.0	2,877.8	2,718.2	2,667.1	8.1	9.3	93.37	-512.4	-554.1	755.9	741.1	14.72	51.336	
3,000.0	2,976.4	2,808.0	2,753.5	8.5	9.8	93.91	-528.7	-572.5	783.1	767.7	15.40	50.856	
3,100.0	3,075.0	2,904.5	2,846.2	8.8	10.3	94.44	-546.4	-592.5	810.6	794.5	16.09	50.366	
3,200.0	3,173.6	2,996.6	2,934.8	9.2	10.8	94.96	-562.8	-611.7	838.1	821.3	16.77	49.968	
3,300.0	3,272.2	3,099.8	3,033.9	9.6	11.3	95.51	-581.1	-633.9	866.2	848.8	17.49	49.532	
3,400.0	3,370.8	3,203.7	3,134.1	10.0	11.8	96.02	-599.0	-654.3	892.5	874.3	18.21	49.015	
3,500.0	3,469.4	3,296.8	3,223.9	10.4	12.3	96.41	-615.8	-672.6	919.2	900.3	18.90	48.627	
3,600.0	3,568.0	3,417.0	3,340.0	10.8	12.9	96.91	-636.7	-695.6	945.2	925.5	19.68	48.038	
3,700.0	3,666.6	3,528.7	3,448.6	11.2	13.4	97.37	-654.9	-714.4	968.7	948.2	20.41	47.463	
3,800.0	3,765.2	3,623.5	3,540.9	11.5	13.8	97.76	-670.0	-729.9	991.6	970.5	21.09	47.009	
7,300.0	7,060.6	7,166.6	7,053.9	19.9	22.1	-35.91	-838.9	-941.5	922.2	894.7	27.48	33.563	
7,400.0	7,080.1	7,185.1	7,072.5	19.8	22.1	-51.80	-839.2	-941.2	825.6	792.7	32.90	25.092	
7,500.0	7,094.8	7,198.6	7,086.0	20.2	22.1	-68.35	-839.4	-941.0	728.7	690.7	38.02	19.166	
7,600.0	7,101.1	7,203.2	7,090.5	21.9	22.1	-88.96	-839.5	-940.9	631.8	590.7	41.18	15.343	
7,700.0	7,100.3	7,200.4	7,087.7	23.8	22.1	-95.05	-839.5	-940.9	535.9	493.3	42.61	12.576	
7,800.0	7,098.8	7,196.9	7,084.3	25.9	22.1	-93.86	-839.4	-941.0	441.8	397.0	44.78	9.865	
7,900.0	7,097.3	7,193.5	7,080.9	28.1	22.1	-92.67	-839.4	-941.1	350.9	303.8	47.08	7.454	
8,000.0	7,095.9	7,190.2	7,077.5	30.4	22.1	-91.50	-839.3	-941.1	266.6	217.1	49.46	5.391	
8,100.0	7,094.4	7,186.9	7,074.2	32.8	22.1	-90.35	-839.2	-941.2	197.5	145.6	51.90	3.804	
8,200.0	7,092.9	7,183.6	7,071.0	35.2	22.1	-89.21	-839.2	-941.2	163.9	109.6	54.39	3.014	
8,210.6	7,092.7	7,183.3	7,070.6	35.5	22.1	-89.09	-839.2	-941.2	163.6	108.9	54.66	2.993 CC, ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 17-10 Pad Sec.10-T6N-R65W - Kaiser 17-10 - Wellbore #1 - Wellbore #1												Offset Site Error:	0.0 ft
Survey Program: 159-MWD												Offset Well Error:	0.0 ft
Reference	Offset	Semi Major Axis		Distance									
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
8,300.0	7,091.4	7,180.4	7,067.8	37.7	22.1	-88.08	-839.1	-941.3	186.4	129.5	56.92	3.275	
8,400.0	7,089.9	7,177.2	7,064.6	40.2	22.1	-86.97	-839.1	-941.4	250.2	190.7	59.46	4.208	
8,500.0	7,088.4	7,174.1	7,061.4	42.8	22.1	-85.88	-839.0	-941.4	332.3	270.3	62.01	5.359	
8,600.0	7,087.0	7,170.0	7,057.3	45.3	22.1	-84.45	-839.0	-941.5	422.2	357.6	64.54	6.541	
8,700.0	7,085.5	7,167.9	7,055.3	48.0	22.1	-83.73	-839.0	-941.5	515.8	448.7	67.11	7.686	
8,800.0	7,084.0	7,164.8	7,052.2	50.6	22.1	-82.66	-838.9	-941.6	611.4	541.7	69.65	8.779	
8,900.0	7,082.5	7,161.8	7,049.1	53.2	22.1	-81.60	-838.9	-941.6	708.2	636.0	72.17	9.813	
9,000.0	7,081.0	7,158.7	7,046.1	55.9	22.1	-80.56	-838.8	-941.7	805.8	731.1	74.67	10.791	
9,100.0	7,079.5	7,155.7	7,043.1	58.6	22.1	-79.53	-838.8	-941.7	903.9	826.7	77.15	11.716	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 17-10 Pad Sec.10-T6N-R65W - KAISER 41-10 (EXISTING) - Wellbore #1 - EXISTING													Offset Site Error:	0.0 ft
Survey Program: 0-MWD													Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
0.0	0.0	0.0	0.0	0.0	0.0	-131.55	-224.8	-253.6	339.5					
100.0	100.0	80.5	80.5	0.1	0.1	-131.55	-224.8	-253.6	338.9	338.7	0.20	1,670.322		
200.0	200.0	180.5	180.5	0.3	0.3	-131.55	-224.8	-253.6	338.9	338.3	0.63	537.524		
300.0	300.0	280.5	280.5	0.6	0.5	-131.55	-224.8	-253.6	338.9	337.8	1.08	313.789		
400.0	400.0	380.5	380.5	0.8	0.7	-131.55	-224.8	-253.6	338.9	337.4	1.53	221.566		
500.0	500.0	480.5	480.5	1.0	1.0	-131.55	-224.8	-253.6	338.9	336.9	1.98	171.239		
600.0	600.0	580.5	580.5	1.2	1.2	-131.55	-224.8	-253.6	338.9	336.5	2.43	139.542		
700.0	700.0	680.5	680.5	1.5	1.4	-131.55	-224.8	-253.6	338.9	336.0	2.88	117.747		
800.0	800.0	780.5	780.5	1.7	1.6	-131.55	-224.8	-253.6	338.9	335.6	3.33	101.841		
900.0	900.0	880.5	880.5	1.9	1.9	-131.55	-224.8	-253.6	338.9	335.1	3.78	89.721		
1,000.0	1,000.0	980.5	980.5	2.1	2.1	-131.55	-224.8	-253.6	338.9	334.7	4.23	80.178		
1,100.0	1,100.0	1,080.5	1,080.5	2.3	2.3	76.03	-224.8	-253.6	338.5	333.8	4.65	72.799		
1,200.0	1,199.8	1,180.3	1,180.3	2.5	2.5	76.92	-224.8	-253.6	337.2	332.2	5.05	66.732		
1,300.0	1,299.5	1,280.0	1,280.0	2.7	2.8	78.40	-224.8	-253.6	335.4	329.9	5.47	61.271		
1,400.0	1,398.7	1,379.2	1,379.2	2.9	3.0	80.48	-224.8	-253.6	333.1	327.2	5.92	56.299		
1,500.0	1,497.5	1,478.0	1,478.0	3.2	3.2	83.15	-224.8	-253.6	330.9	324.5	6.39	51.749		
1,600.0	1,596.1	1,576.6	1,576.6	3.5	3.4	85.99	-224.8	-253.6	329.3	322.4	6.90	47.717		
1,700.0	1,694.7	1,675.2	1,675.2	3.8	3.7	88.86	-224.8	-253.6	328.5	321.1	7.43	44.231		
1,739.8	1,733.9	1,714.4	1,714.4	3.9	3.7	90.00	-224.8	-253.6	328.4	320.8	7.64	42.977 CC		
1,800.0	1,793.3	1,773.8	1,773.8	4.1	3.9	91.73	-224.8	-253.6	328.6	320.6	7.97	41.238 ES		
1,900.0	1,891.9	1,872.4	1,872.4	4.4	4.1	94.59	-224.8	-253.6	329.5	321.0	8.52	38.681		
2,000.0	1,990.5	1,971.0	1,971.0	4.8	4.3	97.43	-224.8	-253.6	331.3	322.2	9.08	36.504		
2,100.0	2,089.1	2,069.6	2,069.6	5.1	4.5	100.23	-224.8	-253.6	333.9	324.3	9.63	34.656		
2,200.0	2,187.7	2,168.2	2,168.2	5.5	4.8	102.99	-224.8	-253.6	337.3	327.1	10.19	33.090		
2,300.0	2,286.2	2,266.7	2,266.7	5.8	5.0	105.68	-224.8	-253.6	341.5	330.8	10.75	31.767		
2,400.0	2,384.8	2,365.3	2,365.3	6.2	5.2	108.31	-224.8	-253.6	346.4	335.1	11.30	30.653		
2,500.0	2,483.4	2,463.9	2,463.9	6.6	5.4	110.86	-224.8	-253.6	352.1	340.3	11.85	29.717		
2,600.0	2,582.0	2,562.5	2,562.5	6.9	5.6	113.32	-224.8	-253.6	358.5	346.1	12.39	28.934		
2,700.0	2,680.6	2,661.1	2,661.1	7.3	5.9	115.70	-224.8	-253.6	365.5	352.6	12.92	28.282		
2,800.0	2,779.2	2,759.7	2,759.7	7.7	6.1	117.99	-224.8	-253.6	373.1	359.7	13.45	27.741		
2,900.0	2,877.8	2,858.3	2,858.3	8.1	6.3	120.18	-224.8	-253.6	381.3	367.3	13.97	27.297		
3,000.0	2,976.4	2,956.9	2,956.9	8.5	6.5	122.28	-224.8	-253.6	390.1	375.6	14.48	26.935		
3,100.0	3,075.0	3,055.5	3,055.5	8.8	6.8	124.28	-224.8	-253.6	399.3	384.3	14.99	26.643		
3,200.0	3,173.6	3,154.1	3,154.1	9.2	7.0	126.20	-224.8	-253.6	409.0	393.6	15.49	26.412		
3,300.0	3,272.2	3,252.7	3,252.7	9.6	7.2	128.03	-224.8	-253.6	419.2	403.2	15.98	26.232		
3,400.0	3,370.8	3,351.3	3,351.3	10.0	7.4	129.76	-224.8	-253.6	429.8	413.3	16.47	26.095		
3,500.0	3,469.4	3,449.9	3,449.9	10.4	7.6	131.42	-224.8	-253.6	440.7	423.8	16.95	25.997		
3,600.0	3,568.0	3,548.5	3,548.5	10.8	7.9	133.00	-224.8	-253.6	452.0	434.6	17.43	25.930		
3,700.0	3,666.6	3,647.1	3,647.1	11.2	8.1	134.49	-224.8	-253.6	463.7	445.8	17.91	25.891		
3,800.0	3,765.2	3,745.7	3,745.7	11.5	8.3	135.92	-224.8	-253.6	475.6	457.2	18.38	25.875		
3,900.0	3,863.8	3,844.3	3,844.3	11.9	8.5	137.28	-224.8	-253.6	487.8	469.0	18.85	25.879		
4,000.0	3,962.4	3,942.9	3,942.9	12.3	8.7	138.56	-224.8	-253.6	500.3	481.0	19.32	25.899		
4,100.0	4,061.0	4,041.5	4,041.5	12.7	9.0	139.79	-224.8	-253.6	513.0	493.2	19.78	25.934		
4,200.0	4,159.6	4,140.1	4,140.1	13.1	9.2	140.96	-224.8	-253.6	525.9	505.7	20.24	25.980		
4,300.0	4,258.2	4,238.7	4,238.7	13.5	9.4	142.07	-224.8	-253.6	539.1	518.4	20.70	26.037		
4,400.0	4,356.8	4,337.3	4,337.3	13.9	9.6	143.13	-224.8	-253.6	552.4	531.3	21.16	26.101		
4,500.0	4,455.4	4,435.9	4,435.9	14.3	9.9	144.14	-224.8	-253.6	565.9	544.3	21.62	26.173		
4,600.0	4,554.0	4,534.5	4,534.5	14.7	10.1	145.10	-224.8	-253.6	579.6	557.5	22.08	26.250		
4,700.0	4,652.6	4,633.1	4,633.1	15.0	10.3	146.02	-224.8	-253.6	593.4	570.9	22.54	26.332		
4,800.0	4,751.2	4,731.7	4,731.7	15.4	10.5	146.90	-224.8	-253.6	607.4	584.4	22.99	26.418		
4,900.0	4,849.7	4,830.2	4,830.2	15.8	10.7	147.73	-224.8	-253.6	621.5	598.1	23.45	26.507		
5,000.0	4,948.3	4,928.8	4,928.8	16.2	11.0	148.54	-224.8	-253.6	635.8	611.9	23.90	26.598		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	0.0 ft
Kaiser 17-10 Pad Sec.10-T6N-R65W - KAISER 41-10 (EXISTING) - Wellbore #1 - EXISTING												Offset Well Error:	0.0 ft
Survey Program: 0-MWD													
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
5,100.0	5,046.9	5,027.4	5,027.4	16.6	11.2	149.30	-224.8	-253.6	650.1	625.8	24.36	26.690	
5,200.0	5,145.5	5,126.0	5,126.0	17.0	11.4	150.03	-224.8	-253.6	664.6	639.8	24.81	26.784	
5,300.0	5,244.1	5,224.6	5,224.6	17.4	11.6	150.73	-224.8	-253.6	679.1	653.9	25.27	26.878	
5,400.0	5,342.7	5,323.2	5,323.2	17.8	11.9	151.41	-224.8	-253.6	693.8	668.1	25.72	26.973	
5,500.0	5,441.3	5,421.8	5,421.8	18.2	12.1	152.05	-224.8	-253.6	708.6	682.4	26.18	27.068	
5,600.0	5,539.9	5,520.4	5,520.4	18.6	12.3	152.69	-224.8	-253.6	723.3	696.7	26.63	27.159	
5,700.0	5,638.9	5,619.4	5,619.4	18.8	12.5	153.32	-224.8	-253.6	736.1	709.1	27.06	27.207	
5,800.0	5,738.3	5,718.8	5,718.8	19.1	12.7	153.78	-224.8	-253.6	745.9	718.4	27.46	27.160	
5,900.0	5,838.0	5,818.5	5,818.5	19.3	13.0	154.09	-224.8	-253.6	752.5	724.7	27.85	27.022	
6,000.0	5,937.9	5,918.4	5,918.4	19.4	13.2	154.25	-224.8	-253.6	756.1	727.8	28.21	26.797	
6,100.0	6,037.9	6,018.4	6,018.4	19.5	13.4	-53.01	-224.8	-253.6	756.7	724.7	31.98	23.662	
6,200.0	6,137.9	6,118.4	6,118.4	19.7	13.6	-53.01	-224.8	-253.6	756.7	724.3	32.33	23.401	
6,300.0	6,237.9	6,218.4	6,218.4	19.8	13.9	-53.01	-224.8	-253.6	756.7	724.0	32.69	23.144	
6,400.0	6,337.9	6,318.4	6,318.4	19.9	14.1	-53.01	-224.8	-253.6	756.7	723.6	33.05	22.891	
6,500.0	6,437.9	6,418.4	6,418.4	20.1	14.3	-53.01	-224.8	-253.6	756.7	723.2	33.42	22.643	
6,600.0	6,537.9	6,518.4	6,518.4	20.2	14.5	-53.01	-224.8	-253.6	756.7	722.9	33.78	22.399	
6,700.0	6,637.6	6,618.1	6,618.1	20.3	14.8	37.40	-224.8	-253.6	751.8	721.3	30.51	24.643	
6,800.0	6,734.4	6,714.9	6,714.9	20.3	15.0	39.94	-224.8	-253.6	732.2	702.4	29.79	24.582	
6,900.0	6,824.6	6,805.1	6,805.1	20.3	15.2	44.73	-224.8	-253.6	699.2	670.4	28.77	24.301	
7,000.0	6,905.1	6,885.6	6,885.6	20.2	15.4	52.09	-224.8	-253.6	655.3	627.1	28.23	23.216	
7,100.0	6,972.8	6,953.3	6,953.3	20.1	15.5	61.91	-224.8	-253.6	604.4	575.5	28.94	20.890	
7,200.0	7,025.3	7,005.8	7,005.8	20.0	15.6	72.93	-224.8	-253.6	551.9	521.2	30.75	17.951	
7,300.0	7,060.6	7,041.1	7,041.1	19.9	15.7	82.69	-224.8	-253.6	504.5	471.8	32.64	15.454	
7,400.0	7,080.1	7,060.6	7,060.6	19.8	15.8	87.29	-224.8	-253.6	469.7	435.6	34.12	13.766	
7,500.0	7,094.8	7,075.3	7,075.3	20.2	15.8	89.67	-224.8	-253.6	453.8	418.1	35.69	12.716	
7,524.9	7,097.2	7,077.7	7,077.7	20.6	15.8	90.00	-224.8	-253.6	453.2	417.0	36.12	12.544	
7,600.0	7,101.1	7,081.6	7,081.6	21.9	15.8	90.18	-224.8	-253.6	459.3	421.9	37.41	12.279 SF	
7,700.0	7,100.3	7,080.8	7,080.8	23.8	15.8	89.67	-224.8	-253.6	485.8	446.5	39.28	12.368	
7,800.0	7,098.8	7,079.3	7,079.3	25.9	15.8	89.48	-224.8	-253.6	530.1	488.8	41.32	12.827	
7,900.0	7,097.3	7,077.8	7,077.8	28.1	15.8	89.30	-224.8	-253.6	588.2	544.7	43.50	13.520	
8,000.0	7,095.9	7,076.4	7,076.4	30.4	15.8	89.11	-224.8	-253.6	656.5	610.7	45.79	14.338	
8,100.0	7,094.4	7,074.9	7,074.9	32.8	15.8	88.92	-224.8	-253.6	732.1	683.9	48.15	15.204	
8,200.0	7,092.9	7,073.4	7,073.4	35.2	15.8	88.73	-224.8	-253.6	813.0	762.4	50.58	16.073	
8,300.0	7,091.4	7,071.9	7,071.9	37.7	15.8	88.55	-224.8	-253.6	897.7	844.7	53.06	16.919	
8,400.0	7,089.9	7,070.4	7,070.4	40.2	15.8	88.36	-224.8	-253.6	985.3	929.8	55.58	17.728	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 2-10 Pad Sec.10-T6N-R65W - Kaiser 18-10 - Wellbore #1 - Wellbore #1												Offset Site Error:	0.0 ft
Survey Program: 130-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
9,900.0	7,067.7	7,144.1	7,032.0	80.3	23.3	-91.28	-889.5	-3,582.0	977.2	877.1	100.10	9.762	
10,000.0	7,066.2	7,143.7	7,031.6	83.1	23.3	-91.18	-889.5	-3,582.0	880.1	777.2	102.86	8.556	
10,100.0	7,064.7	7,143.3	7,031.2	85.8	23.3	-91.07	-889.5	-3,582.0	783.8	678.1	105.62	7.421	
10,200.0	7,063.2	7,142.9	7,030.8	88.6	23.3	-90.97	-889.5	-3,582.0	688.5	580.1	108.38	6.352	
10,300.0	7,061.7	7,142.5	7,030.4	91.3	23.3	-90.86	-889.5	-3,582.0	594.7	483.6	111.15	5.351	
10,400.0	7,060.3	7,142.1	7,030.0	94.1	23.3	-90.75	-889.5	-3,582.0	503.4	389.5	113.92	4.419	
10,500.0	7,058.8	7,141.7	7,029.6	96.9	23.3	-90.65	-889.5	-3,582.0	416.1	299.4	116.70	3.566	
10,600.0	7,057.3	7,141.2	7,029.1	99.6	23.3	-90.54	-889.5	-3,582.0	336.0	216.5	119.47	2.812	
10,700.0	7,055.8	7,140.8	7,028.7	102.4	23.3	-90.43	-889.5	-3,582.0	269.4	147.2	122.25	2.204	
10,800.0	7,054.3	7,140.4	7,028.3	105.2	23.3	-90.32	-889.5	-3,582.0	228.7	103.7	125.03	1.829	
10,851.4	7,053.6	7,140.2	7,028.1	106.6	23.3	-90.26	-889.5	-3,582.0	222.9	96.4	126.46	1.762 CC, ES, SF	
10,900.0	7,052.8	7,140.0	7,027.9	107.9	23.3	-90.21	-889.5	-3,582.0	228.1	100.3	127.81	1.785	
11,000.0	7,051.4	7,139.5	7,027.4	110.7	23.3	-90.10	-889.5	-3,582.0	267.9	137.3	130.59	2.051	
11,100.0	7,049.9	7,139.1	7,027.0	113.5	23.3	-89.99	-889.5	-3,582.0	333.9	200.5	133.38	2.503	
11,200.0	7,048.4	7,138.7	7,026.6	116.3	23.3	-89.88	-889.5	-3,582.0	413.8	277.6	136.16	3.039	
11,300.0	7,046.9	7,138.2	7,026.1	119.0	23.3	-89.76	-889.5	-3,582.0	500.9	362.0	138.95	3.605	
11,400.0	7,045.4	7,137.8	7,025.7	121.8	23.3	-89.65	-889.5	-3,582.0	592.1	450.4	141.74	4.178	
11,500.0	7,043.9	7,137.3	7,025.2	124.6	23.3	-89.53	-889.5	-3,582.0	685.8	541.3	144.52	4.745	
11,600.0	7,042.4	7,136.9	7,024.8	127.4	23.3	-89.42	-889.5	-3,581.9	781.1	633.8	147.31	5.302	
11,697.7	7,041.0	7,136.4	7,024.4	130.1	23.3	-89.31	-889.5	-3,581.9	875.2	725.1	150.03	5.833	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 2-10 Pad Sec.10-T6N-R65W - Kaiser 2-10 - Wellbore #1 - Wellbore #1												Offset Site Error:	0.0 ft
Survey Program: 160-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
8,100.0	7,094.4	7,241.2	7,086.6	32.8	26.6	93.43	-153.2	-1,666.3	986.3	927.3	59.05	16.703	
8,200.0	7,092.9	7,237.2	7,082.5	35.2	26.6	92.98	-153.2	-1,666.4	903.0	841.5	61.49	14.684	
8,300.0	7,091.4	7,233.2	7,078.6	37.7	26.6	92.55	-153.1	-1,666.5	823.3	759.3	63.98	12.867	
8,400.0	7,089.9	7,229.4	7,074.8	40.2	26.6	92.13	-153.1	-1,666.5	748.5	682.0	66.51	11.253	
8,500.0	7,088.4	7,225.7	7,071.1	42.8	26.6	91.72	-153.1	-1,666.6	680.1	611.1	69.08	9.846	
8,600.0	7,087.0	7,222.1	7,067.5	45.3	26.6	91.33	-153.1	-1,666.7	620.4	548.8	71.67	8.657	
8,700.0	7,085.5	7,218.7	7,064.0	48.0	26.6	90.94	-153.1	-1,666.7	572.1	497.8	74.28	7.702	
8,800.0	7,084.0	7,215.3	7,060.6	50.6	26.6	90.57	-153.1	-1,666.8	538.2	461.3	76.92	6.997	
8,900.0	7,082.5	7,212.0	7,057.4	53.2	26.6	90.22	-153.1	-1,666.8	521.5	441.9	79.56	6.554	
8,938.6	7,081.9	7,210.8	7,056.2	54.3	26.6	90.08	-153.1	-1,666.8	520.0	439.5	80.59	6.453 CC, ES	
9,000.0	7,081.0	7,208.9	7,054.2	55.9	26.6	89.87	-153.1	-1,666.9	523.7	441.4	82.22	6.369 SF	
9,100.0	7,079.5	7,205.8	7,051.1	58.6	26.6	89.53	-153.1	-1,666.9	544.5	459.6	84.90	6.414	
9,200.0	7,078.1	7,202.8	7,048.2	61.3	26.6	89.20	-153.1	-1,667.0	582.0	494.4	87.58	6.646	
9,300.0	7,076.6	7,199.9	7,045.3	64.0	26.6	88.88	-153.1	-1,667.0	633.2	543.0	90.26	7.015	
9,400.0	7,075.1	7,197.1	7,042.4	66.7	26.6	88.57	-153.1	-1,667.0	695.1	602.2	92.96	7.478	
9,500.0	7,073.6	7,194.3	7,039.7	69.4	26.6	88.27	-153.1	-1,667.1	765.1	669.4	95.66	7.998	
9,600.0	7,072.1	7,191.7	7,037.0	72.1	26.6	87.97	-153.1	-1,667.1	841.2	742.8	98.36	8.552	
9,700.0	7,070.6	7,189.1	7,034.4	74.9	26.6	87.69	-153.1	-1,667.1	921.8	820.7	101.07	9.120	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser 2-10 Pad Sec.10-T6N-R65W - Kaiser 21-10 (Exist) - Wellbore #1 - Wellbore #1												Offset Site Error:	0.0 ft
Survey Program: 7364-UNKNOWN												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
9,300.0	7,076.6	7,041.1	7,041.1	64.0	140.8	91.58	-224.6	-2,856.5	939.7	735.2	204.52	4.595	
9,400.0	7,075.1	7,039.6	7,039.6	66.7	140.8	91.39	-224.6	-2,856.5	853.0	645.7	207.22	4.116	
9,500.0	7,073.6	7,038.1	7,038.1	69.4	140.8	91.20	-224.6	-2,856.5	769.4	559.5	209.92	3.665	
9,600.0	7,072.1	7,036.6	7,036.6	72.1	140.7	91.01	-224.6	-2,856.5	690.2	477.6	212.63	3.246	
9,700.0	7,070.6	7,035.1	7,035.1	74.9	140.7	90.82	-224.6	-2,856.5	617.1	401.7	215.34	2.865	
9,800.0	7,069.2	7,033.7	7,033.7	77.6	140.7	90.63	-224.6	-2,856.5	552.4	334.4	218.06	2.533	
9,900.0	7,067.7	7,032.2	7,032.2	80.3	140.6	90.44	-224.6	-2,856.5	499.6	278.8	220.78	2.263	
10,000.0	7,066.2	7,030.7	7,030.7	83.1	140.6	90.24	-224.6	-2,856.5	462.6	239.1	223.50	2.070	
10,100.0	7,064.7	7,029.2	7,029.2	85.8	140.6	90.05	-224.6	-2,856.5	445.4	219.1	226.22	1.969	
10,128.1	7,064.3	7,028.8	7,028.8	86.6	140.6	90.00	-224.6	-2,856.5	444.5	217.5	226.98	1.958	CC, ES, SF
10,200.0	7,063.2	7,027.7	7,027.7	88.6	140.6	89.86	-224.6	-2,856.5	450.2	221.3	228.94	1.967	
10,300.0	7,061.7	7,026.2	7,026.2	91.3	140.5	89.67	-224.6	-2,856.5	476.6	244.9	231.67	2.057	
10,400.0	7,060.3	7,024.8	7,024.8	94.1	140.5	89.48	-224.6	-2,856.5	521.0	286.6	234.39	2.223	
10,500.0	7,058.8	7,023.3	7,023.3	96.9	140.5	89.29	-224.6	-2,856.5	579.5	342.4	237.12	2.444	
10,600.0	7,057.3	7,021.8	7,021.8	99.6	140.4	89.10	-224.6	-2,856.5	648.2	408.4	239.84	2.703	
10,700.0	7,055.8	7,020.3	7,020.3	102.4	140.4	88.91	-224.6	-2,856.5	724.3	481.7	242.56	2.986	
10,800.0	7,054.3	7,018.8	7,018.8	105.2	140.4	88.72	-224.6	-2,856.5	805.6	560.3	245.29	3.284	
10,900.0	7,052.8	7,017.3	7,017.3	107.9	140.3	88.52	-224.6	-2,856.5	890.7	642.7	248.01	3.591	
11,000.0	7,051.4	7,015.9	7,015.9	110.7	140.3	88.33	-224.6	-2,856.5	978.6	727.9	250.73	3.903	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Offset Design Kaiser Pad Sec.10-T6N-R65W - Kaiser 921-10 - Wellbore #1 - Wellbore #1												Offset Site Error:	0.0 ft
Survey Program: 95-MWD												Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	
8,700.0	7,085.5	7,198.0	7,066.3	48.0	24.1	-104.30	-785.4	-2,368.2	944.8	881.0	63.81	14.806	
8,800.0	7,084.0	7,193.6	7,061.9	50.6	24.1	-102.19	-785.5	-2,368.2	845.7	778.8	66.87	12.647	
8,900.0	7,082.5	7,191.1	7,059.4	53.2	24.1	-101.00	-785.6	-2,368.2	746.8	677.1	69.72	10.711	
9,000.0	7,081.0	7,188.6	7,056.9	55.9	24.1	-99.80	-785.7	-2,368.3	648.2	575.6	72.59	8.930	
9,100.0	7,079.5	7,186.1	7,054.4	58.6	24.1	-98.57	-785.7	-2,368.3	550.1	474.6	75.46	7.290	
9,200.0	7,078.1	7,183.6	7,051.8	61.3	24.1	-97.32	-785.8	-2,368.3	452.9	374.5	78.33	5.781	
9,300.0	7,076.6	7,181.0	7,049.3	64.0	24.0	-96.06	-785.9	-2,368.3	357.1	275.9	81.19	4.398	
9,400.0	7,075.1	7,178.4	7,046.7	66.7	24.0	-94.78	-786.0	-2,368.4	264.5	180.4	84.04	3.147	
9,500.0	7,073.6	7,175.8	7,044.1	69.4	24.0	-93.48	-786.0	-2,368.4	179.9	93.0	86.87	2.071	
9,600.0	7,072.1	7,173.1	7,041.4	72.1	24.0	-92.17	-786.1	-2,368.4	121.5	31.9	89.68	1.355 Level 3	
9,638.0	7,071.6	7,172.1	7,040.4	73.2	24.0	-91.66	-786.1	-2,368.4	115.4	24.7	90.74	1.272 Level 3, CC, ES, SF	
9,700.0	7,070.6	7,170.4	7,038.7	74.9	24.0	-90.84	-786.2	-2,368.5	131.0	38.5	92.45	1.417 Level 3	
9,800.0	7,069.2	7,167.7	7,036.0	77.6	24.0	-89.50	-786.3	-2,368.5	198.8	103.6	95.18	2.089	
9,900.0	7,067.7	7,165.0	7,033.3	80.3	24.0	-88.15	-786.3	-2,368.5	286.2	188.3	97.87	2.924	
10,000.0	7,066.2	7,162.3	7,030.6	83.1	24.0	-86.78	-786.4	-2,368.6	379.8	279.3	100.51	3.779	
10,100.0	7,064.7	7,159.5	7,027.8	85.8	24.0	-85.41	-786.5	-2,368.6	476.0	372.9	103.10	4.617	
10,200.0	7,063.2	7,156.6	7,024.9	88.6	24.0	-84.04	-786.6	-2,368.6	573.5	467.9	105.62	5.430	
10,300.0	7,061.7	7,153.8	7,022.1	91.3	24.0	-82.65	-786.7	-2,368.7	671.7	563.6	108.07	6.215	
10,400.0	7,060.3	7,150.9	7,019.2	94.1	24.0	-81.26	-786.7	-2,368.7	770.4	659.9	110.46	6.974	
10,500.0	7,058.8	7,148.0	7,016.3	96.9	24.0	-79.87	-786.8	-2,368.7	869.3	756.6	112.77	7.709	
10,600.0	7,057.3	7,145.1	7,013.4	99.6	24.0	-78.48	-786.9	-2,368.8	968.5	853.5	115.00	8.422	

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum


Reference Depths are relative to WELL @ 4823.5ft (Original Well Elev) Coordinates are relative to: Kaiser D-10HN

Offset Depths are relative to Offset Datum

Coordinate System is US State Plane 1983, Colorado Northern Zone

Central Meridian is -105.500000 °

Grid Convergence at Surface is: 0.55°

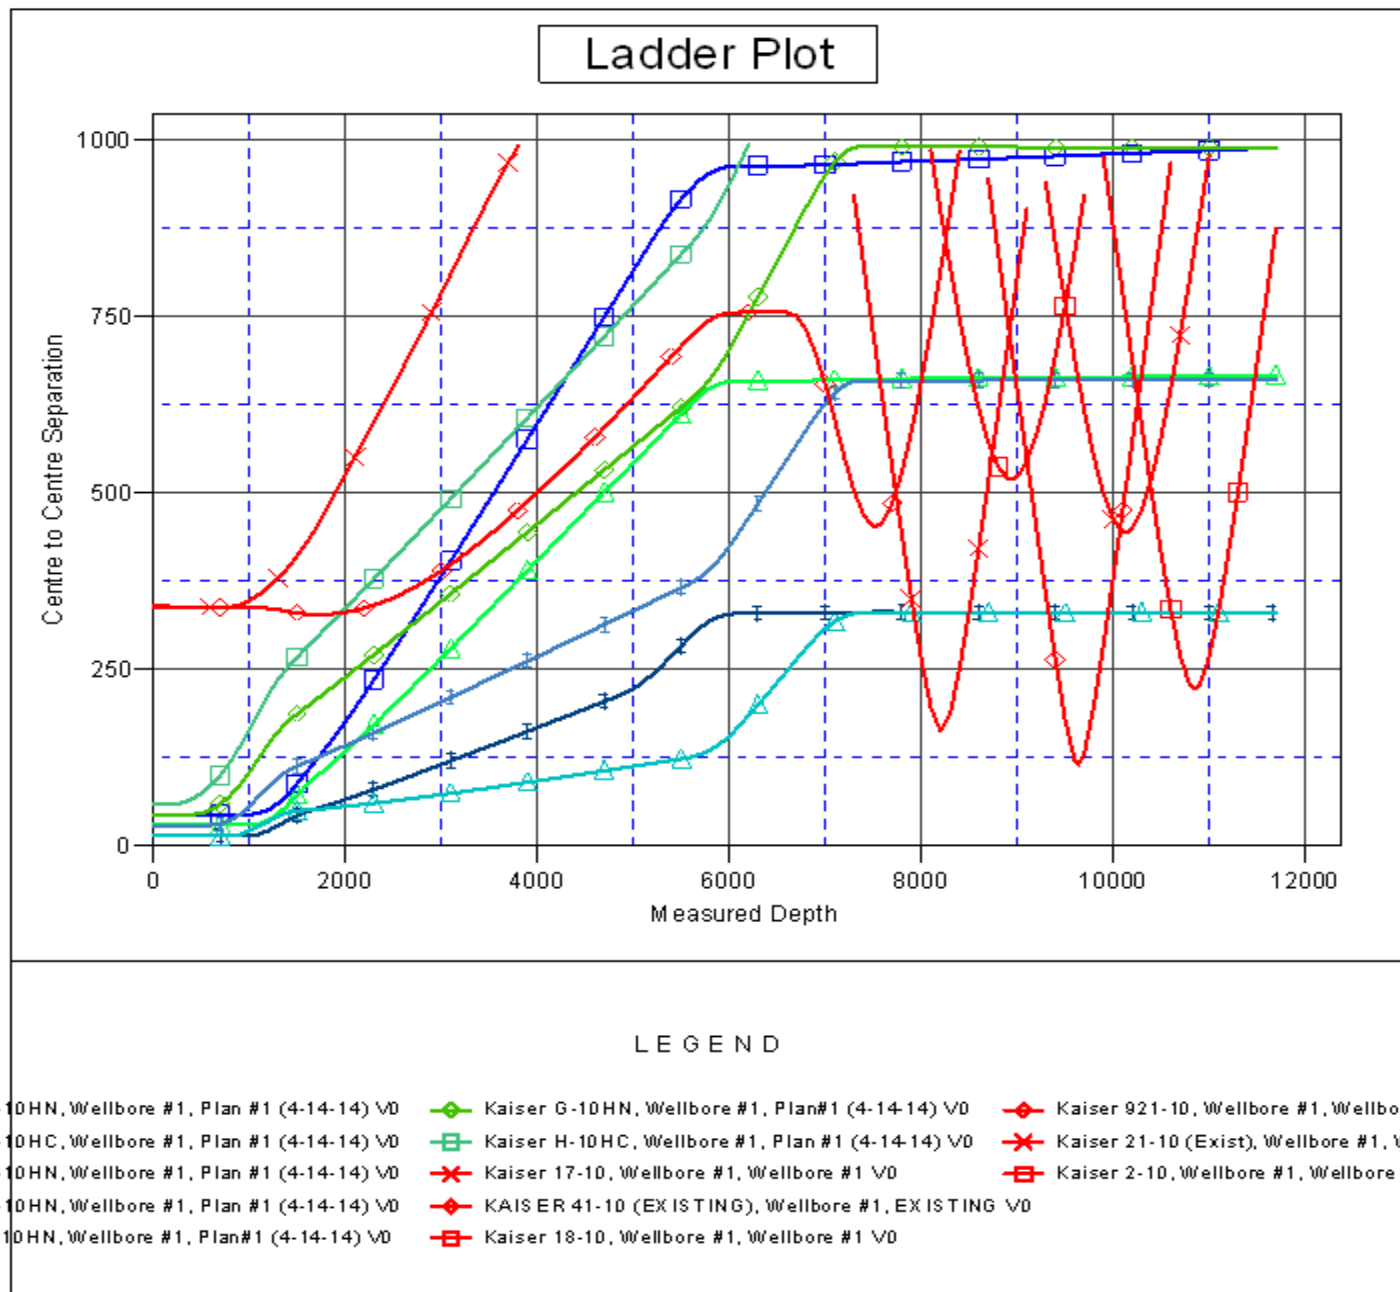

Company:	Bayswater Exploration & Production, LLC	Local Co-ordinate Reference:	Well Kaiser D-10HN
Project:	SEC.10-T6N-R65W	TVD Reference:	WELL @ 4823.5ft (Original Well Elev)
Reference Site:	Kaiser 10-D Pad Sec.10-T6N-R65W	MD Reference:	WELL @ 4823.5ft (Original Well Elev)
Site Error:	0.0ft	North Reference:	True
Reference Well:	Kaiser D-10HN	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	Landmark
Reference Design:	Plan #1 (4-14-14)	Offset TVD Reference:	Offset Datum

Reference Depths are relative to WELL @ 4823.5ft (Original Well Elev) Coordinates are relative to: Kaiser D-10HN
 Offset Depths are relative to Offset Datum Coordinate System is US State Plane 1983, Colorado Northern Zone
 Central Meridian is -105.500000 ° Grid Convergence at Surface is: 0.55°

