

NOBLE ENERGY INC.
 DINNER 01-44
 SESE 1-4N-65W
 860' FSL & 460' FEL
 Weld County, Colorado
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 7/24/2014

API: 05-123-17082
 COGCC #


GL Elev: 4800'
 KB Elev: 4811'

Spud Date: 7/13/1993

Surface Casing :
 8 5/8" 24# @ 449'
 Cement: 300 sx
 TOC: Surface

TOC @ 6240'

Production Casing :
 4 1/2" 15.1# @ 7229'
 Cement: 200 sx
 TD: 7/18/1993

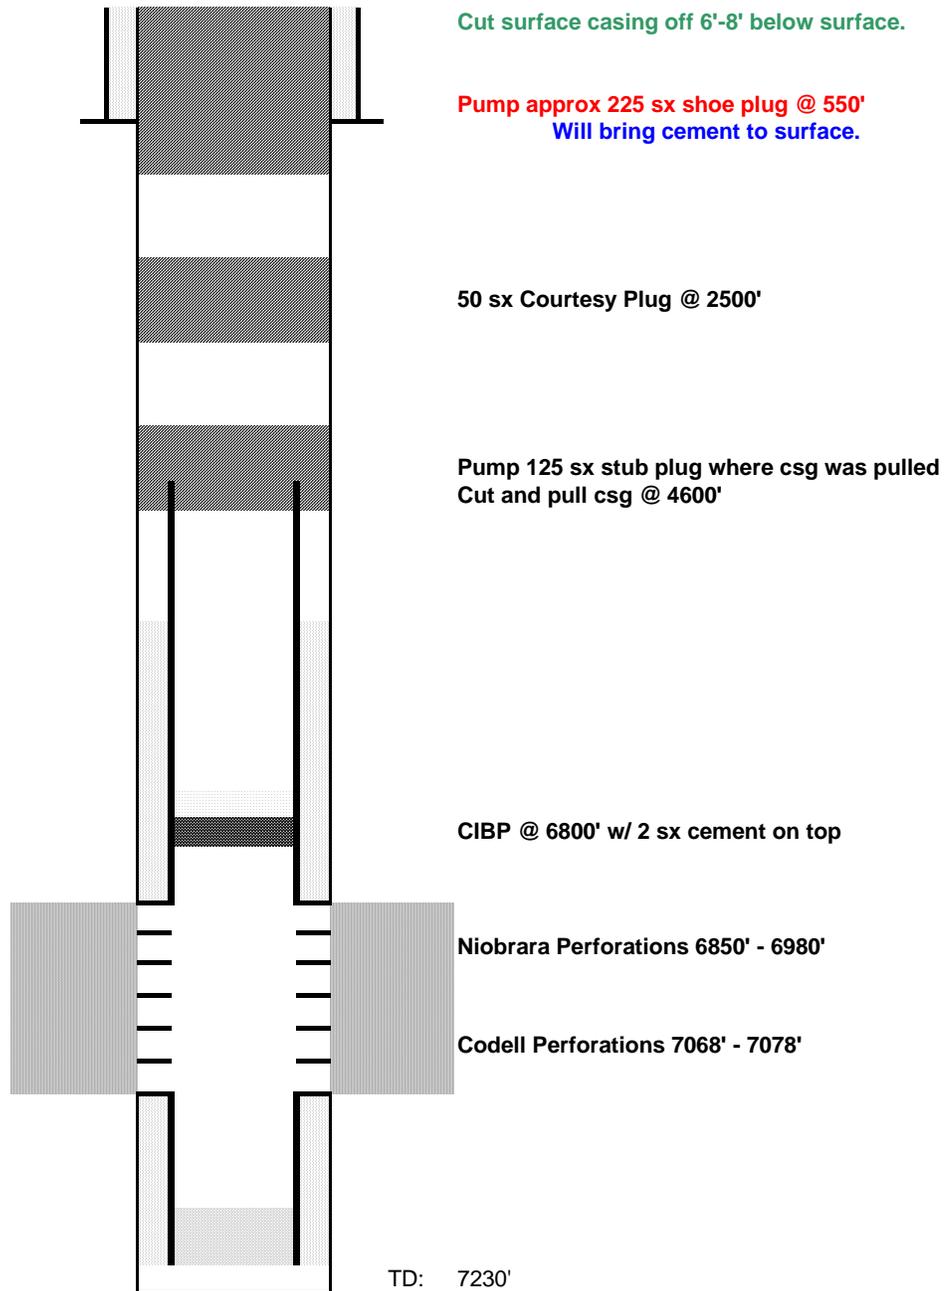

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx shoe plug @ 550'
 Will bring cement to surface.

50 sx Courtesy Plug @ 2500'

Pump 125 sx stub plug where csg was pulled
 Cut and pull csg @ 4600'

CIBP @ 6800' w/ 2 sx cement on top

Niobrara Perforations 6850' - 6980'

Codell Perforations 7068' - 7078'

TD: 7230'