NABORS COMPLETION & PRODUCTION SERVICES CO.

GAMMA RAY / CCL CEMENT BOND / VDL

Company NOBLE ENERGY, INC
Well FARAMIR FARMS 06-32
Field WATTENBERG
County WELD
State COLORADO

Company	NOBLE ENERGY, INC
Well	FARAMIR FARMS 06-32
Field	WATTENBERG
County	WELD
State	COLORADO
API #:	05-123-19254
Location:	NW/SW
	SEC 6 TWP 3N RGE 64W
Other Services	

		Elevation
Permanent Datum	GROUND LEVEL	Elevation 4843
Log Measured From	KELLY BUSHING,11'	
Drilling Measured From	KELLY BUSHING	

Elevation
K.B. 4843
D.F.
G.L. 4832

Date	8-7-14
Run Number	
Depth Driller	
Depth Logger	
Bottom Logged Interval	3900'
Top Log Interval	SURFACE
Casing Size	4 1/2"
Type Fluid	WATER
Max. Recorded Temp.	
Estimated Cement Top	
Time Well Ready	
Time Logger On Bottom	
Unit Number	92-0438
Tool Size / ID Number	2 3/4"TEKCO
Location	FT.LUPTON
Recorded By	BRACKELSBERG
Witnessed By	MR ZWAGSTRA

Borehole Record				Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String				
Prot. String				
Production String				
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING
NABORS COMPLETION AND PRODUCTION SERVICES CO.
NOTE: LOG NOT CORROLATED

Database File:	cblfarimer6-32.db
Dataset Pathname:	pass2
Presentation Format:	nuexbond
Dataset Creation:	Thu Aug 07 11:57:40 2014 by Log SCH 120430
Charted by:	Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150
95	CCL	-4.5
340	TT3 (usec)	240

0	Amplified Amplitude (mV)	20
0	Amplitude (mV)	100

200	VDL	1200

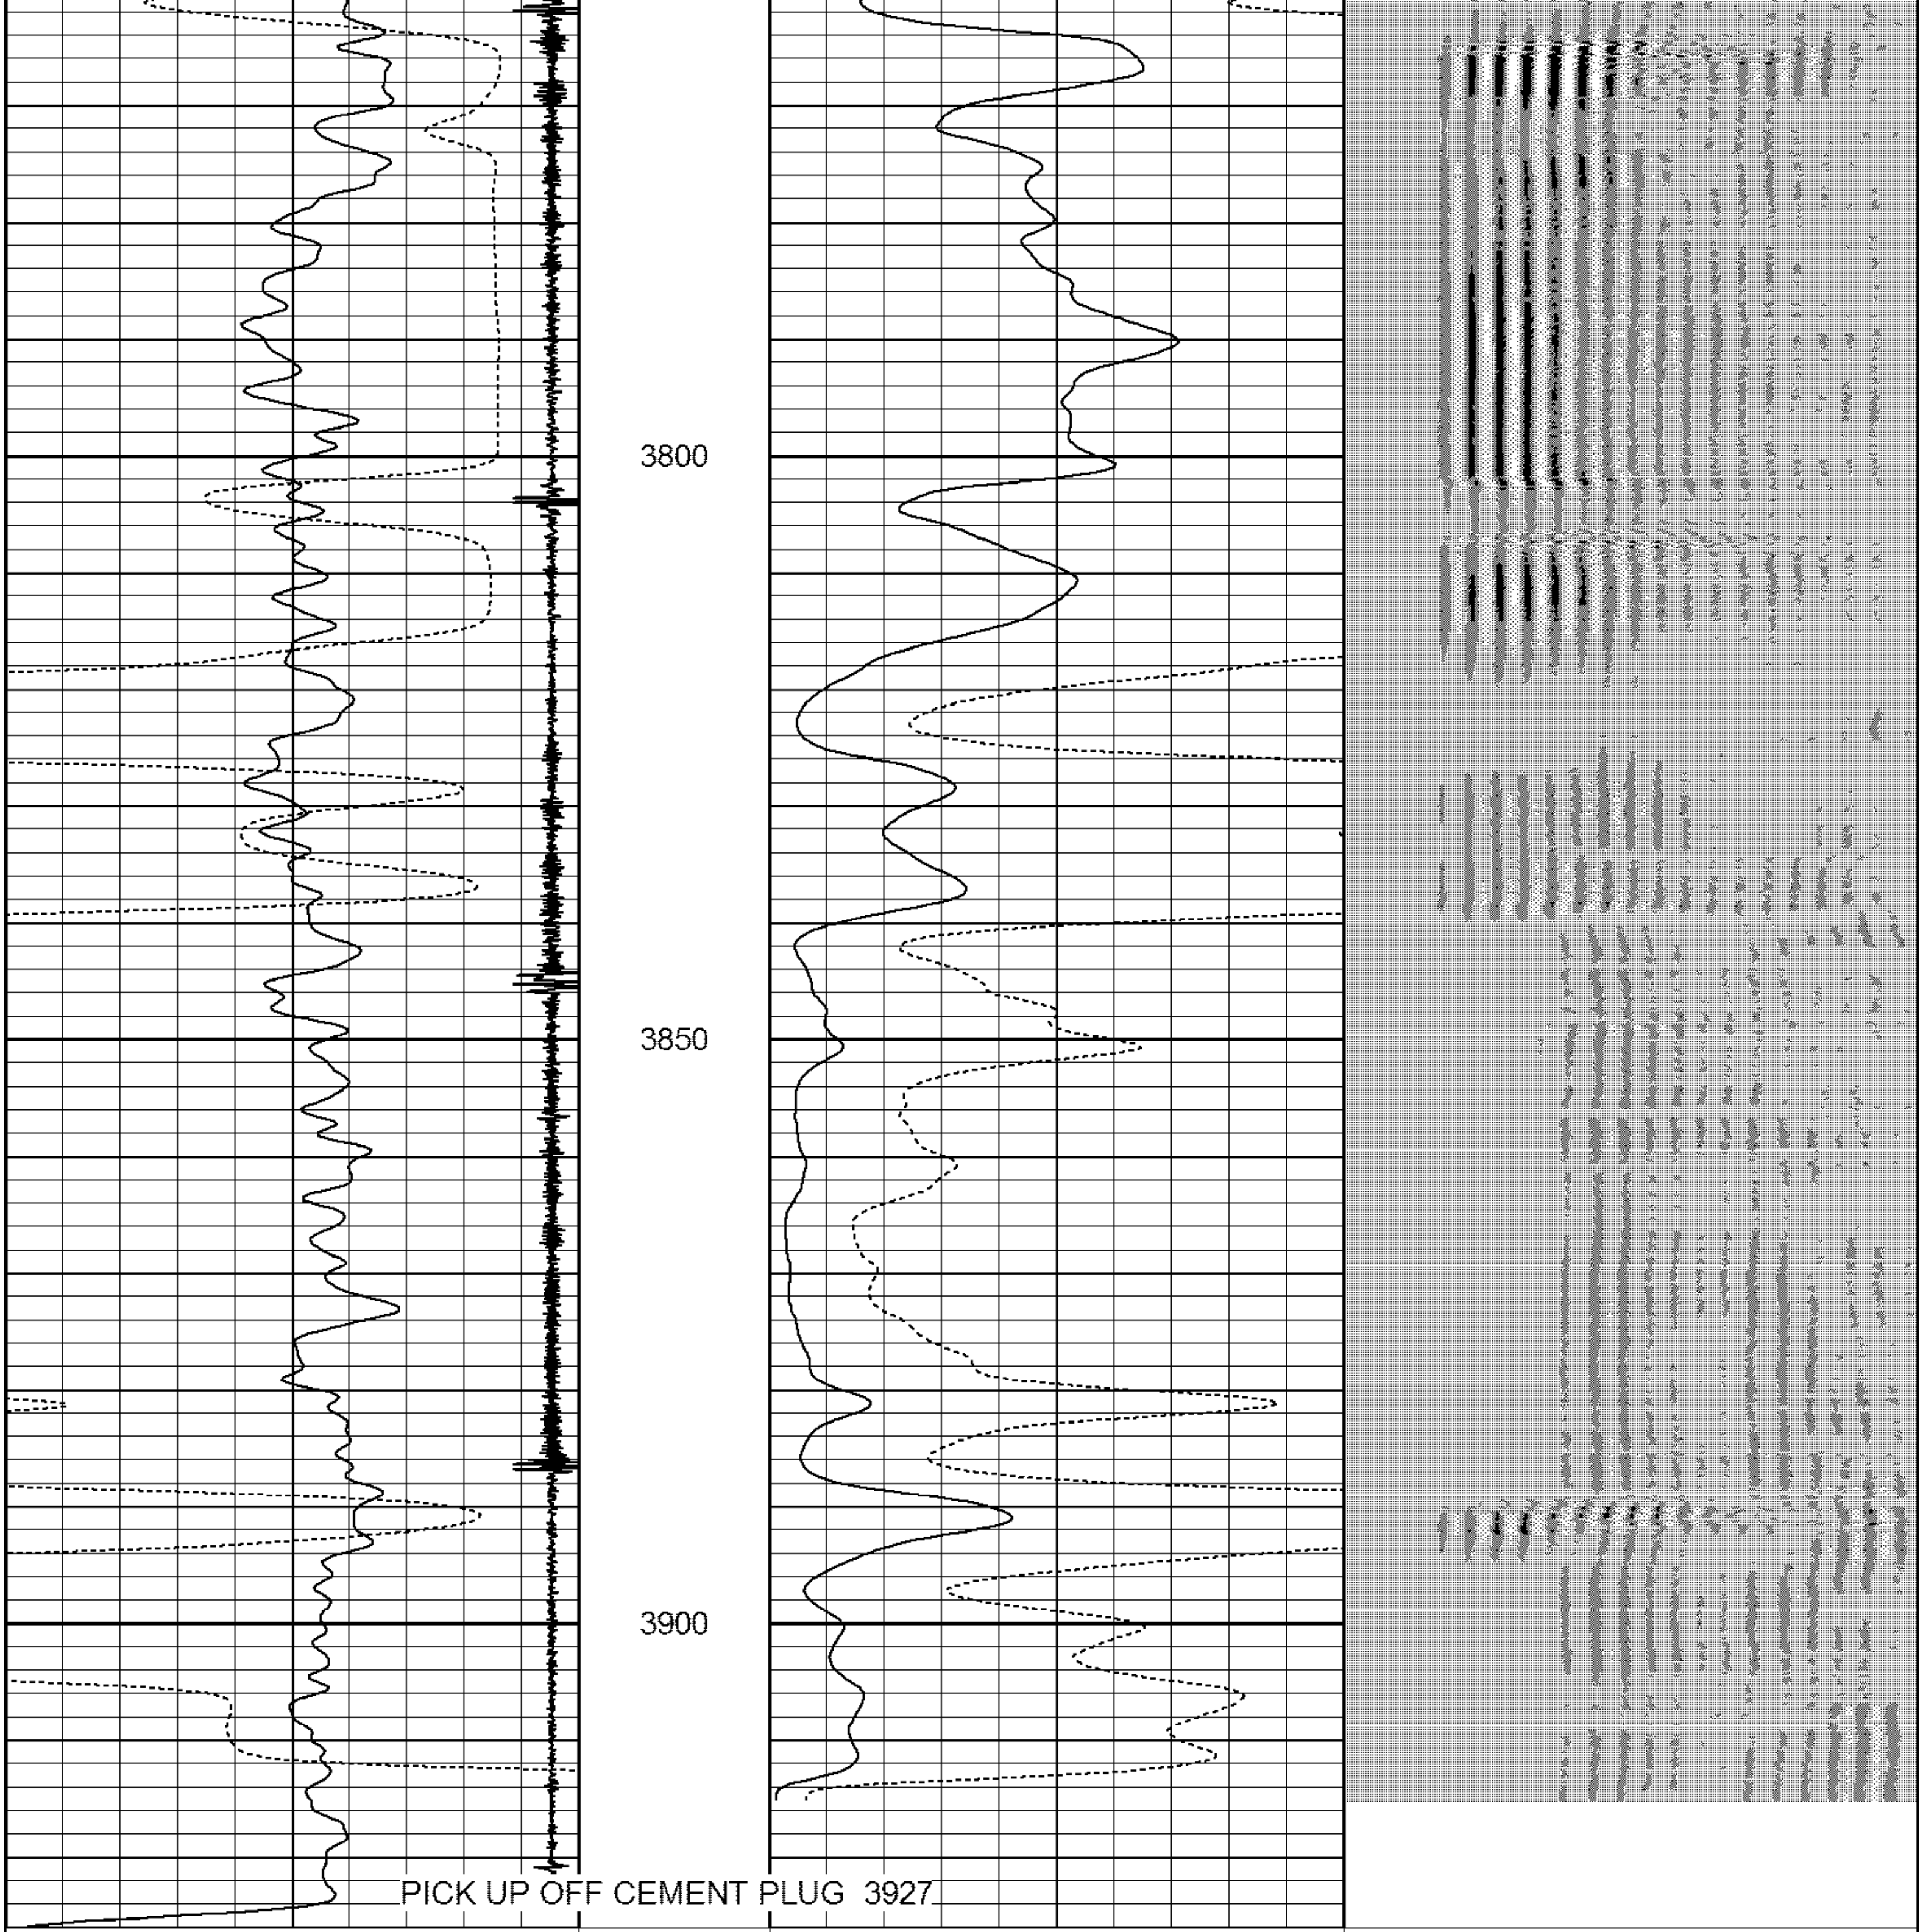

0	Gamma Ray (GAPI)	150	0	Amplified Amplitude (mV)	20	200	VDL	1200
95	CCL	-4.5	0	Amplitude (mV)	100		▨ ▨ ▨ ■	
340	TT3 (usec)	240						