

NOBLE ENERGY INC.
 VON REYN MC09-05
 SWNW 9-1N-69W
 2001 FNL & 671 FWL
 BOULDER COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 9/23/2014

API: 05-013-06304
 COGCC #


GL Elev: 5187'
 KB Elev: 5199'

Spud Date: 5/9/1993

Surface Casing :
 8 5/8" 24# @ 700'
 Cement: 350 sx
 TOC: Surface

TOC @ 6746'

Production Casing :
 3 1/2" 9.30# N-80 @ 7936'
 Cement: 300 sx
 TD: 5/21/1993

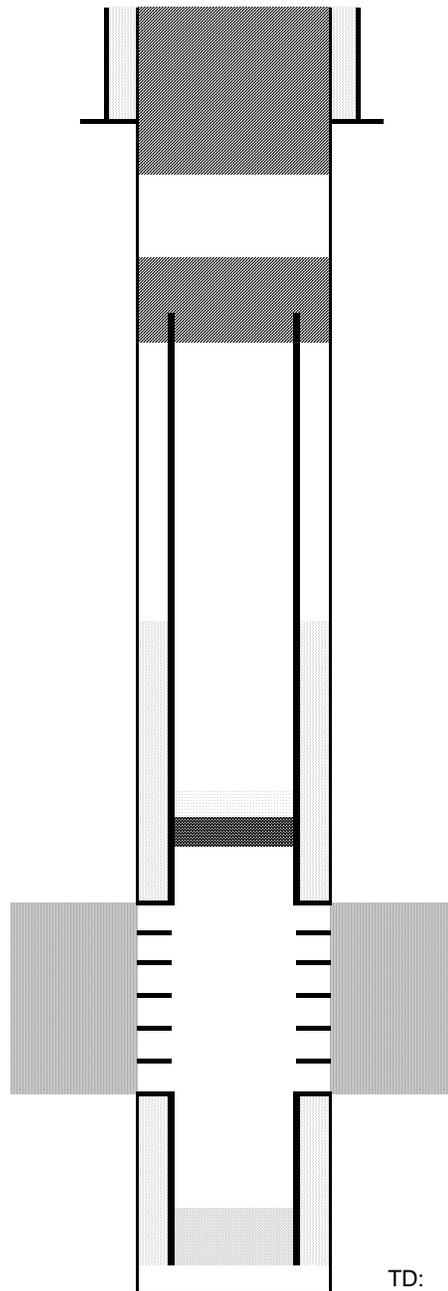

Cut surface casing off 6'-8' below surface.

Pump approx 290 sx shoe plug @ 750'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 7348' w/ 2 sx cement on top

Niobrara Perforations 7398' - 7661'

Codell Perforations 7780' - 7793'

TD: 7954'