

Company: Noble Energy Inc

Well: Rico LC29-74-1HNA
Field: Wildcat
County: Weld
State: Colorado

County: Weld		USI-LITE	
Field: Wildcat			
Location: SWSE Sec 29 T9N R59W			
Well: Rico LC29-74-1HNA			
Company: Noble Energy Inc			
LOCATION			
Permanent Datum:		GL	Elev: K.B. 4895.0 F
Log Measured From:		KB	G.L. 4871.0 F
Drilling Measured From:		KB	D.F. 4894.0 F
Logging Date	29-Jun-2014	API Serial No.	
Run Number	Run 1	05-123-38777-0000	
Depth Driller	6415.0 F	Section 29	
Schlumberger Depth	6415.0 F	Township	
Bottom Log Interval	6410.0 F	Range 59W	
Top Log Interval	-999.2 F		
Casing Fluid Level	8.0 F		
Salinity			
Density	8.40 LB/G		
Fluid Level	8.0 F		
BIT/CASING/TUBING STRING			
Bit Size	8.750 IN		
From	640.0 F		
To	6415.0 F		
Casing Size	7.00 IN		
Weight	26.00 LB/F		
Grade	P110		
From	24.0 F		
To	6408.3 F		
Max Recorded Temp	220.0		
Logger on bottom (date)	29-Jun-2014		
Location	Fort Morgan CO		
Recorded By	Keri Ondrus		
Witnessed By			

DEPTH SUMMARY LISTING

DEPTH SYSTEM EQUIPMENT

Depth Measuring Device	Tension Device	Logging Cable
Type: Serial Number: Calibration Date: Calibration Cable Type: Wheel Correction 1: Wheel Correction 2:	Type: Serial Number: 1109 Calibration Date: Calibrator Serial Number: Number Of Calibration Points: Calibration RMS: Calibration Peak Error:	Serial Number: Length: 12000.00000

DISCLAIMER


THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIIONS ON USE OF THE RECORDED-DATA (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE OF ANR RELIANCE UPN THE RECORDED-DATA; AND (c)CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISIONS MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA


Toolstring run as per toolsketch.
0 PSI repeat pass. 2500 PSI main pass.
Estimated TOC @ 1000'. Expected TOC @ 1000'.
11.5 PPG tuned spacer 12.5 PPG lead cement 13.8 PPG tail cement.
Top of 4.5" liner at 6263.8'.
Bottom log interval at 6210' due to loss of tension.
Bottom hole temperature 220 degF.
High resolution repeat pass ran from 1570-1840' under 2500 PSI.


Thank you for choosing Schlumberger Wireline.
SLB crew Jay Musgrave Troy Ocanas Nolan Welsh and Keri Ondrus.


Main Pass


Company: Noble Energy Inc
Well: Rico LC29-74-1HNA
Field: Wildcat

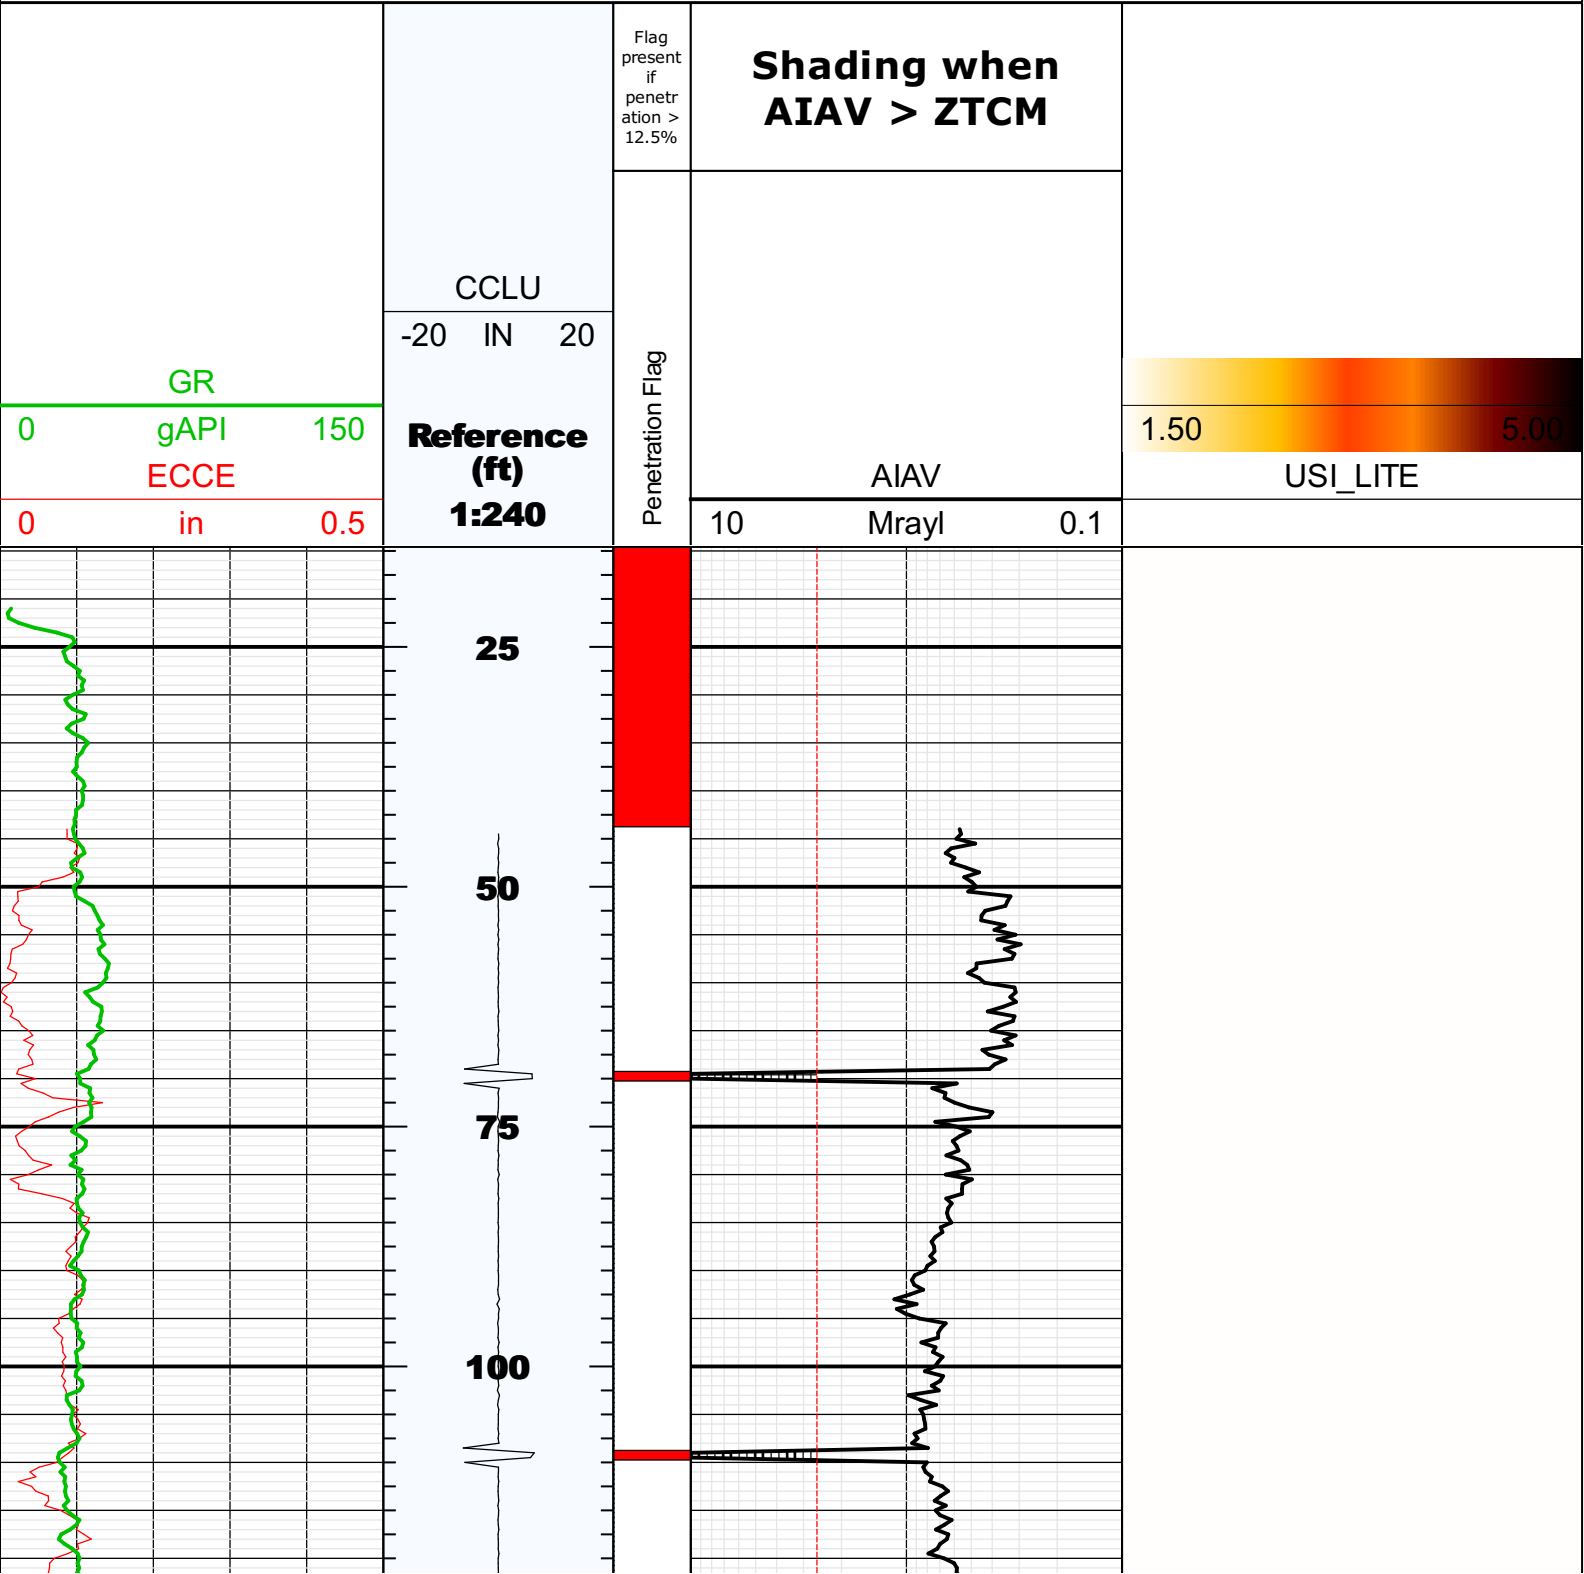


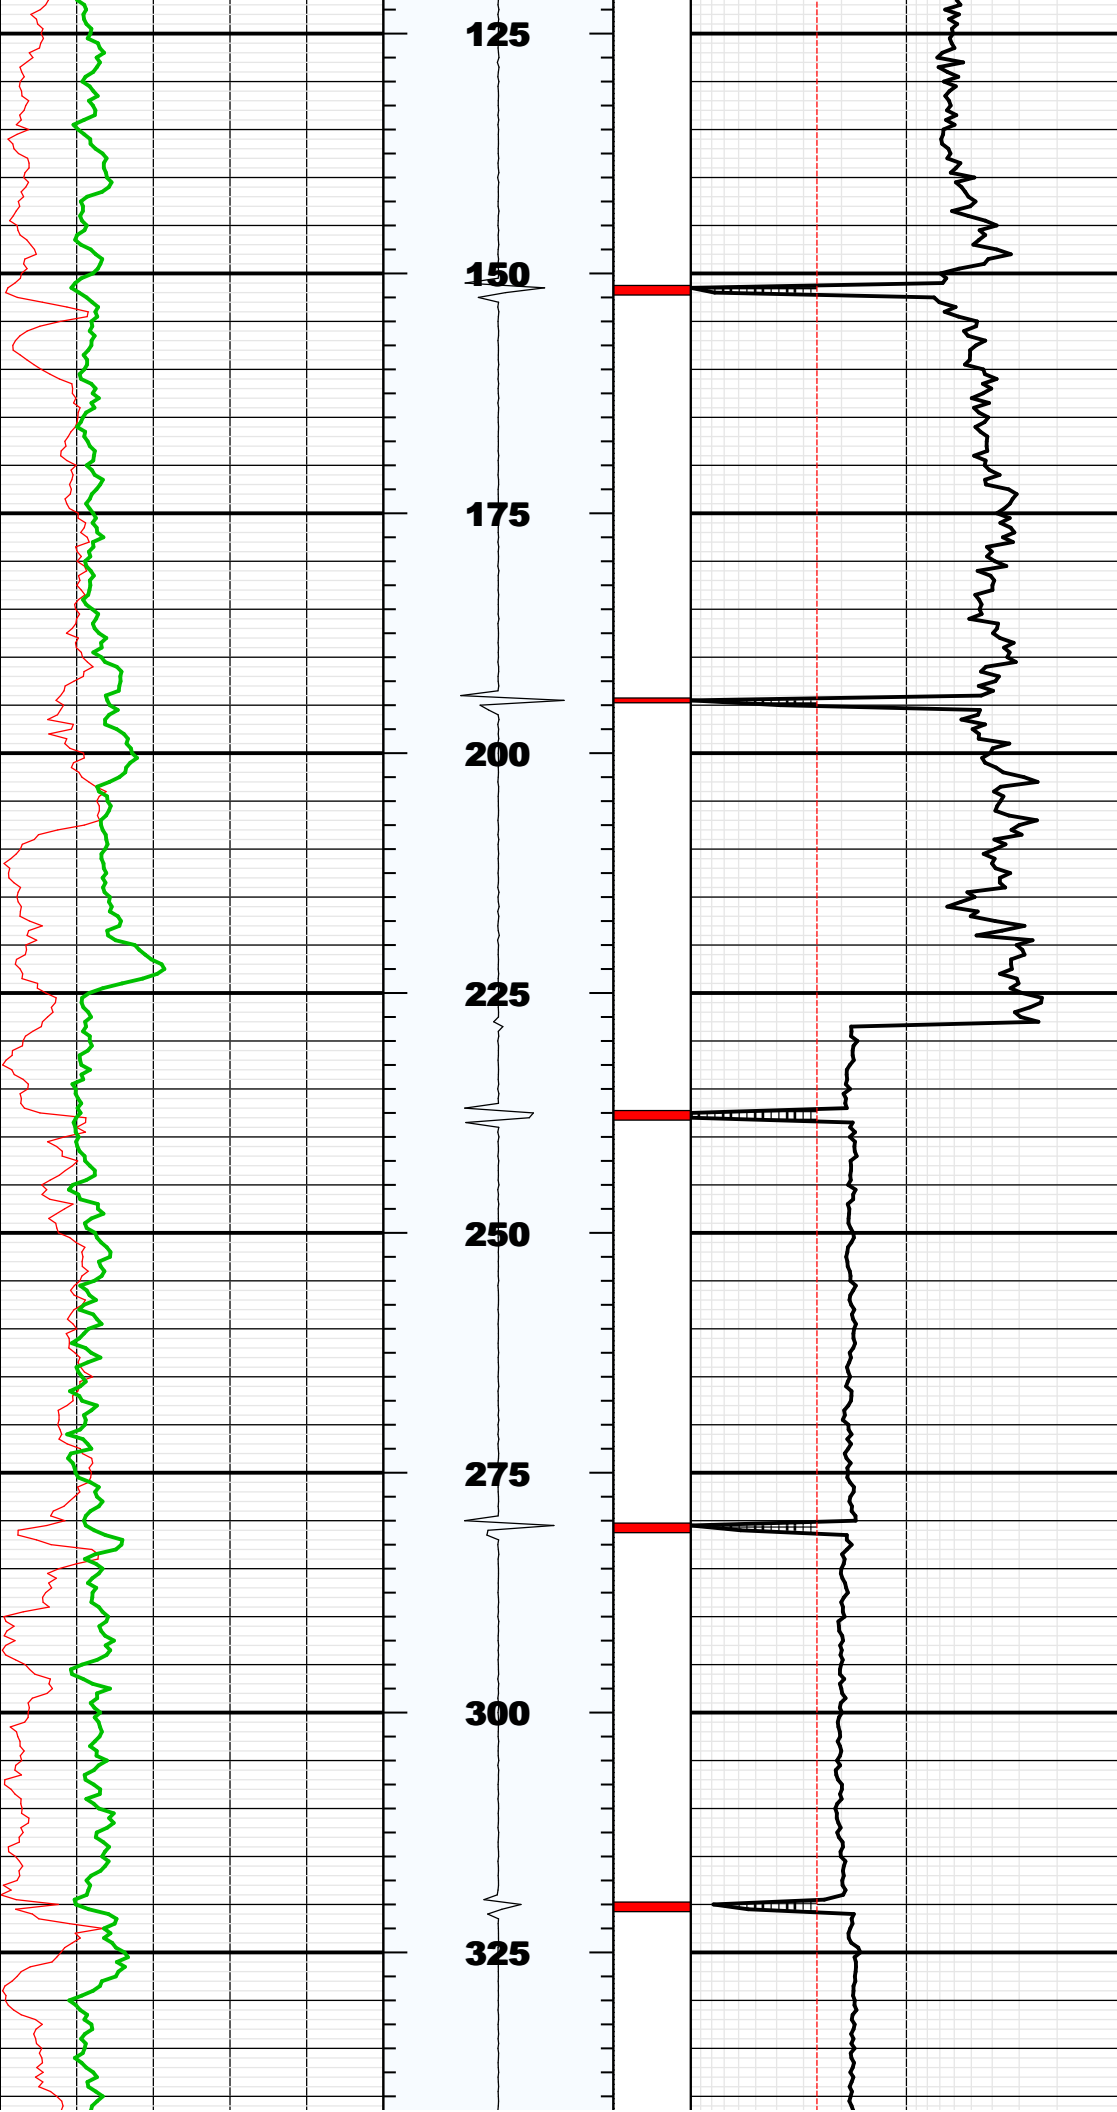


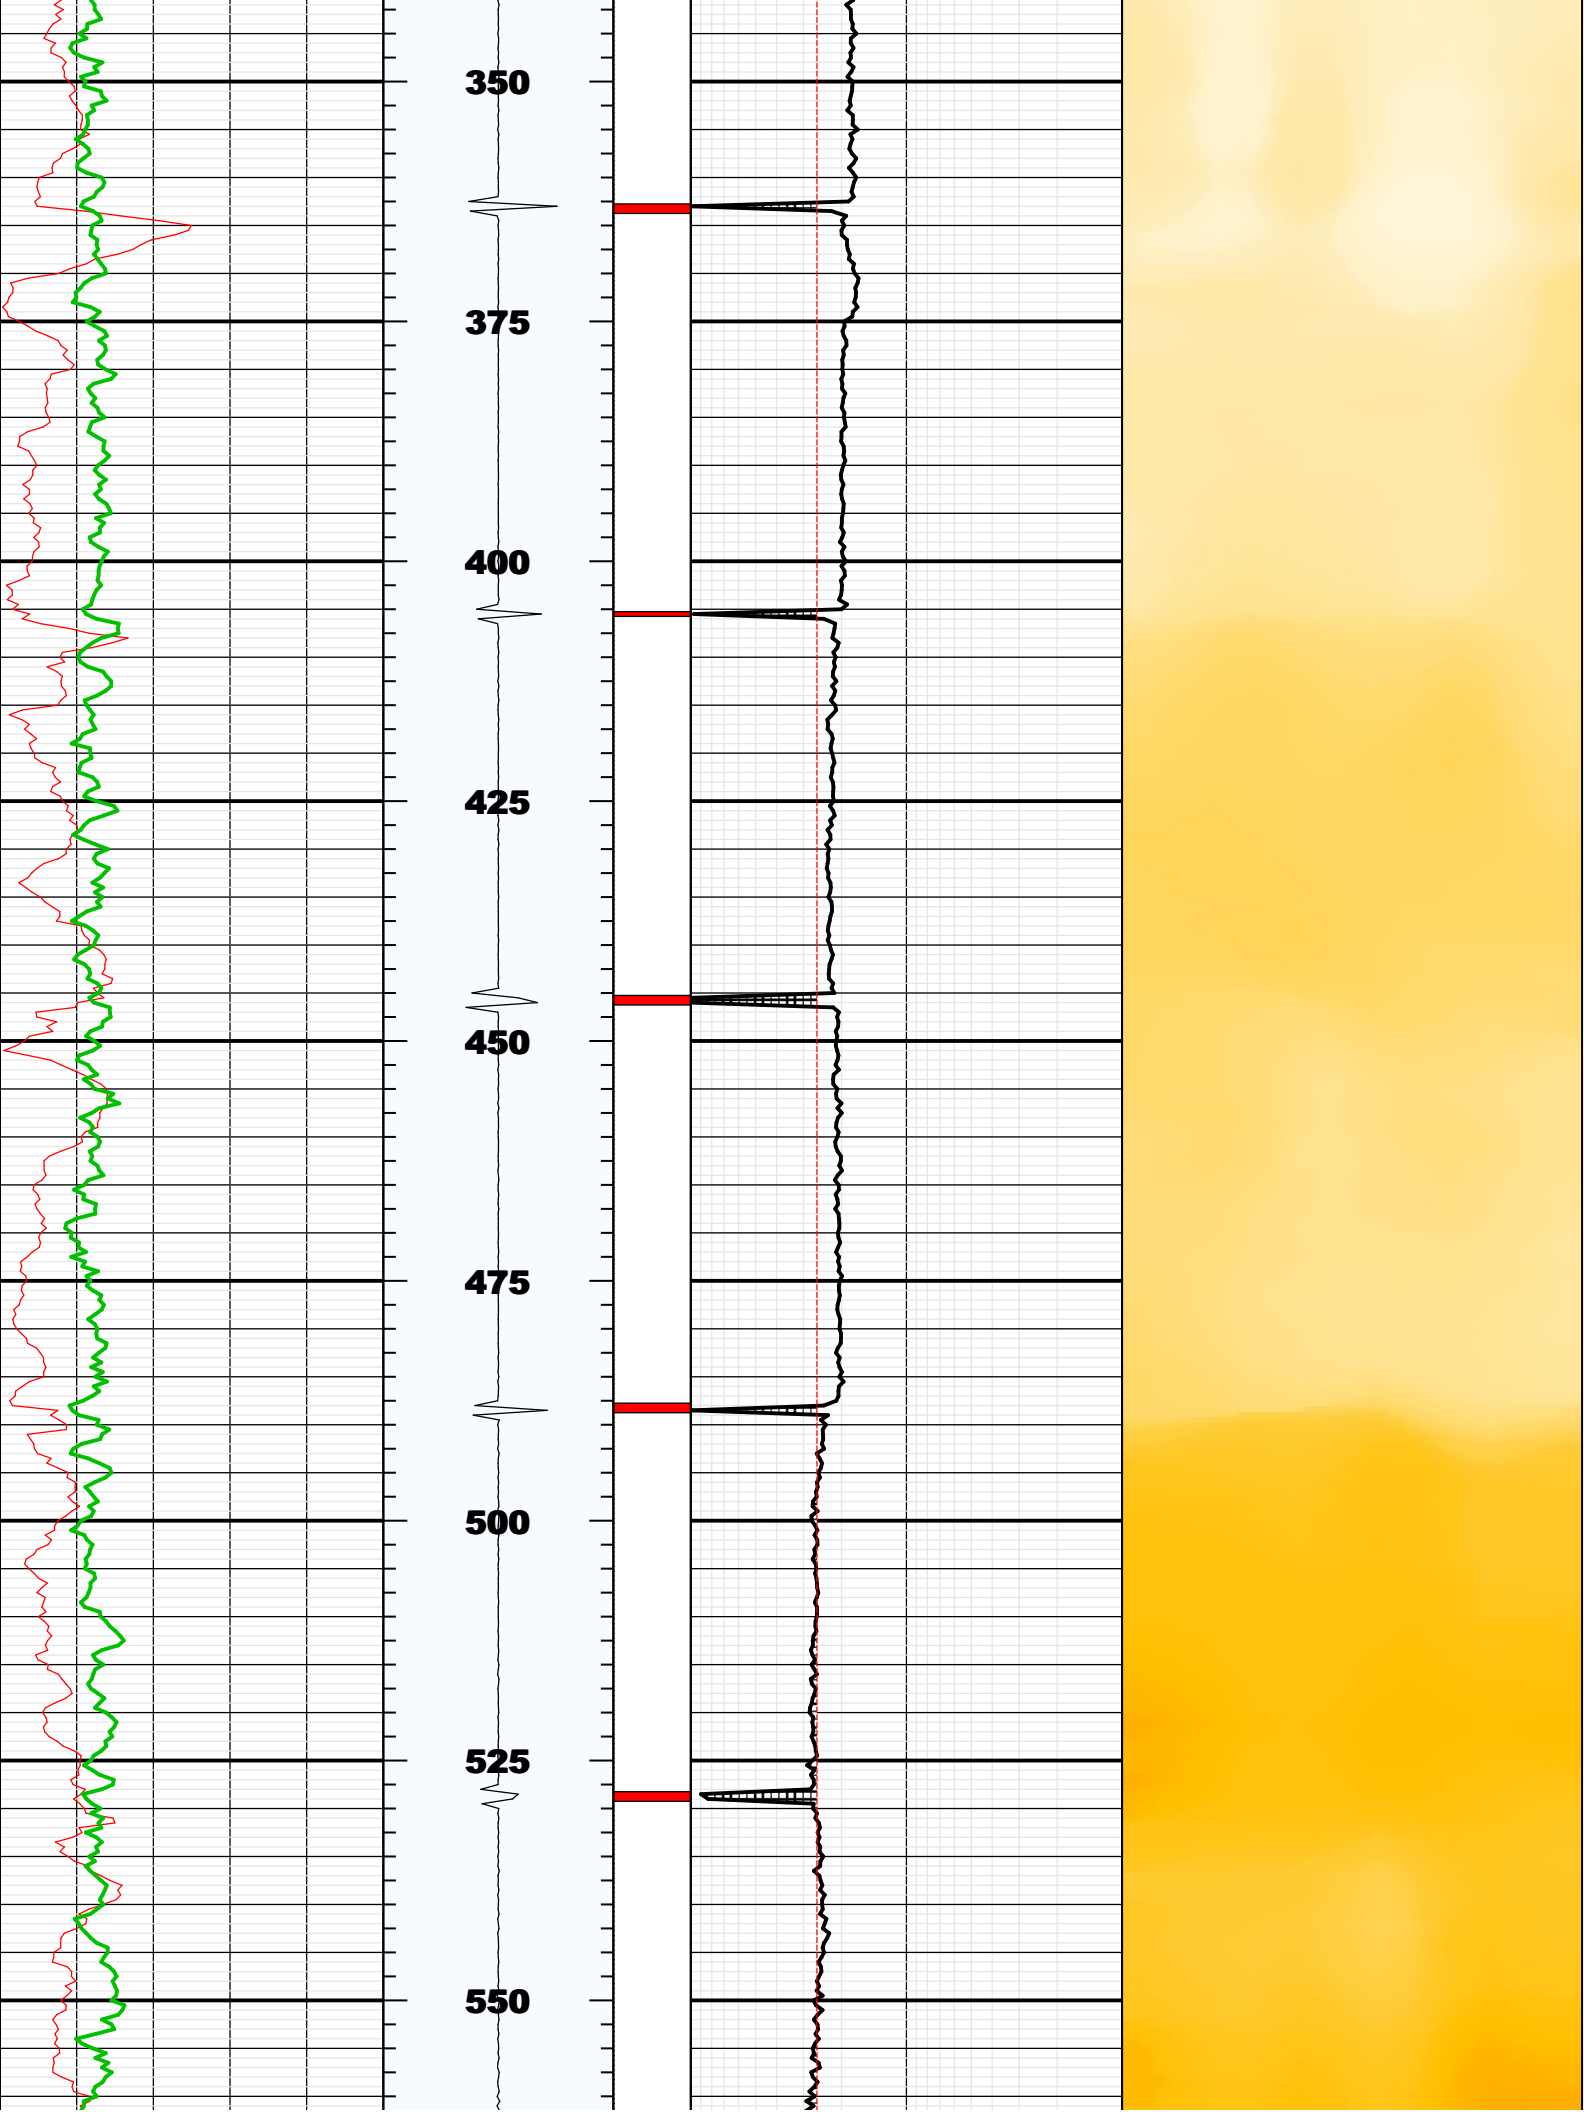


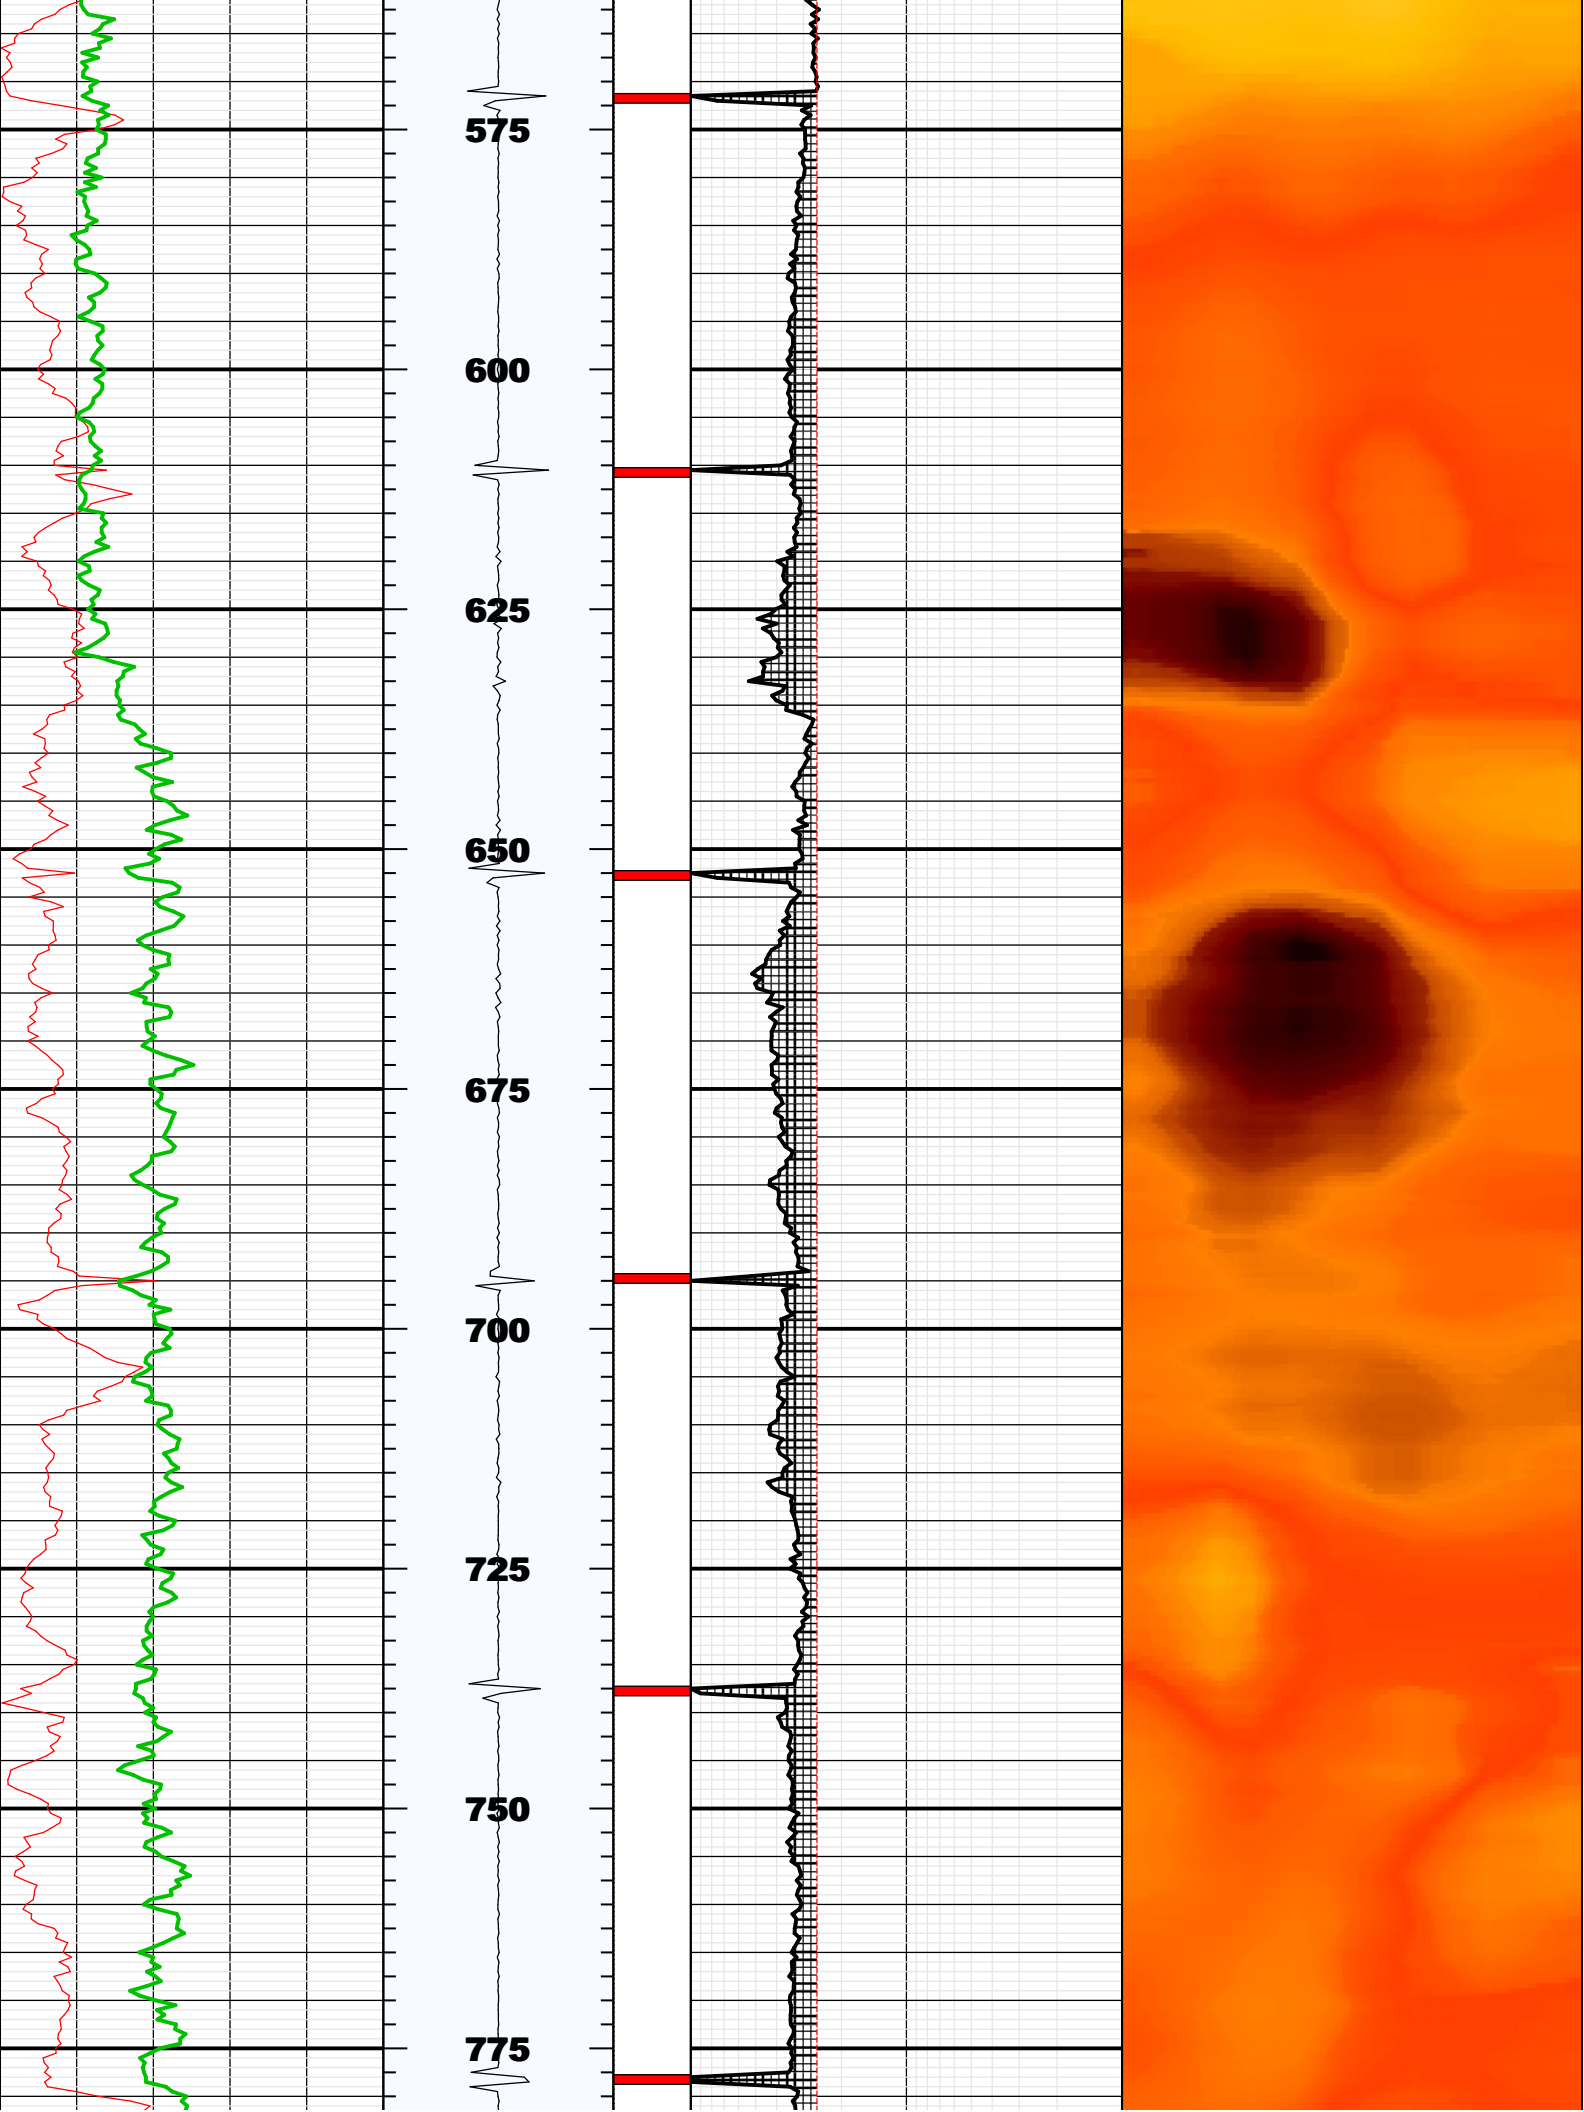


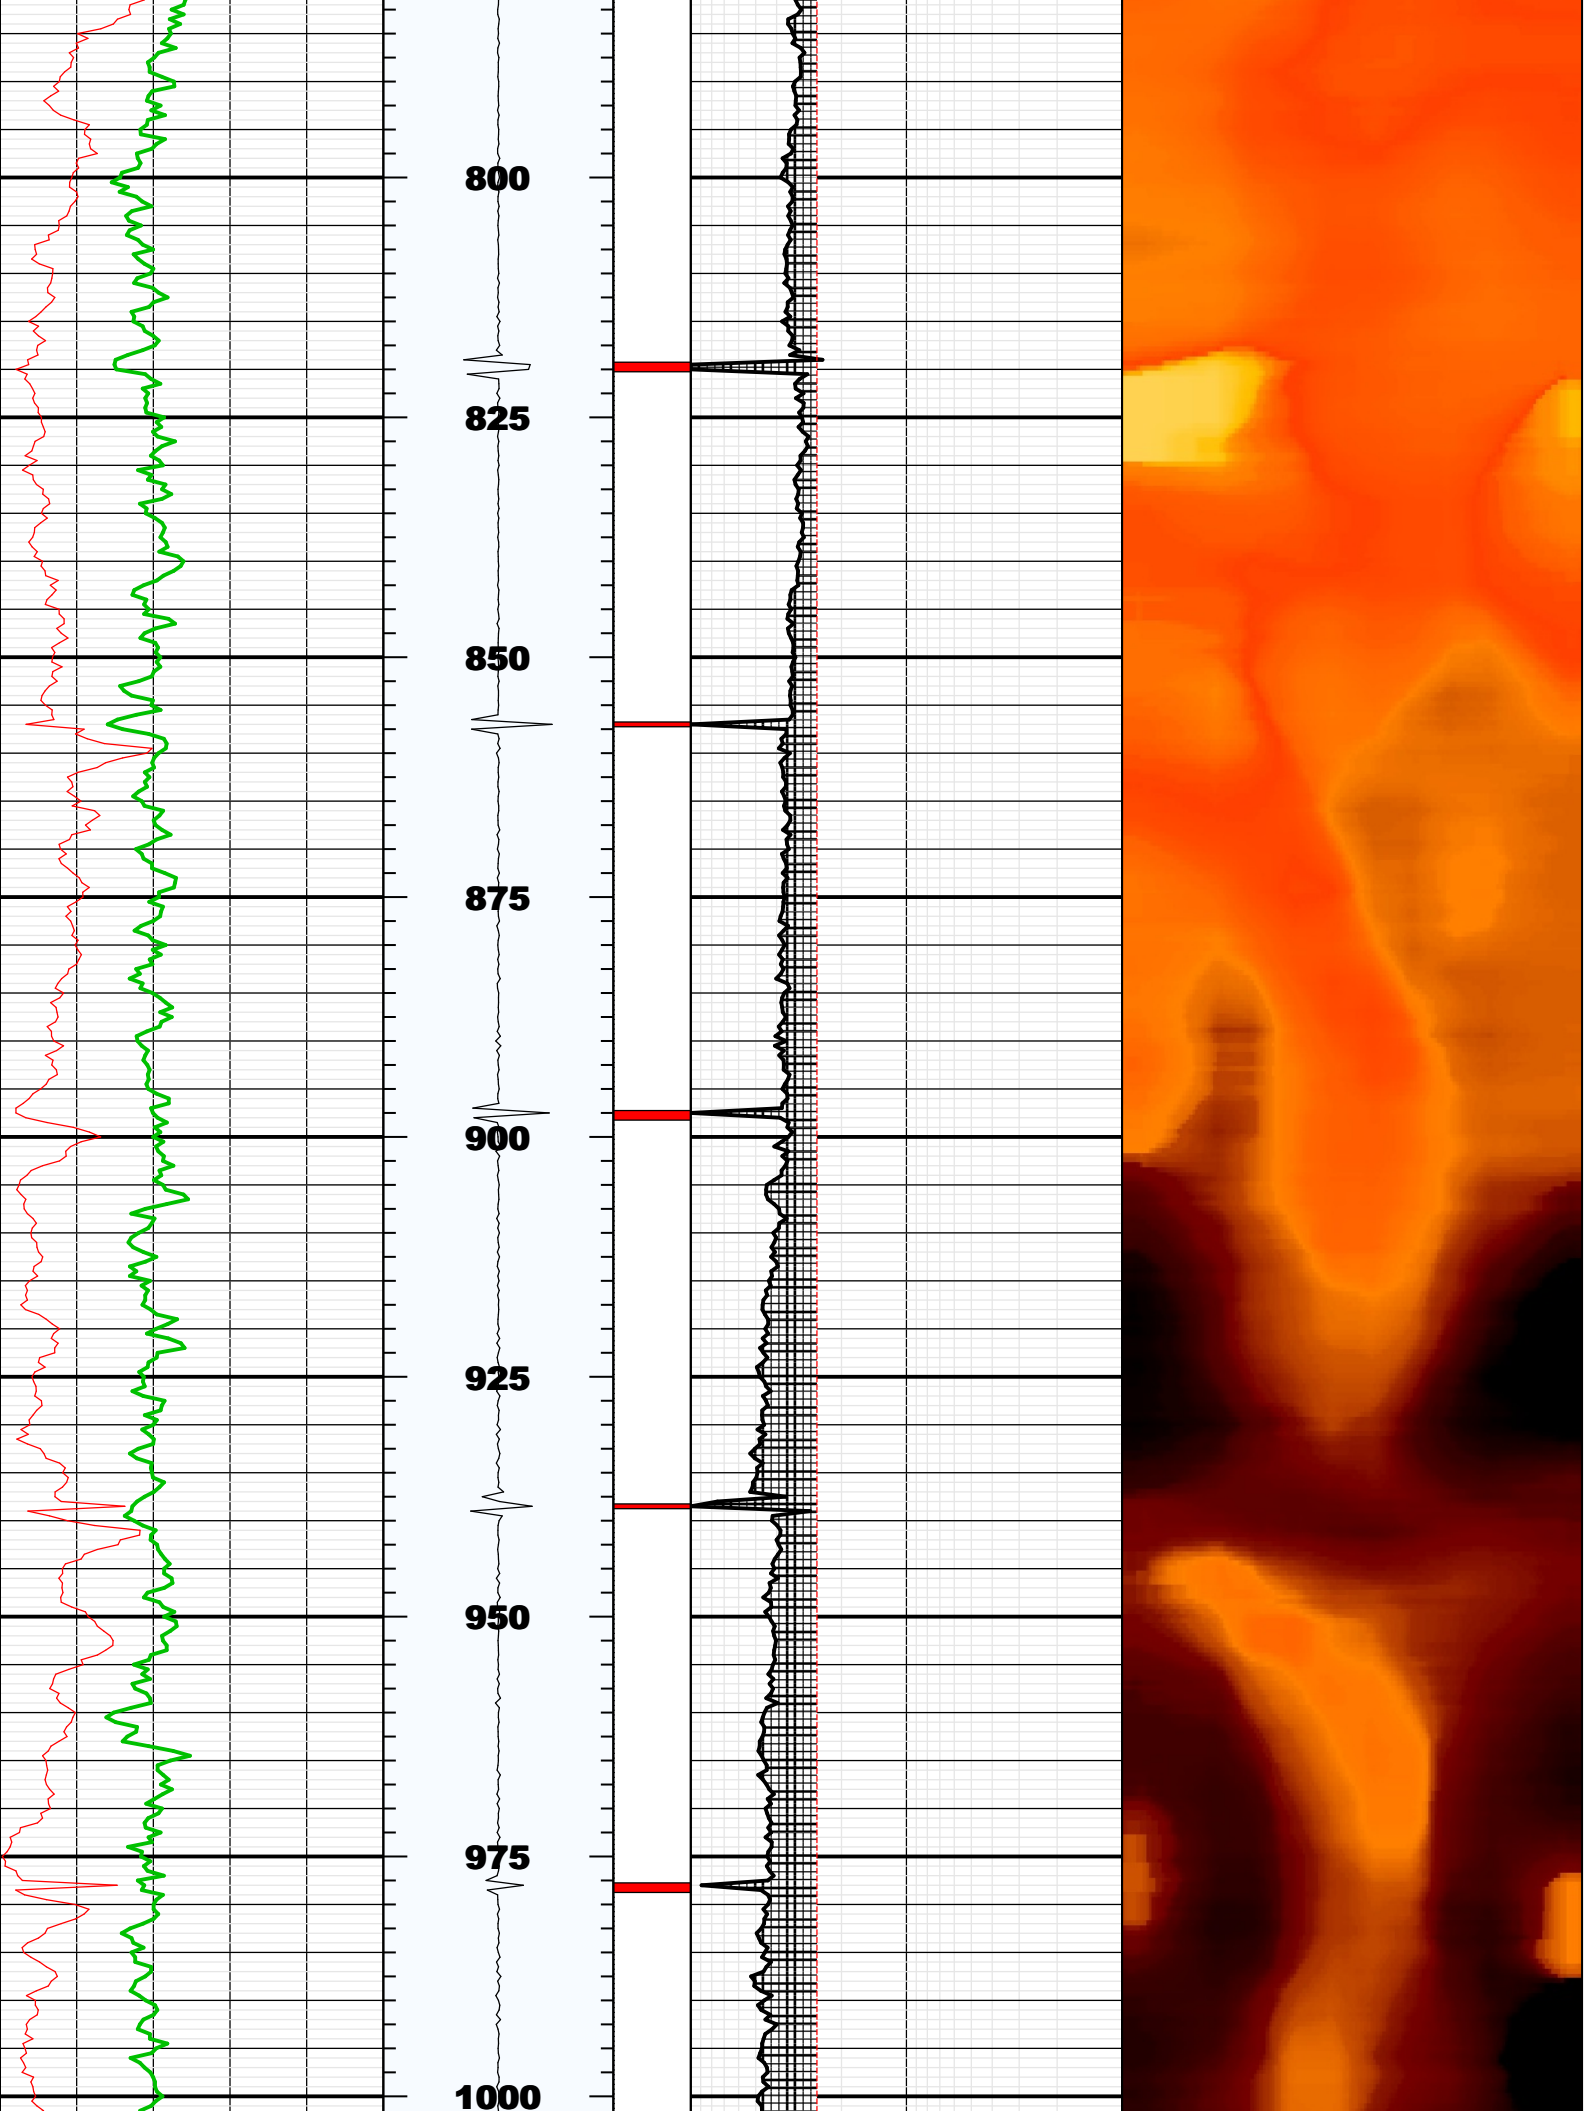


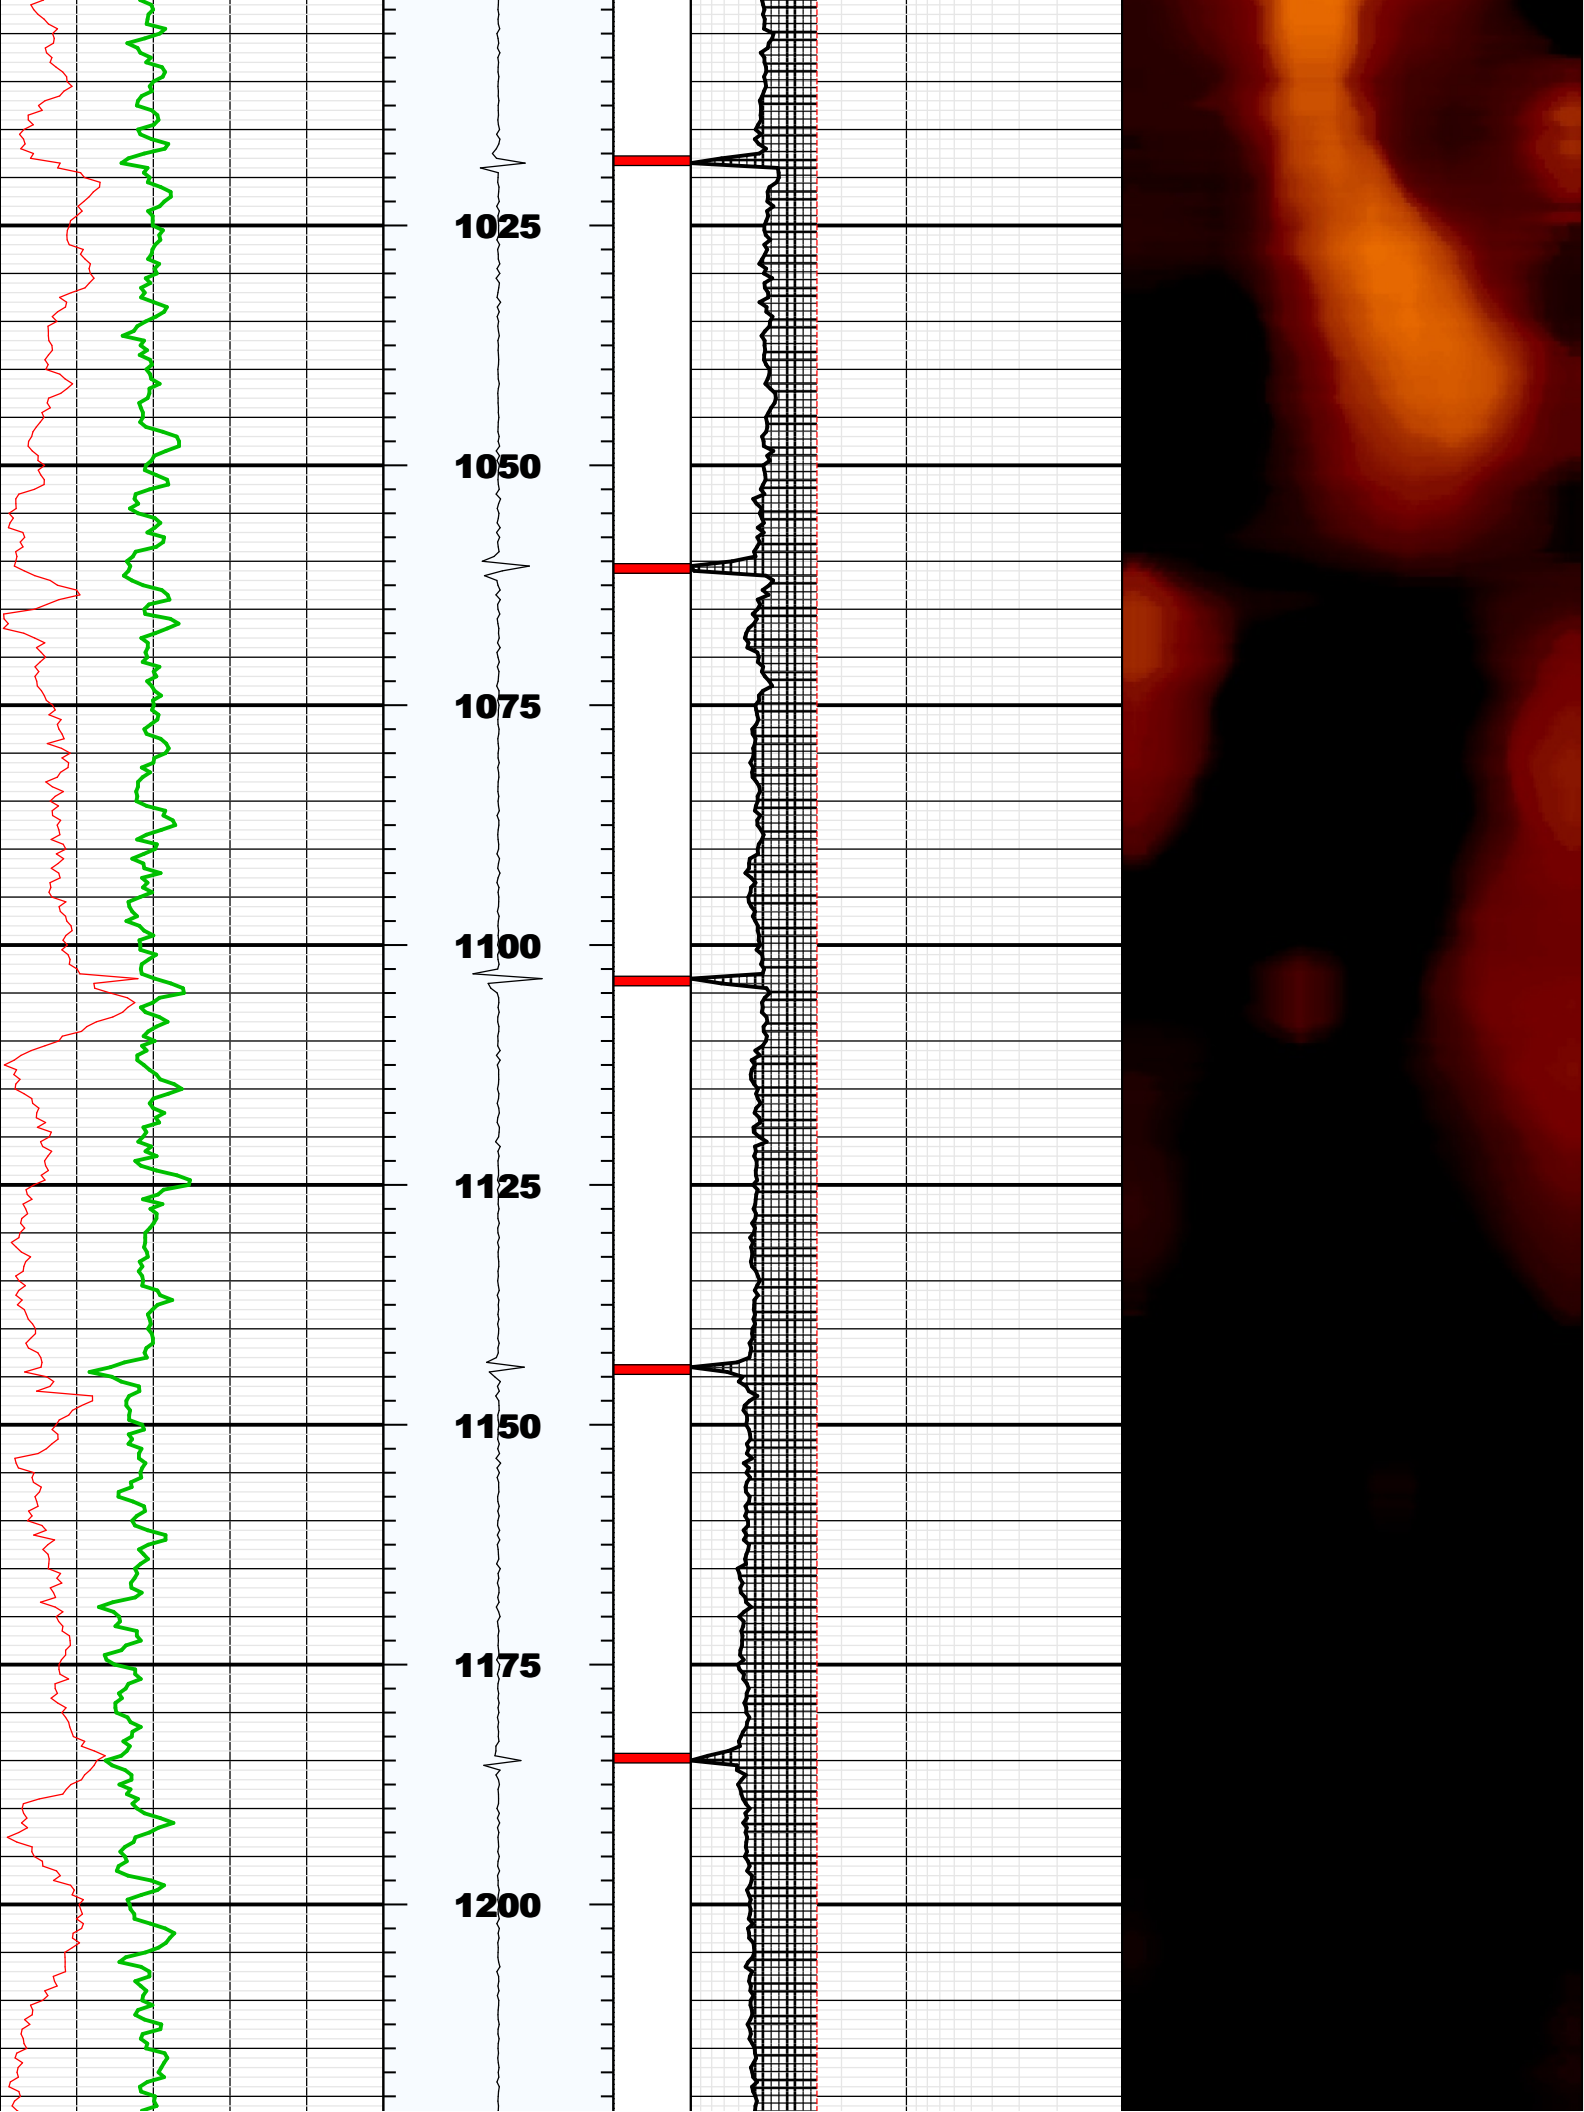


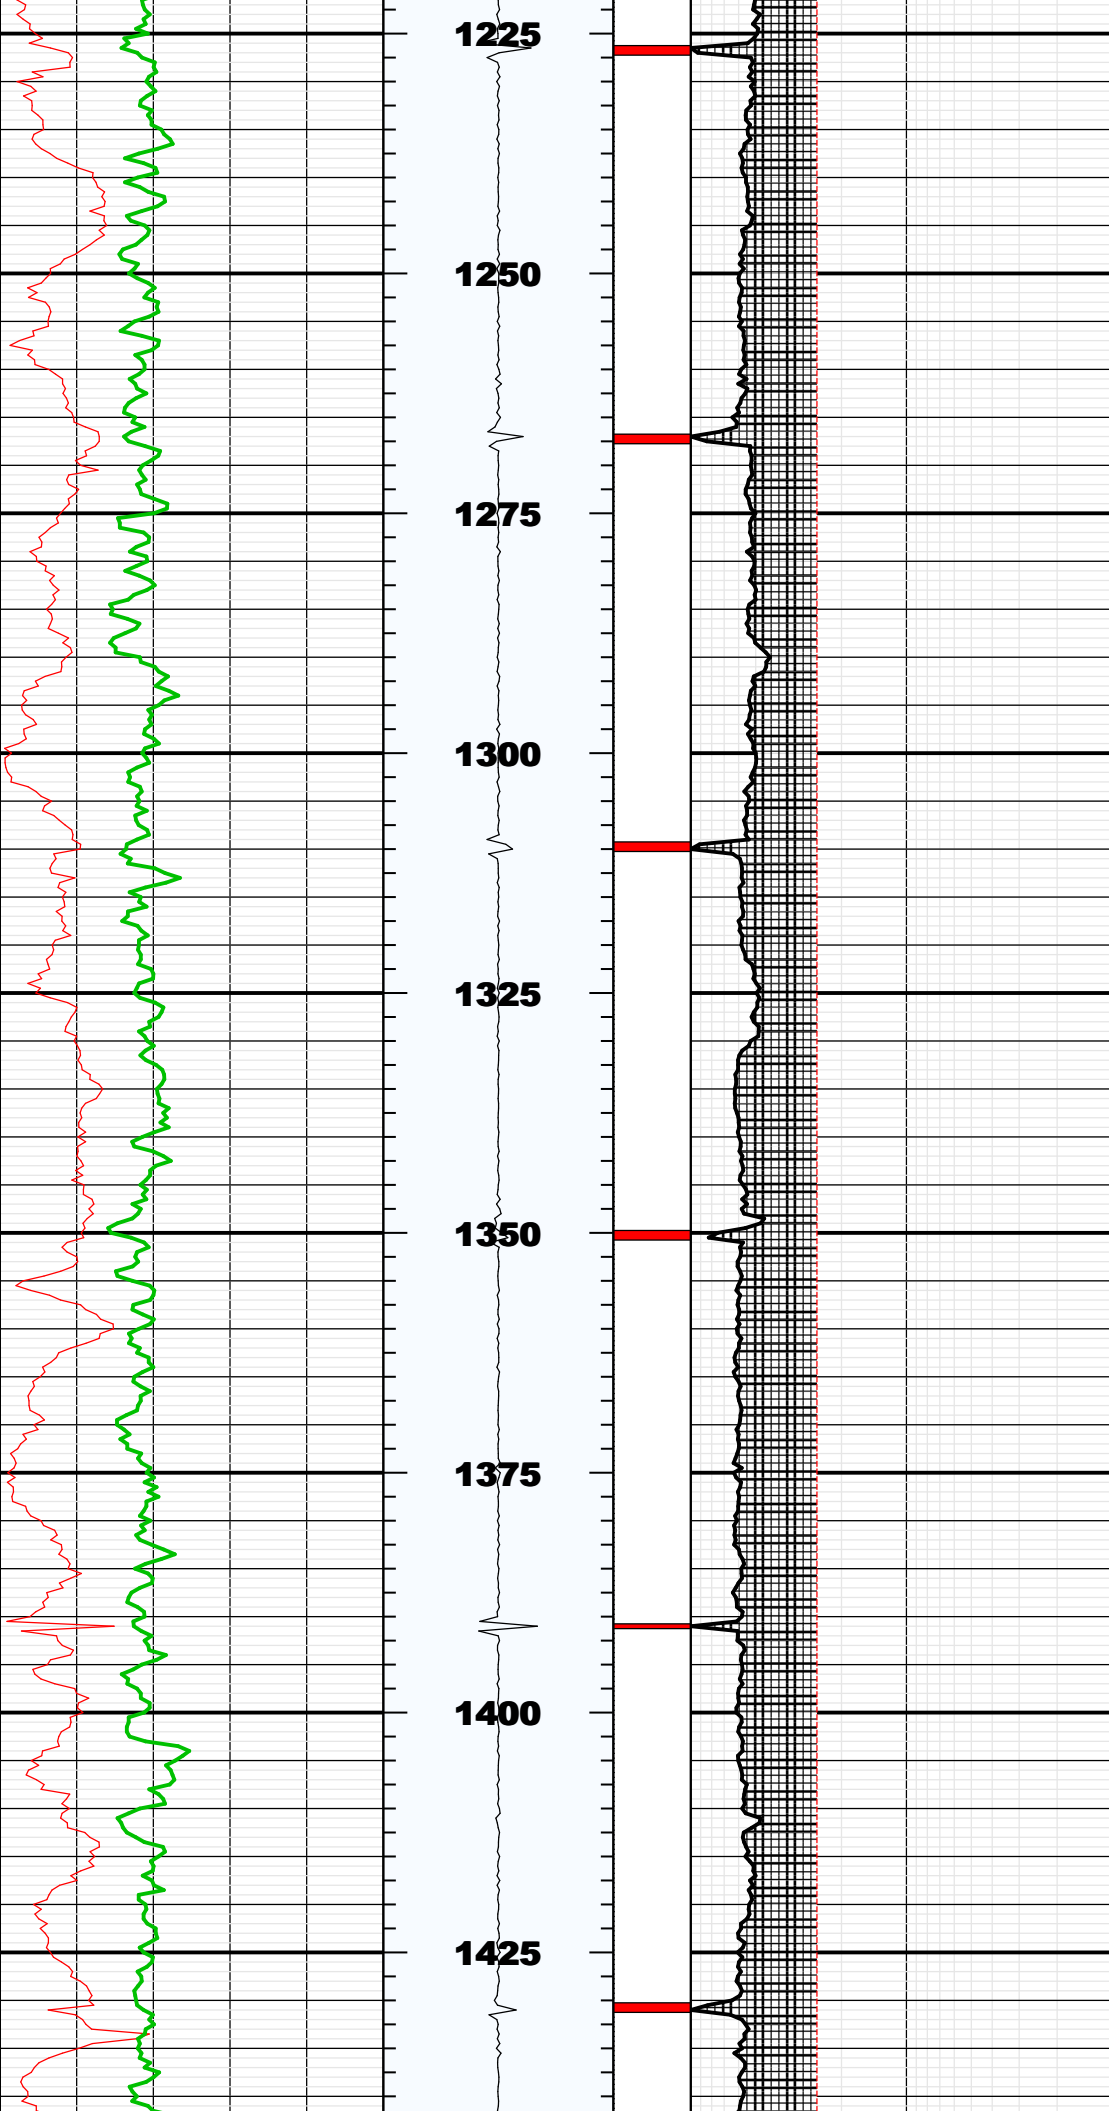


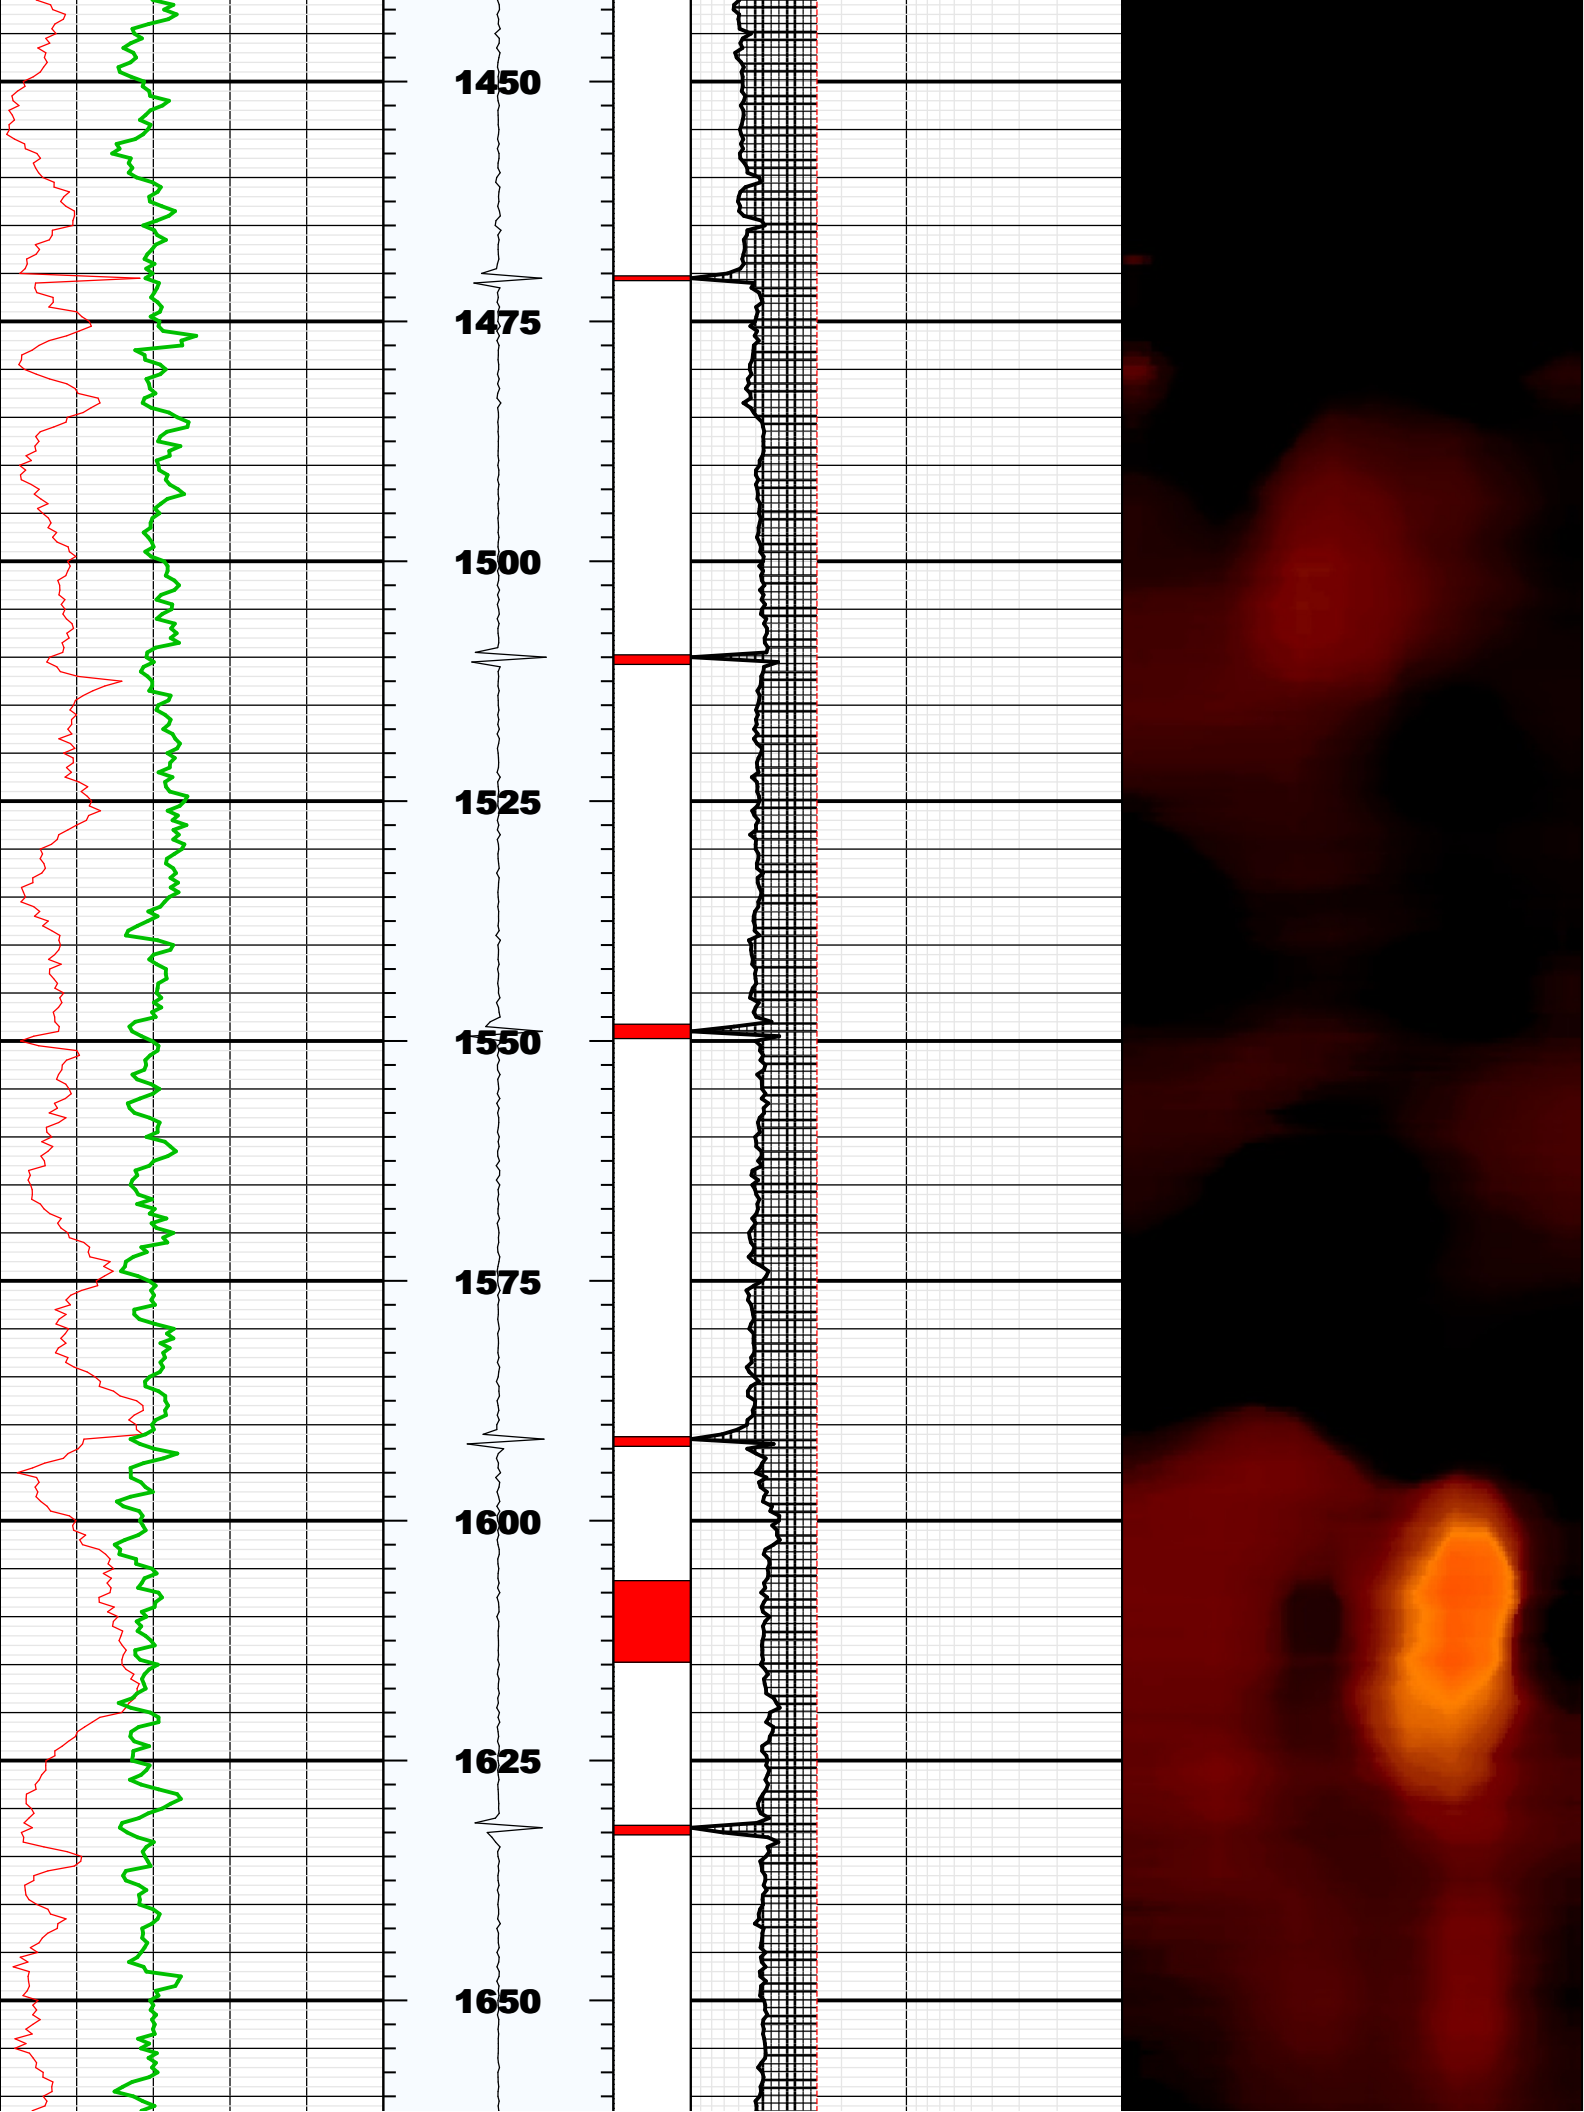


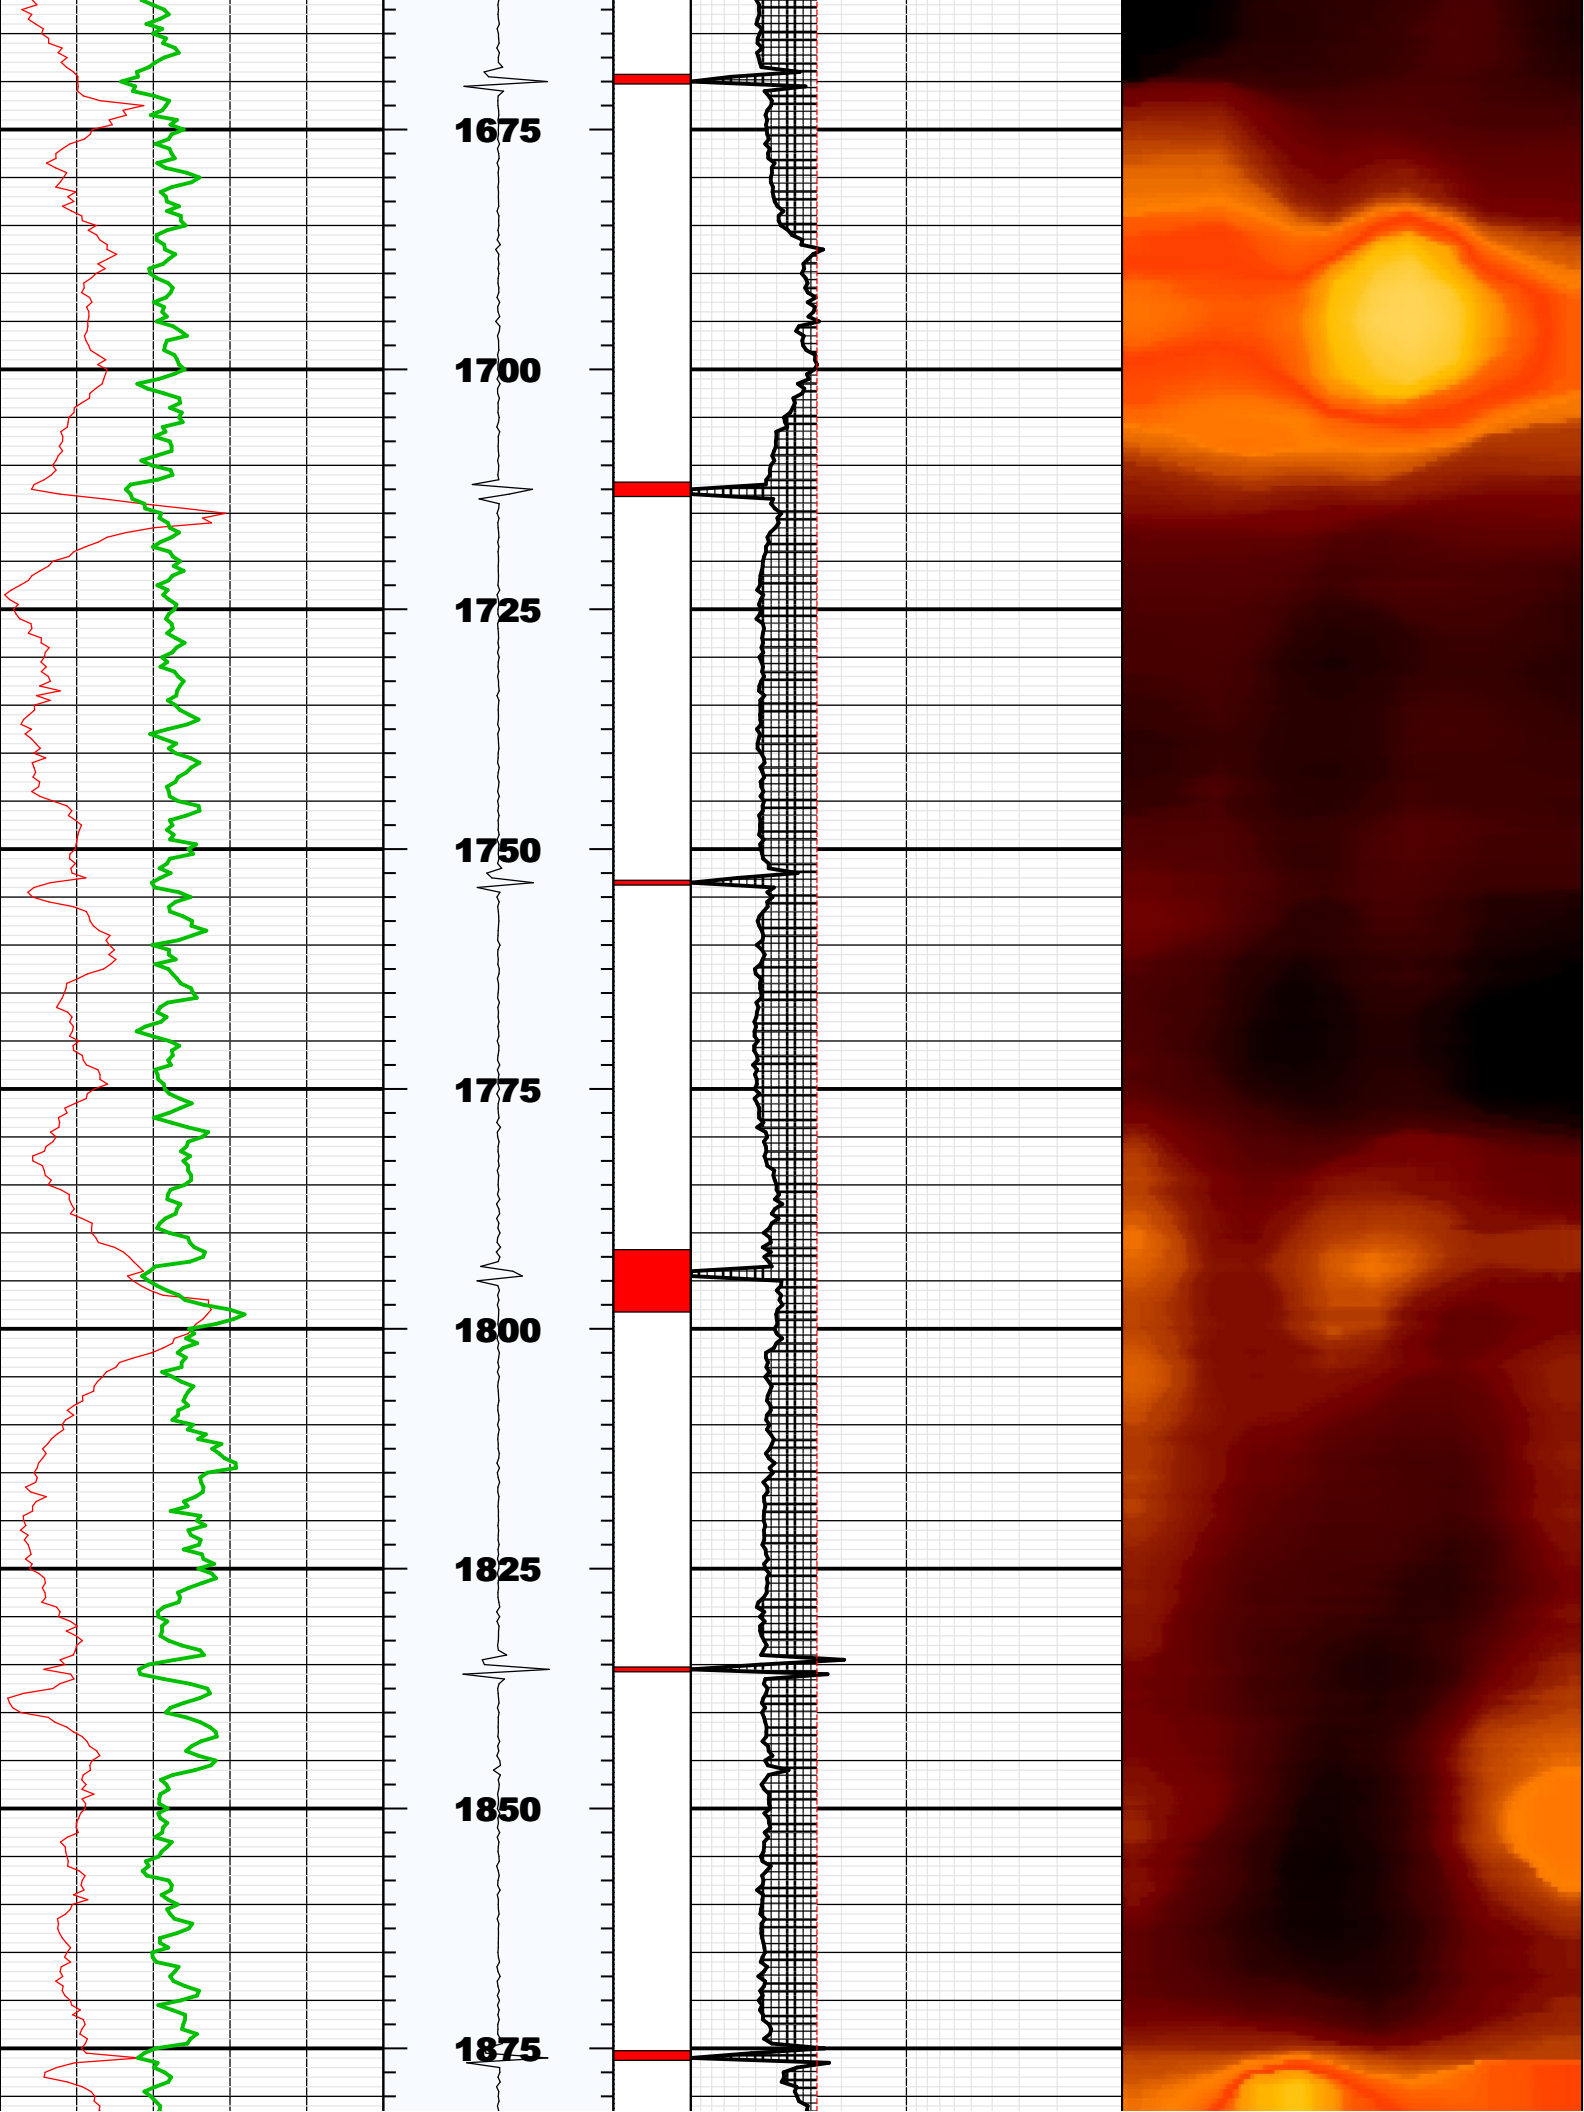


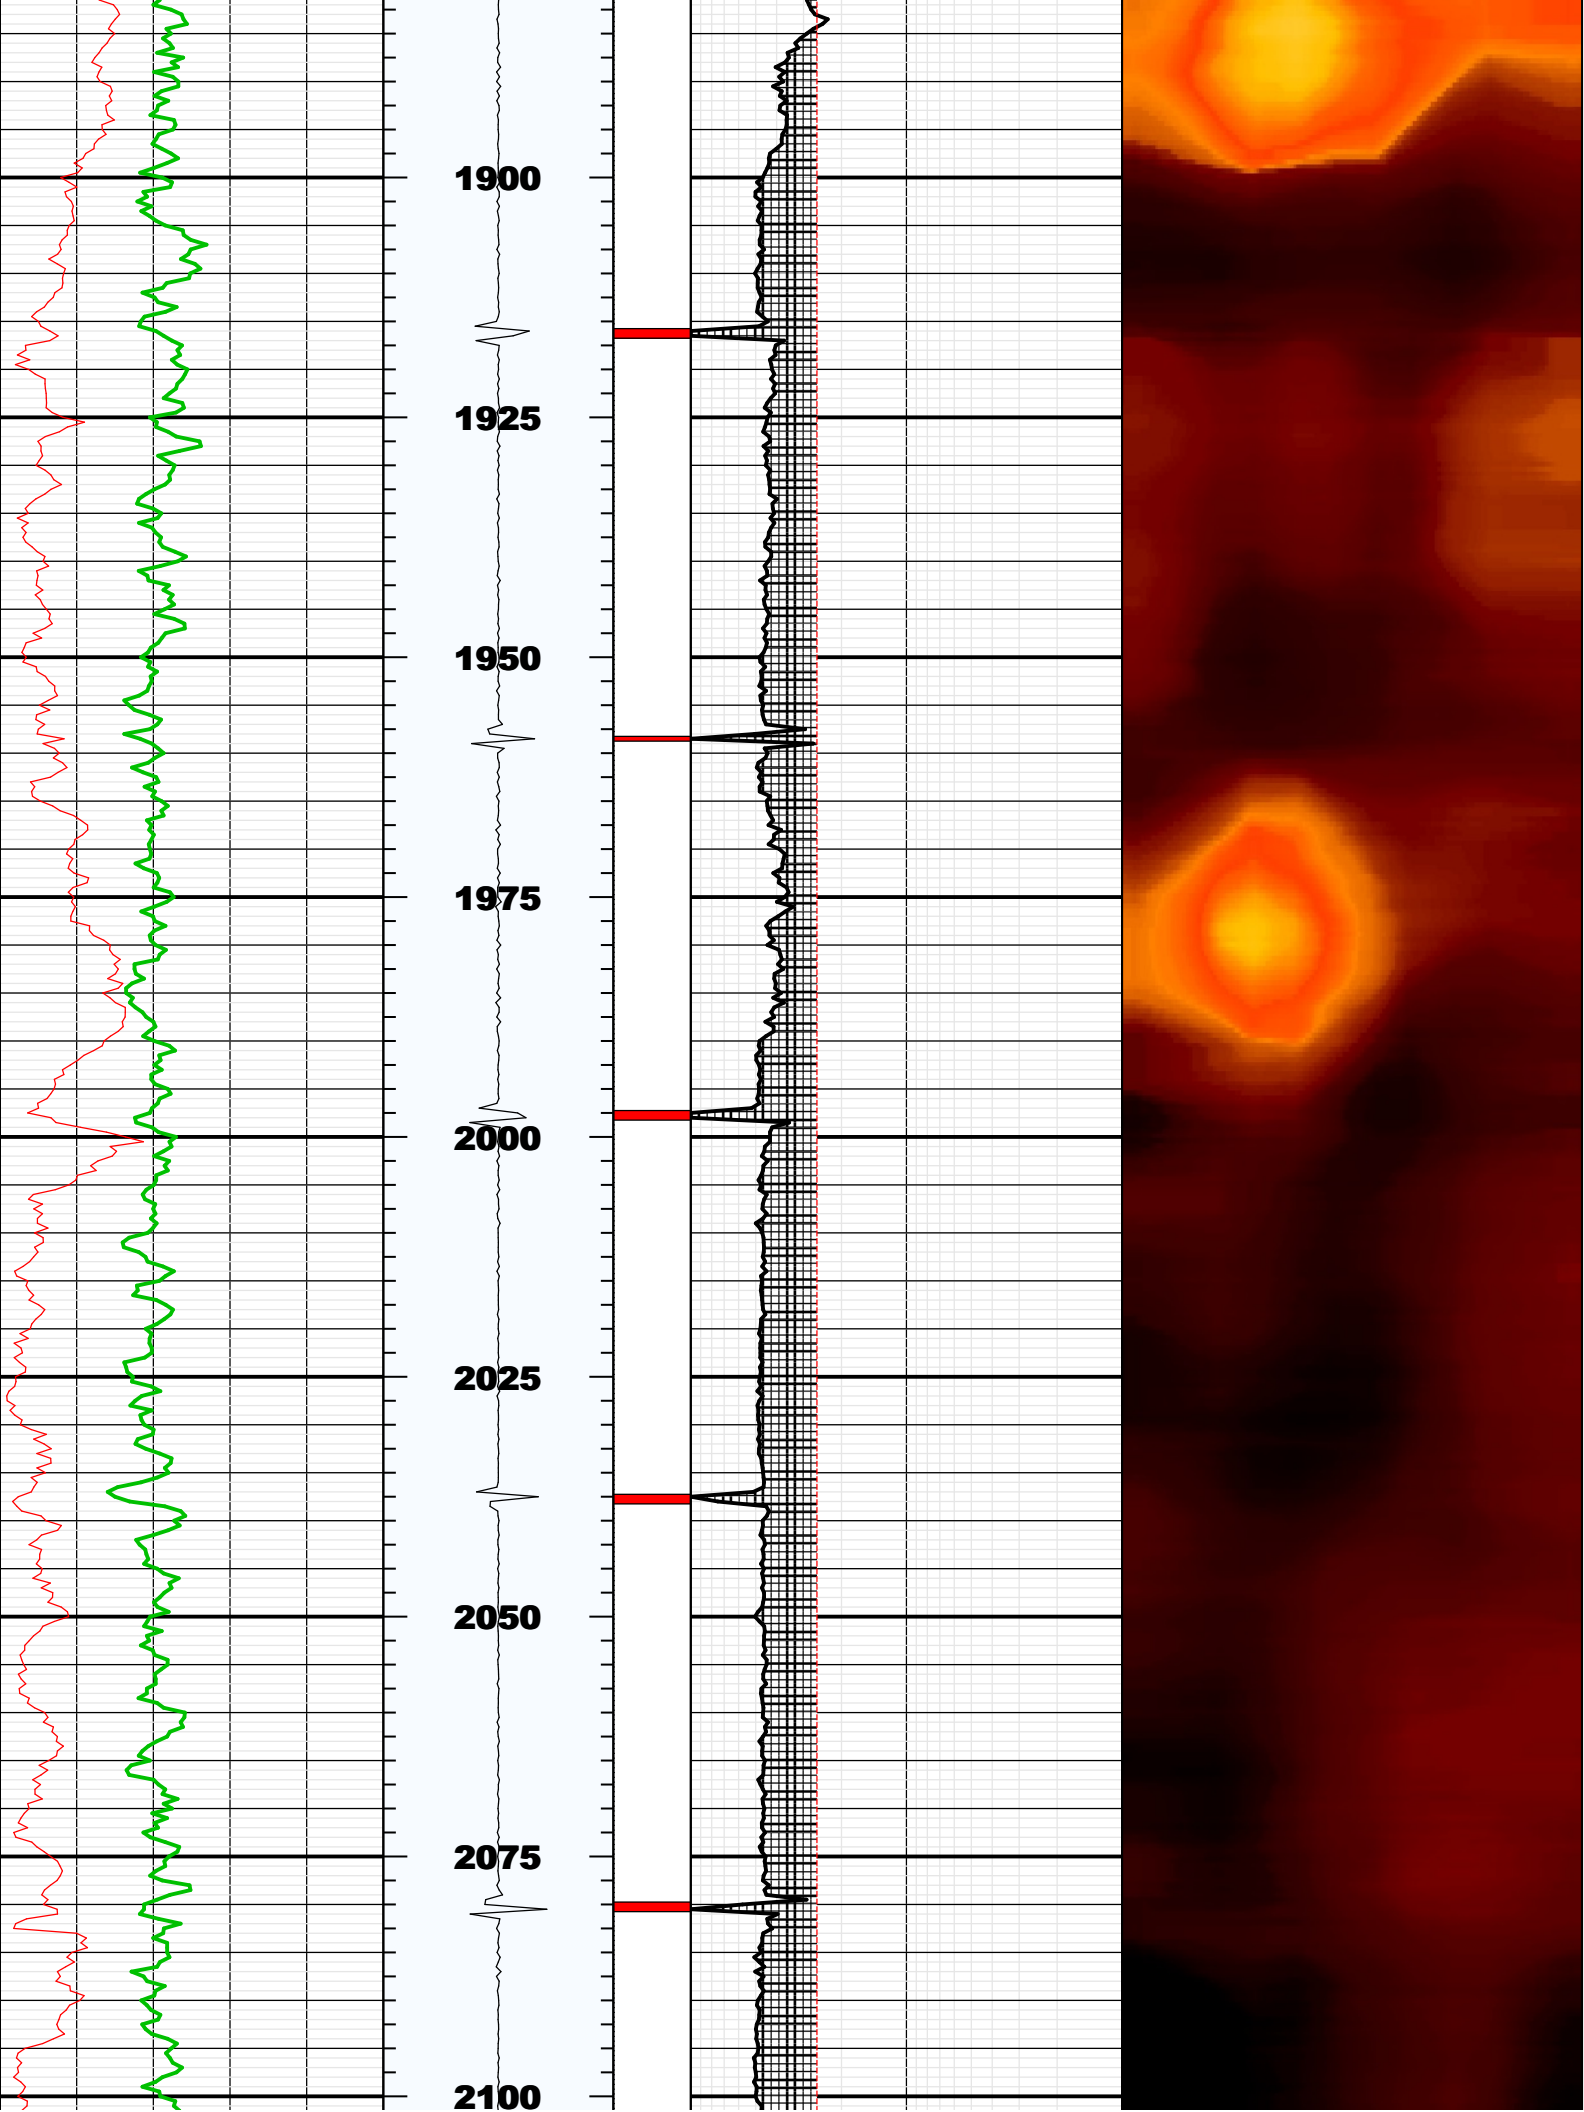


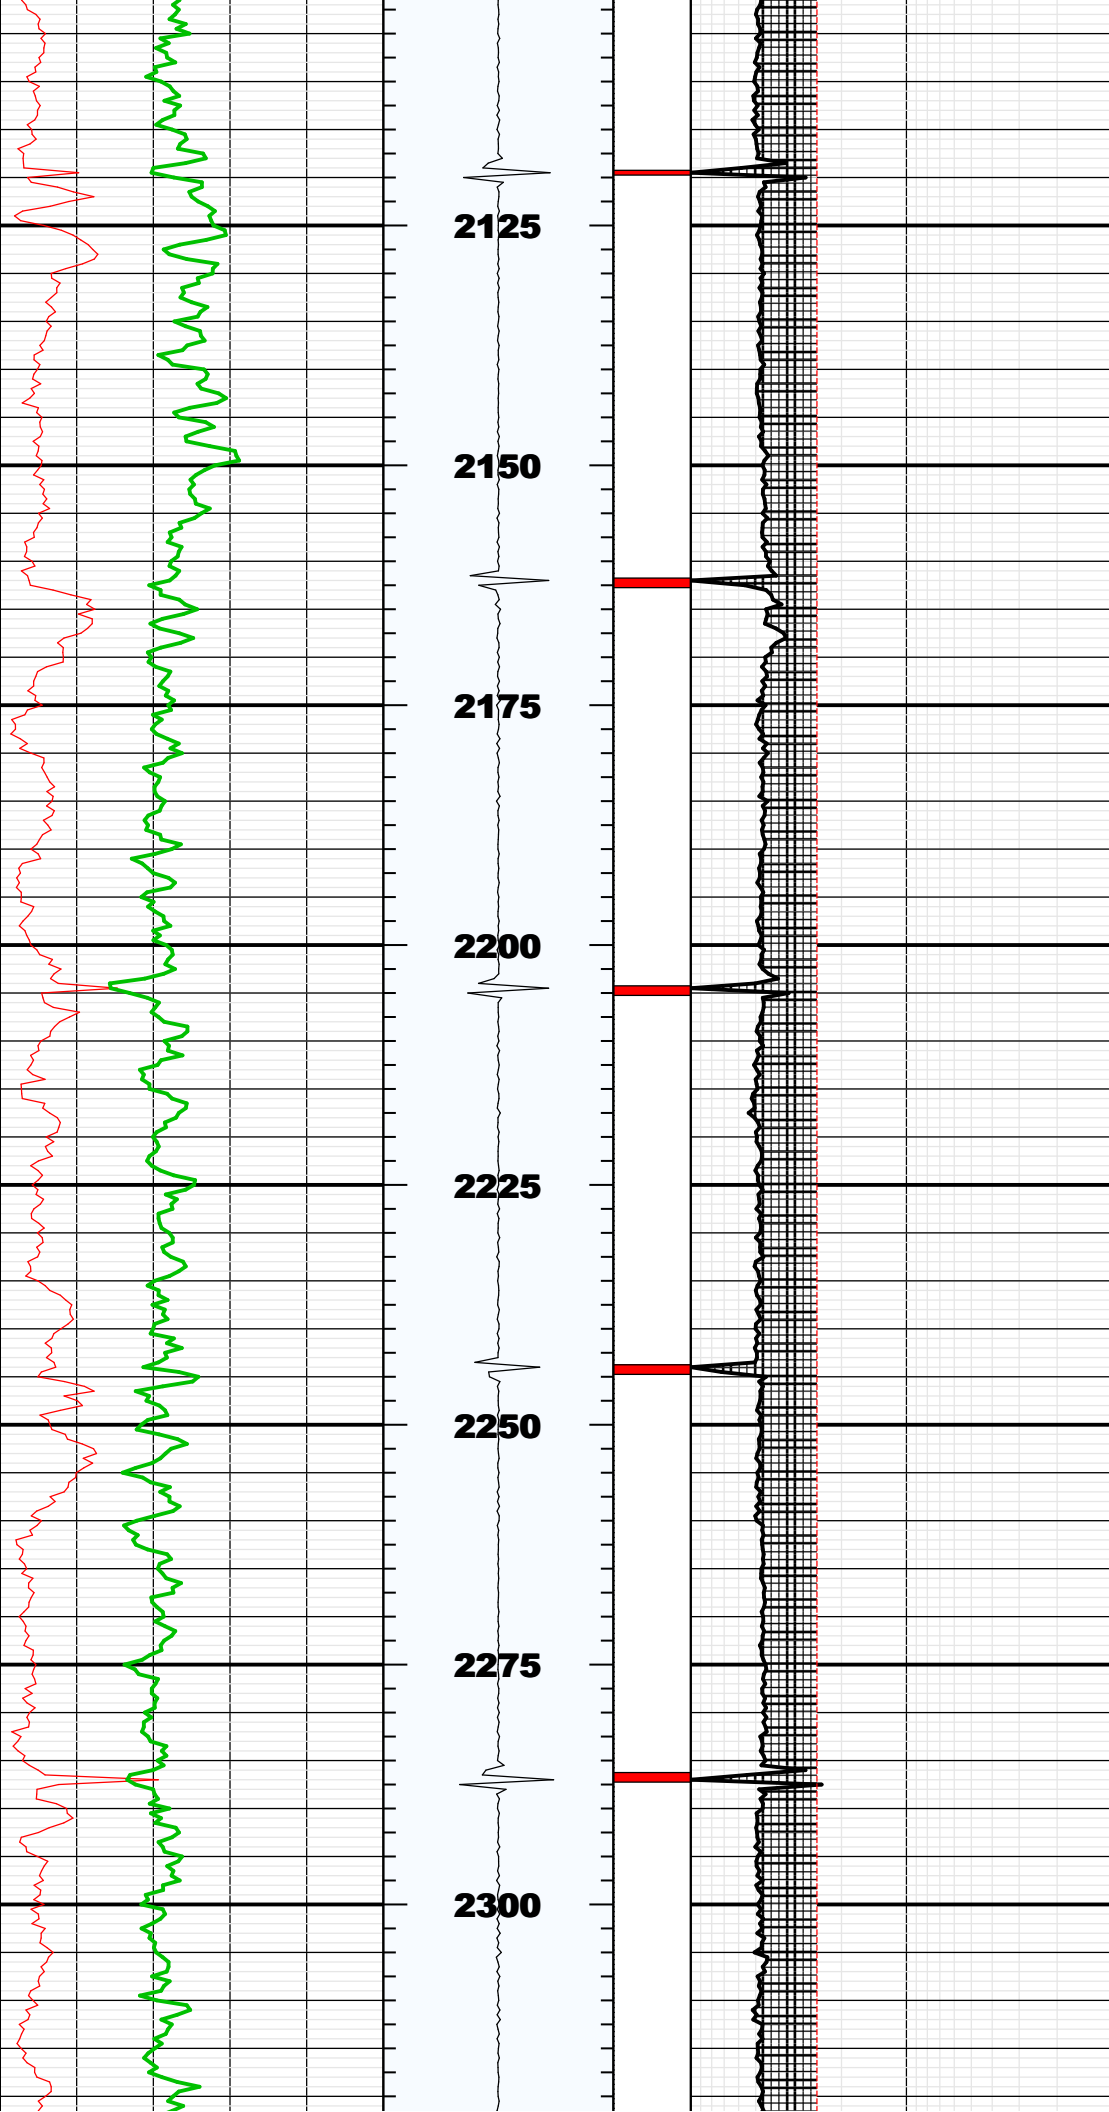



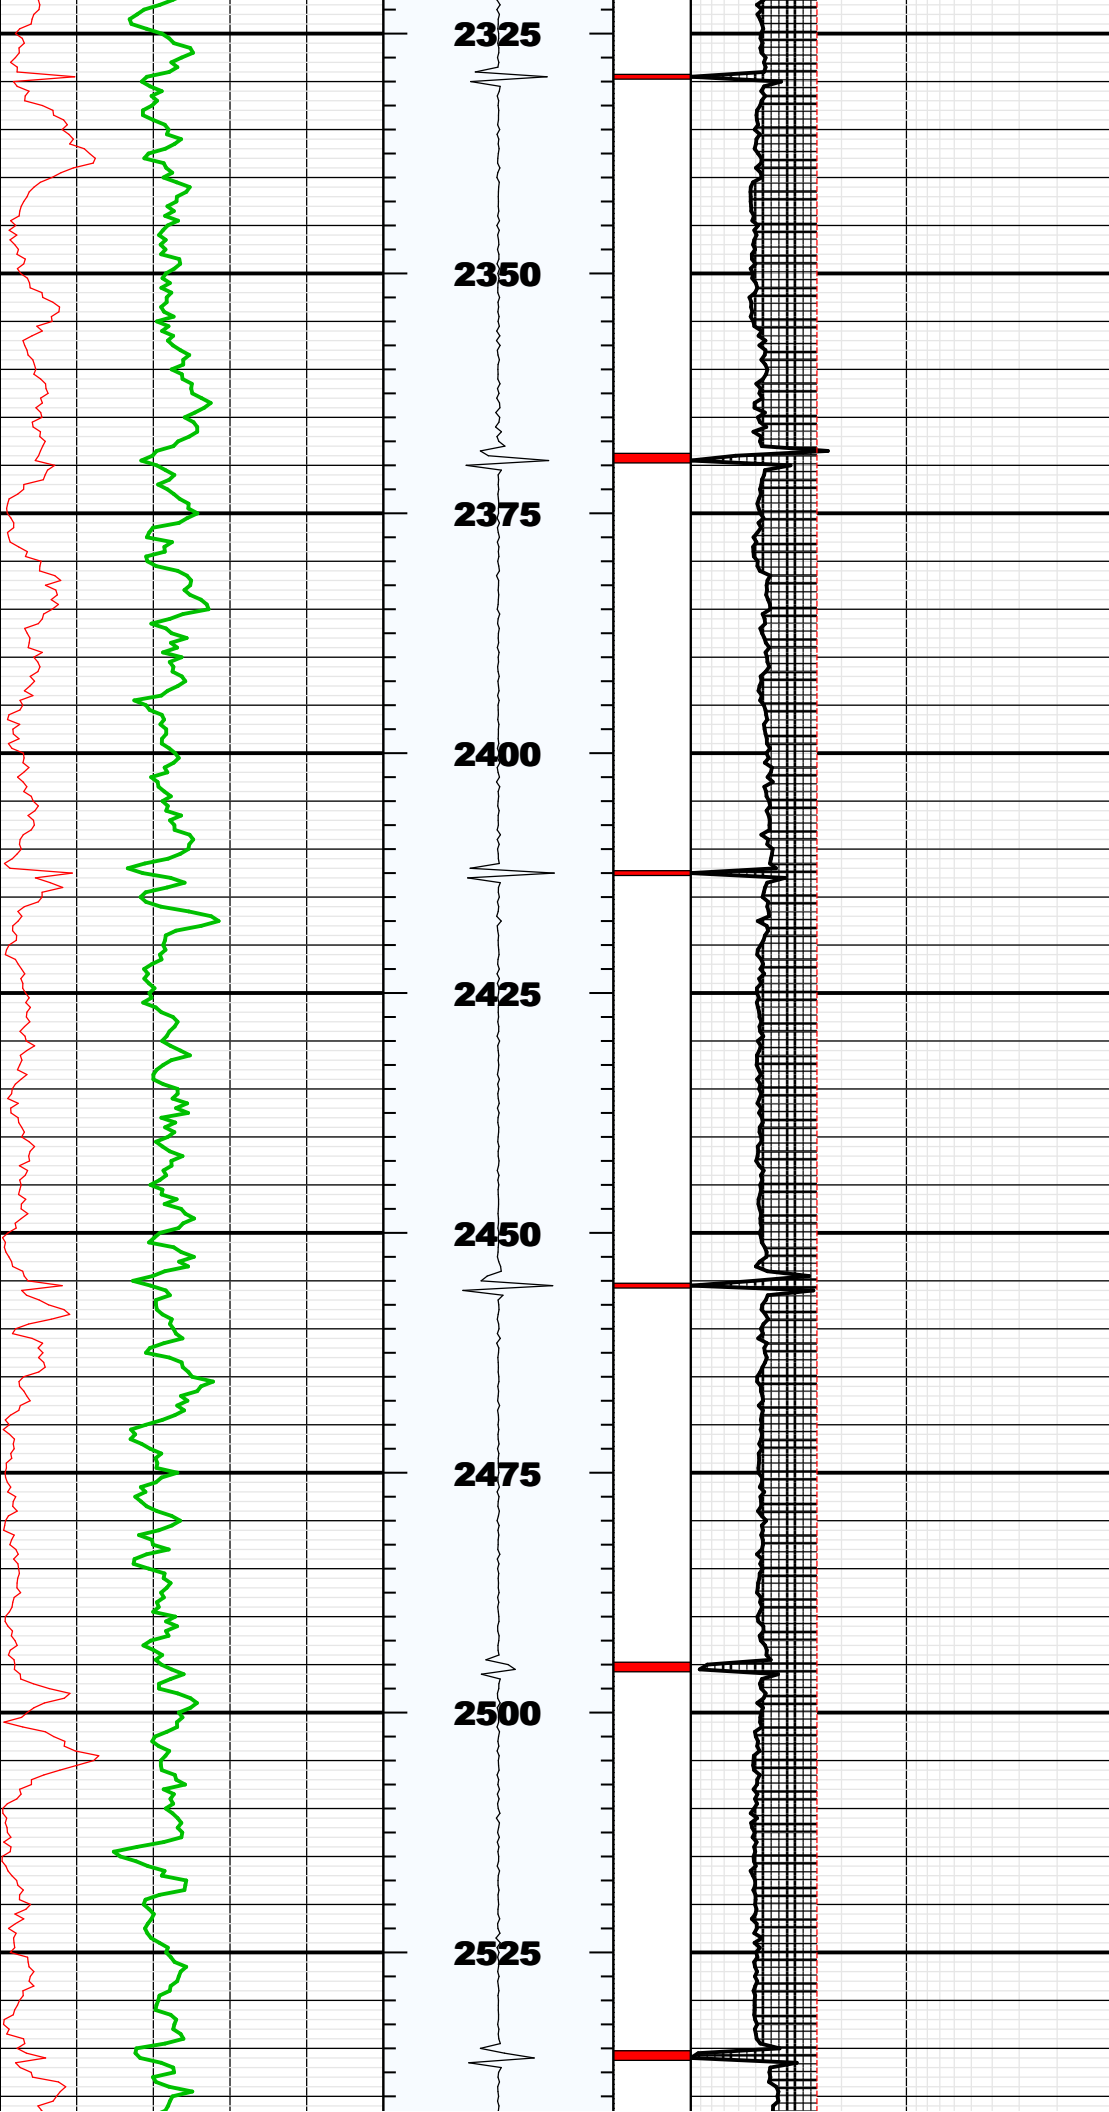



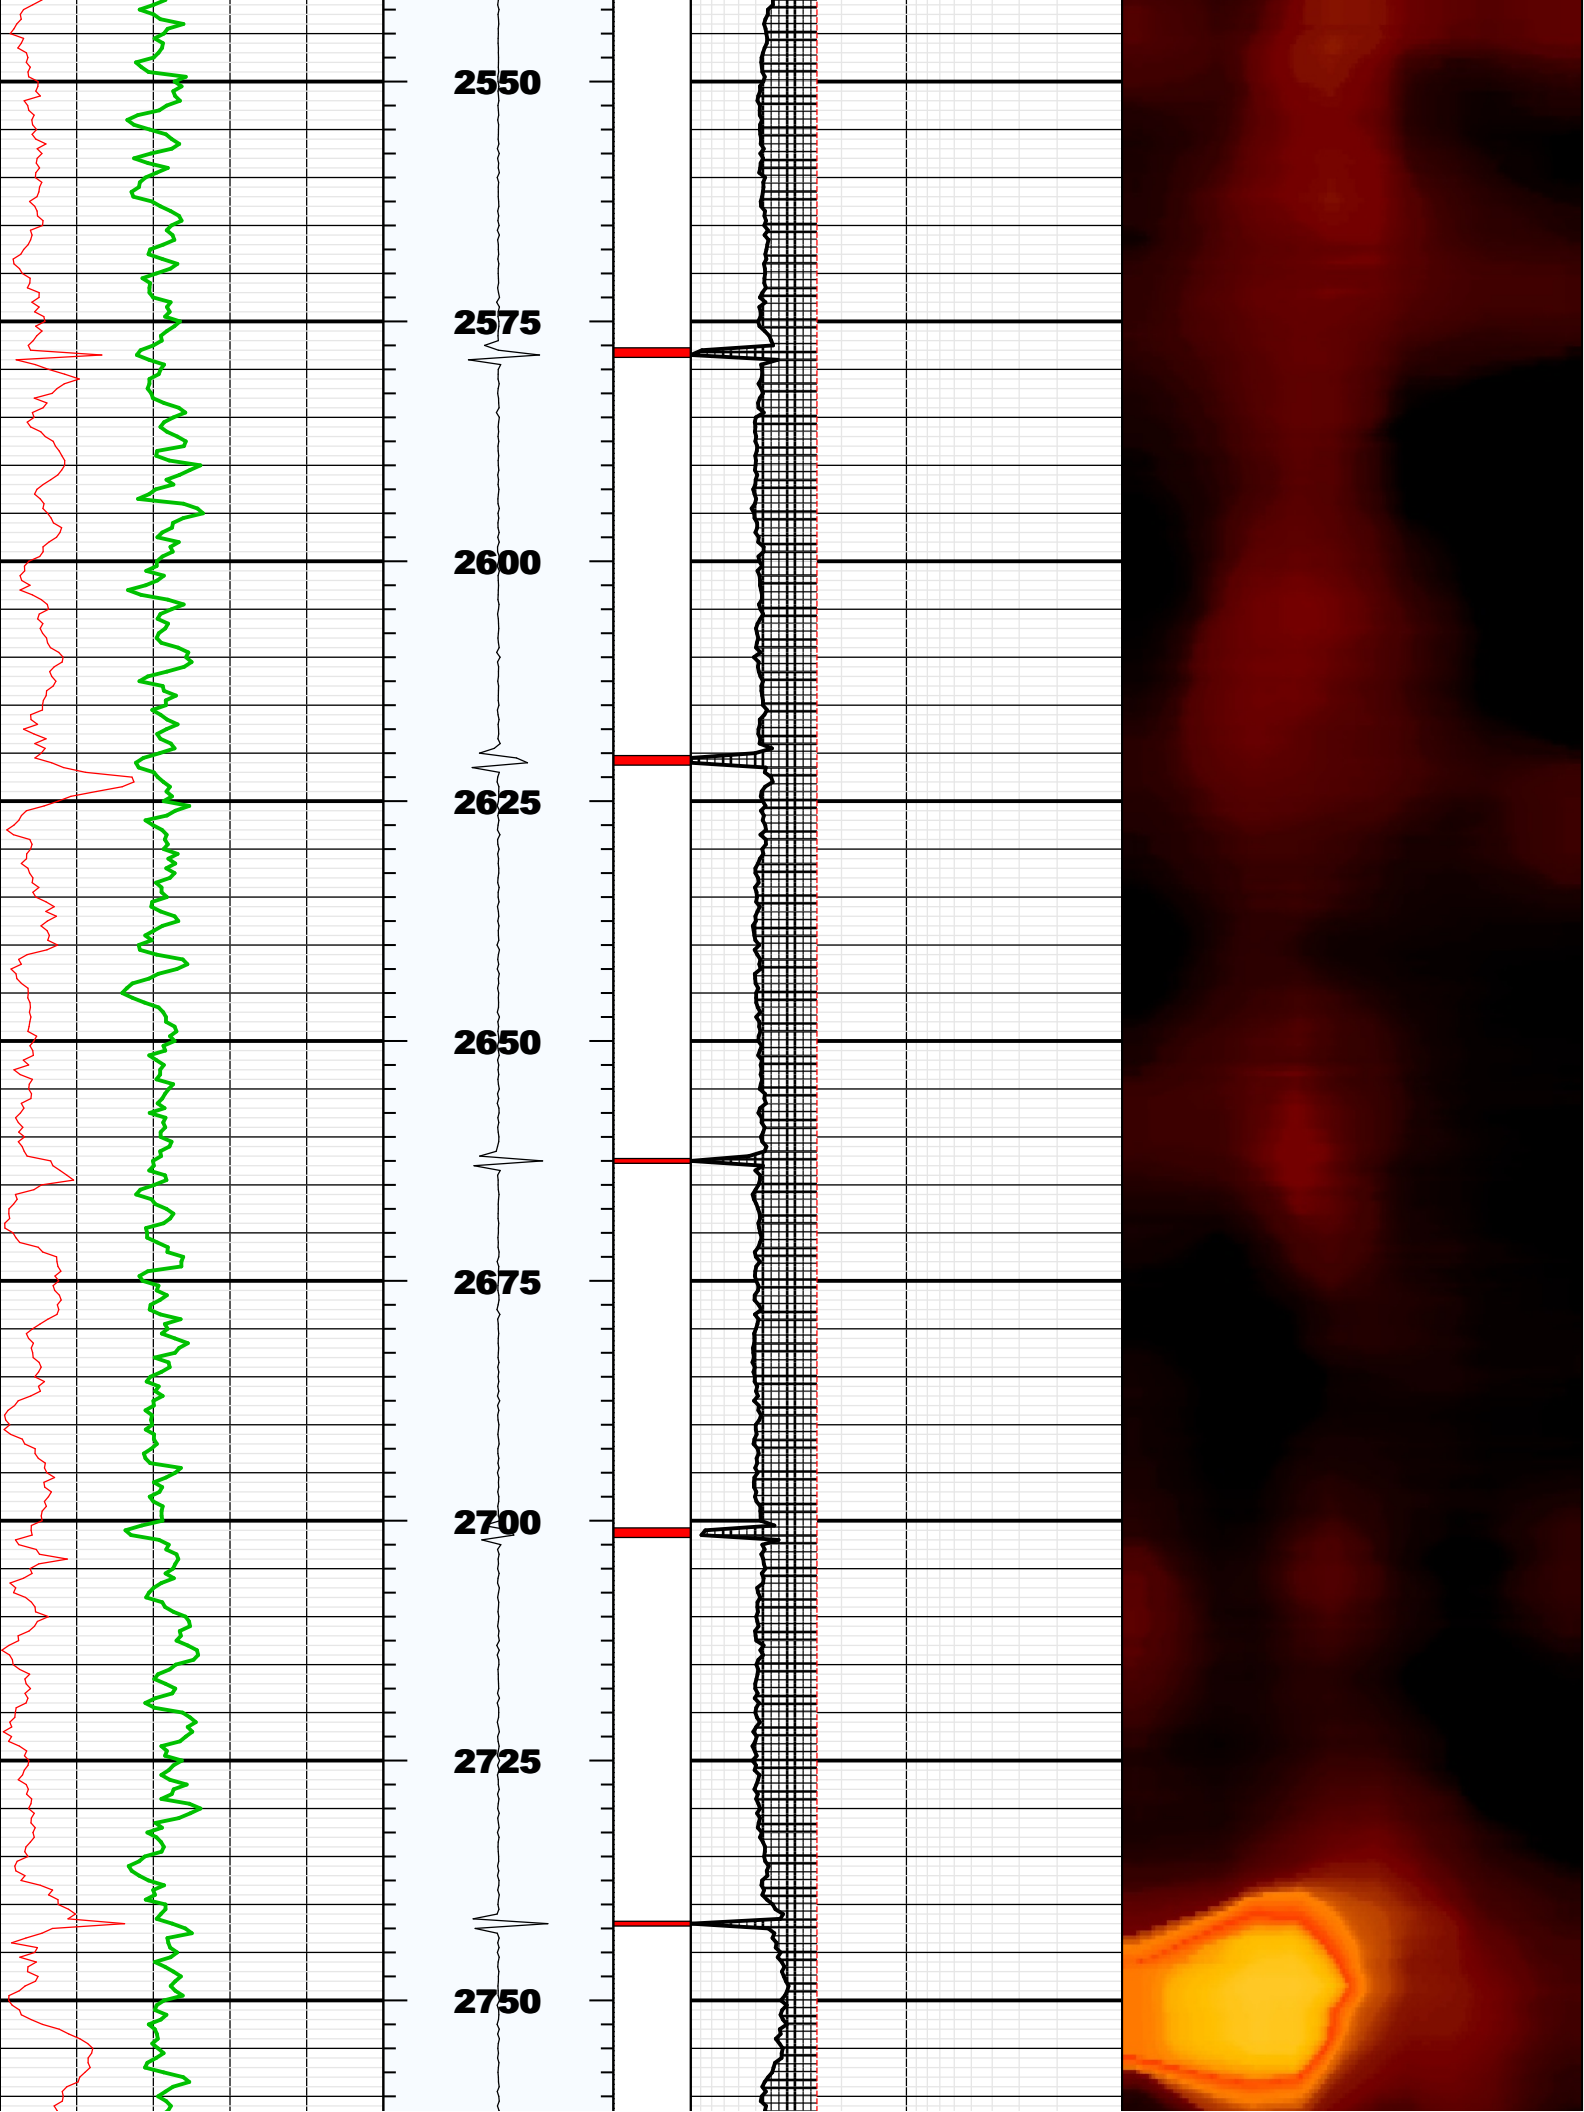


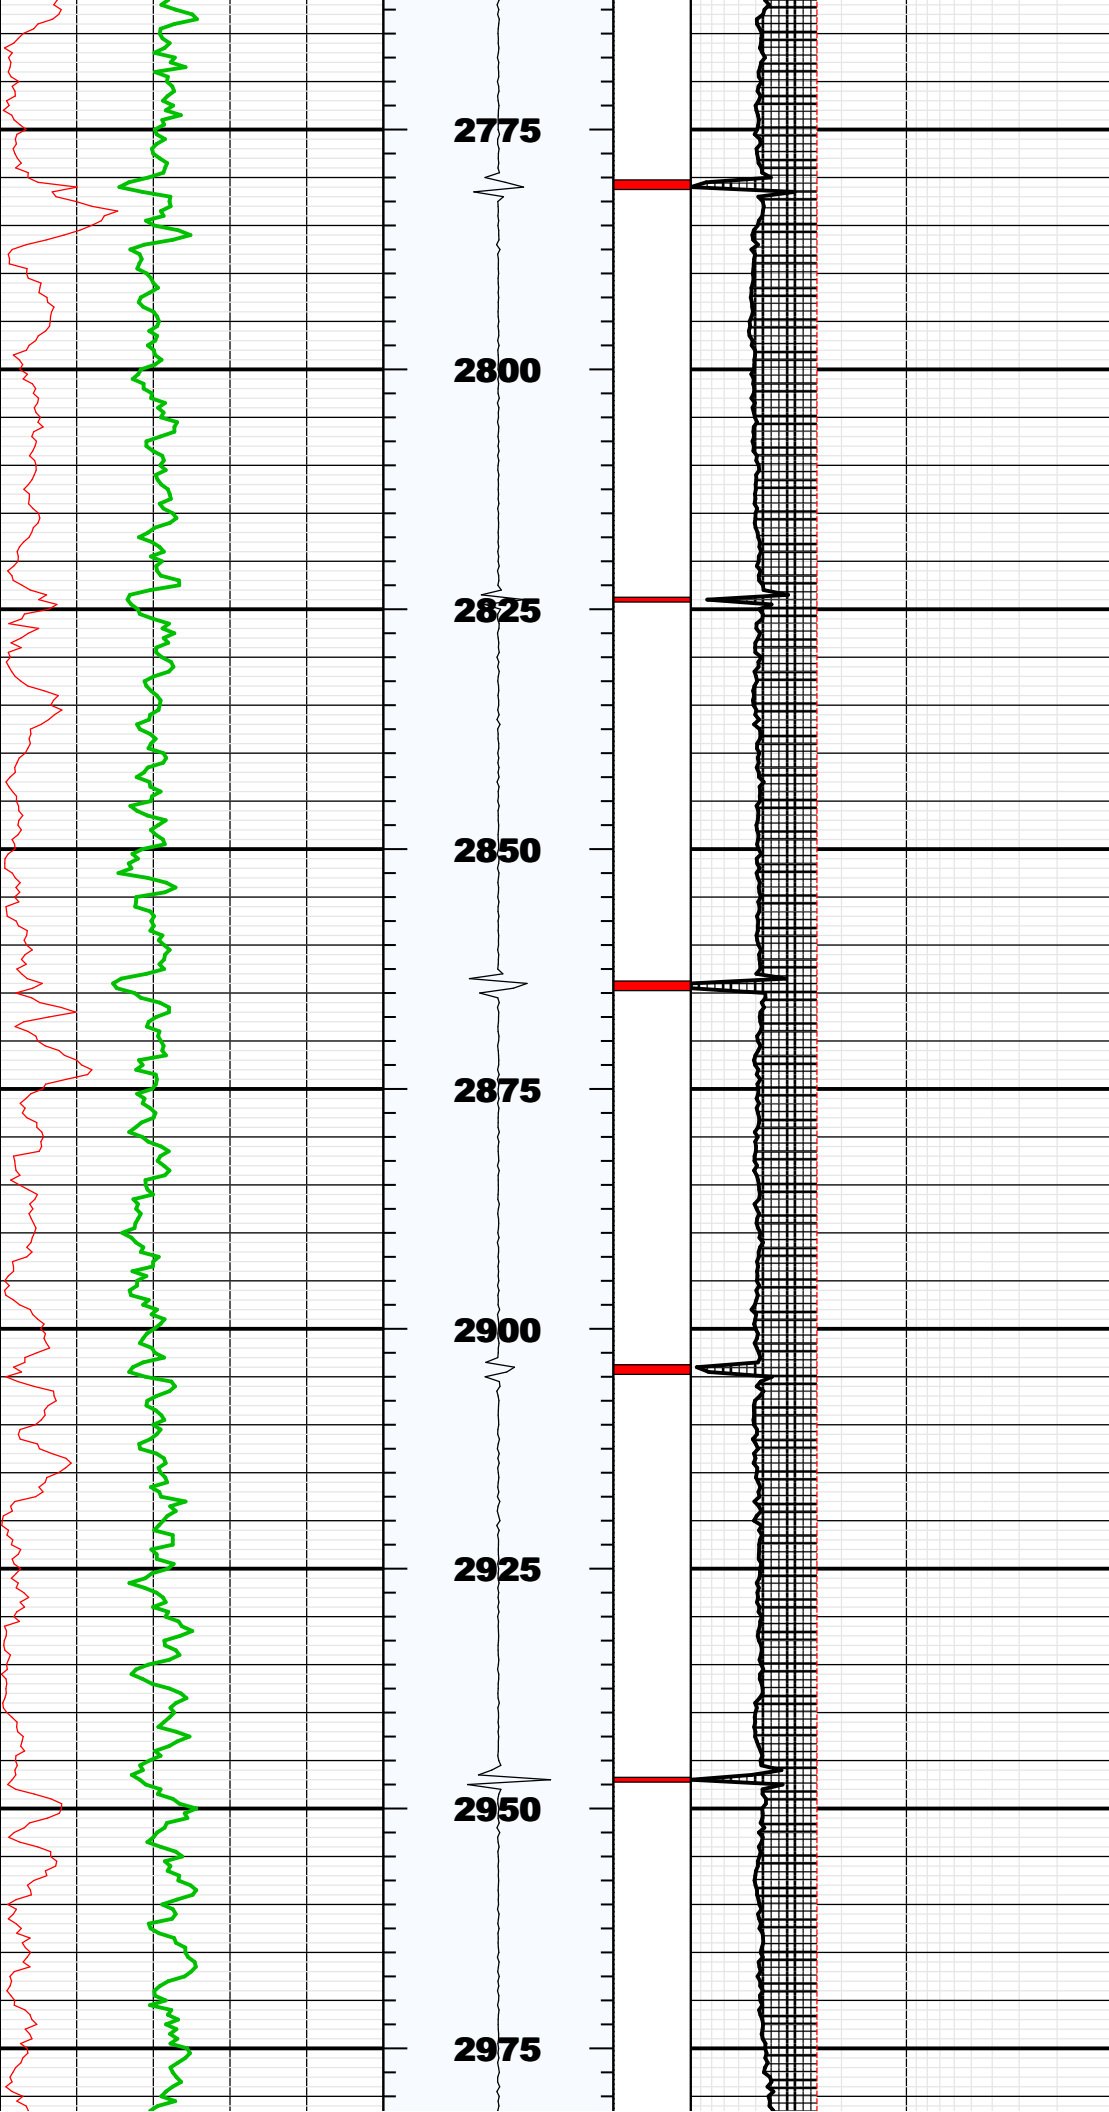


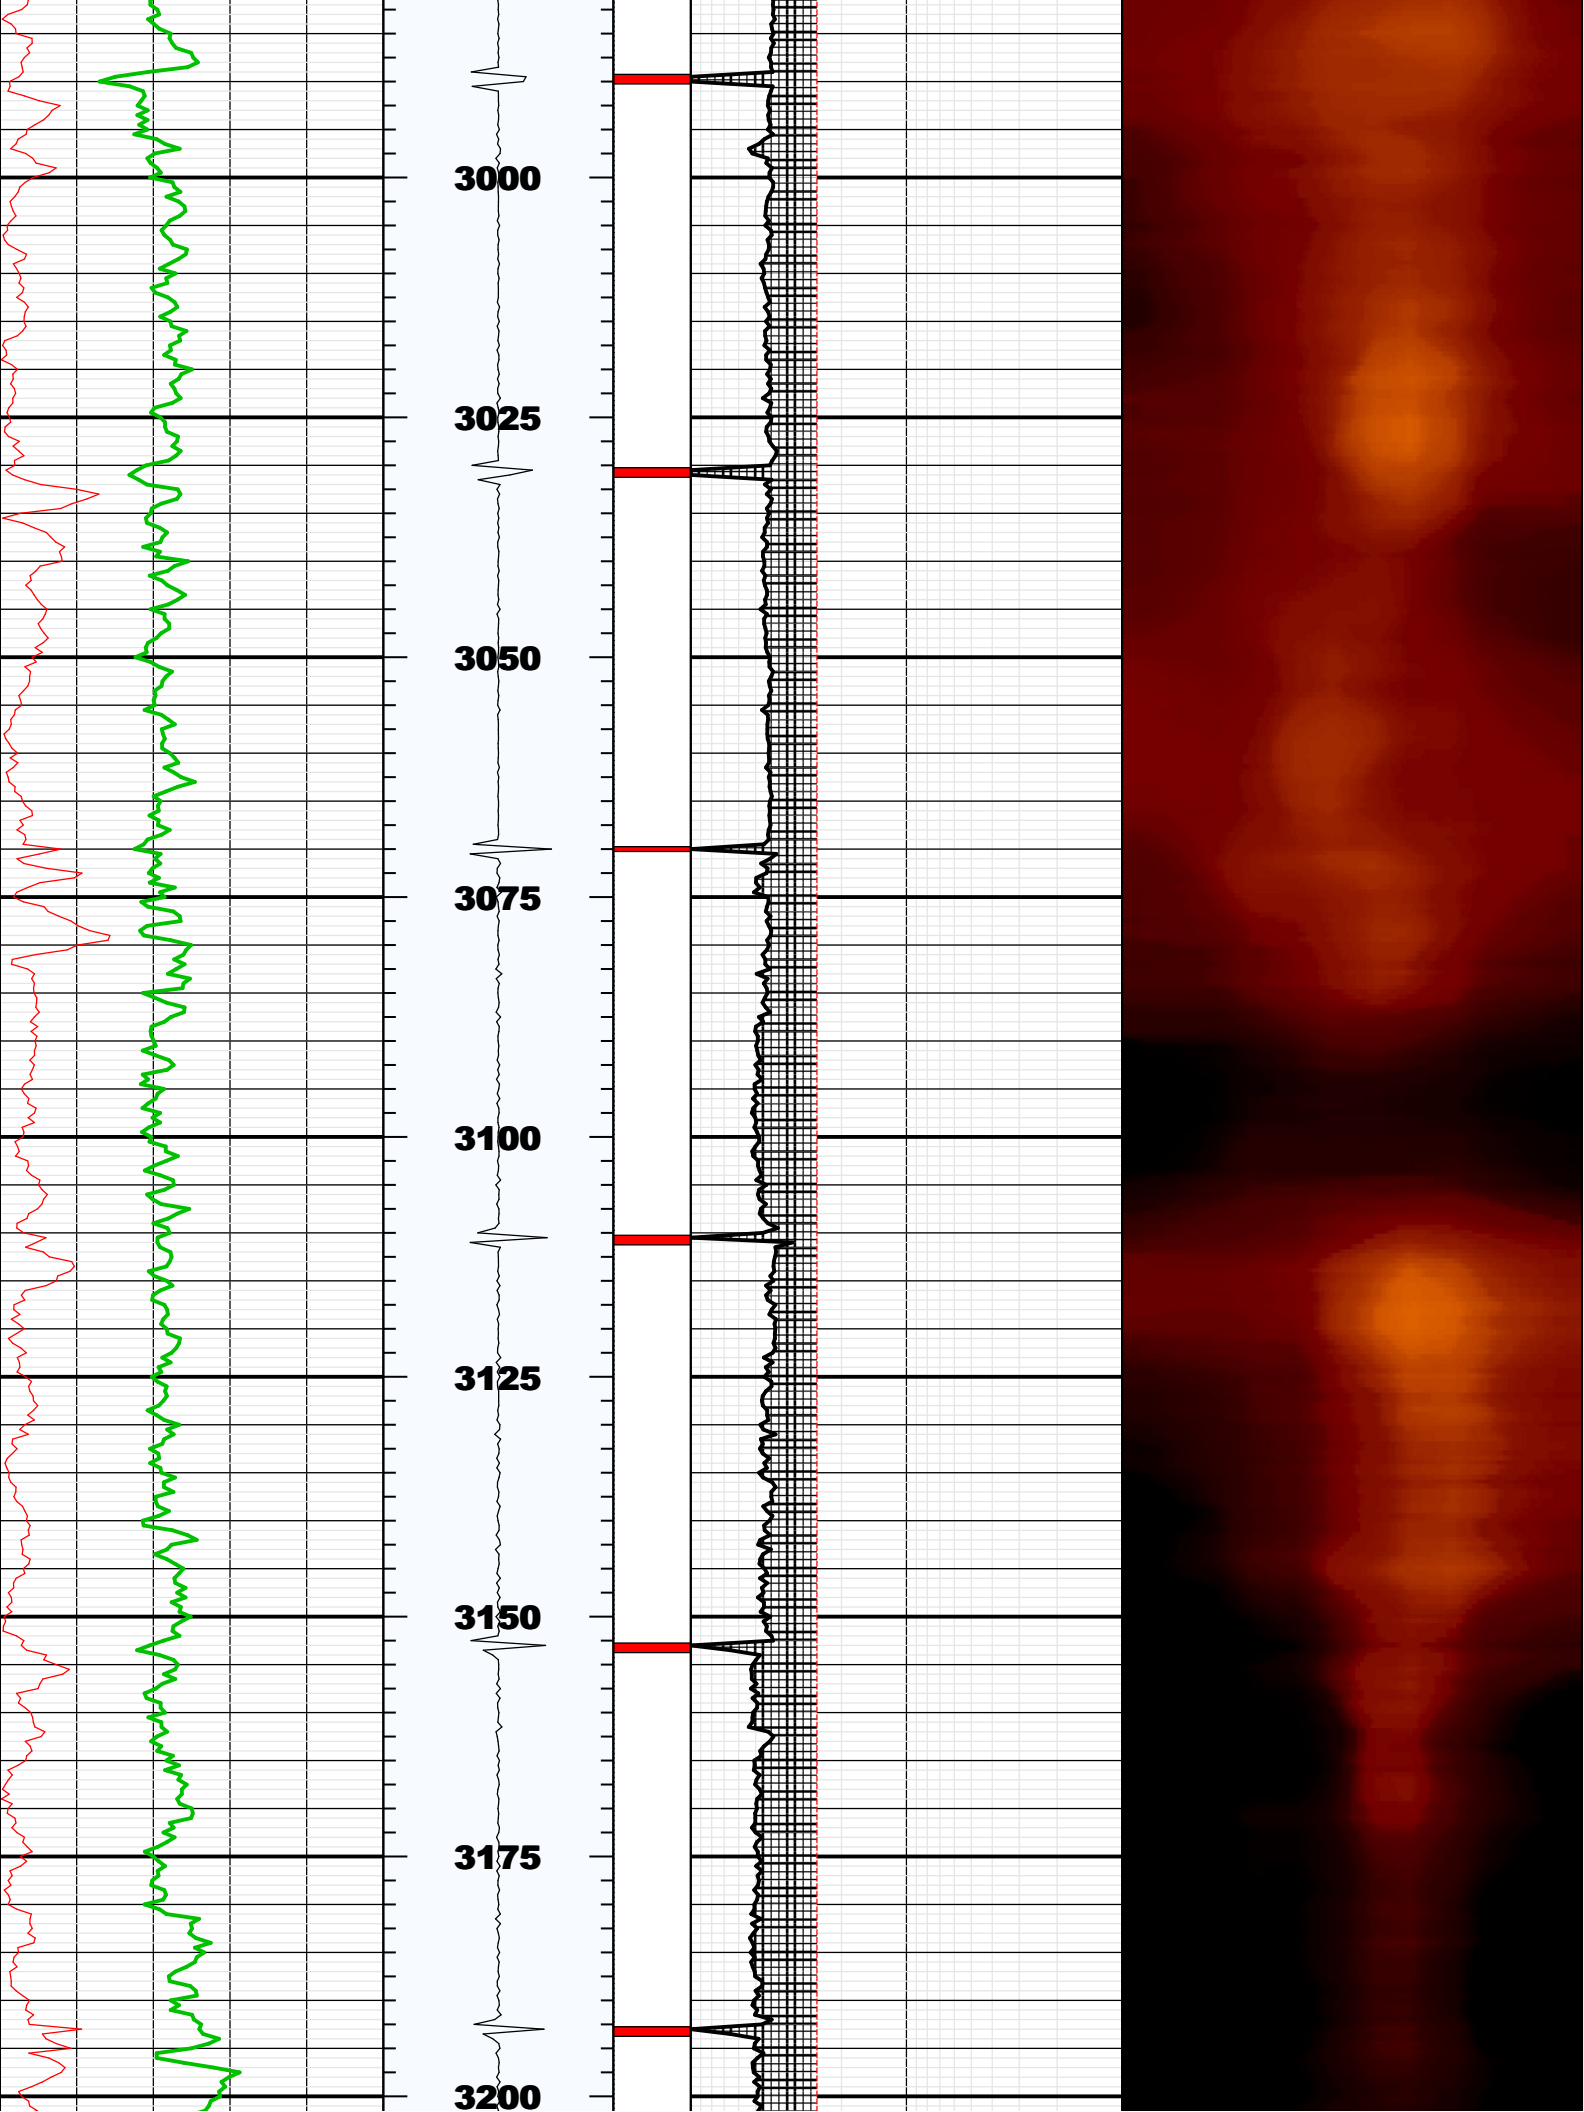


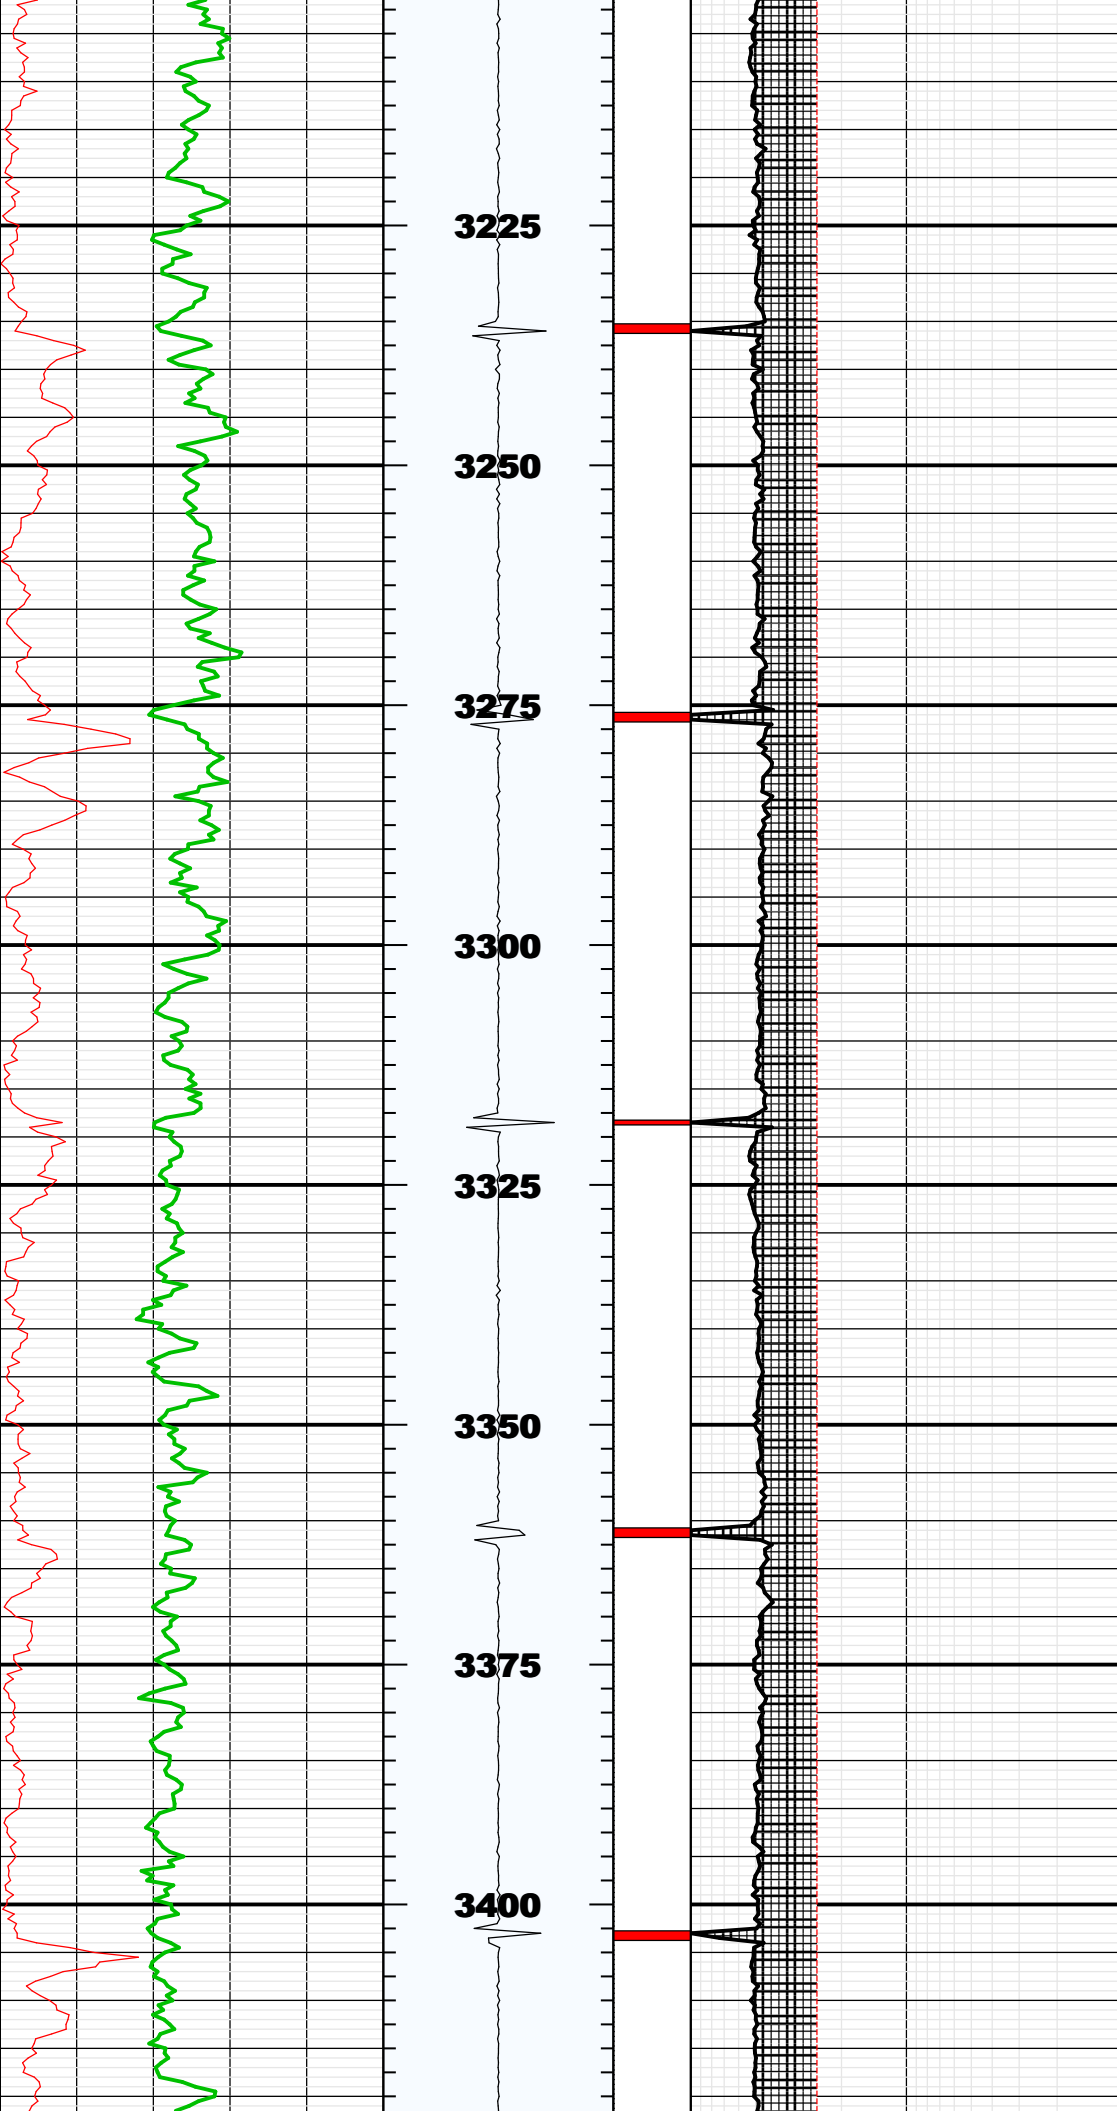


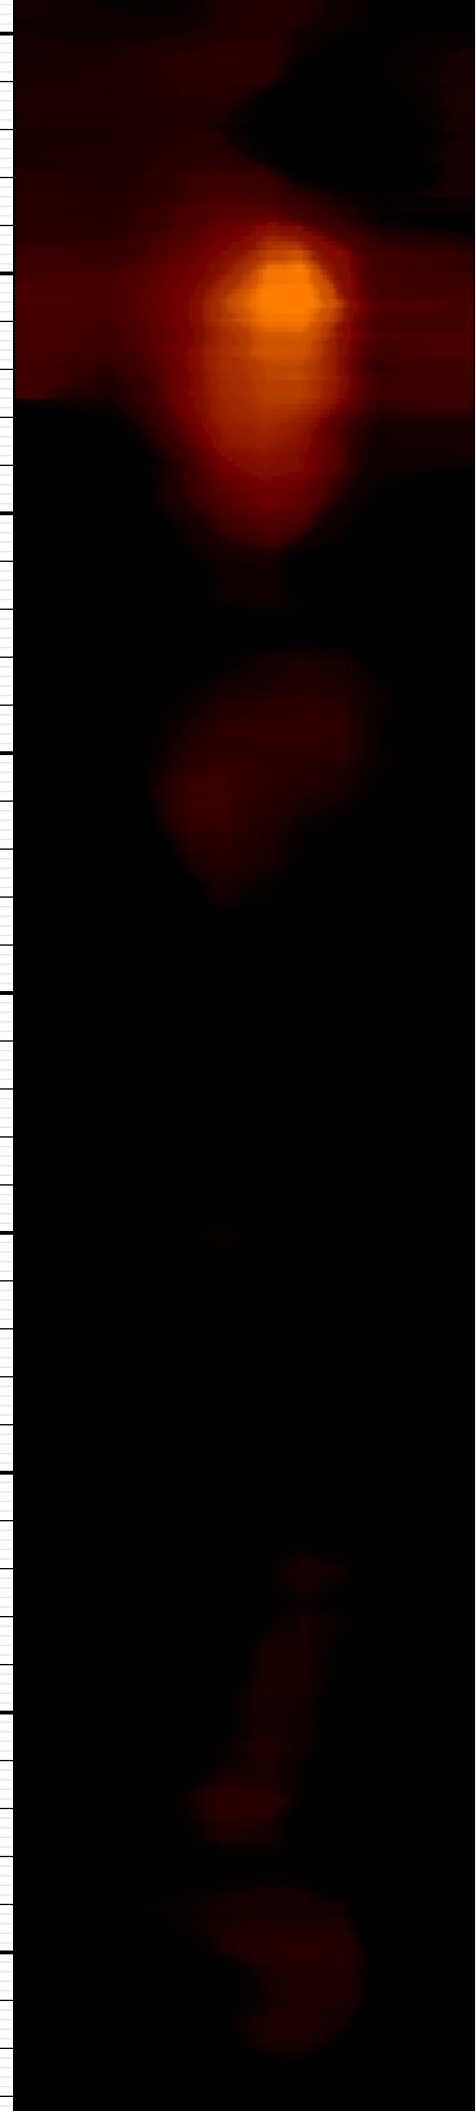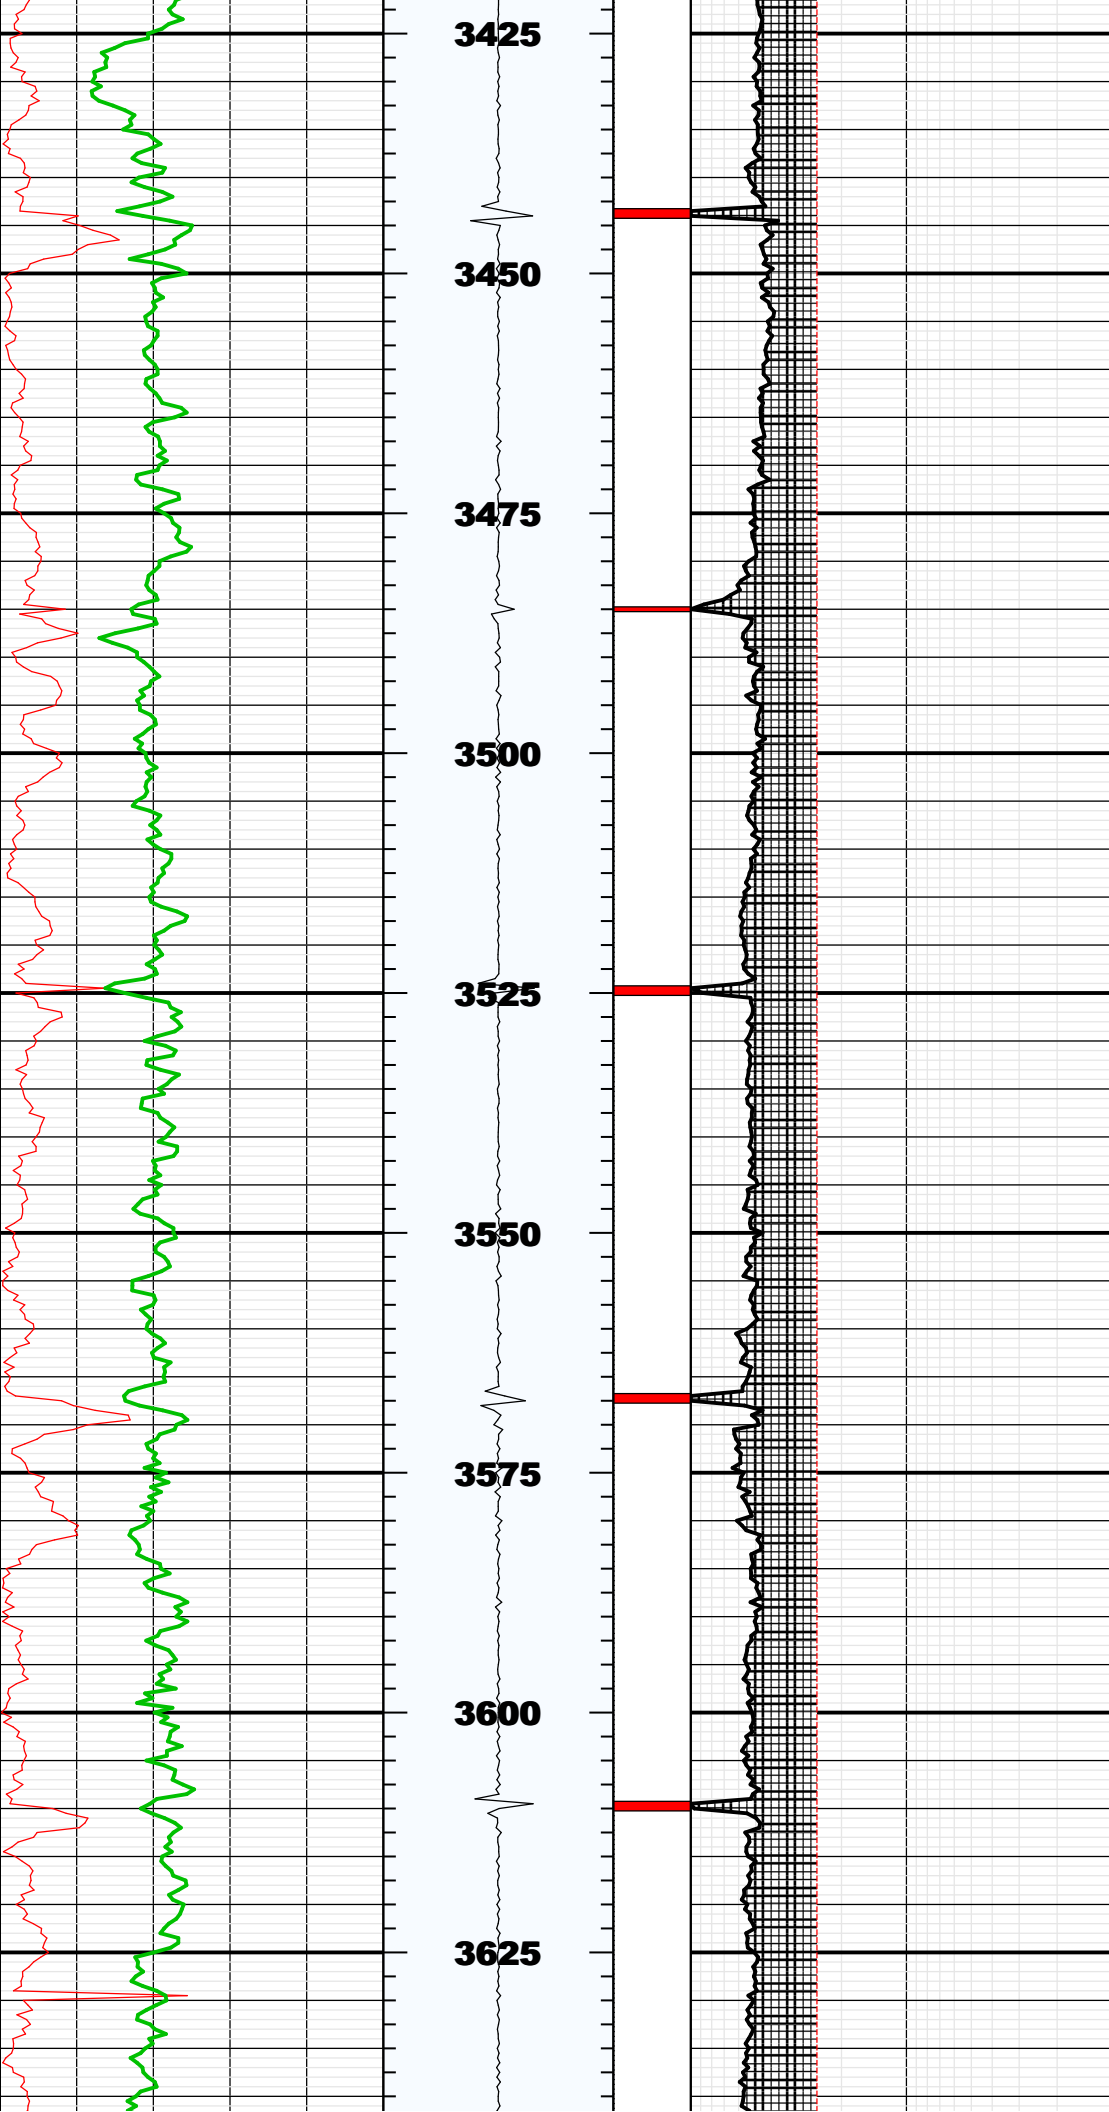


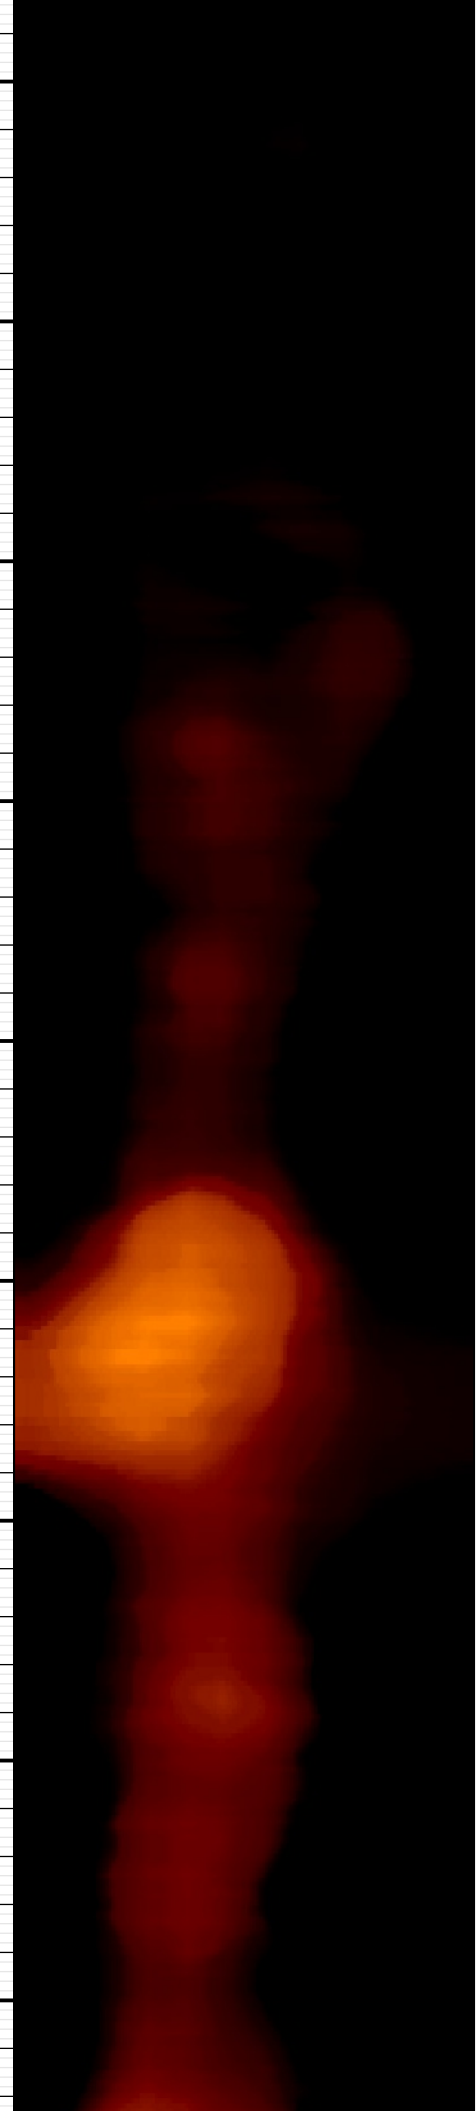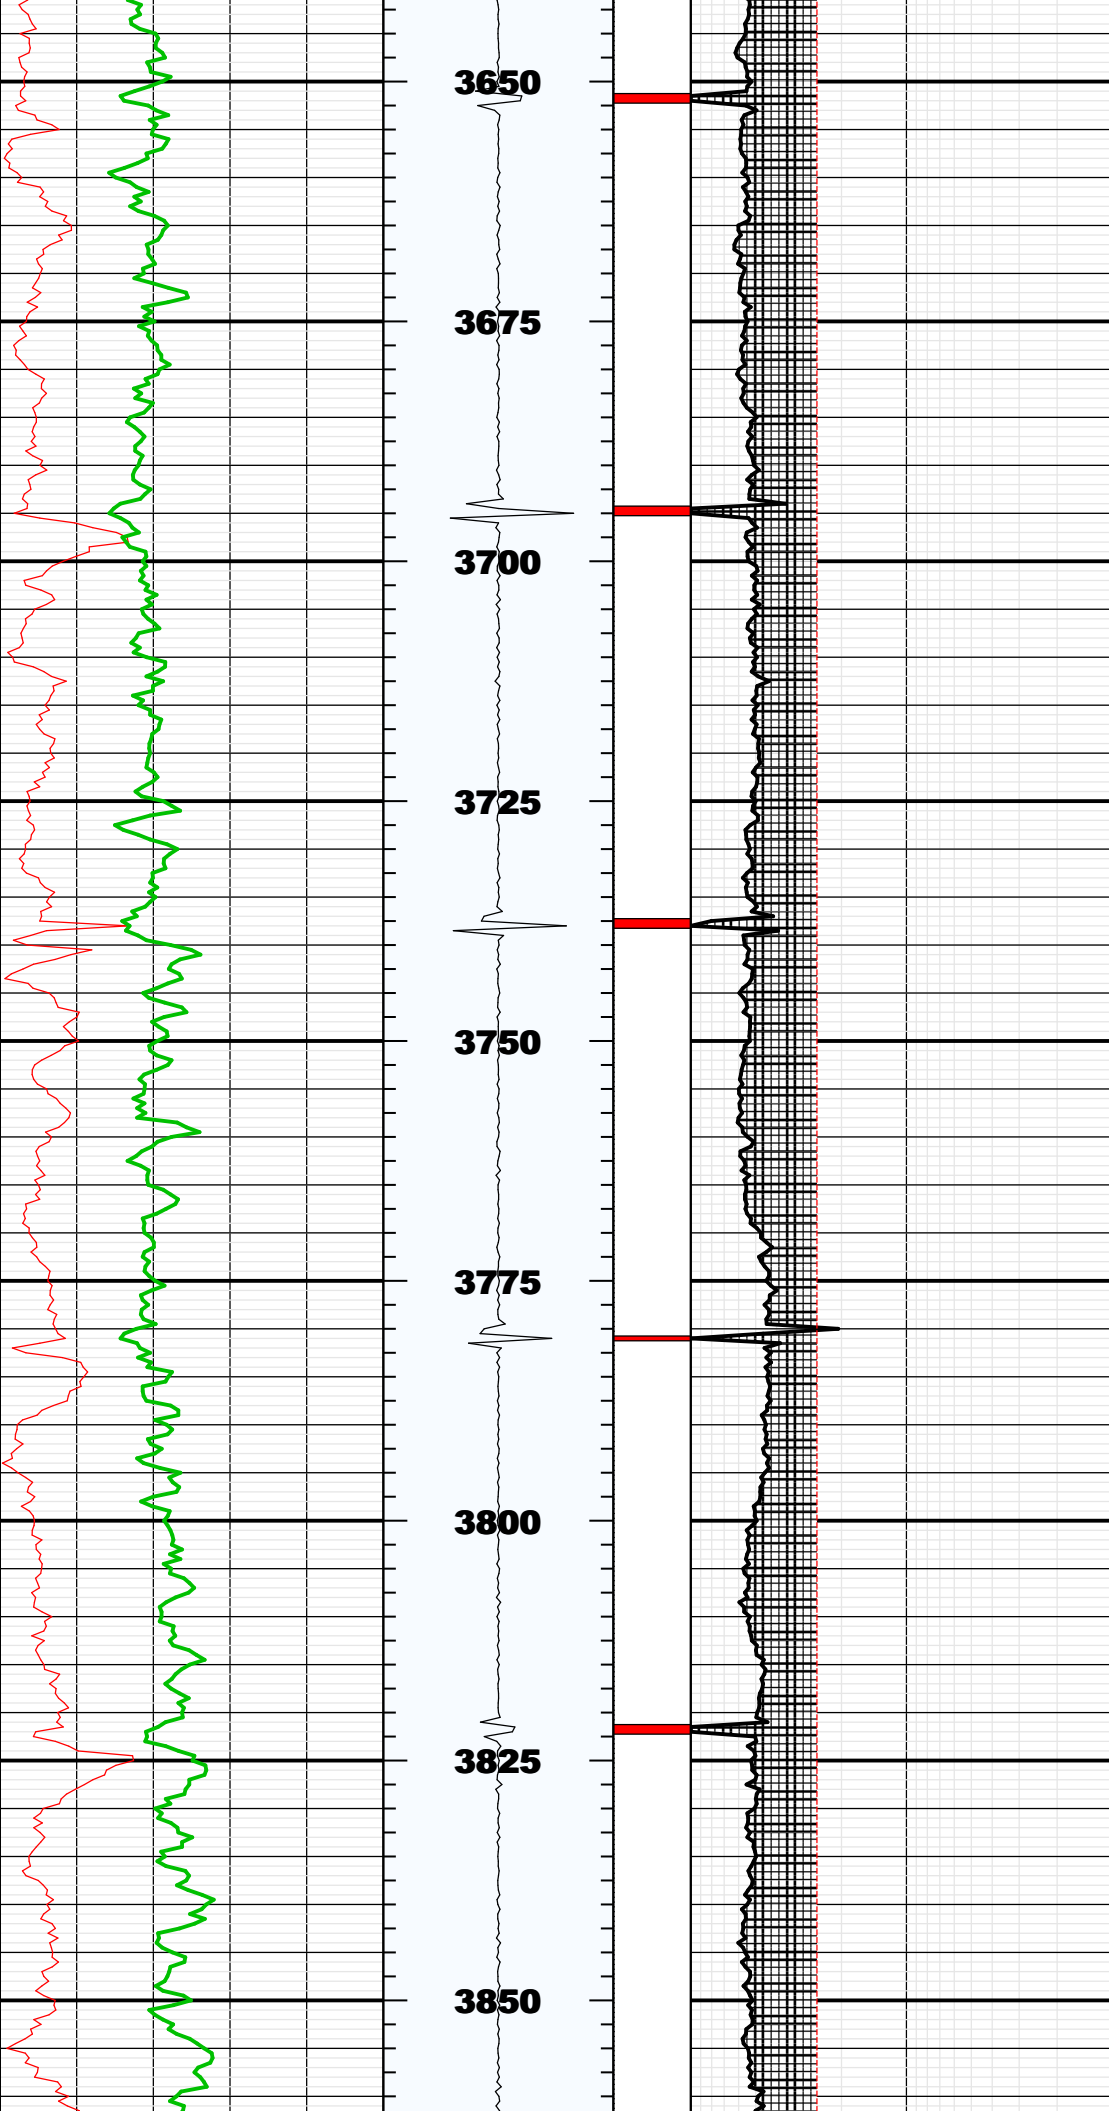


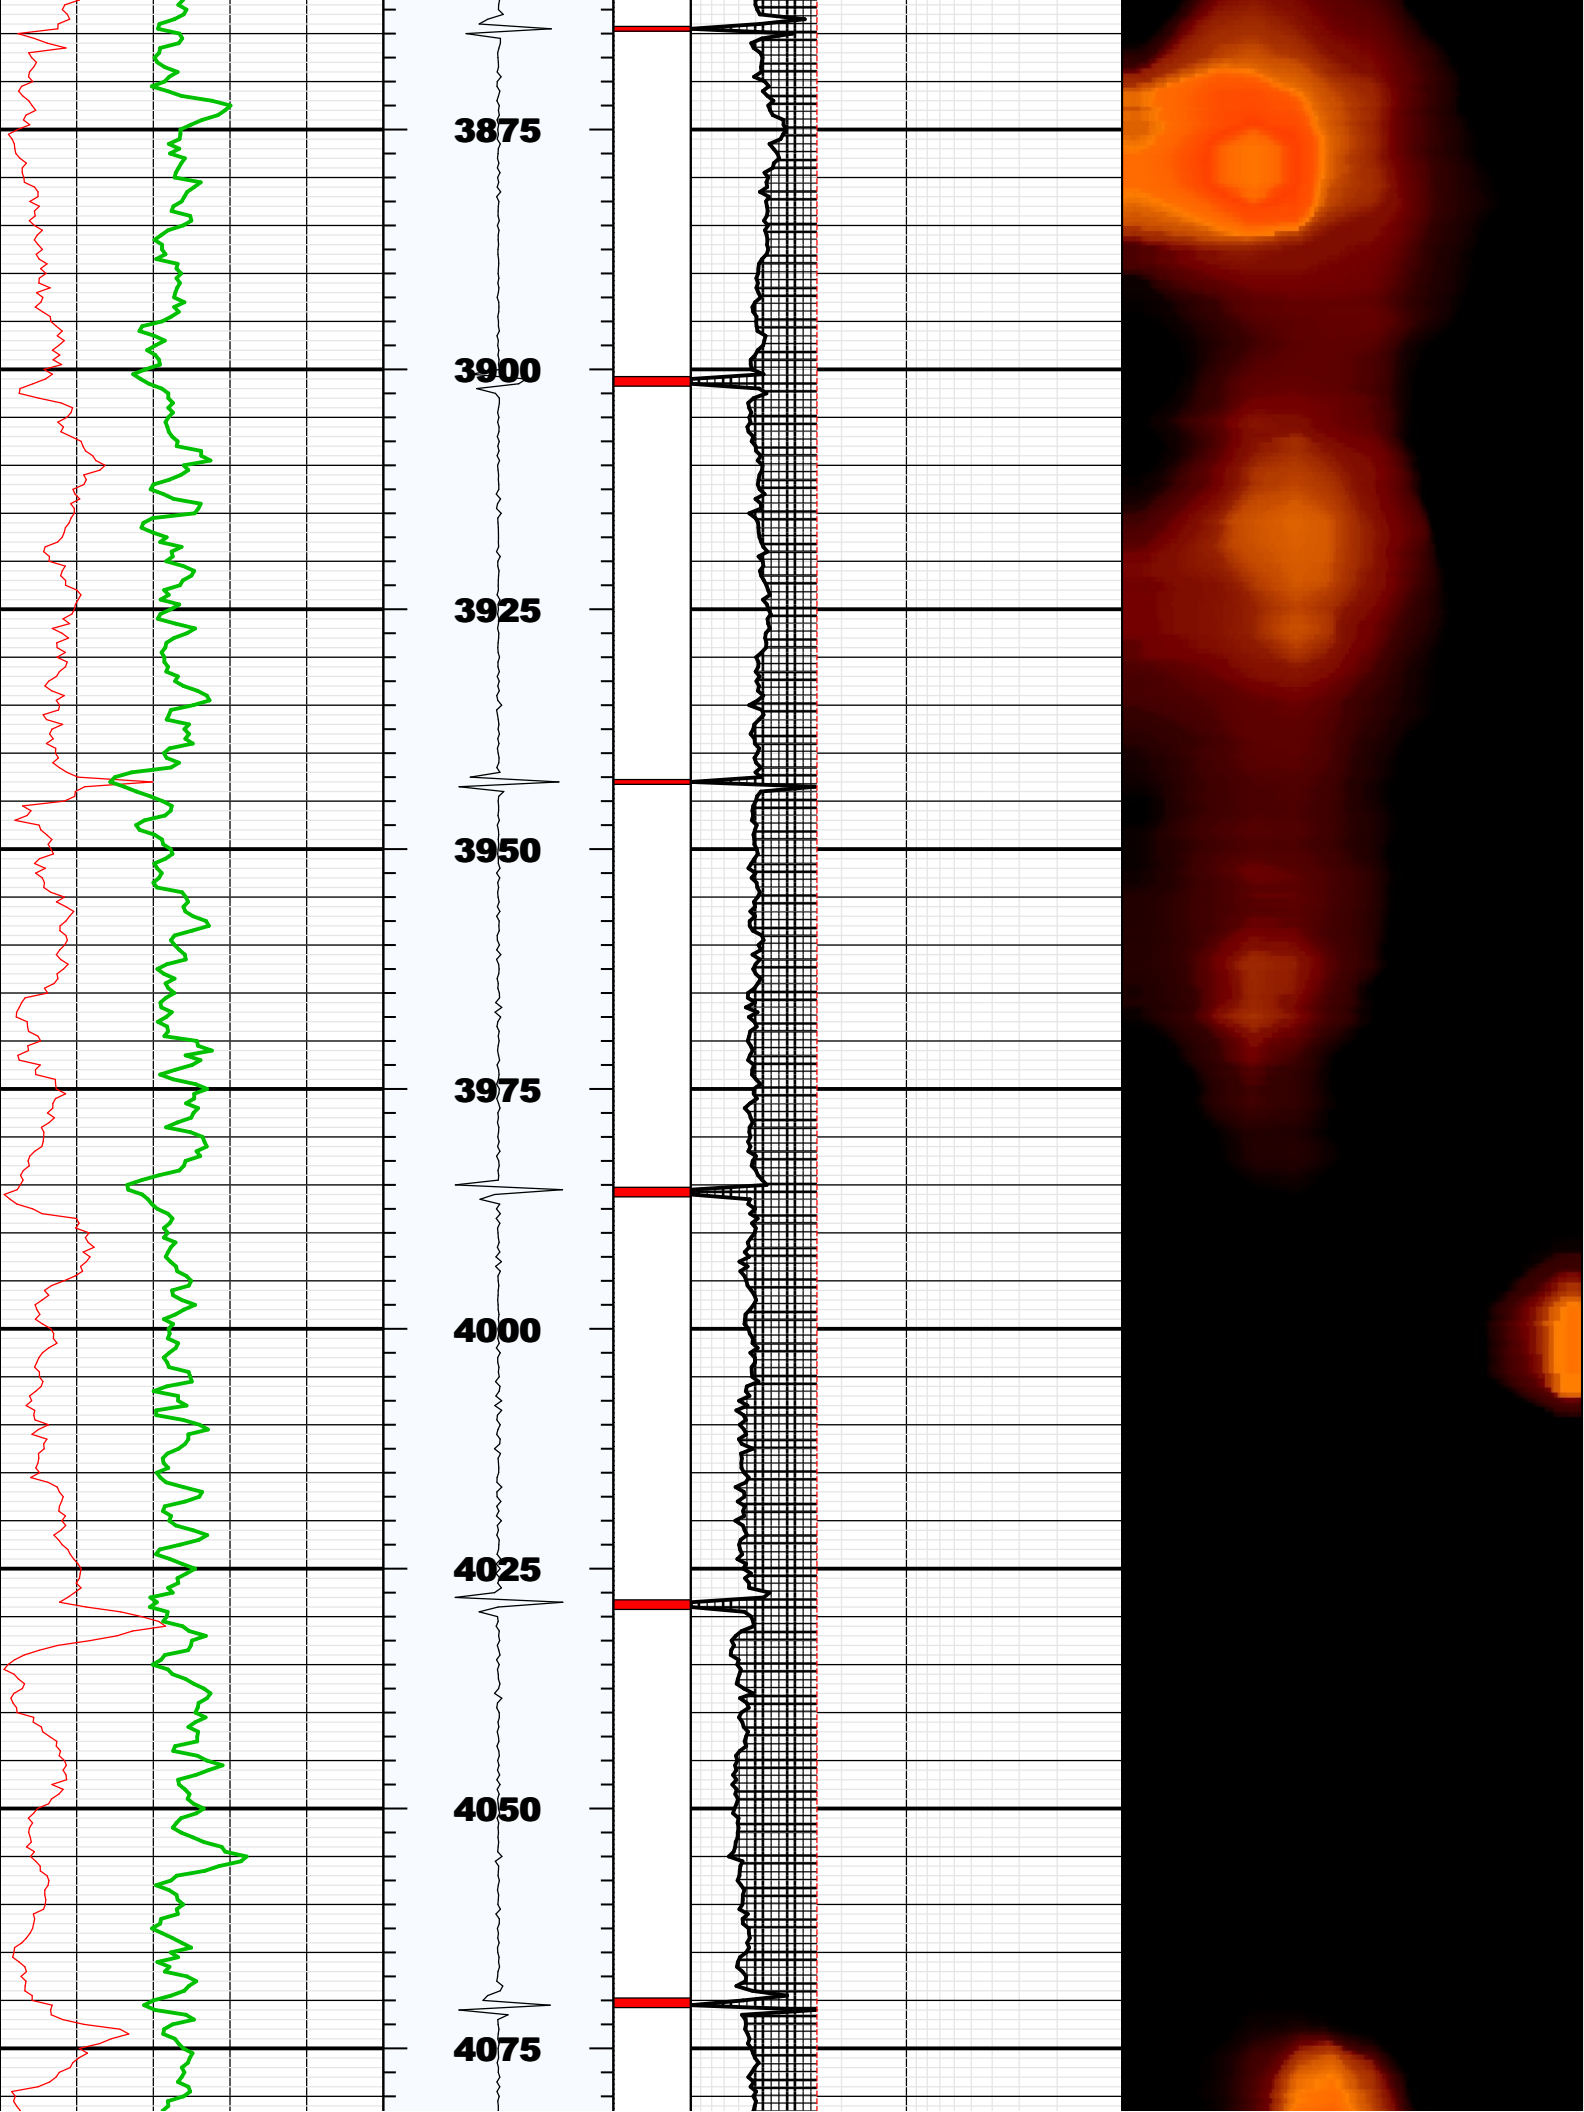


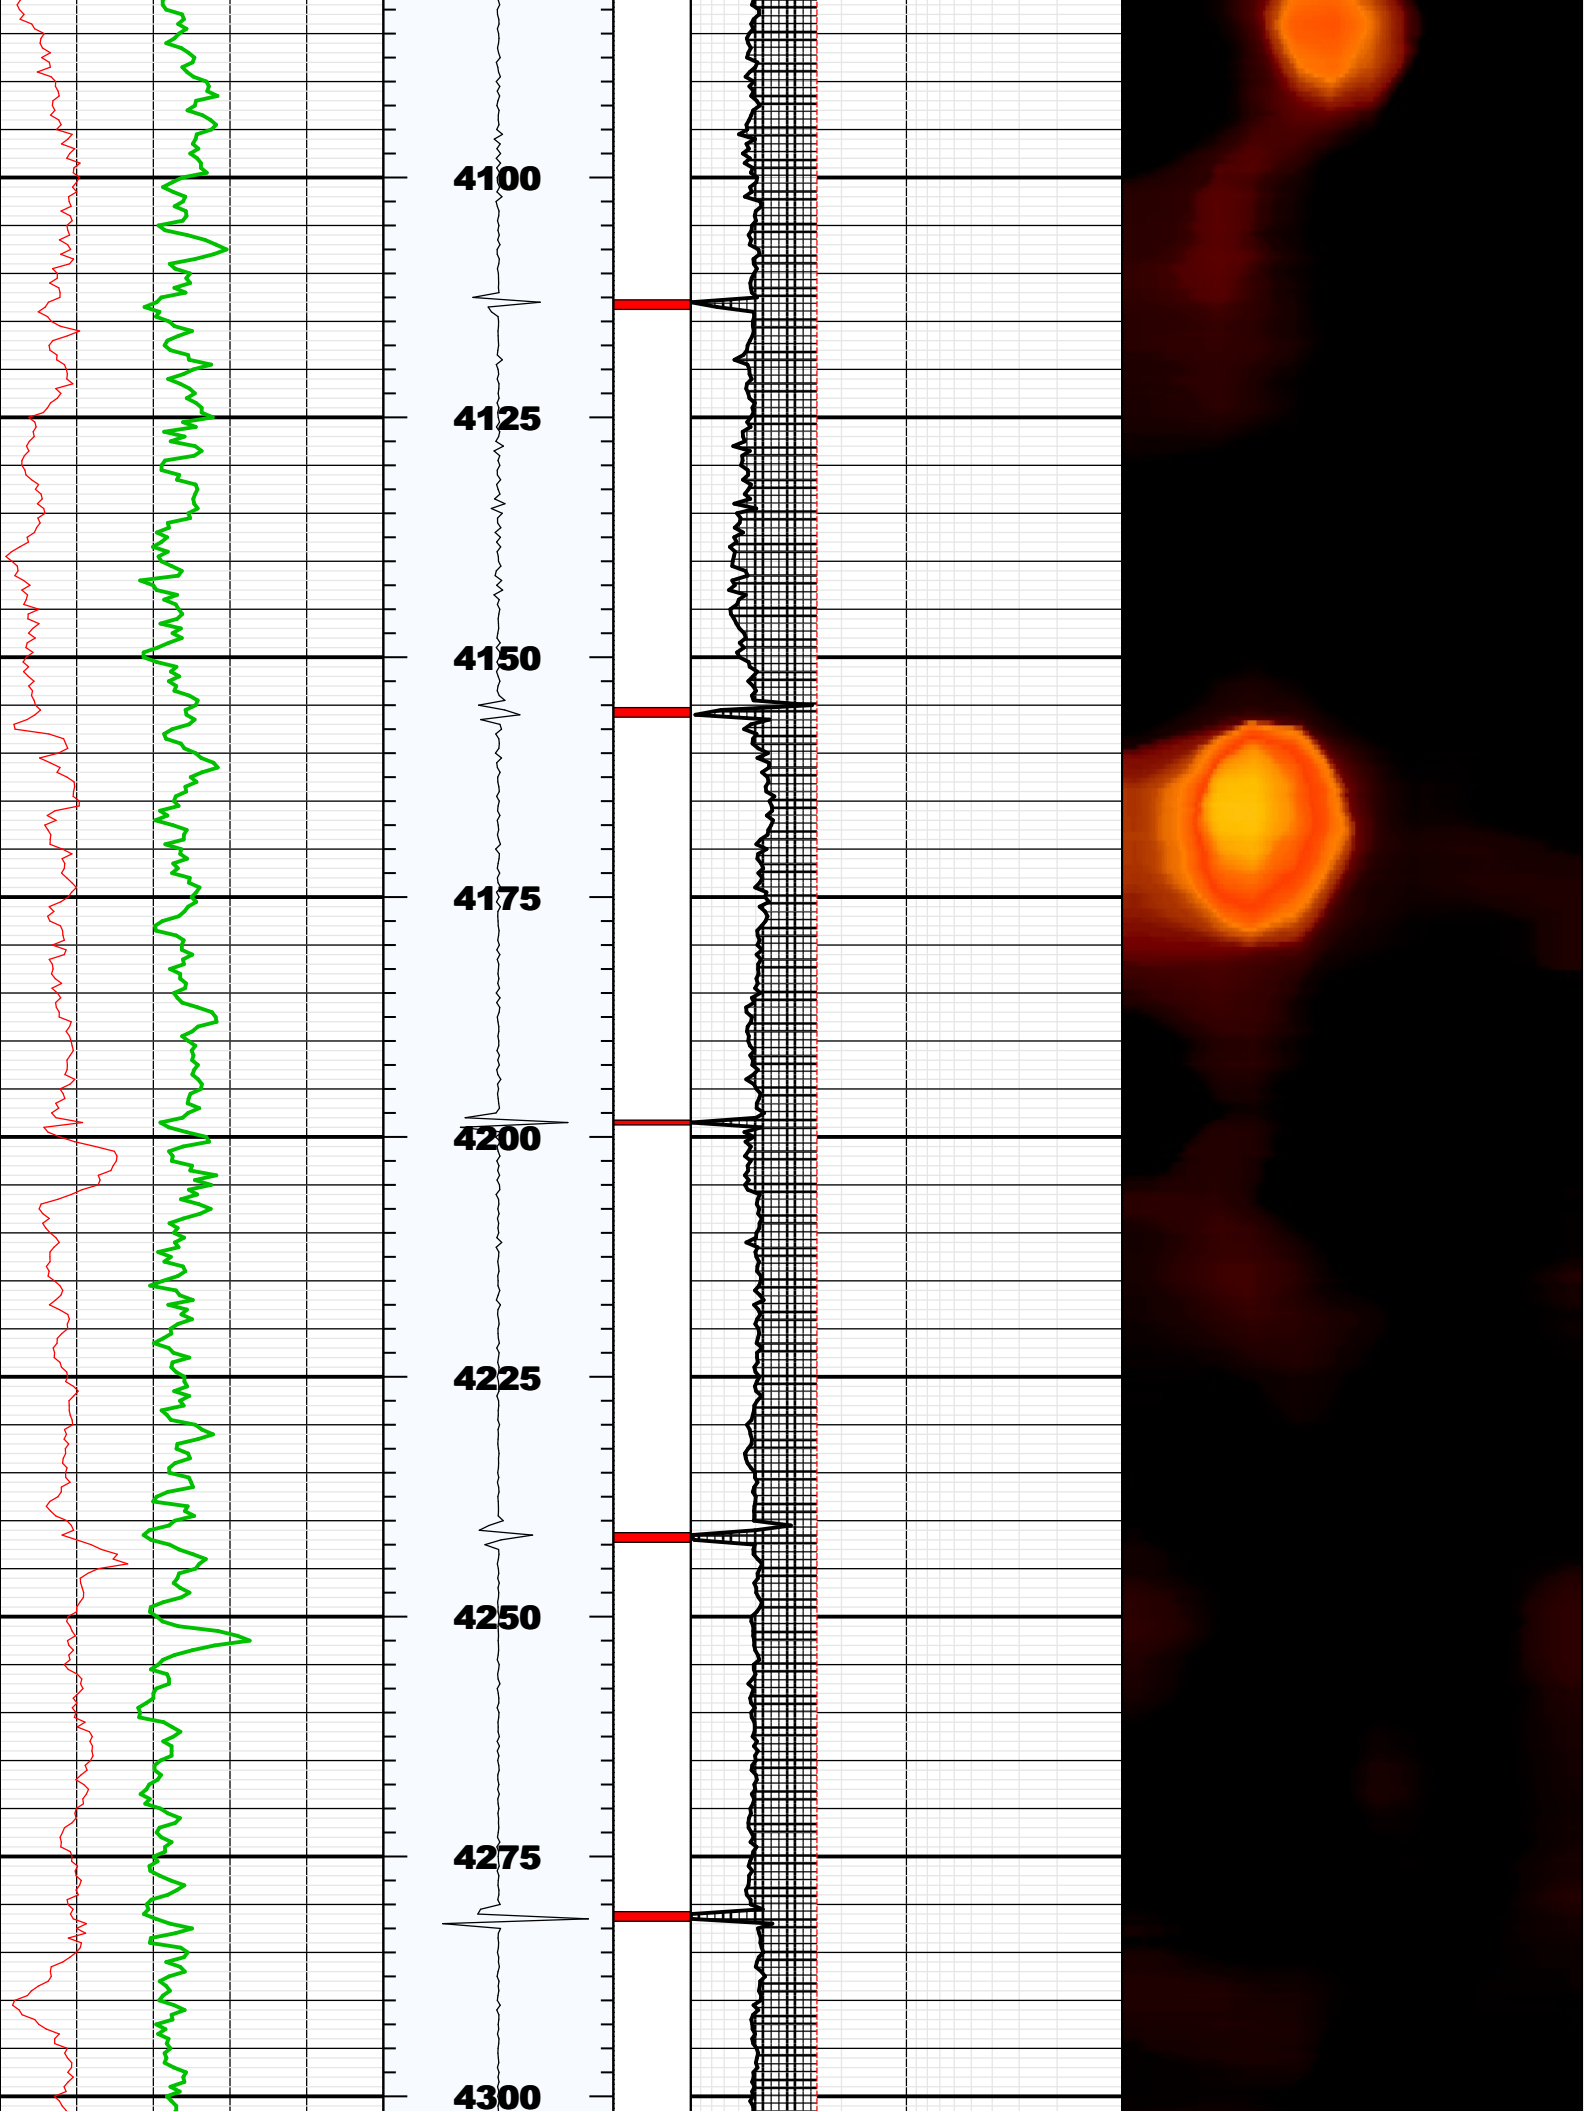


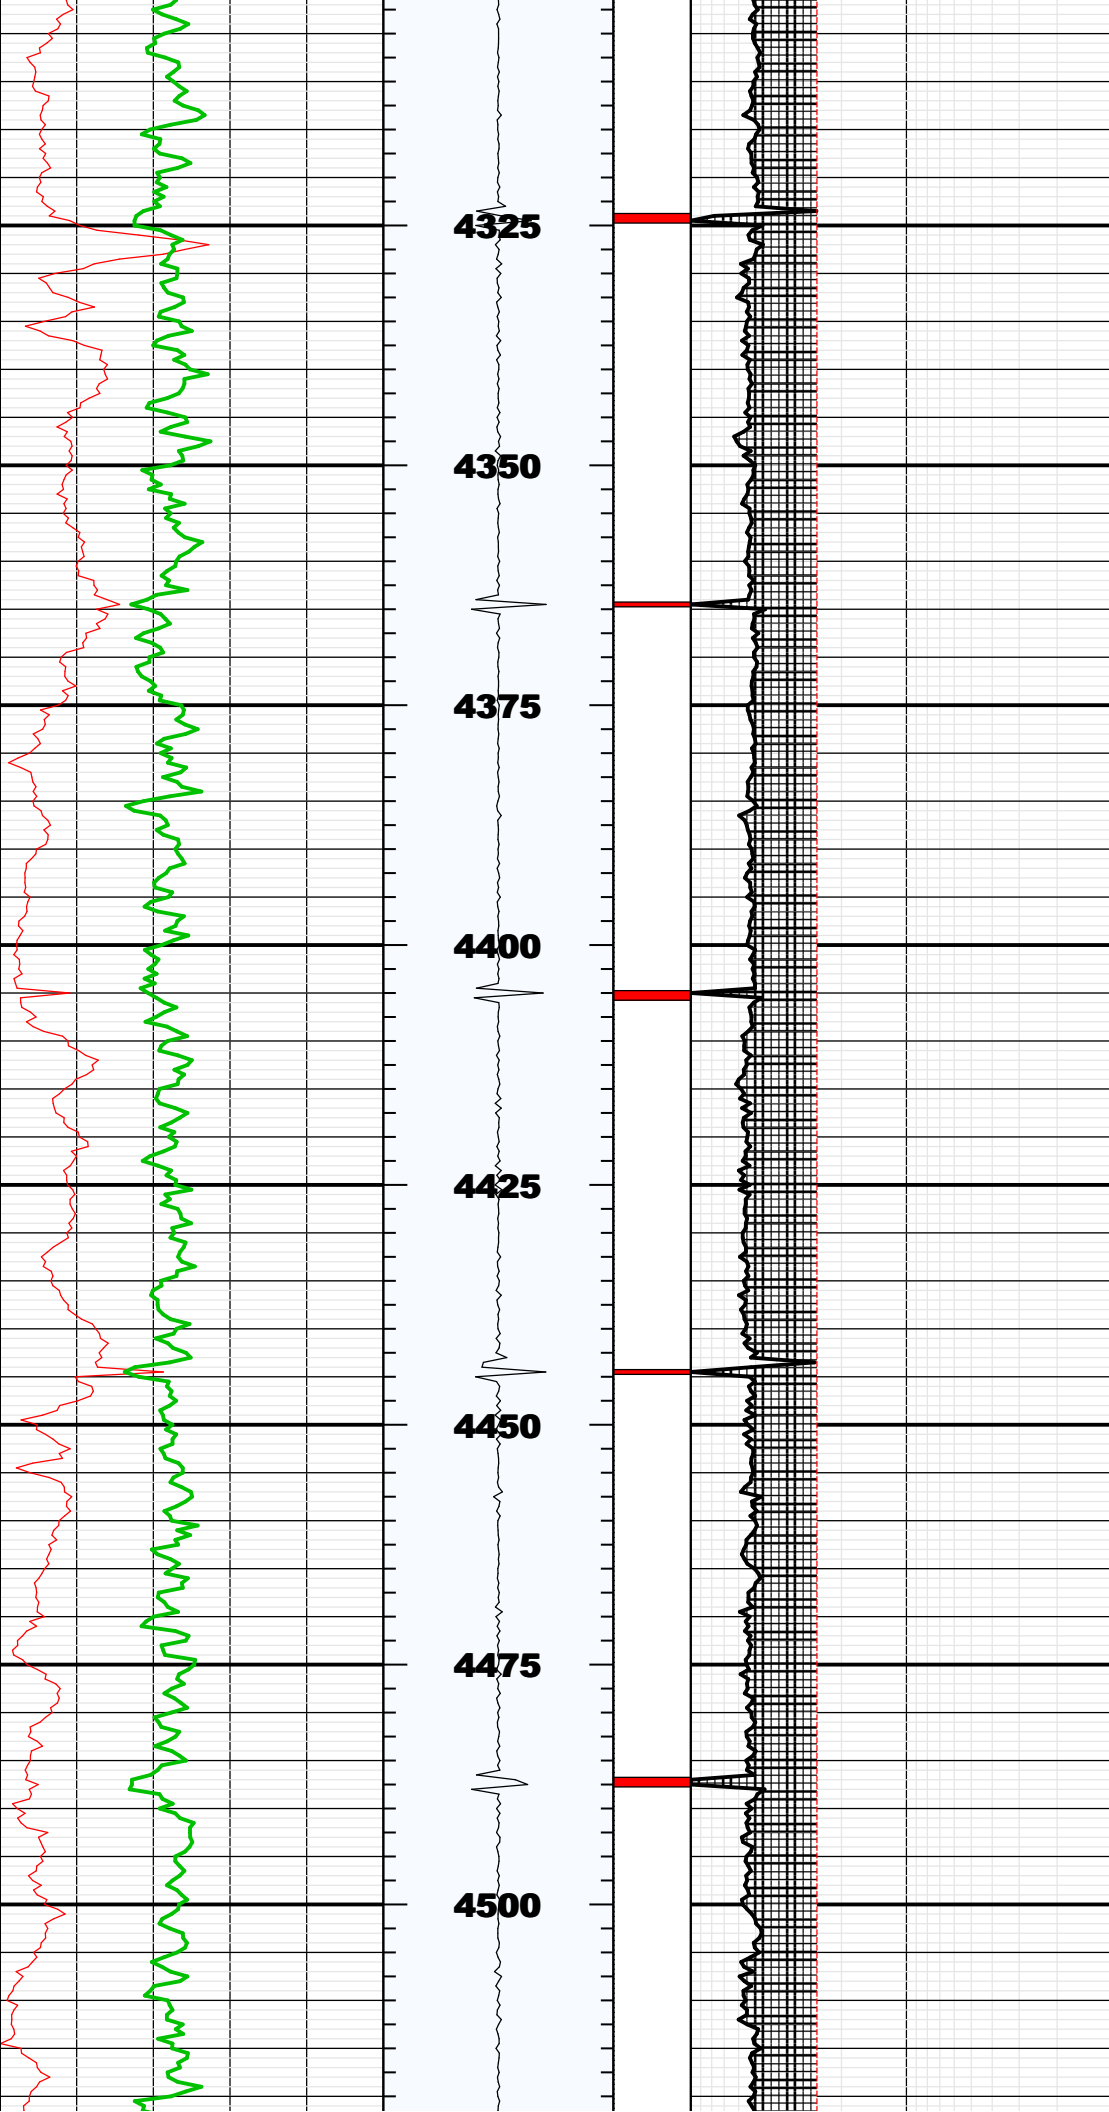


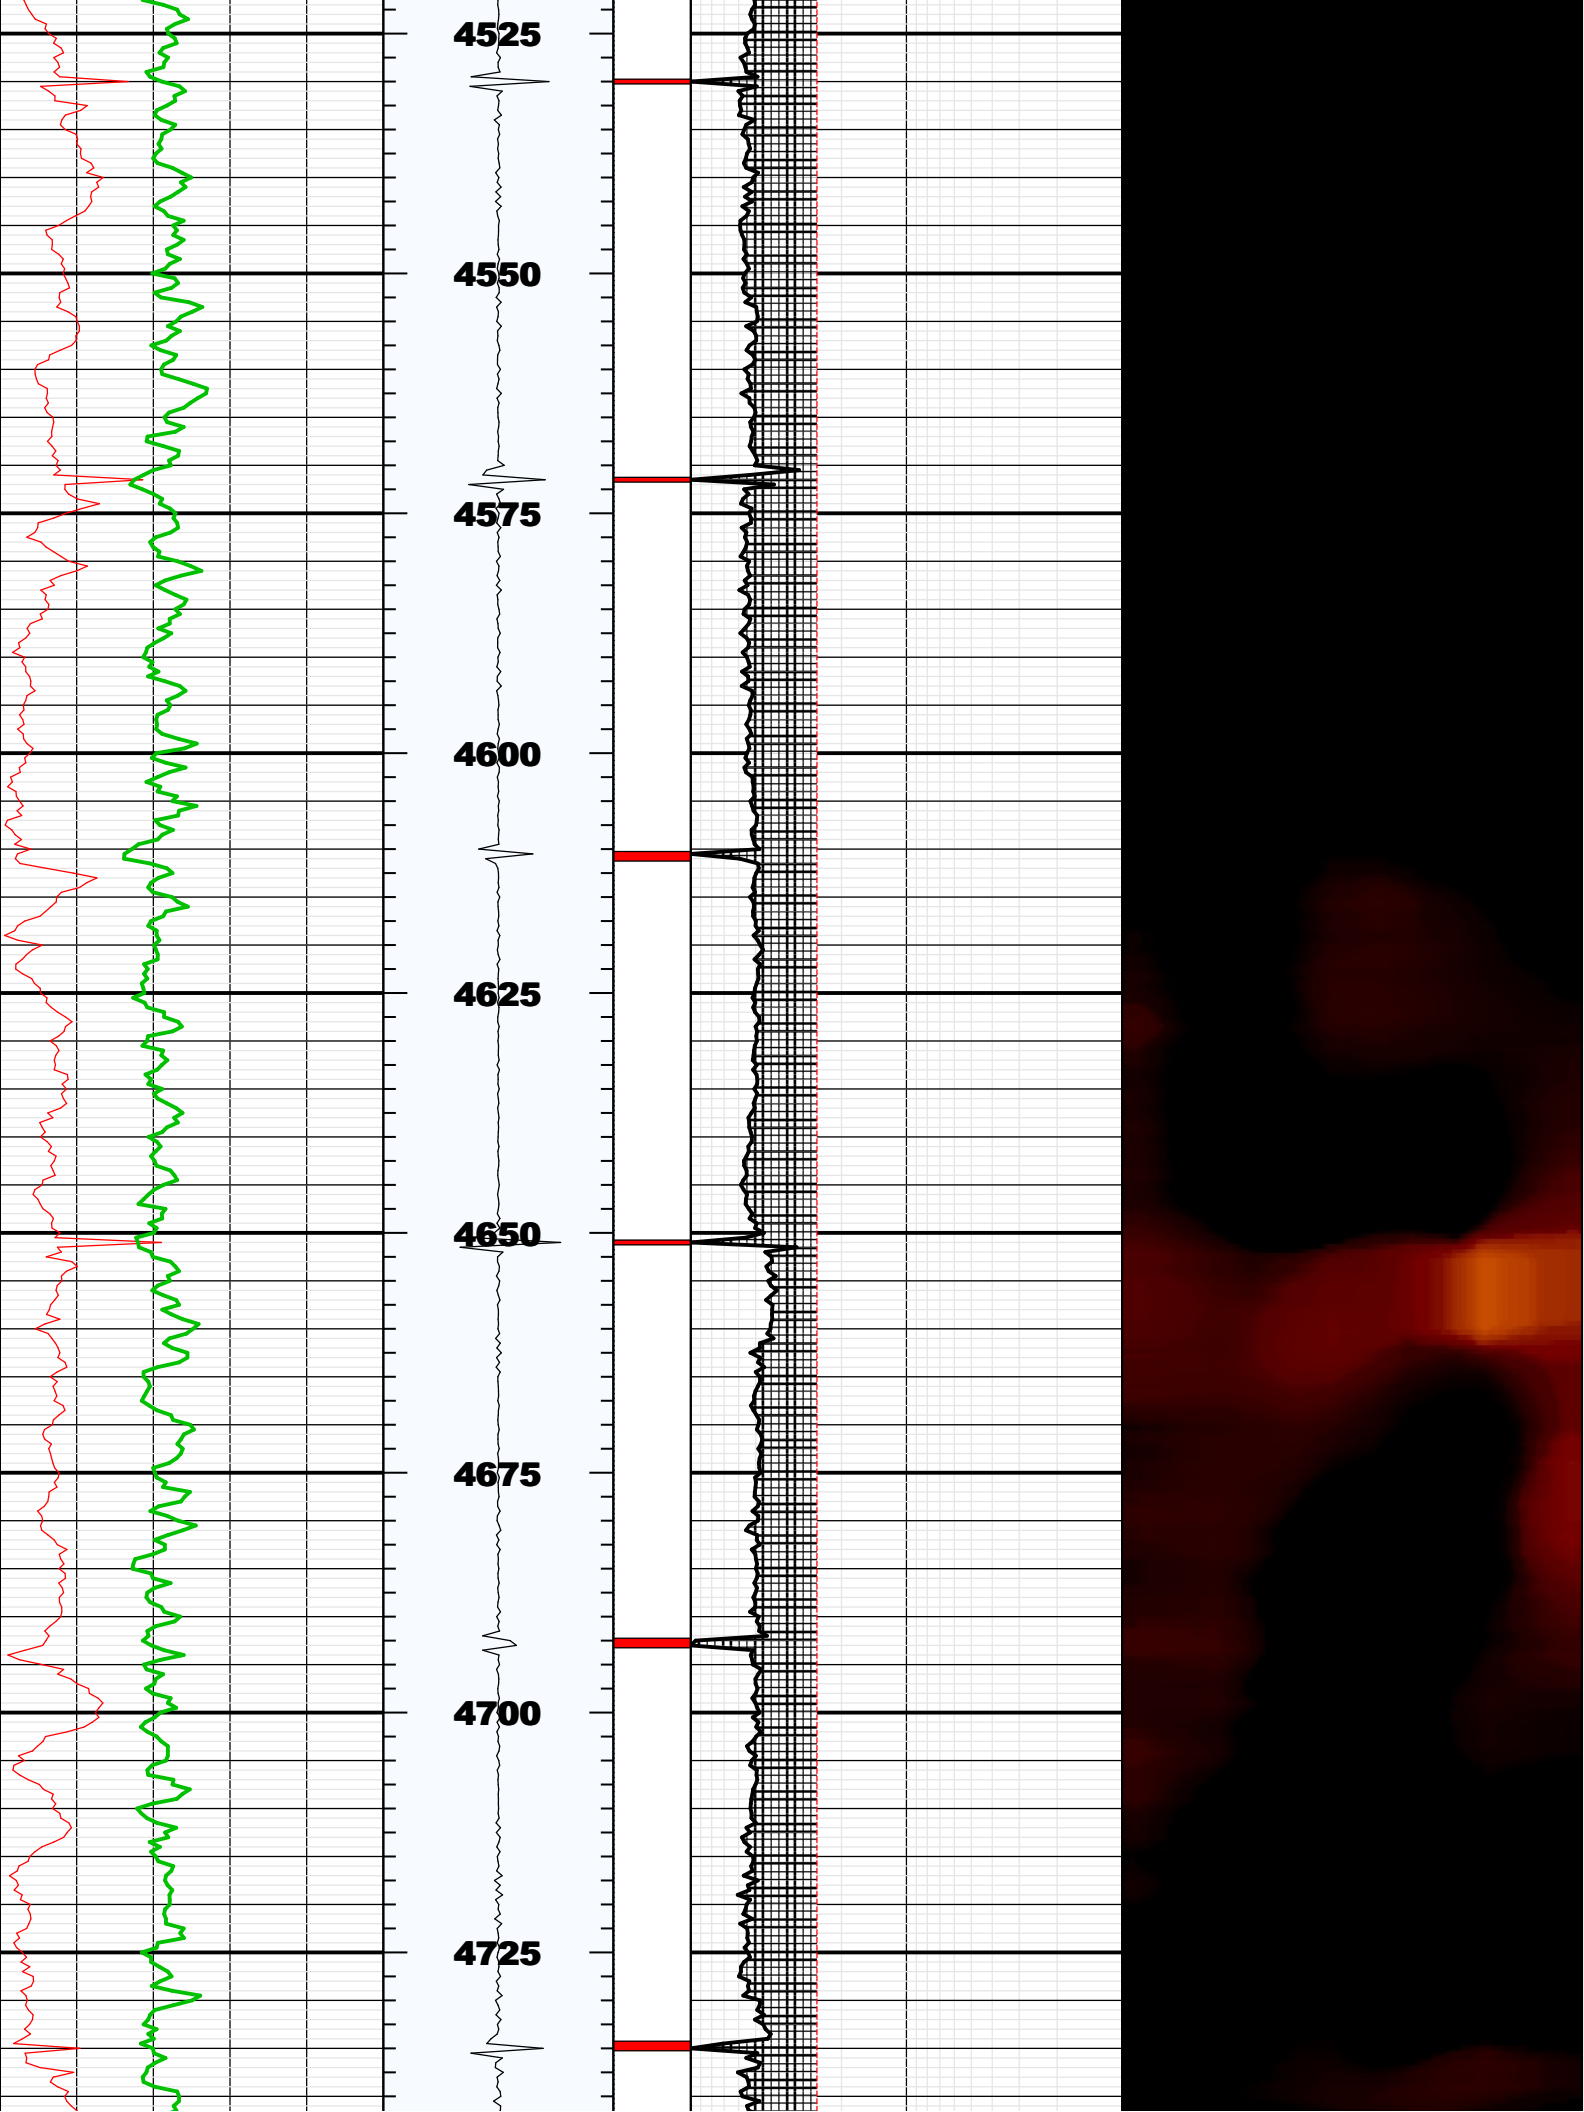


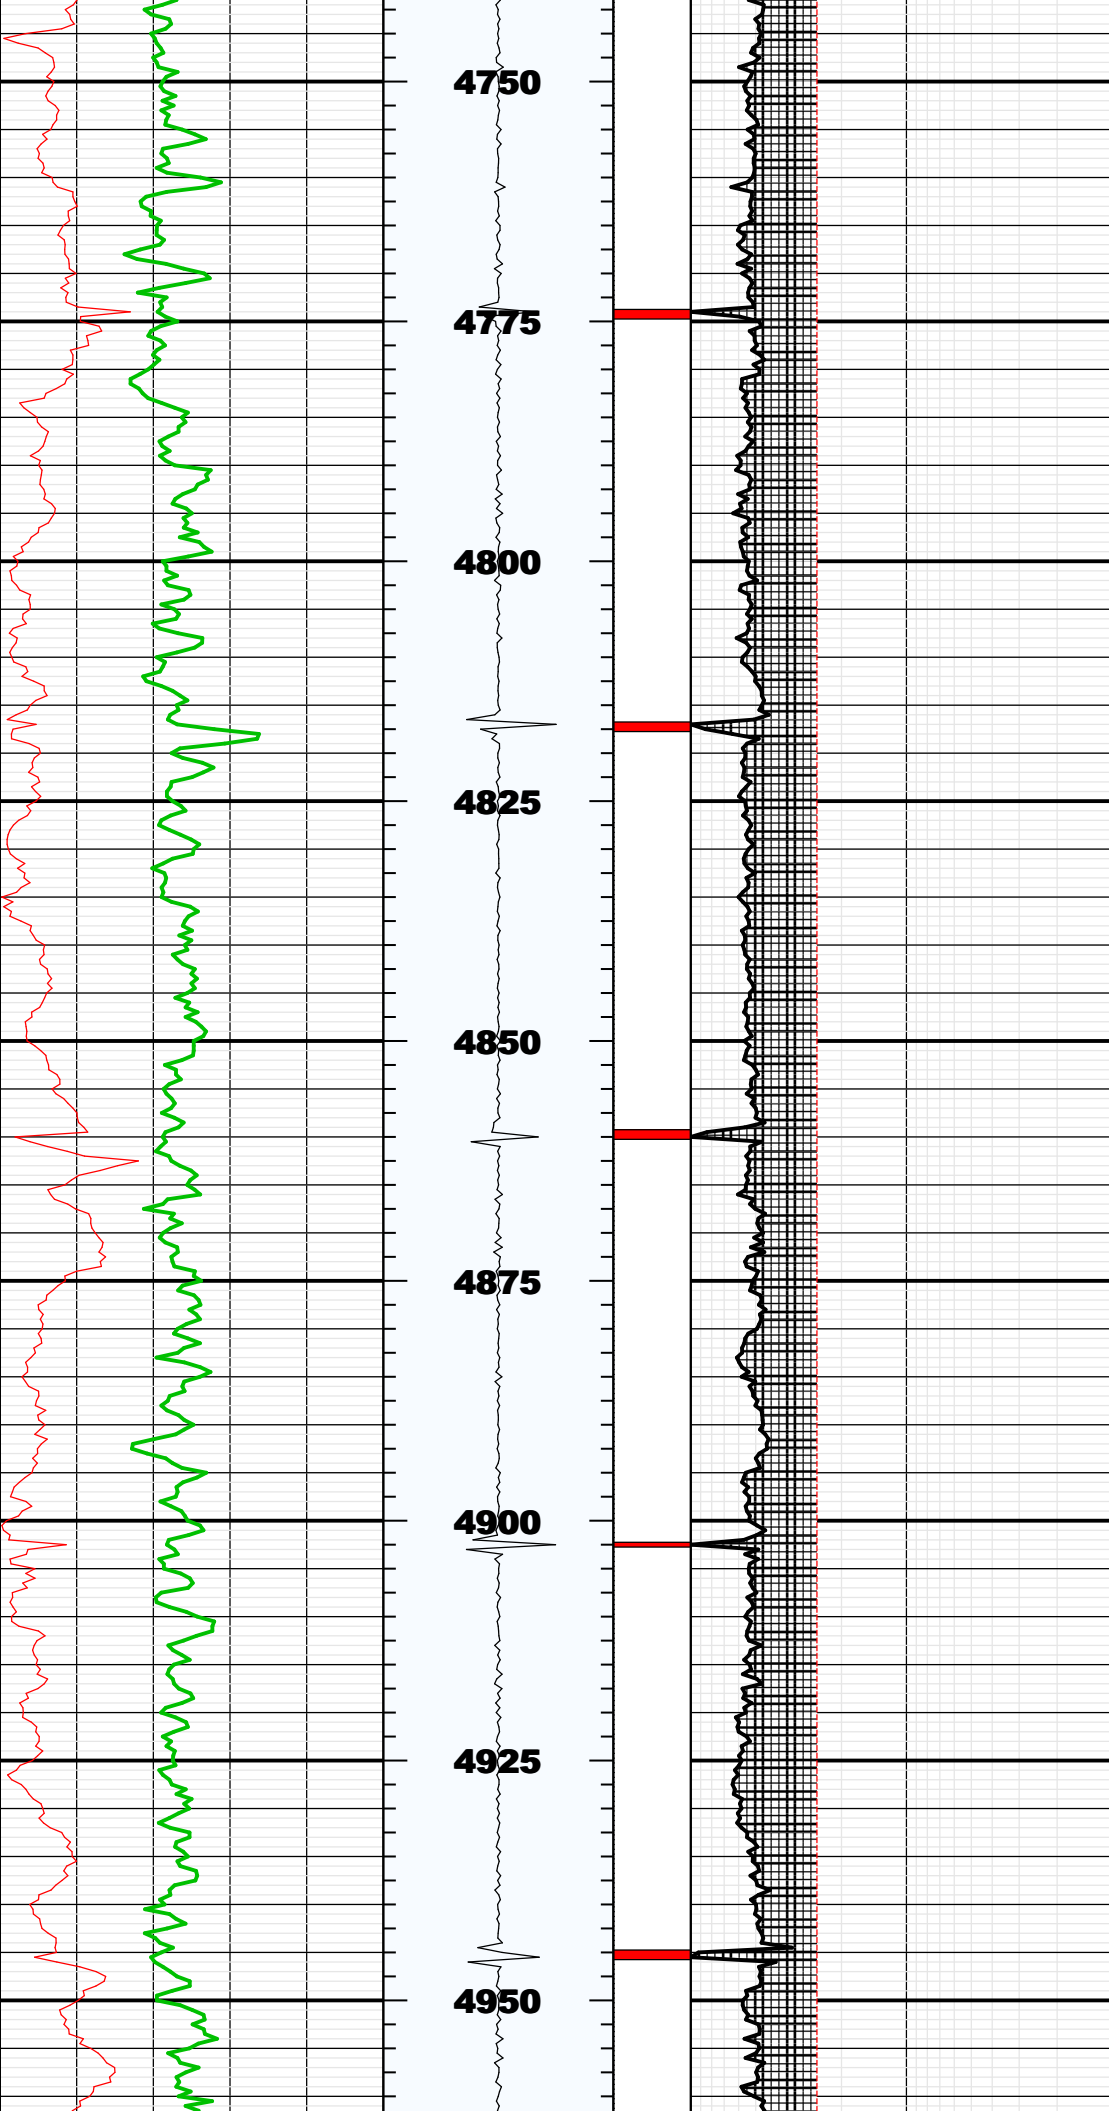


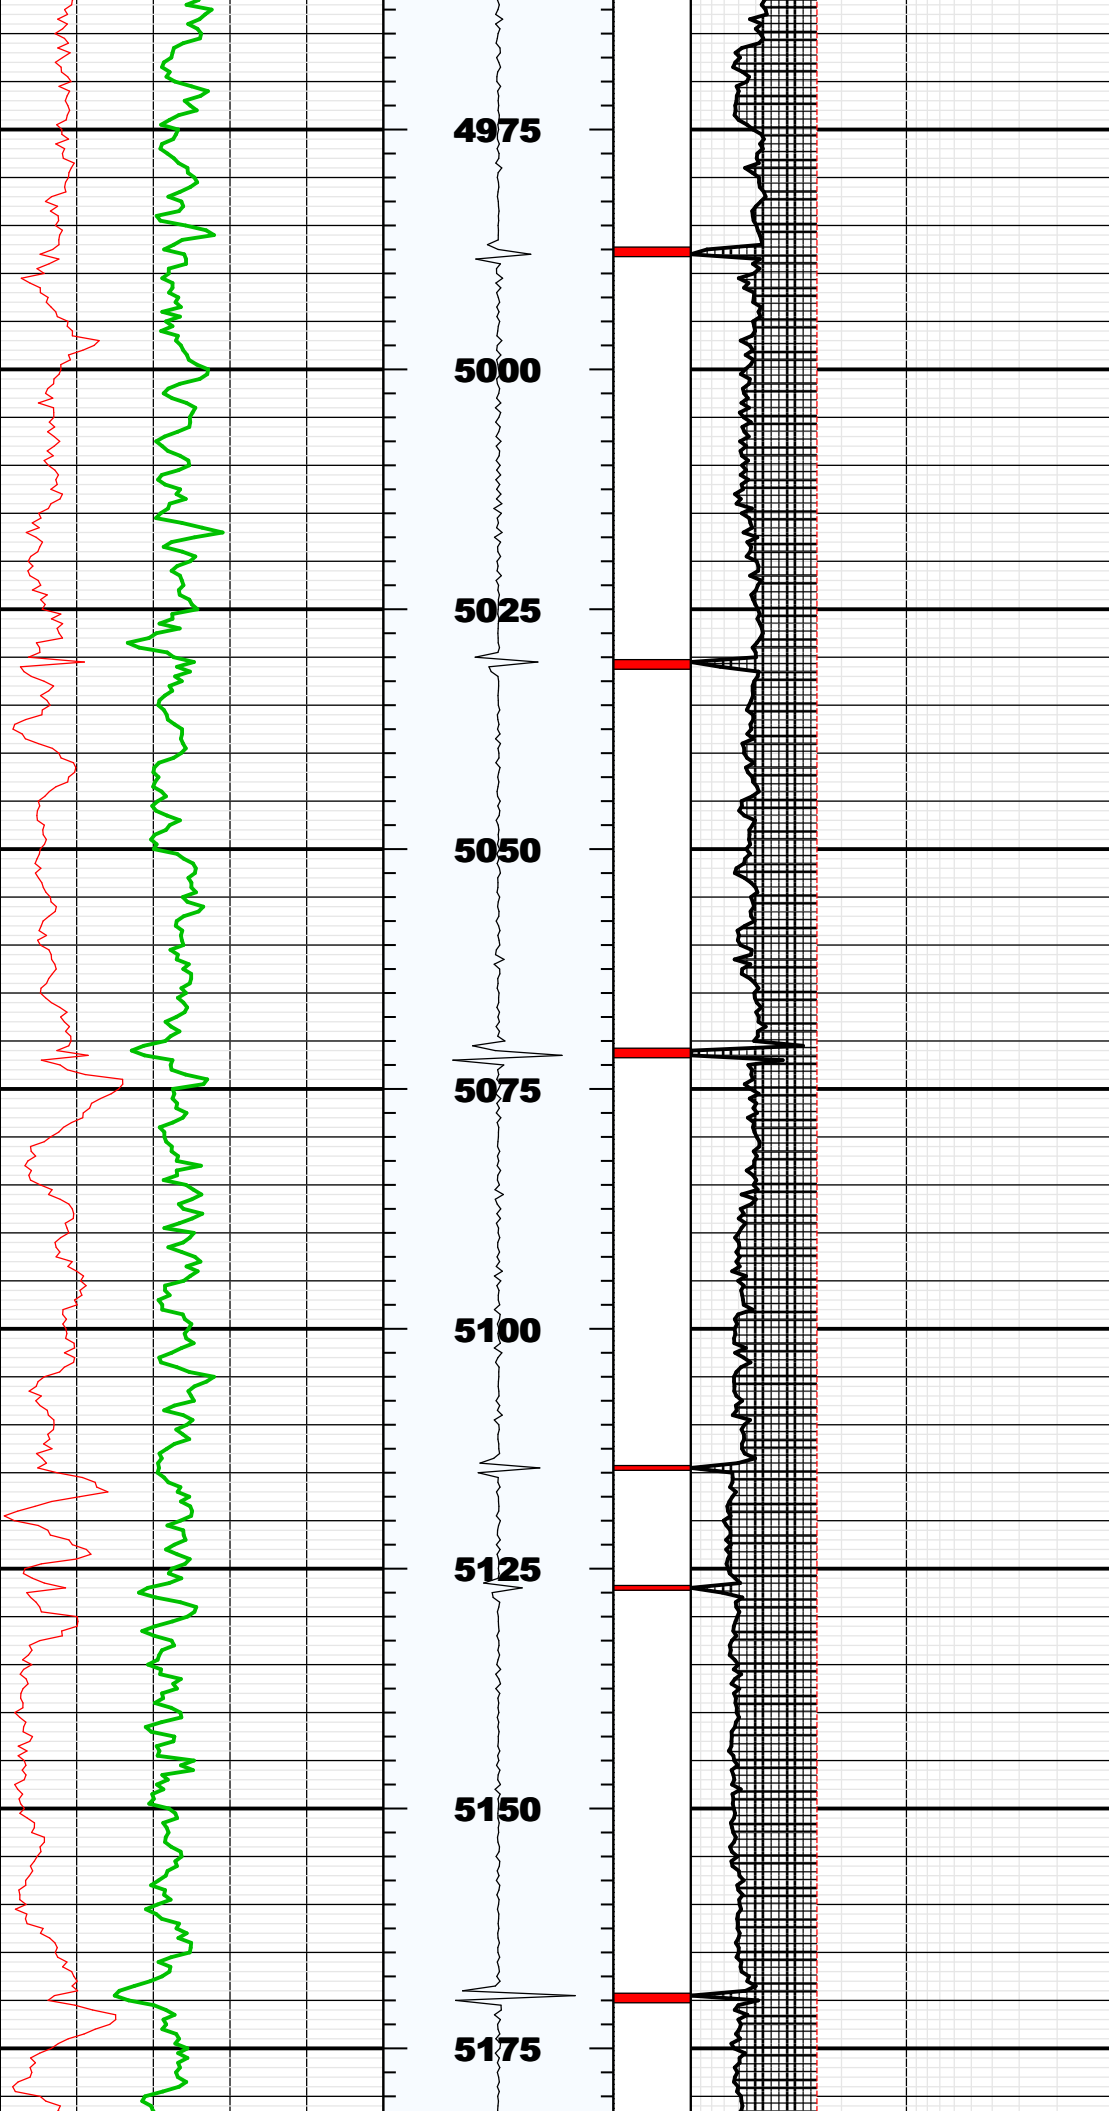


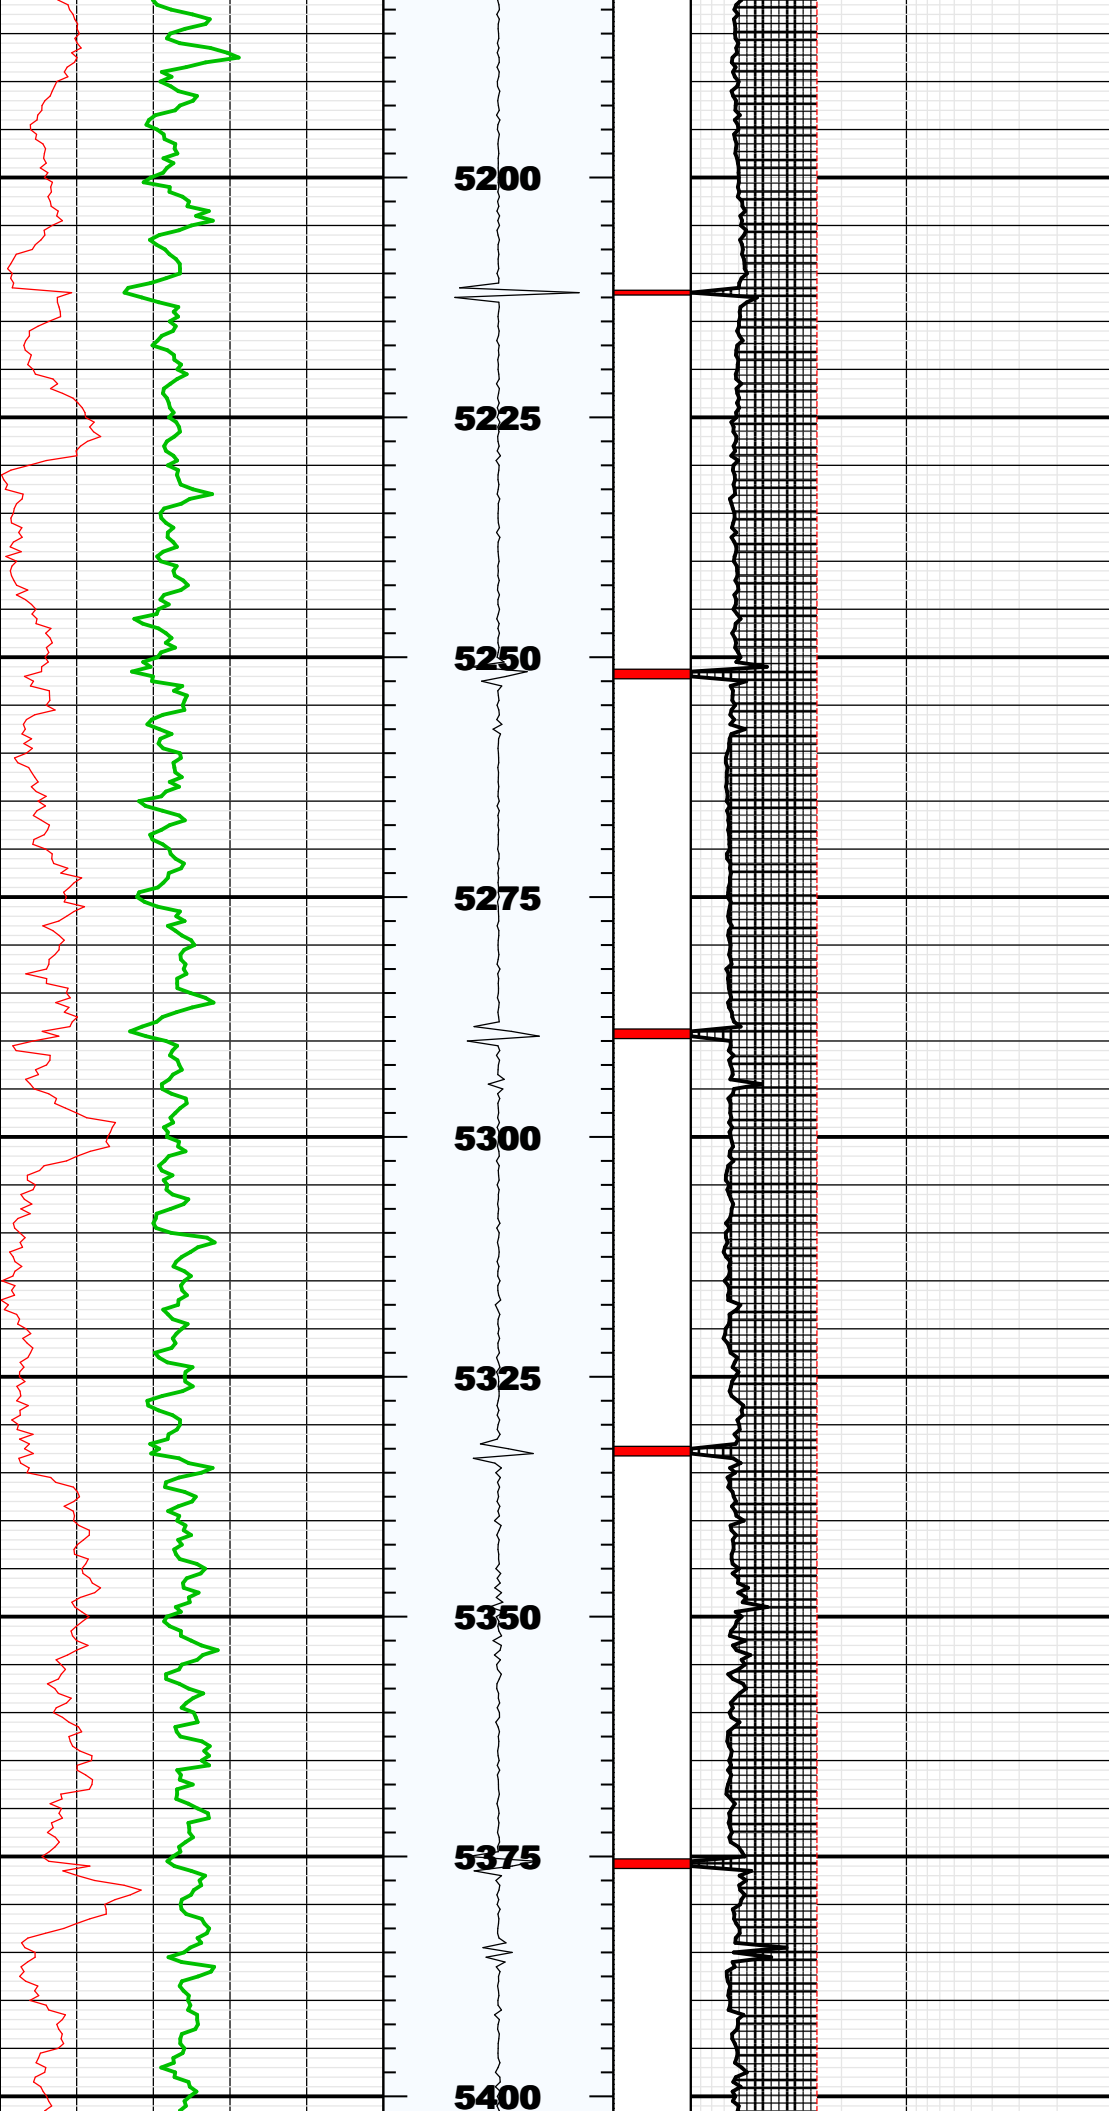

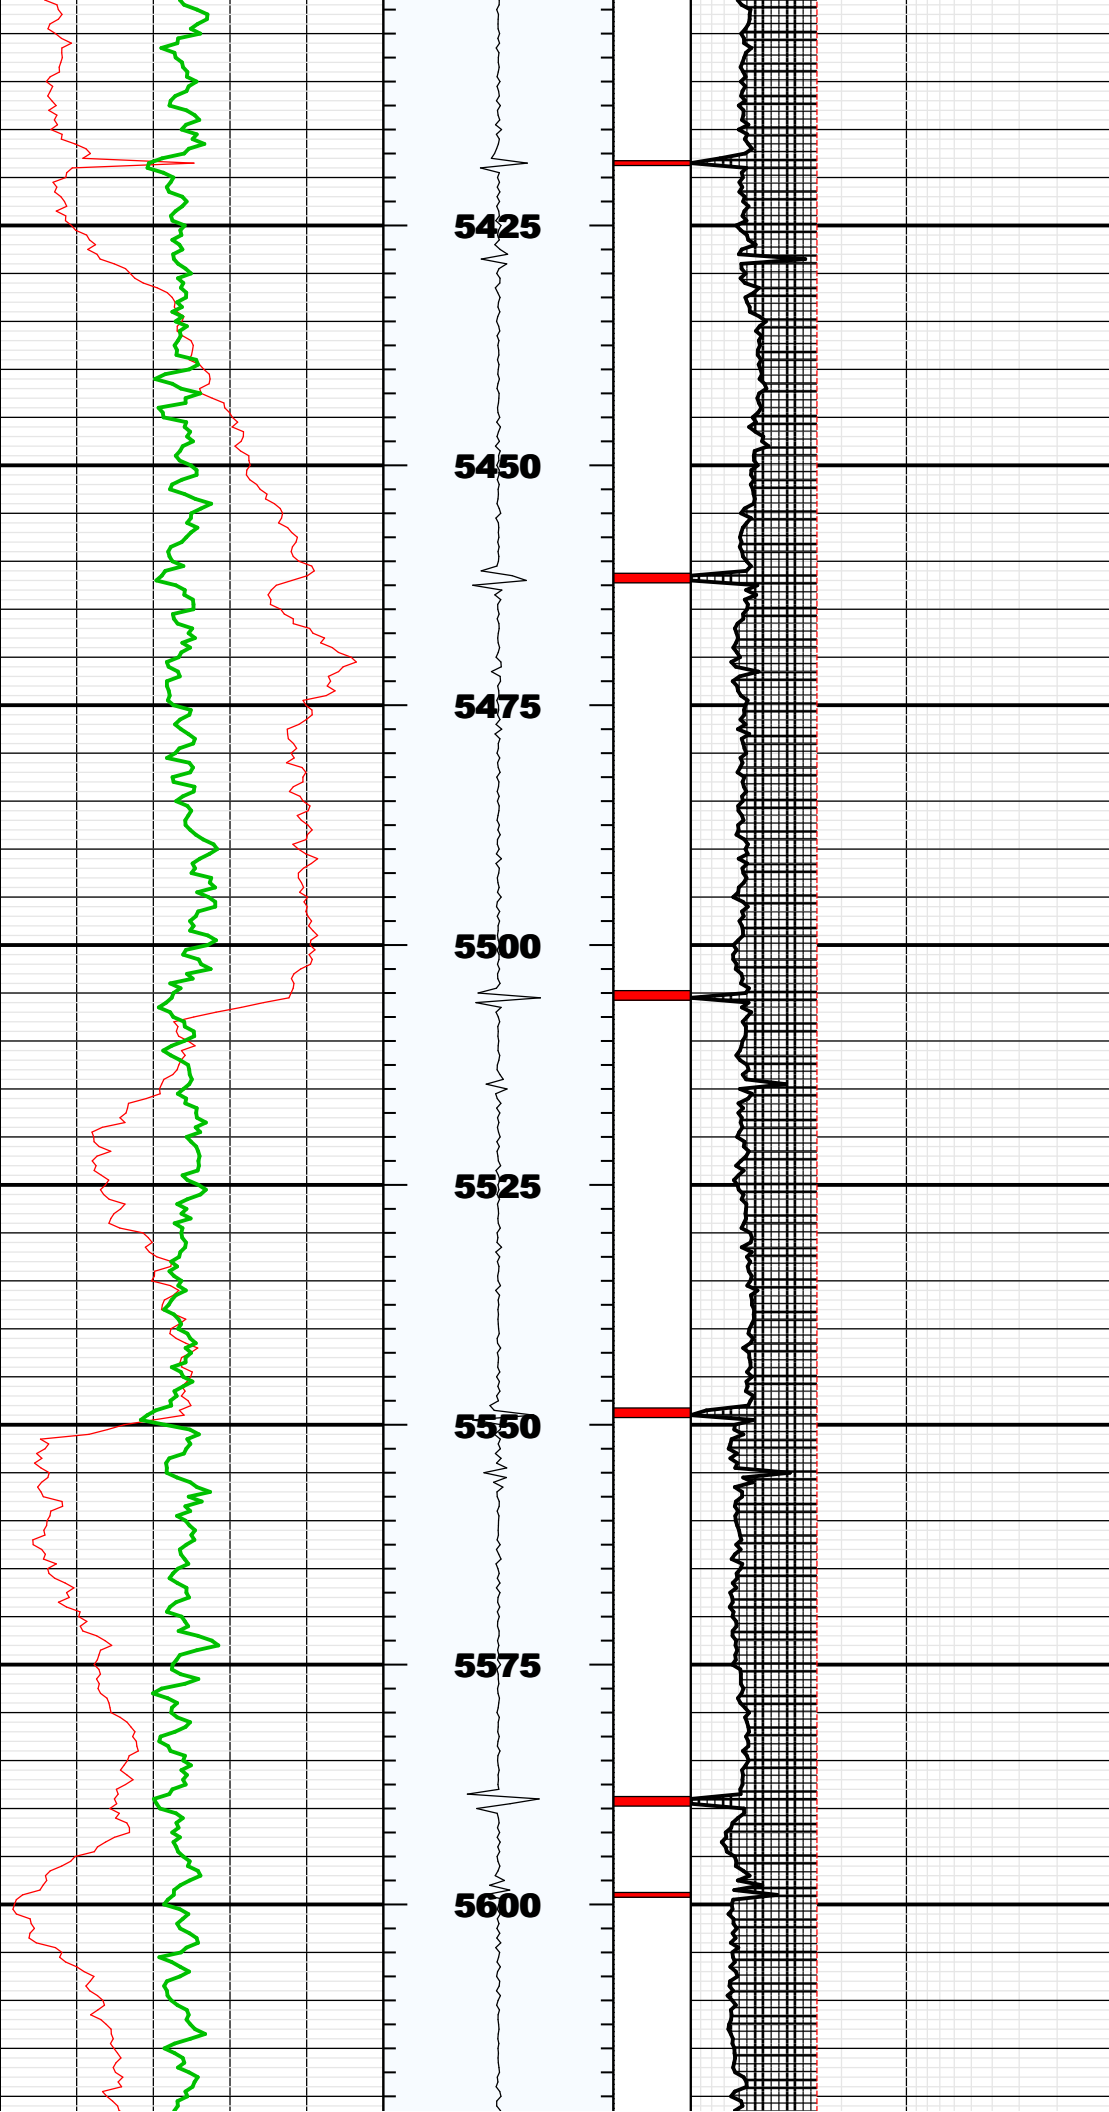

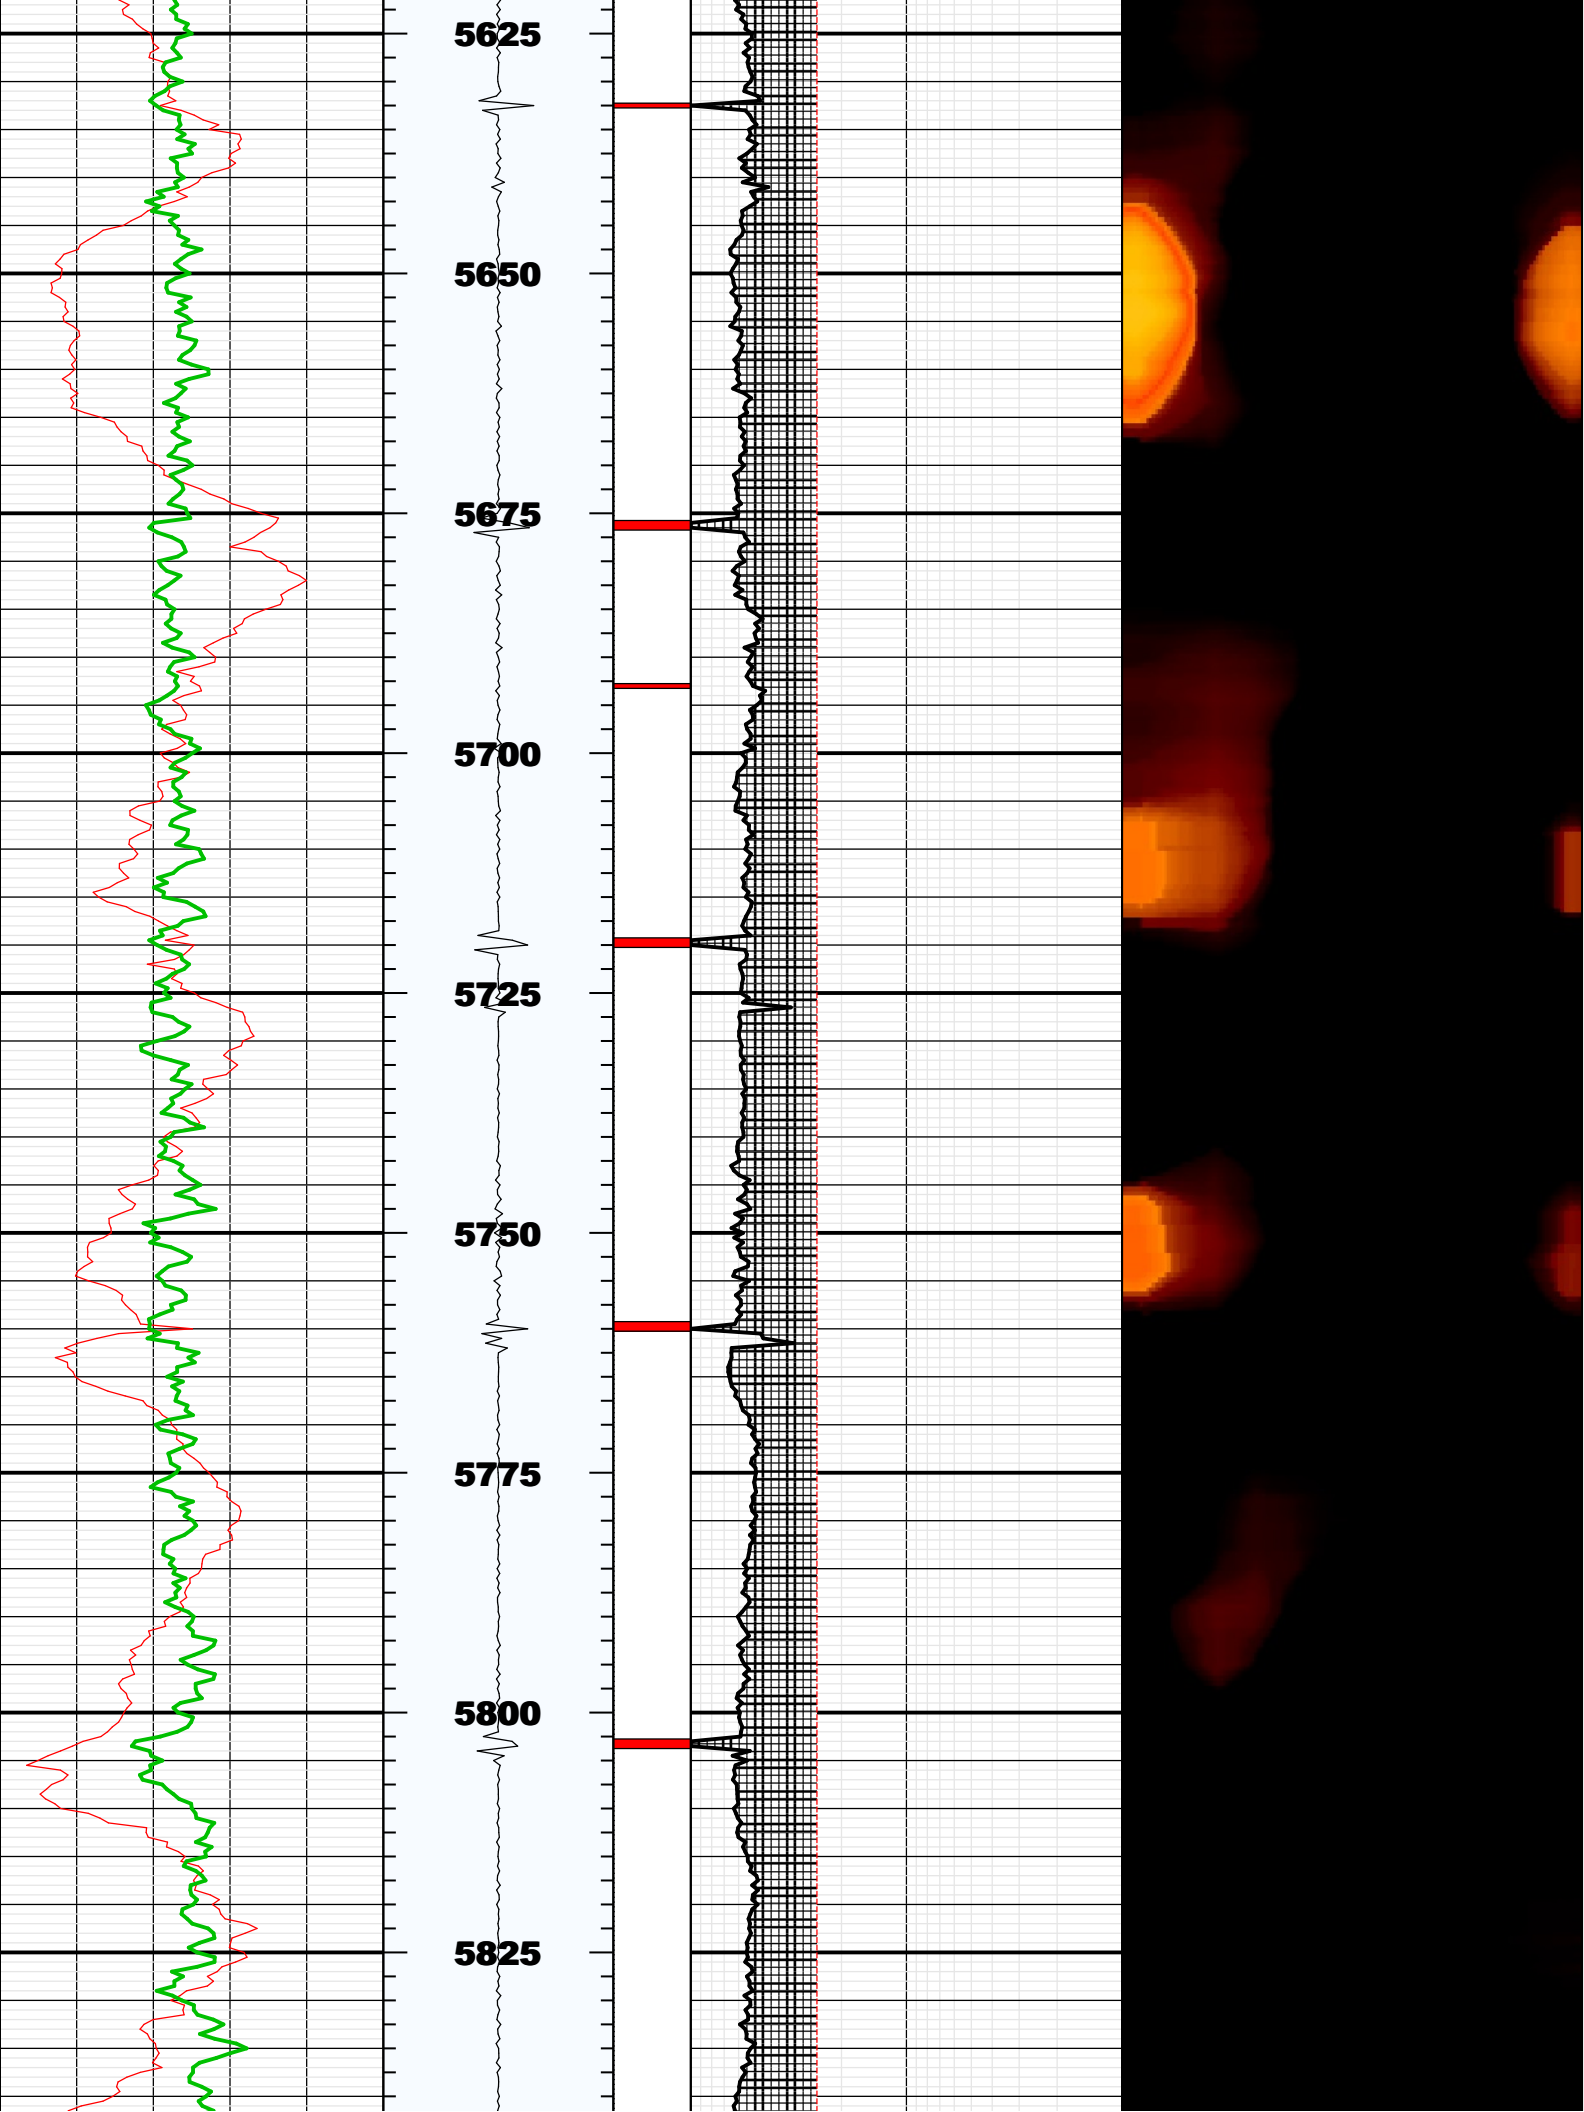

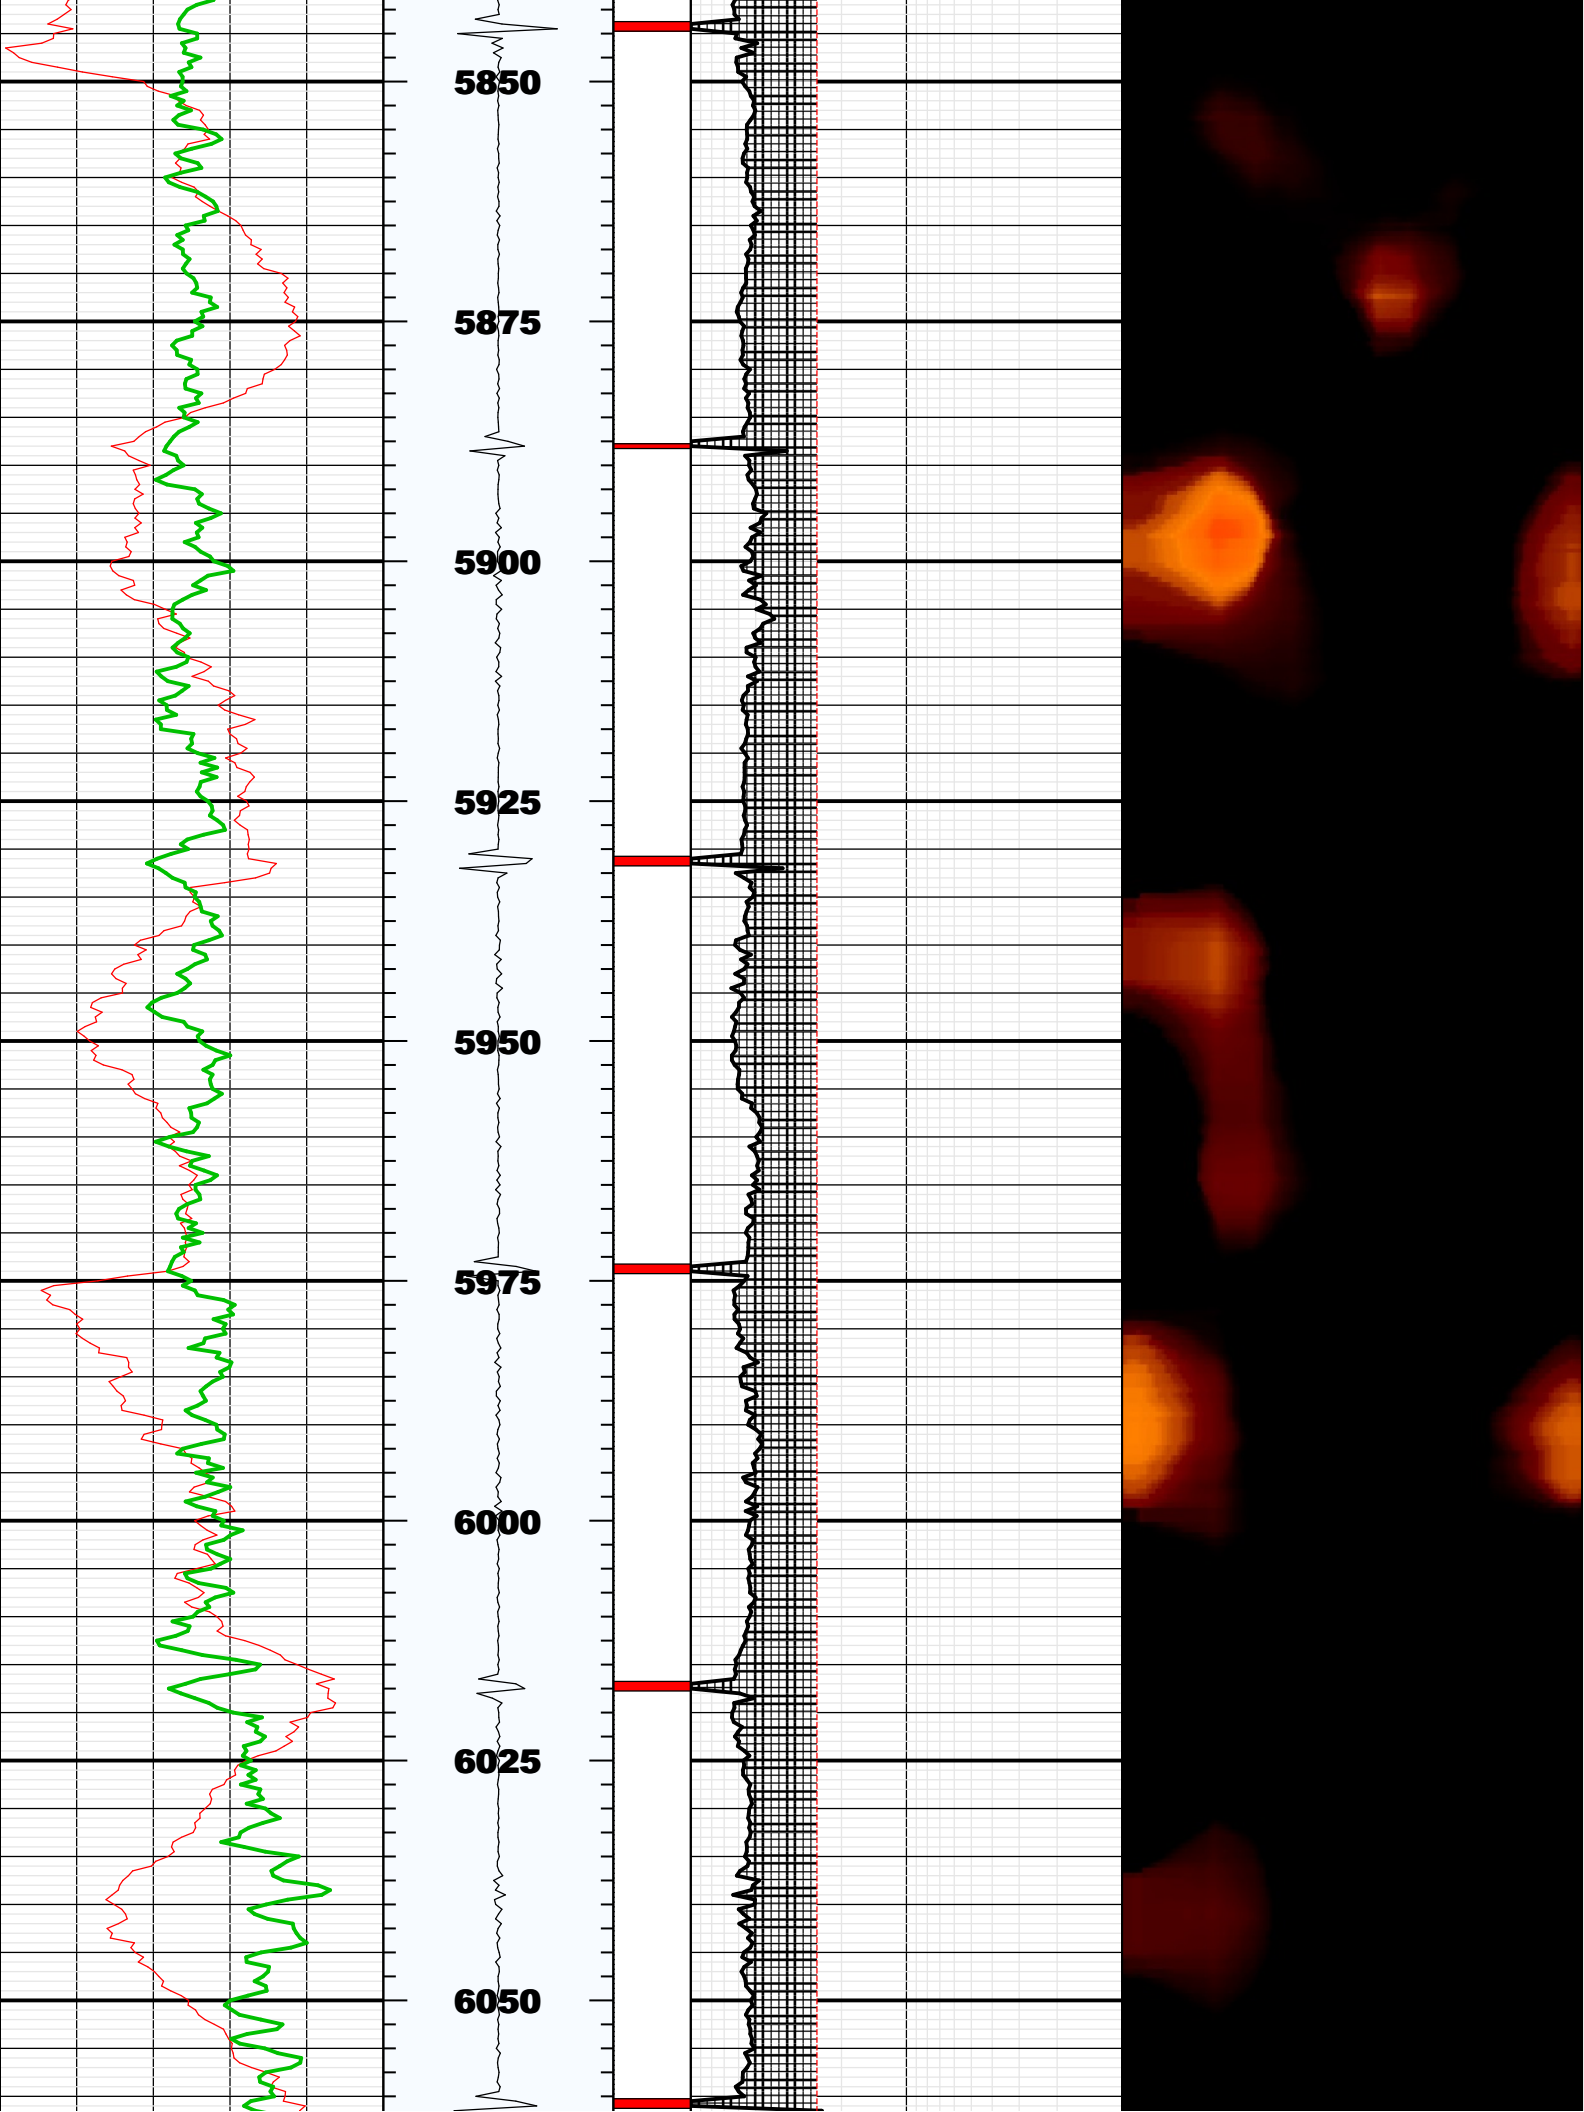


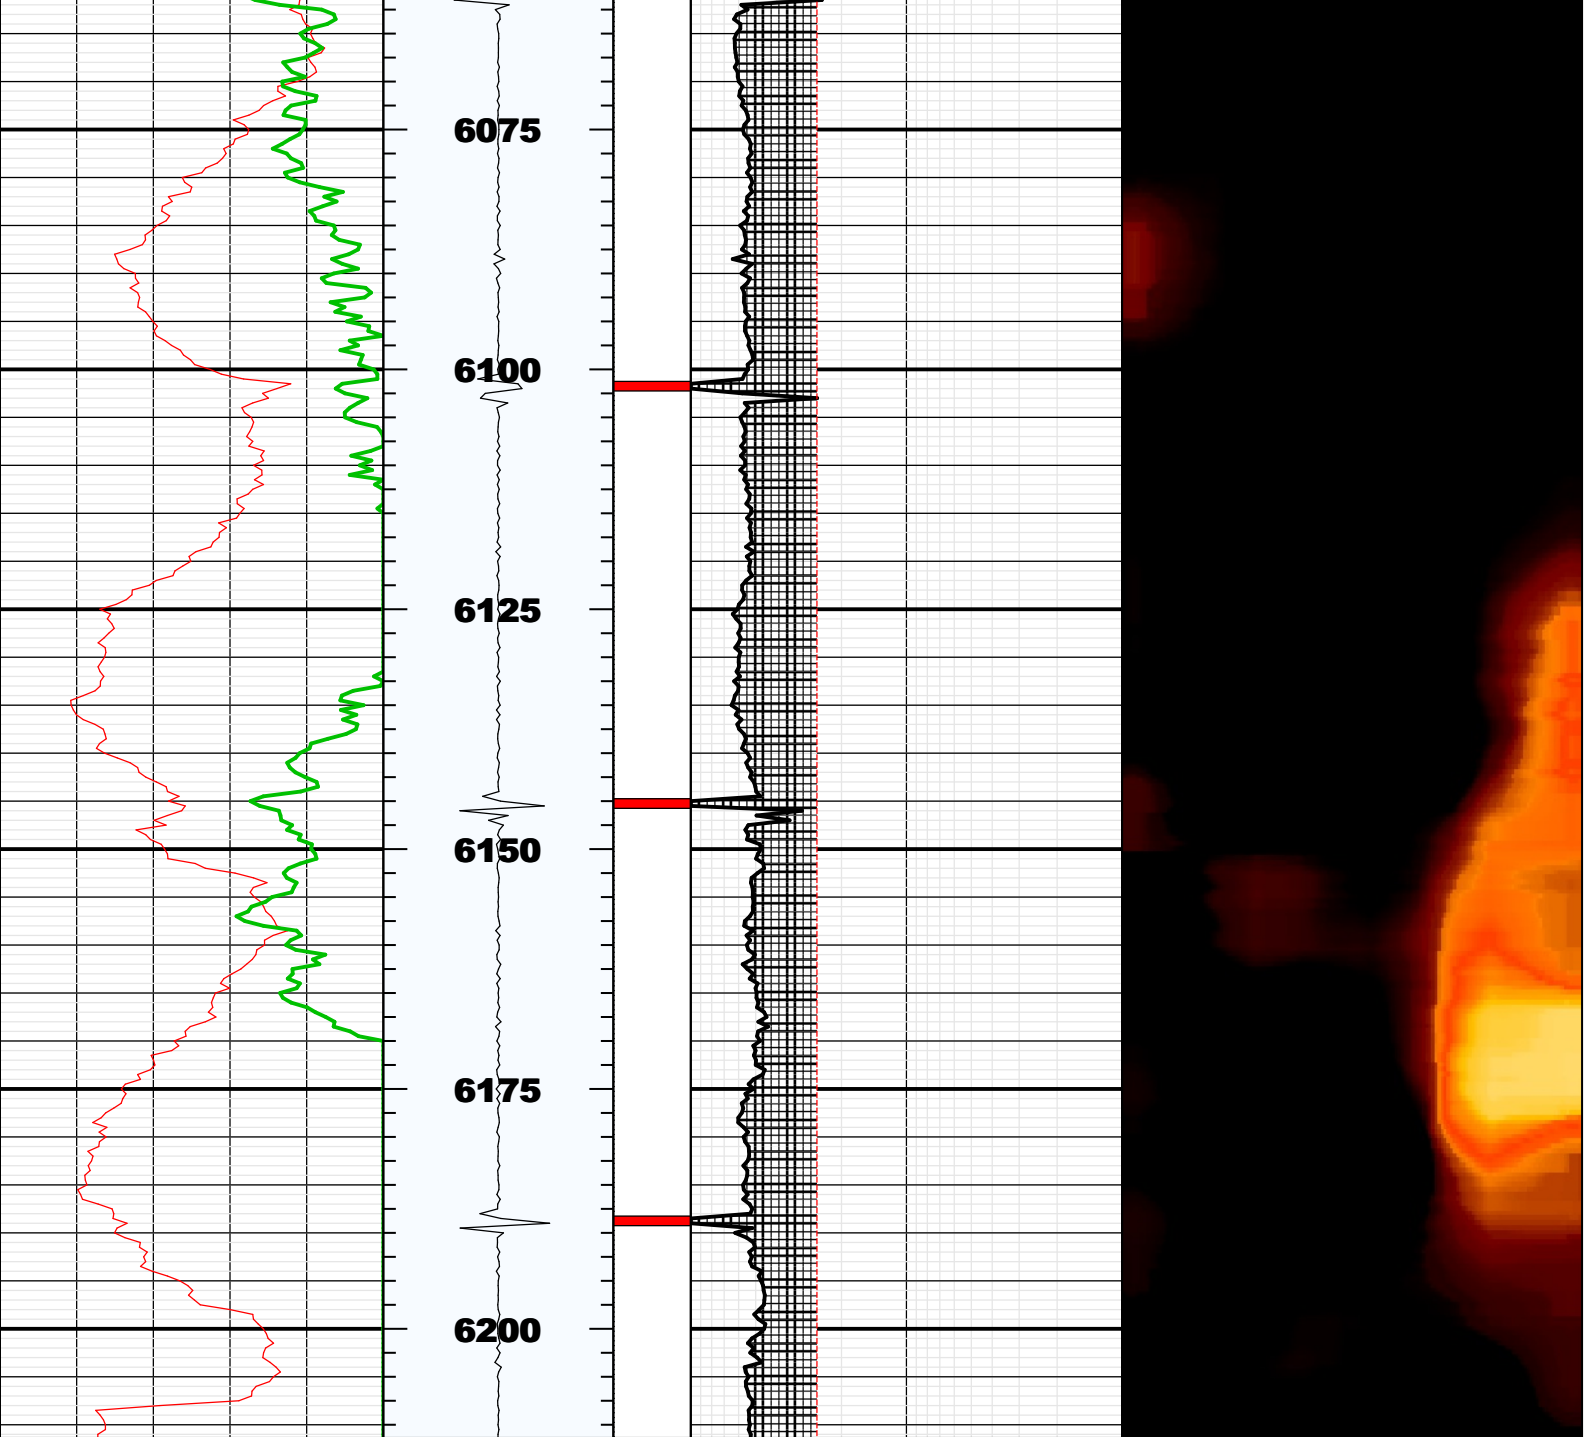



BS	8.75000	IN	Bit Size
CASG	P110		Casing Grade
CDIA	7.00000	IN	Casing Outer Diameter
CSID			
CSIZ	7.00000	IN	Current Casing Size
CWEI	26.00000	LB/F	Casing Weight
DFD	8.40000	LB/G	Drilling Fluid Density
DFVL	206.00000	US/F	Default Fluid Velocity
DO			
DOT	2.87400	IN	Diameter of Transducer Sensor
EMXV	56	V	EMEX Voltage
FDII	0.00000	F	FPM Data Interpolation Interval
FSOD	0_OFF		Fluid Slowness Fits Casing Outer Diameter
LOGMODE			
PP			
STEP	-0.5	F	STEP
THDH	130.00000	%	Maximum Search Thickness (percentage of nominal)
THDL	70.00000	%	Minimum Search Thickness (percentage of nominal)
THDP	Fundamental		Thickness Detection Policy
THNO	0.36200	IN	Nominal Thickness of Casing
TMUC	WRM		Type of Mud
U-USIT_DT3P			
UPAT	375K		Emission Pattern
USUB	7INC		USIT Sub Identifier
UWKM	D603010L		Working Mode
VCAS	51.40000	US/F	Ultrasonic Transversal Velocity in Casing
WINB	35.79583	US	Window Begin Time
WINE	78.40100	US	Window End Time
ZCAS	46.25000	MRAY	Acoustic Impedance of Casing
ZINI	-1.00000	MRAY	Initial Estimate of Cement Impedance
ZMUD	1.77000	MRAY	Acoustic Impedance of Mud
ZTCM	2.60000	MRAY	Acoustic Impedance Threshold for Cement
ZTGS	0.30000	MRAY	Acoustic Impedance Threshold for Gas
WLEN	22.50350	US	T [^] 3 Processing Length

Repeat Pass

Company: Noble Energy Inc
Well: Rico LC29-74-1HNA
Field: Wildcat

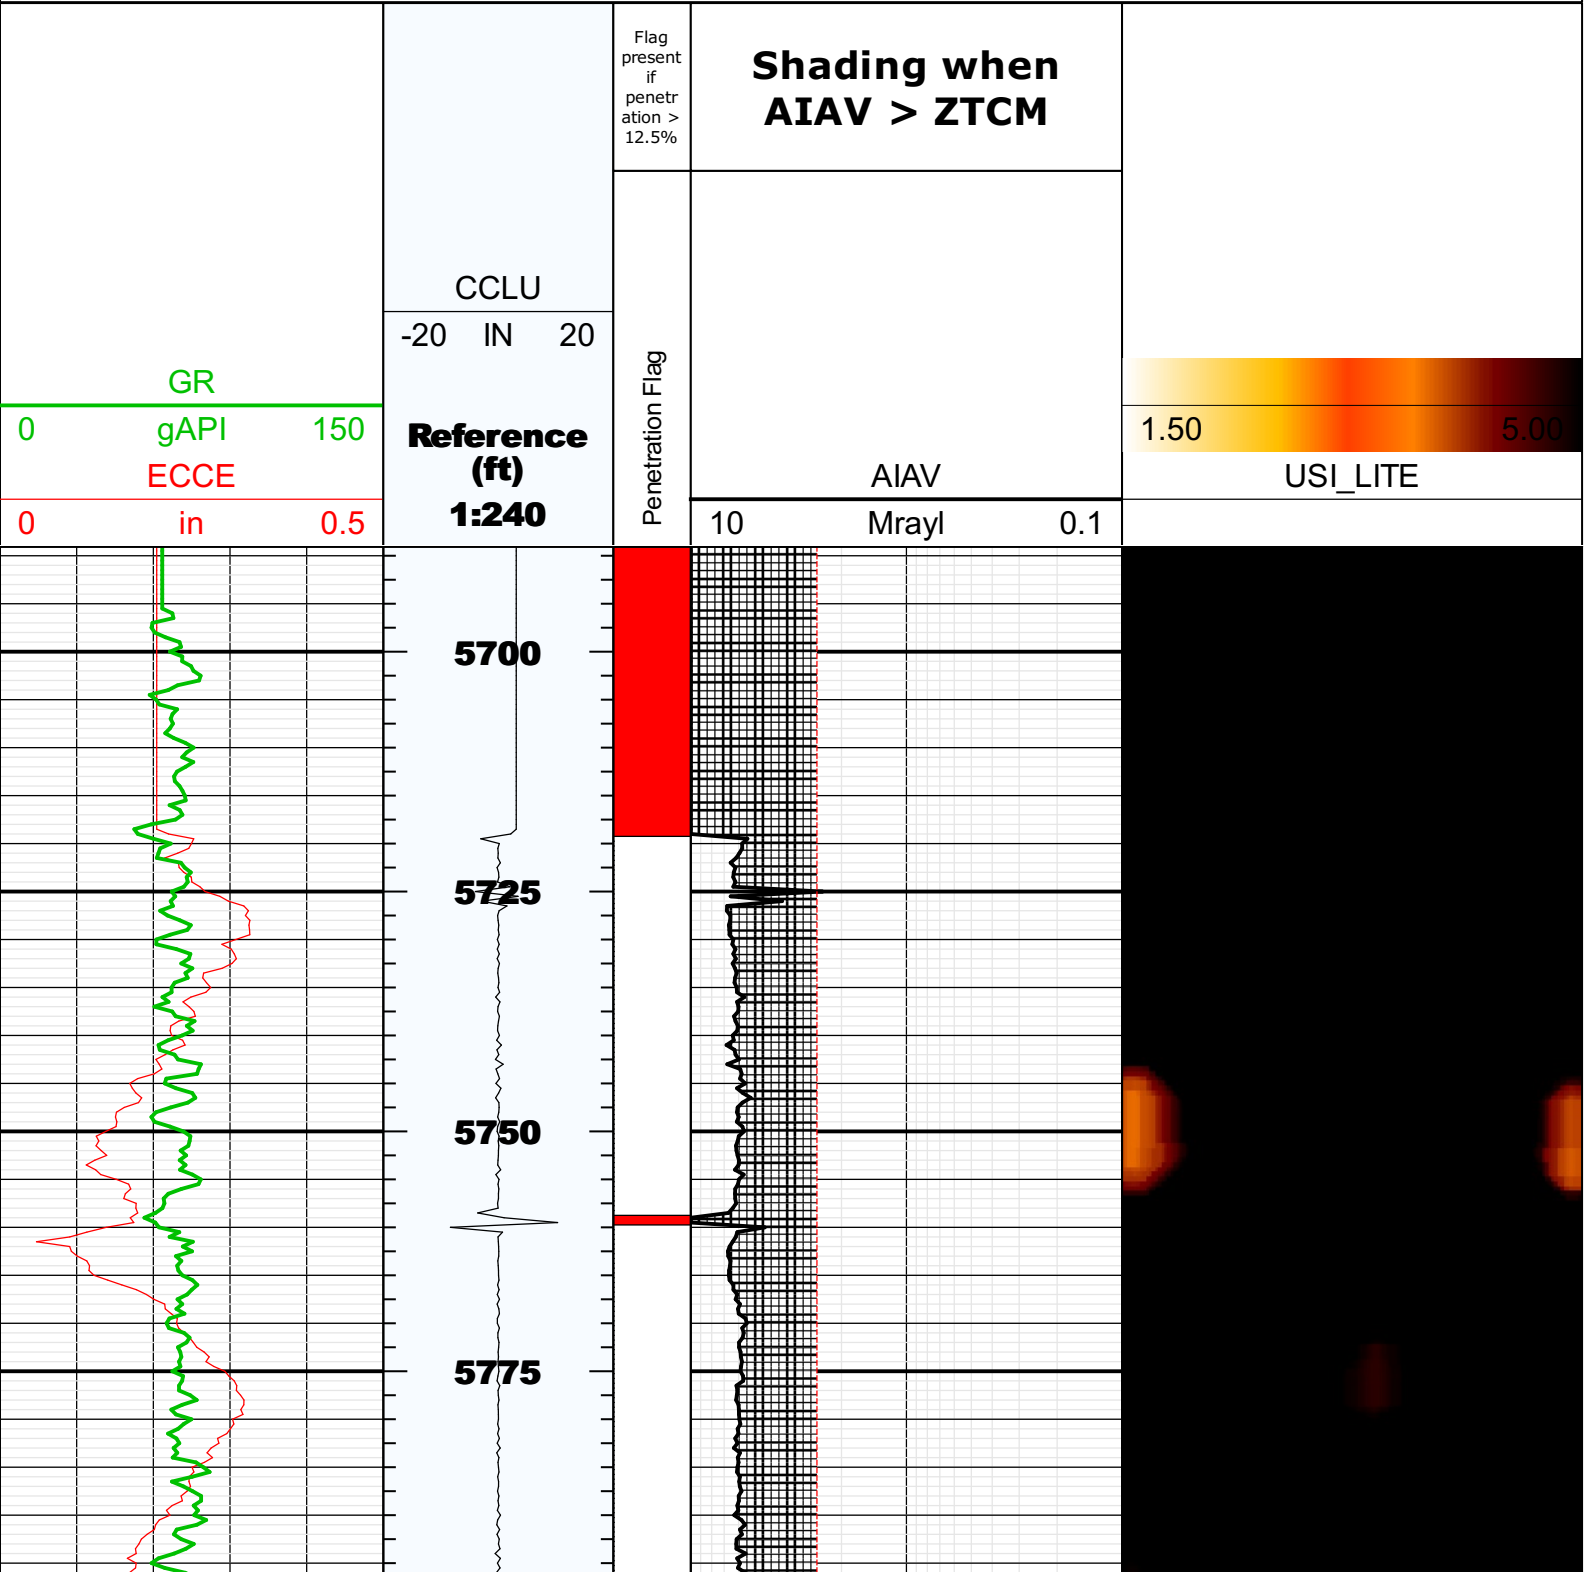

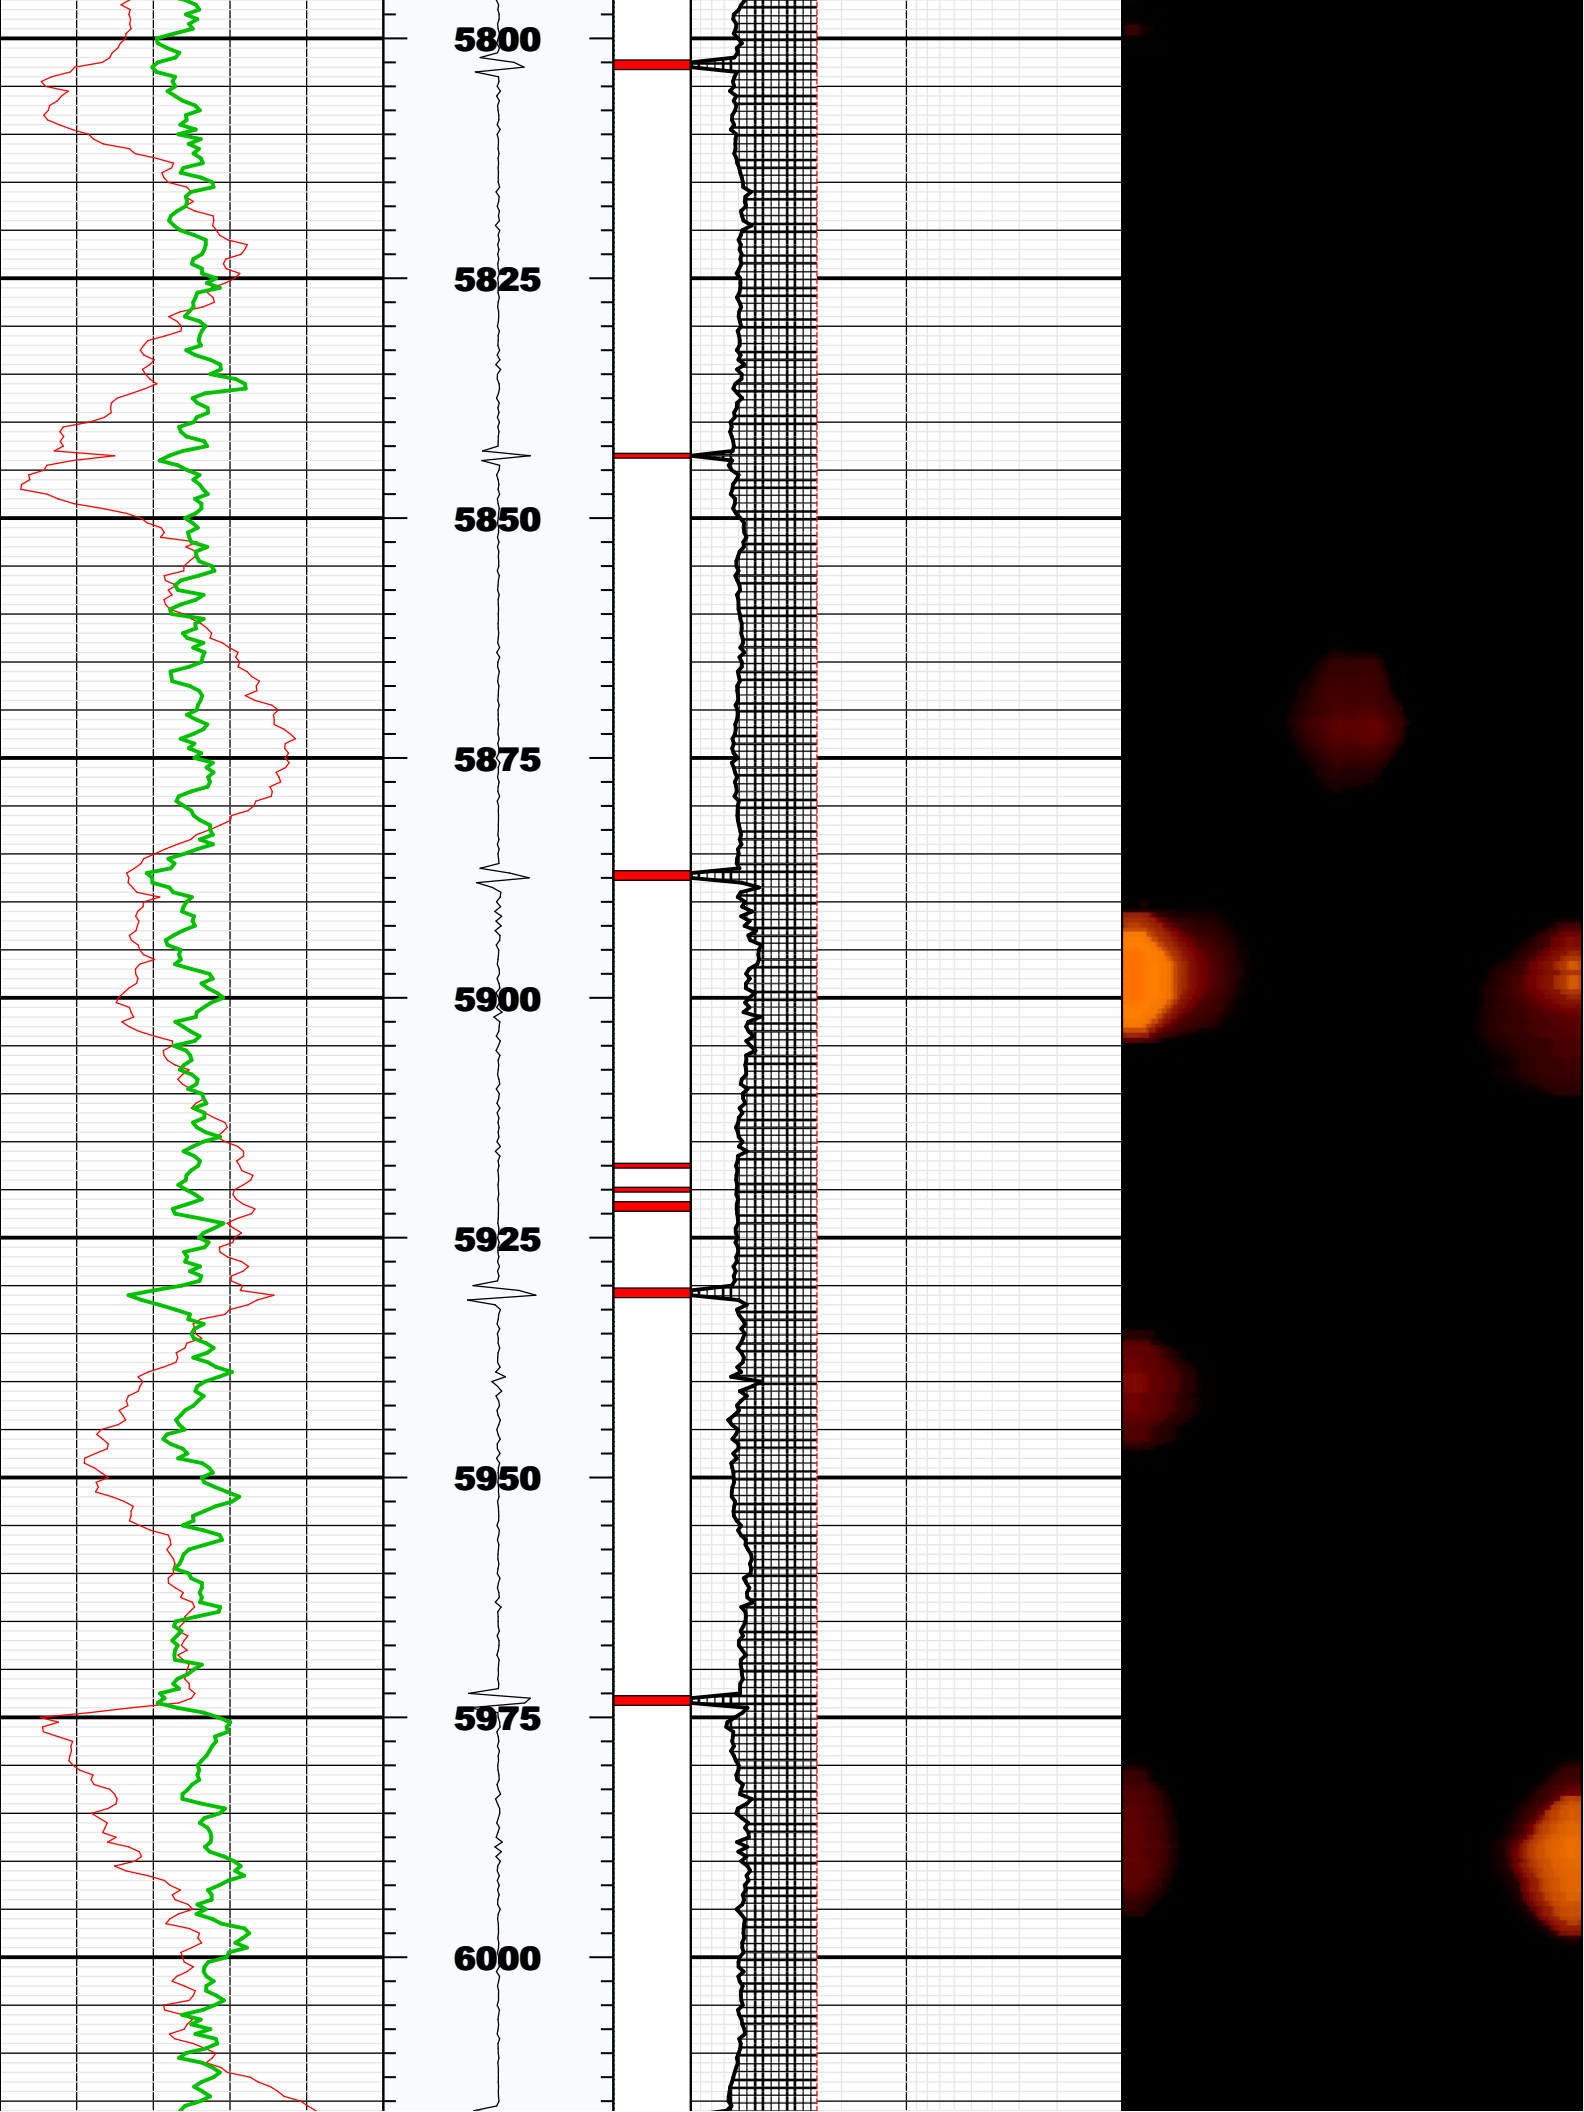

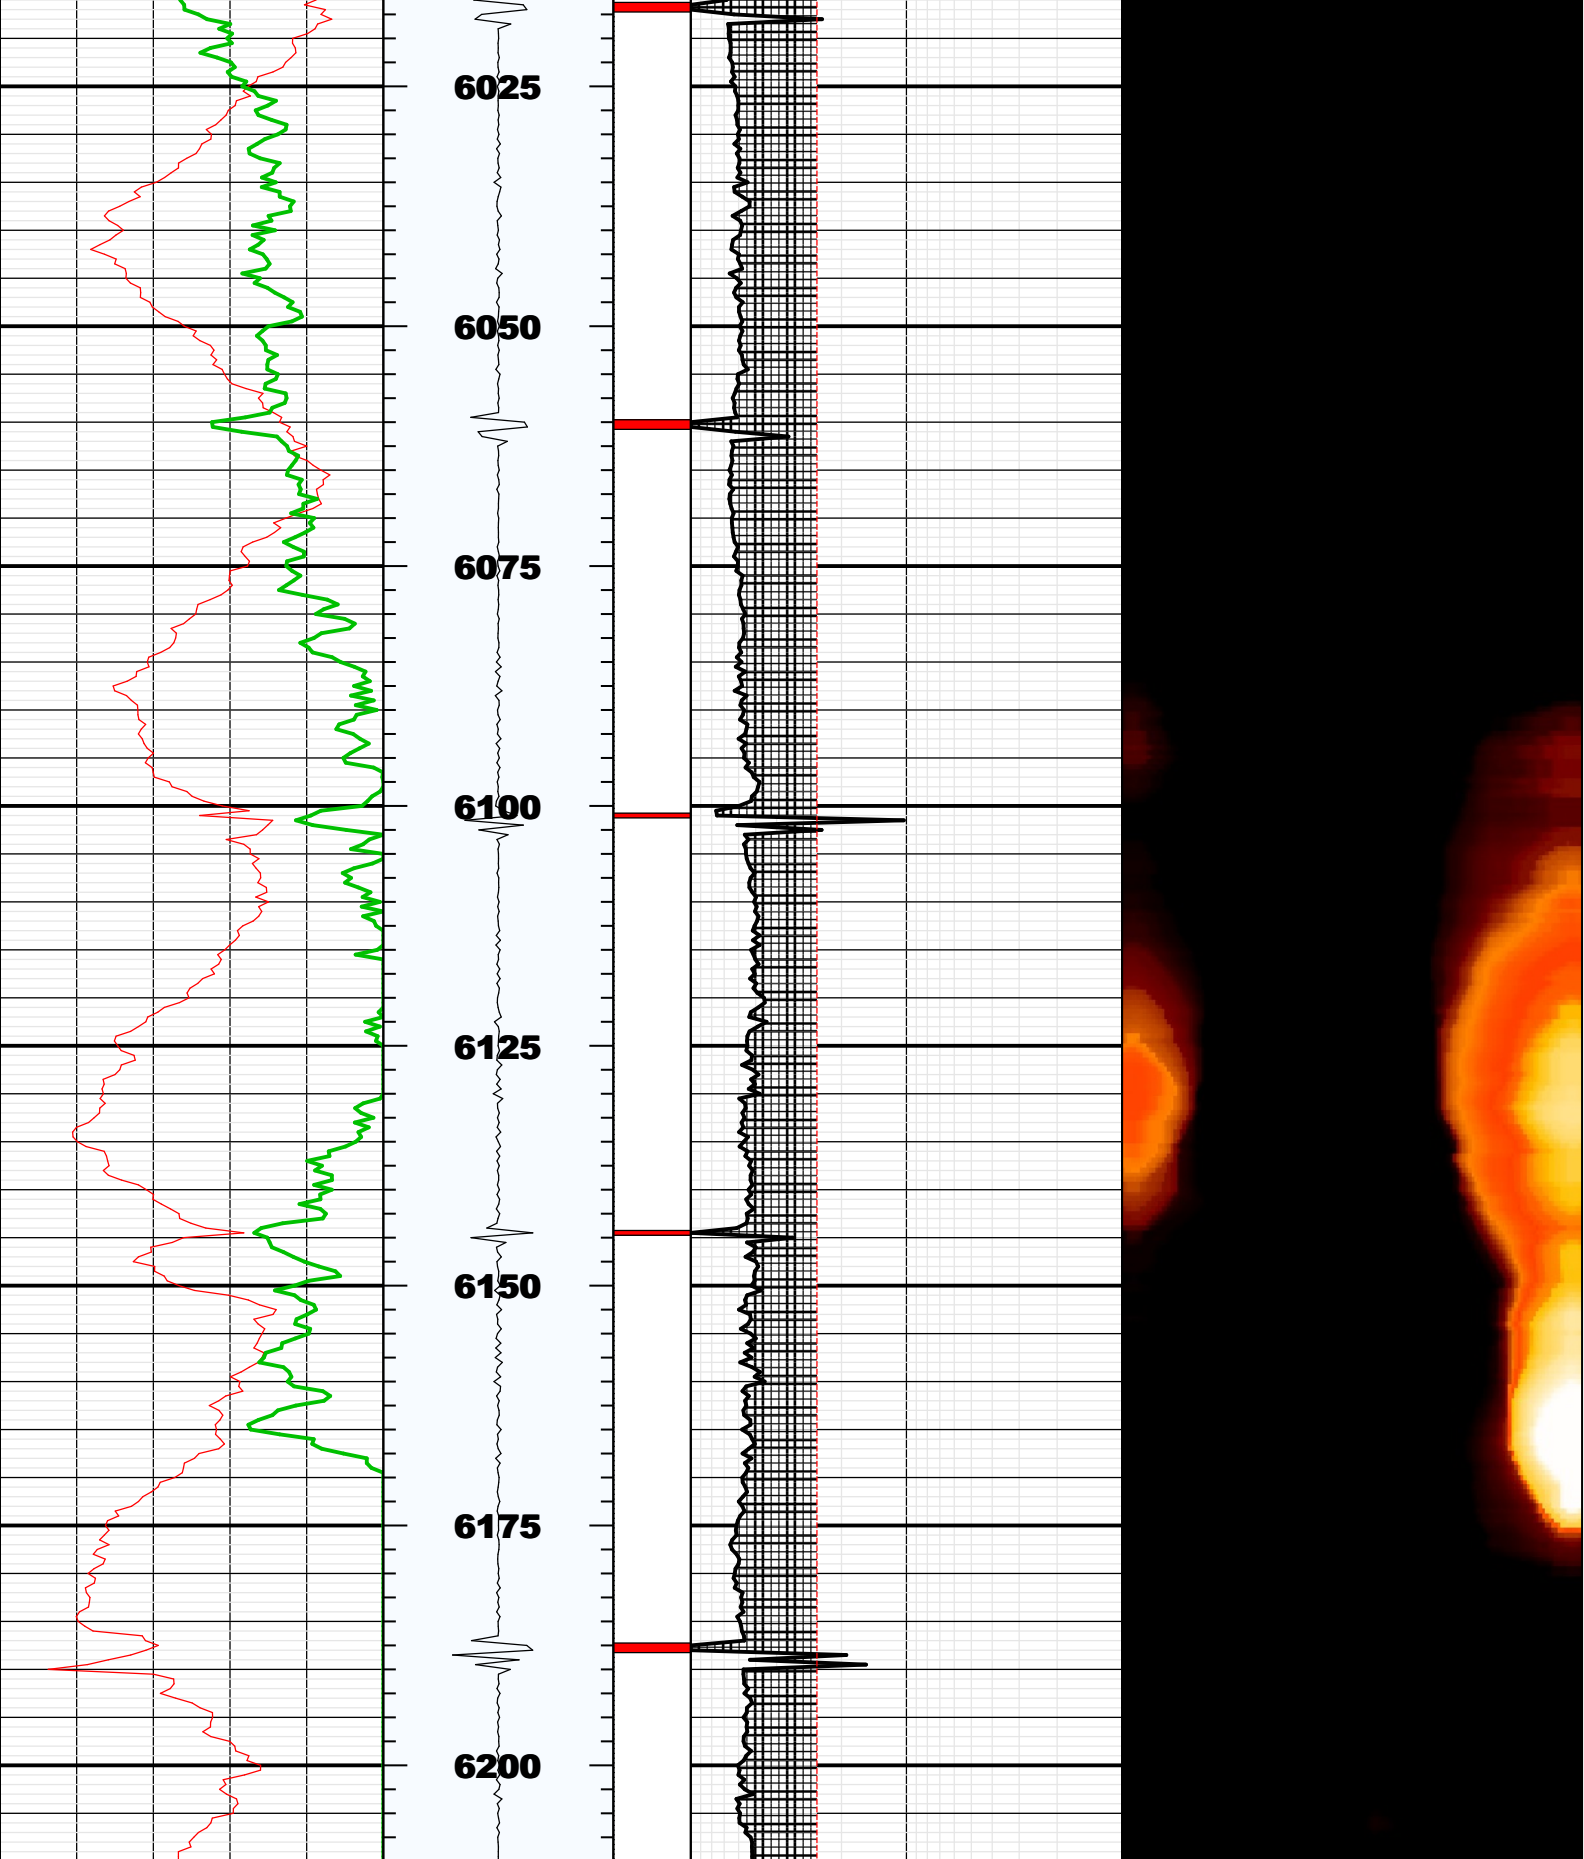

Fluid Properties Used for Main Pass

