

NOBLE ENERGY INC.
MELVIN Y04-04
NWNW 4-2N-64W
990 FNL & 990 FWL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
2/20/2015

API: 05-123-16972
 COGCC #

GL Elev: 4874
 KB Elev: 4884


Spud Date: 6/17/1993

Surface Casing :
 8 5/8" 24# @ 825'
 Cement: 575 sx
 TOC: Surface

Prod Csg Cement from 3940' - 4828'

TOC @ 6257'

Production Casing :
 4 1/2" 11.6# @ 7685'
 Cement: 360 sx + 330 sx
 TD: 6/18/1993

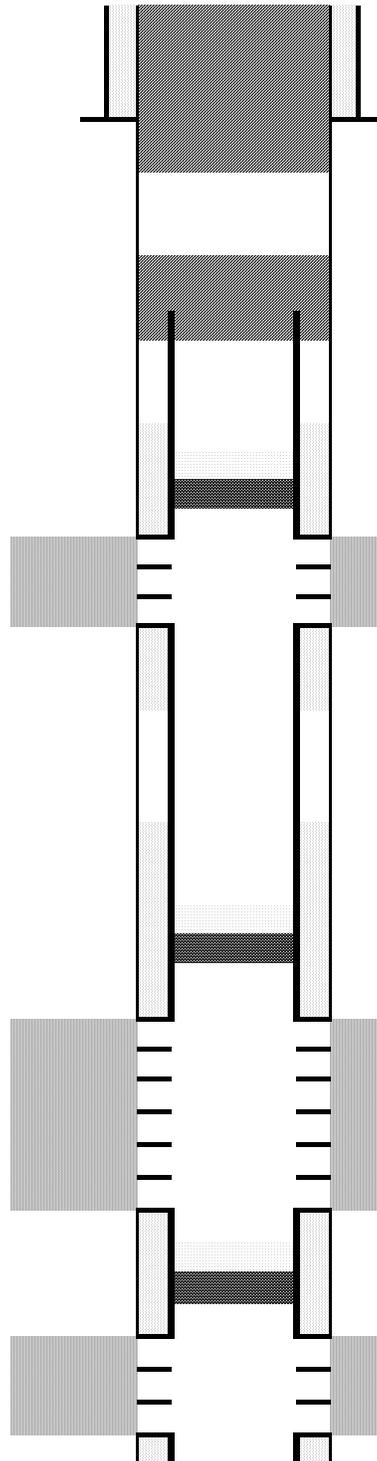

Cut surface casing off 6'-8' below surface.

Pump approx 350 sx stub/shoe plug @ 925'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 4464' w/ 2 sx cement on top

Sussex Perforations 4514' - 4534'


CIBP @ 6800' w/ 2 sx cement on top

Niobrara Perforations 6850' - 6856'

Codell Perforations 7076' - 7086'

CIBP @ 7487' w/ 2 sx cement on top

Jsand Perforations 7537' - 7580'



TD:

7685