


Federal RG 11-14-298

T. 2 S.

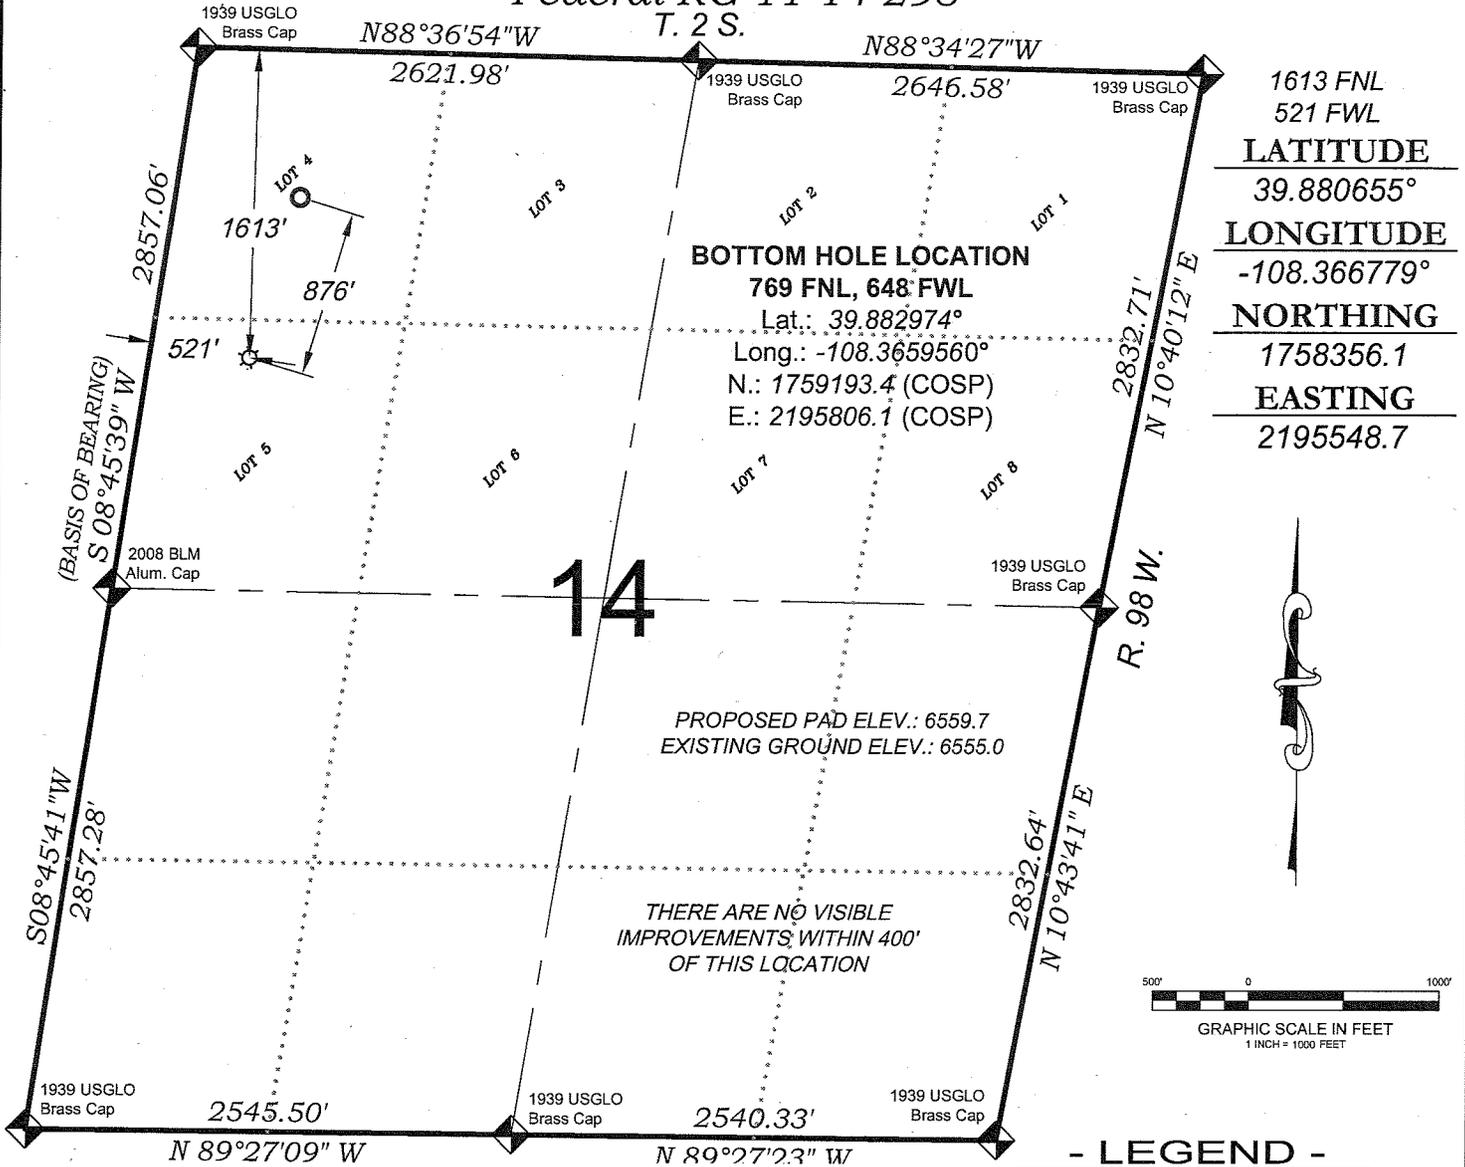

1613 FNL  
521 FWL  
**LATITUDE**  
39.880655°  
**LONGITUDE**  
-108.366779°  
**NORTHING**  
1758356.1  
**EASTING**  
2195548.7

**BOTTOM HOLE LOCATION**

769 FNL, 648' FWL  
Lat.: 39.882974°  
Long.: -108.3659560°  
N.: 1759193.4 (COSP)  
E.: 2195806.1 (COSP)

PROPOSED PAD ELEV.: 6559.7  
EXISTING GROUND ELEV.: 6555.0

THERE ARE NO VISIBLE  
IMPROVEMENTS WITHIN 400'  
OF THIS LOCATION

SURVEYORS STATEMENT

I, MICHAEL J. LANGHORNE, A REGISTERED LAND SURVEYOR IN THE STATE OF COLORADO DO HEREBY CERTIFY THAT THE SURVEY SHOWN HEREON WAS PREPARED UNDER MY DIRECT SUPERVISION AND HAS BEEN STAKED ON THE GROUND AS SHOWN ON THE PLAT AND CHECKING THAT THIS MAP IS A TRUE REPRESENTATION THEREOF.

*Michael Langhorne*

MICHAEL J. LANGHORNE, COLORADO REGISTRATION NO. 36572  
FOR AND ON BEHALF OF  
BOOKCLIFF SURVEY SERVICES, INC.

REFERENCES

- 1) CORRECTIVE DEPENDENT RESURVEY T. 2 S., R. 98 W., 6<sup>th</sup> P.M (GLO PLAT)
- 2) U.S.G.S. QUAD: Rock School and Square S Ranch, CO

FIELD LOCATED SECTION MONUMENTS AS DESCRIBED

FIELD SURVEYED WELL LOCATION

CALCULATED BOTTOM HOLE LOCATION

CALCULATED SECTION CORNER LOCATION

**NOTES**

- 1) ELEVATIONS BASED ON N.A. V.D. 1988 PUBLISHED COORDINATES.
- 2) LATITUDES AND LONGITUDES ARE BASE ON NAD 83, PUBLISHED COORDINATES
- 3) STATE PLANE COORDINATES ARE BASED ON COLORADO CENTRAL ZONE, U.S. SURVEY FEET.
- 4) ELEVATION MASK SET TO 15°
- 5) GPS OPERATOR J. KIRKPATRICK, OBSERVED A PDOP OF 1.5 FOR SURVEY POINT NUMBER 21250.
- 6) SURFACE AND BOTTOM HOLE LOCATIONS ARE MEASURED 90° FROM SECTION LINES.

**WELL LOCATION PLAT Prepared for:**

Williams Production, RMT

SW1/4 NW1/4, SECTION 14  
T. 2 S., R. 98 W. of the 6<sup>th</sup> P.M.  
Rio BLANCO COUNTY, COLORADO

SURVEY DATE:	2/16/10
MAP DATE:	4/2/10
SCALE:	1" = 1000'
PLAT:	1 of 9
PROJECT:	Williams

136 East Third Street  
Rifle, Colorado 81650  
Ph. (970) 625-1310  
Fax (970) 625-2773

