

NOBLE ENERGY INC.
 Lilli Unit 14-7
 SESW 7-8N-58W
 800' FSL & 2120' FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 5/27/2015

API: 05-123-13884
 COGCC #

GL Elev: 4,734.00
 KB Elev: 4,744.00


Spud Date:

Surface Casing :
 8 5/8" 24# @ 185'
 Cement: 115 sxs
 TOC: Surface

TOC @ 5,824'

Nio Top 5,684'

Production Casing :
 4 1/2" 10.5# @ 6580'
 Cement: 190 sxs
 TD: 3/22/1988

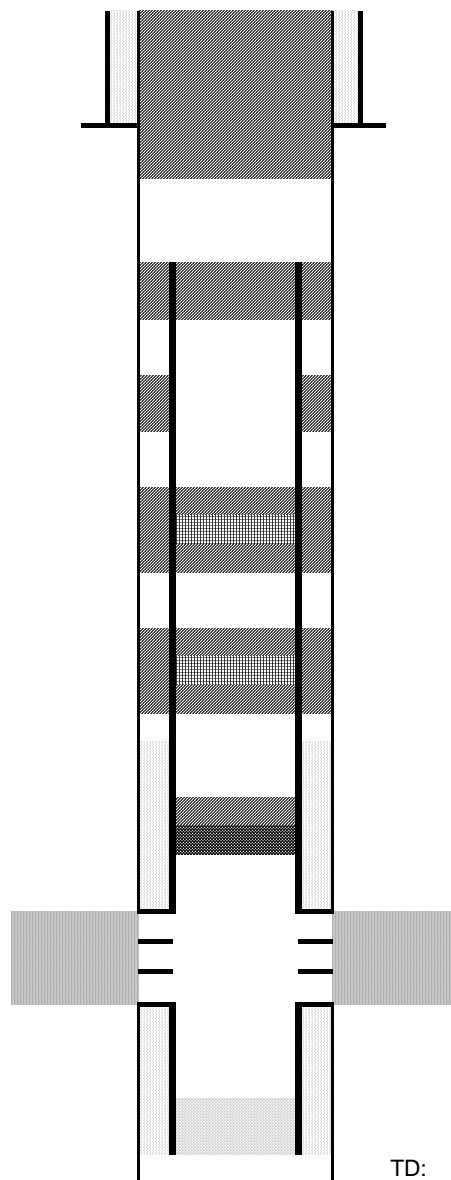

Cut surface casing off 6'-8' below surface.

Pump approx 100 sx shoe plug @ 285'
 Will bring cement to surface.

Cut and pull csg @ 1,600'
 Pump 100 sx stub plug where casing cut

Existing Squeeze @ 1,614'

Perforate @ 2,400'
 Set CIGR @ 2,500'
 Pump 50sxs through & 15sxs on top
 Perforate at 2,600'

Perforate @ 5,484'
 Set CIGR @ 5,634'
 Pump 80sxs through & 10sxs on top
 Perforate at 5,734'

CIBP @ 6,377' w/ 2 sx cement on top

D Sand 6,427' - 6,436'

TD: 6,580.00