

NOBLE ENERGY INC.
 Clement 13-11
 NWSW 11-4N-66W
 1,980' FSL & 660' FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 9/18/2015

API: 05-123-16482
 COGCC #

GL Elev: 4,710'
 KB Elev: 4720'

Spud Date:

Surface Casing :

8-5/8" 24# @ 281'
 Cement: 250
 TOC: Surface


existing cement from 4,324' - 5,160"

TOC @ 6,620'

Nio Top 6,852'

Production Casing :

4-1/2" 11.6# @ 7,335'
 Cement: 490 sx
 TD: 12/14/1992

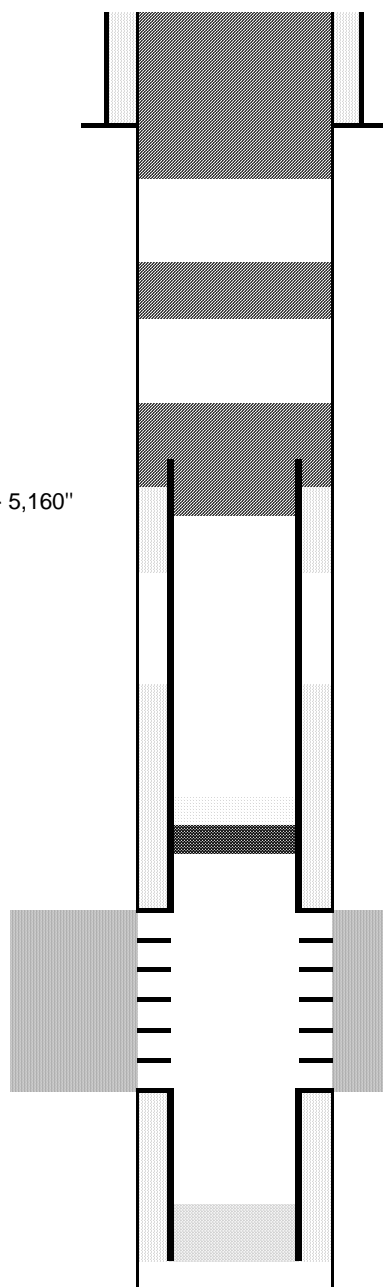

Cut surface casing off 6'-8' below surface.

Pump approx 146 sx shoe plug @ 381'
 Will bring cement to surface.

Pump 50 sx courtesy plug @ 2,500'

Pump 125 sx stub plug where csg was pulled

Cut and pull csg @ TOC determined by CBL
 (~4,324')

CIBP @ 6,946' w/ 2 sx cement on top

Niobrara Perforations 6,996' - 7,008'

Codell Perforations 7,199' - 7,209'

TD: 7,361'