



CEMENTER'S WELL SERVICE, INC.

P.O. BOX 336220 • GREELEY, CO 80633 • (970) 353-7299 • FAX (970) 353-7712

OUR INVOICE

198154

Date <u>6/15/2010</u>	Well Owner <u>KERR/McGEE</u>	Well No. <u>23-8</u>	Lease <u>DCR</u>
County <u>WELD</u>	State <u>COLORADO</u>	Field	
Charge to <u>KERR/McGEE OIL & GAS ONSHORE, LP</u>	Charge Code		
Address <u>1999 BROADWAY, STE 3700 (XTREME #12)</u>	For Office Use Only		
City, State <u>DENVER COLORADO 80202</u>			
Pump Truck No. <u>1201</u>	Code	Bulk Truck No. <u>1215/1214</u>	Code
Type of Job	Depth	Ft. <u>1025</u>	To
Surface <u>8 5/8" CSG 24"</u>	Bottom of Surface	Ft. <u>1015</u>	To
Plug	Plug Landed @ <u>971</u>	Ft. Time On <u>1300</u>	
Production	Pipe Landed @ <u>1015</u>	Ft. Time Off <u>PLUG DOWN 1545</u>	

Reference No.	Description	Qty.	Meas	Unit Price	Amount
	Pump Truck Charge				
	Cement Neat TYPE III	640	SKS		
	Poz. Mix				
	Calcium Chloride	2590			
	Gel % Flo-Cele 1/4 #Per Sack				
	Handling Charge				2039619.00
	Hauling Charge				80012090
	Additional Cement				
	MIXING RATE 4 BPM	PRE-F LUSH		1457-1502	
	DISP. RATE 5 BPM	MIX		1502-1530	
	SLURRY VOL 1.32 FT ³ /SK	CHANGE VALVES		1530-1533	
	SLURRY WT 14.8-15 PPG	DISPLACE		1533-1545	
	WATER/CEMENT 6.25 GAL/SK	LANDED PLUG @ 450 PSI			
	WATER TEMP 60	TOTAL SLURRY VOL 150		BBIS CEMENT	
		FINAL LIFT 435			

Remarks: <u>PRE-F LUSH W/ 30 BBIS H₂O</u>	Tax Reference Code	Sub Total					
<u>DISPLACE W/ 61.5 BBIS H₂O</u>	State <u>202.9</u> %	Tax					
<u>CIRCULATE 8 BBIS CEMENT</u>	Disc.	Total					
Truck No.	Code	State Mileage	Nebraska	Colorado	Wyoming	Other	Total Mileage
<u>1201</u>		Pump Truck		<u>43</u>			
<u>1215/1214</u>		Bulk Truck		<u>43/43</u>			

We do not assume any responsibility for any damage or conditions resulting from our services. All pricing is subject to review and revision.

Delivered By JIM/SAM/JOSH

Received By MZA

Customer or His Agent

Prepared by: CEMENTERS WELL SERVICE INC.

Company Name: KERR/McGEE OIL&GAS XTREME #12

Well Name: NCR 23-8

Field:

Formation:

County: WELD

State: COL

Job Date: 06/15/10

Comments: TD @1025FT KB 1015 FT

PLUG LANDED @971 FT

Fluids: PRE FLUSH W/30BBLS DISPW/61.5BBLSH2O

Proppants:

Average Rate: 4 BBLS

Average STP:

Tubing:


Casing: 8 5/8"

Packer:

Filename: 10042801

Closure Pres: 4000

LINEAR PLOT

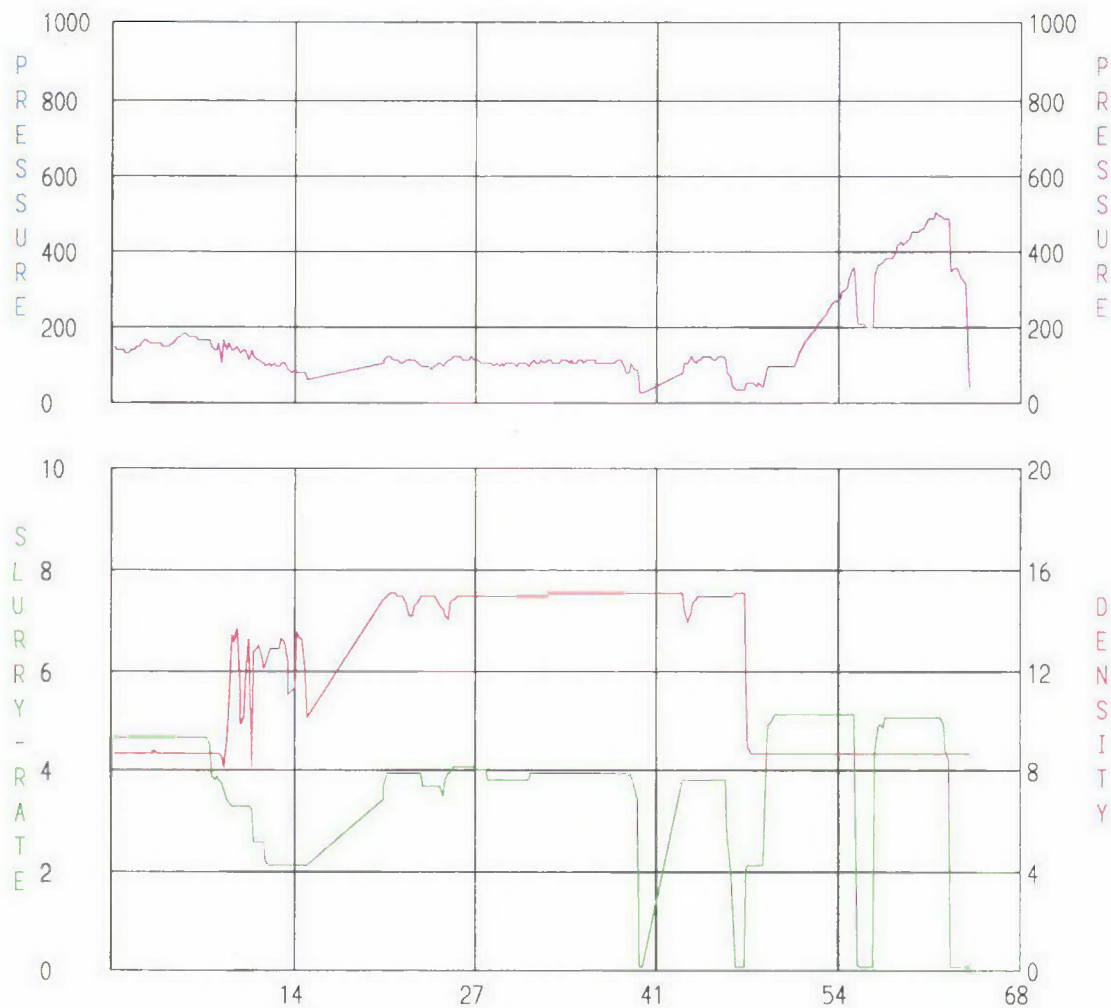

Elapsed Time (min), Start at 14:39:01