

**NOBLE ENERGY INC.**  
**BAILEY FEDERAL 18-01**  
**NWNE 18-6N-65W**  
**660 FNL & 1980 FEL**  
**WELD COUNTY, CO**  
**Wattenberg**  
**CURRENT WELLBORE SCHEMATIC**  
**with PROPOSED P&A**  
**3/16/2016**

API: 05-123-10934  
 COGCC #

GL Elev: 4775'  
 KB Elev: 44775'


**Spud Date:** 12/31/1982

**Surface Casing :**  
 8 5/8" 24#, J-55 @ 317'  
 Cement: 300  
 TOC: Surface

**TOC @**

**Nio Top**

**Production Casing :**  
 4 1/2", 11.60#, J-55/N-80 @ 7759'  
 Cement: 275  
 TD: 12/11/1982

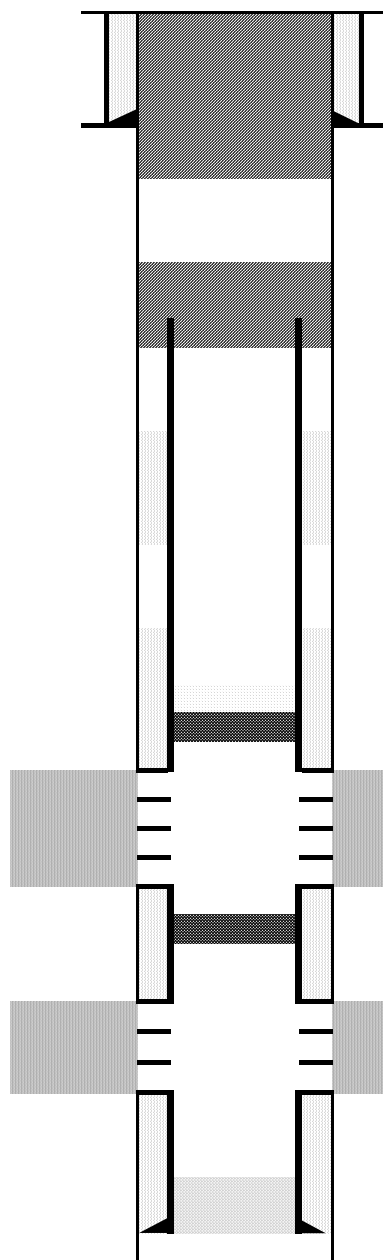

Cut surface casing off 6'-8' below surface.

Pump approx 130 sx shoe plug @ 375'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

Prod. casing cement: 4140' - 4738'

CIBP @ 6782' w/ 2 sx cement on top

Niobrara Perforations 6832' - 7034'

CIBP @ 7076' (1/28/2005)

Codell Perforations 7146' - 7156'

TD: 7759'