

NOBLE ENERGY INC.
TREBOR B02-15
SWSE 2-5N-64W
660' FSL & 1980' FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
3/21/2016

API: 05-123-13773
 COGCC #

GL Elev: 4607'
 KB Elev: 4618'


Spud Date: 1/14/1988

Surface Casing :
 8 5/8" 24# @ 320'
 Cement: 220 sx
 TOC: Surface

TOC @ 5940'

Production Casing :
 4 1/2" 15.1# @ 6914'
 Cement: 220 sx
 TD: 1/19/1988

2 7/8" 6.5# Liner @ 6903' (Cemented to Surface)
2 7/8" 6.5# Liner Cement 11' - 6903' (~210 sx)

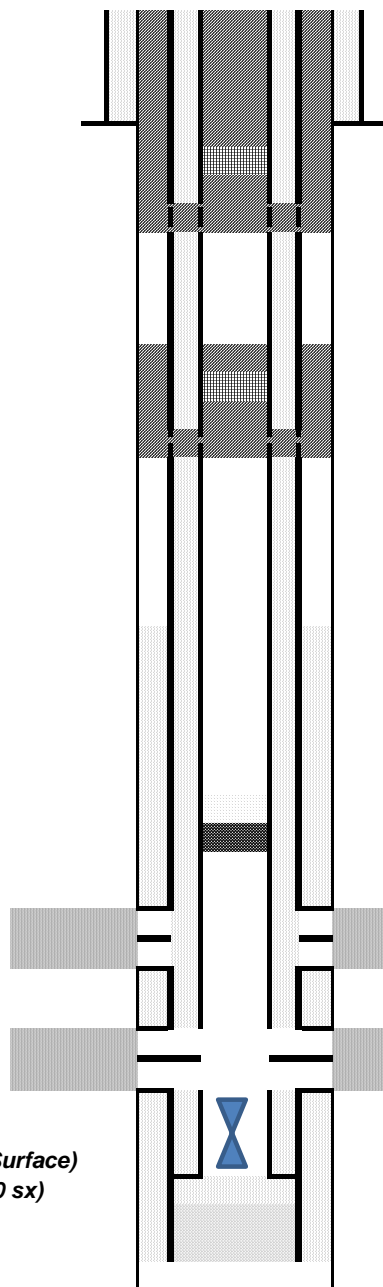

Cut surface casing off 6'-8' below surface.

Use 1 11/16" perf gun thru-out procedure

Will bring cement to surface.

Set CICR @ 560'
Pump 170 sx thru and 16 sx on top
Perforate thru 2 7/8" and 4 1/2" @ 660'

Set CICR @ 2400'
Pump 60 sx thru and 3 sx on top
Perforate thru 2 7/8" and 4 1/2" @ 2500'

CIBP @ 6429' w/ 2 sx cement on top

Niobrara Perforations 6479' - 6683'

Codell Perforations 6762' - 6772'

Fish 6829' - 6902' (1/18/2003)

TD: 6916'