

NOBLE ENERGY INC.
 Monfort E #30-16
 NESE 30-6N-65W
 1950' FSL & 720' FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 4/1/2016

API: 05-123-23553
 COGCC #

GL Elev: 4708'
 KB Elev: 4724'

Spud Date: 2/4/2006


Surface Casing :
 8-5/8"; 24 ppf; J-55; set at 453'
 Cement: 340 sx
 TOC: Surface

Deepest water well = 331' + 150' = 481'
 Surface casing shoe = 453' + 100' = 553'
 Fox Hills = 335' + 150' = 485'

TOC @ 2056'

Nio Top 7020'

Production Casing :
 4-1/2"; 11.6 ppf; M-80; set at 7473'
 Cement: 830 sx
 TD: 2/8/2006

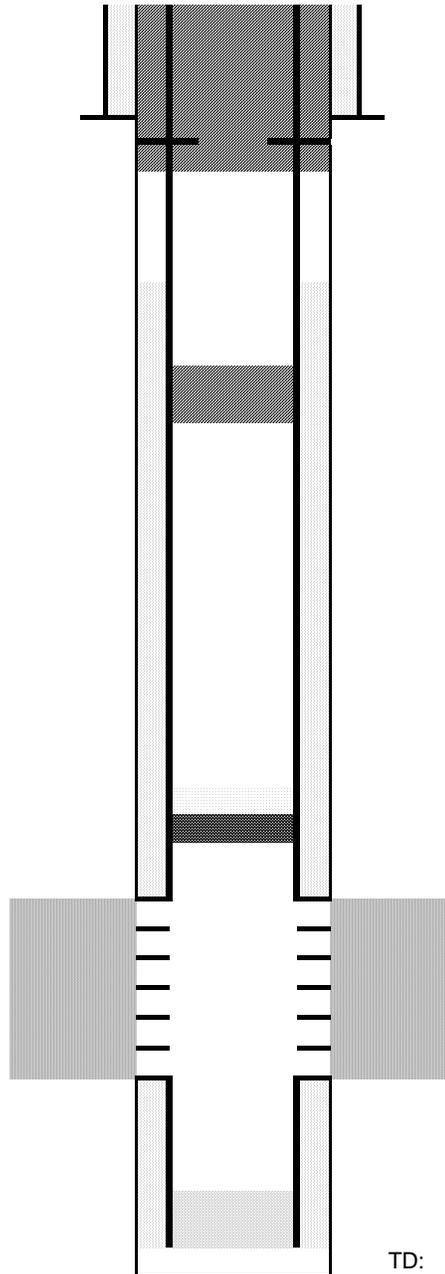

Cut surface casing off 6'-8' below surface.
 Perforate at 553'
 Pump approx 215 sx shoe plug @ 553'
 170 sx out and 45 sx in
 Will bring cement to surface.

Pump 20 sx plug from 2500' to 2300'

No producing Sussex within 1 mile.

CIBP @ 7279' w/ 30 sx cement on top to 6920' inside casing

Codell Perforations 7329' - 7346'

TD: 7506'