

NOBLE ENERGY INC.
 CECIL USX A01-16
 SESE 1-6N-64W
 615 FSL & 643 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 2/23/2016

API: 05-123-24339
 COGCC #

GL Elev: 4715'
 KB Elev: 4727'

Spud Date:

Surface Casing :

8-5/8" 24# @ 808'
 Cement: 600
 TOC: Surface

TOC @ 1446'


BOC @ 5155'

TOC @ 5950'

Nio Top 6576'

Production Casing :

4-1/2" 11.6# M-80 @ 7006'
 Cement: 960
 TD: 1/14/2006

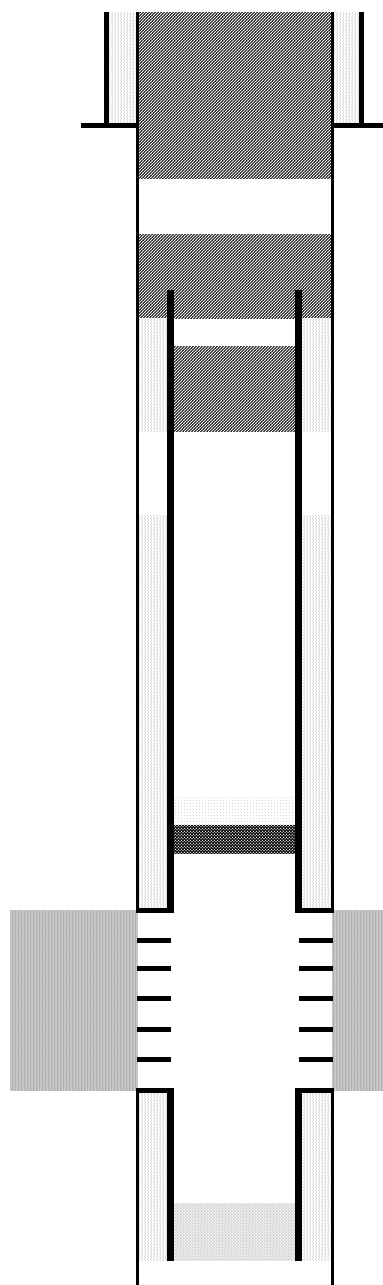

Cut surface casing off 6'-8' below surface.

Pump approx 296 sx shoe plug @ 908'
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled
 Cut and pull csg @ 1400'

Pump 50 sx balance plug @ 2500'

CIBP @ 6546' w/ 2 sx cement on top

Niobrara Perforations:
 6596'-6610'; 6708'-6725'

Codell Perforations: 6880'-6891'

TD: 7089'