


Well: Rector 3
(5536)
Field: RWSU


Run No.9		R/A Tracer indicates top perf and packer O.K. - Note: RIH with 1.75" G/R to 5684'. Unable to get any deeper. POOH, RD. R/A checks top perf and casing shoe is O.K.
Survey Type: T-S-T	Surface Temp: 79.6 °F	
Date: 04/13/2016	BHT: 110.7 °F	
Metered Rate: N/A	TBG Pressure: 1520 PSI	
Measured Rate: 594 B/D	CSG Pressure: 0 PSI	
Desired Rate: N/A	Pick Up: 5692' TDL	
Service Co: PLS	Inj. Fluid: H ₂ O	
		Recorded By: J.R. Hacking

Mechanical Information

7" 23# Casing	0'-5586'
Open Hole	5586'-6347'
2-7/8" F.L. Tubing	0'-5265'
Top Packer	5265'-5272'
2-7/8" F.G.W. Tubing	5272'-5282'
On/Off Tool 1.875" "F"	5282'-5288'
2-7/8" F.G.W. Tubing	5288'-5294'
Packer	5294'-5298'
2-3/8" F.G. Tubing	5298'-5589'
R-27	
API No. 051030106000	

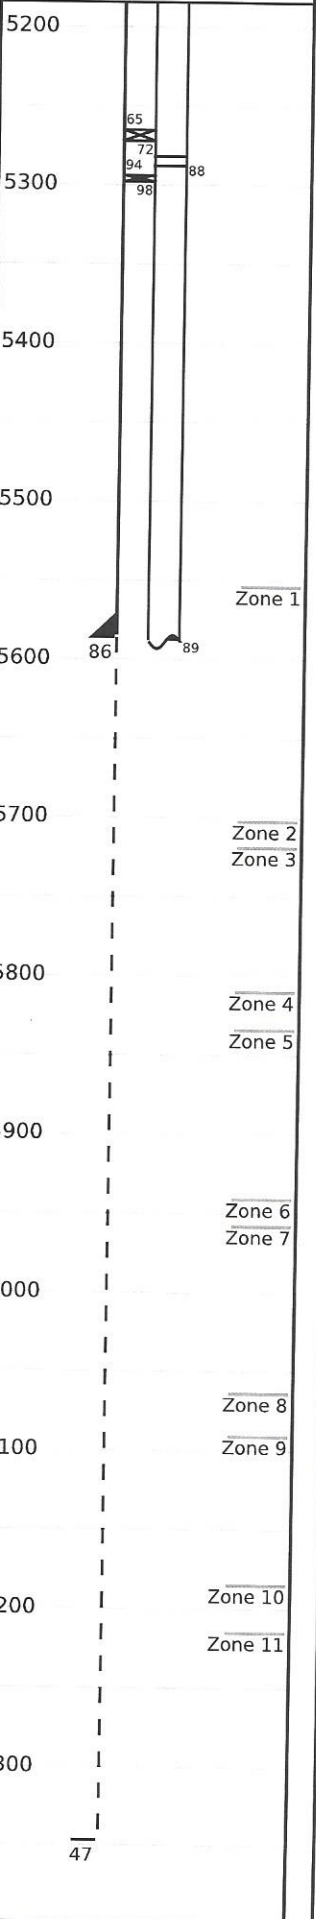

0% 50% 100%

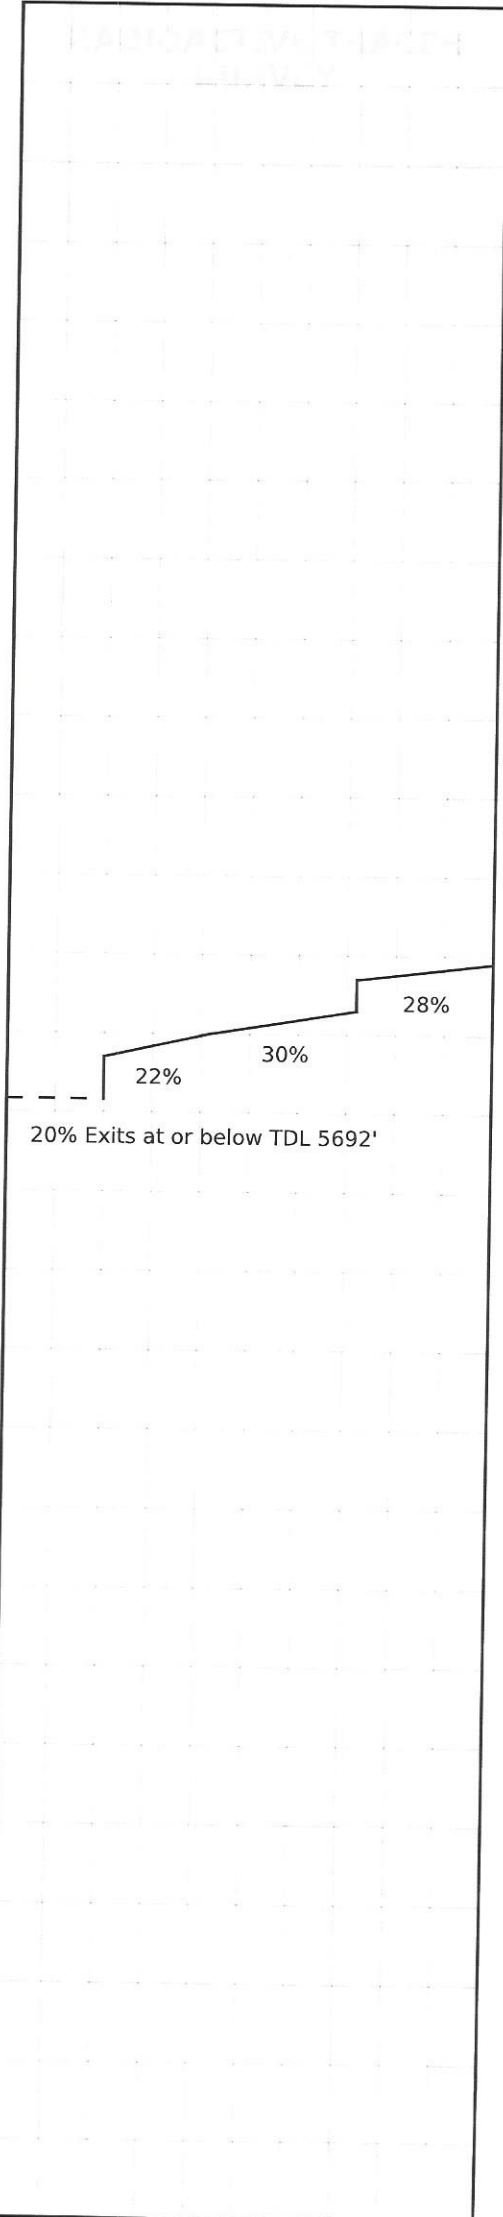

(%) Injected Into Zone

Zone 1
5554-5713

Zone 2
5713-5719

Zone 3
5719-5810

Zone 4
5810-5834

Zone 5
5834-5941

Zone 6
5941-5958


Zone 7
5958-6064

Zone 8
6064-6091

Zone 9
6091-6185

Zone 10
6185-6215

Zone 11
6215-6347

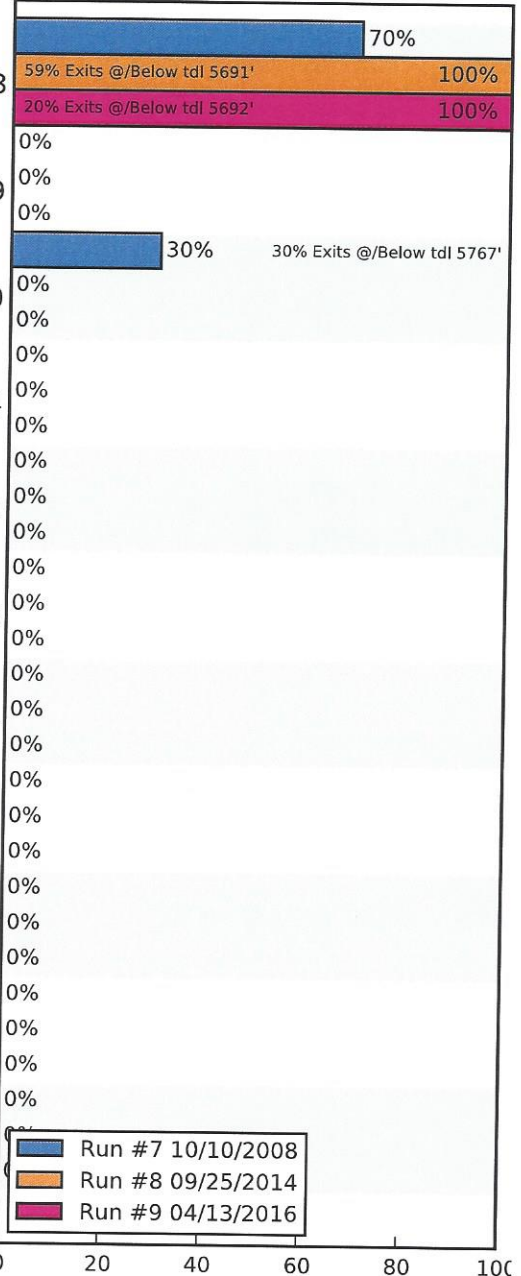

Average Temperature (°F)

	Run #7 10/10/2008	Run #8 09/25/2014	Run #9 04/13/2016
Surface	81.5	95.9	79.6
5554-5713	--	--	--
TDL (5692)	114.7	106.4	110.7
5713-5719	--	--	--
5719-5810	--	--	--
5810-5834	--	--	--
5834-5941	--	--	--
5941-5958	--	--	--
5958-6064	--	--	--
6064-6091	--	--	--
6091-6185	--	--	--
6185-6215	--	--	--
6215-6347	--	--	--
Rate (B/D)	665	1513	594
Press (PSI)	1450	1770	1520