

NOBLE ENERGY INC.
 Aloysius C34-31
 NWNW 34-4N-64W
 1296 FNL & 192 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 8/18/2016

API: 05-123-31158


KB Elev: 4733'
 GL Elev: 4720'

Spud Date: 9/24/2010

Surface Casing :
 8 5/8", 24#, J-55 @ 650'
 Cement: sx
 TOC: Surface

TOC @ 1450'

Production Casing :
 4 1/2", 11.6#, M-80 @ 7050'
 Cement: sx
 Run Date: 9/27/2010

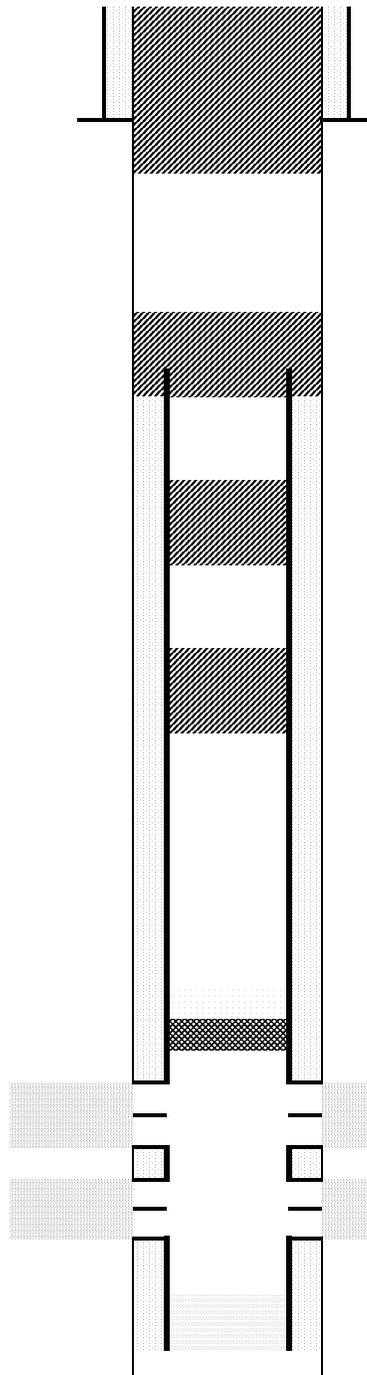

Cut surface casing off 6'-8' below surface.

Pump approx 260 sx shoe plug @ 750'
 Will bring cement to surface.

Pump 100 sx stub plug from 1460' - 1360'
 Cut and pull csg @ 1410' (Collar @ 1400')

Pump 15 sx balance plug from 2600' - 2400'

Pump 15 sx balance plug from 4300' - 4100'

CIBP @ 6572' w/ 2 sx cement on top

Niobrara Perforations: 6622' - 6870'

Codell Perforations: 6896' - 6908'

TD: 7057'