

NOBLE ENERGY INC.
 BIERIG 08-26
 SENE 26-5N-66W
 1950 FNL & 1341 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 10/5/2016

API: 05-123-25622
 COGCC #


GL Elev: 4753'
 KB Elev: 4763'

Spud Date: 2/14/2005

Surface Casing :
 8 5/8" 24.0#, grade? @ 489'
 Cement: 345 sx
 TOC: Surface

TOC @ 6712'

Production Casing :
 4 1/2" 11.60, grade? @ 7351'
 Cement: 100 sx
 TD: 2/18/2005

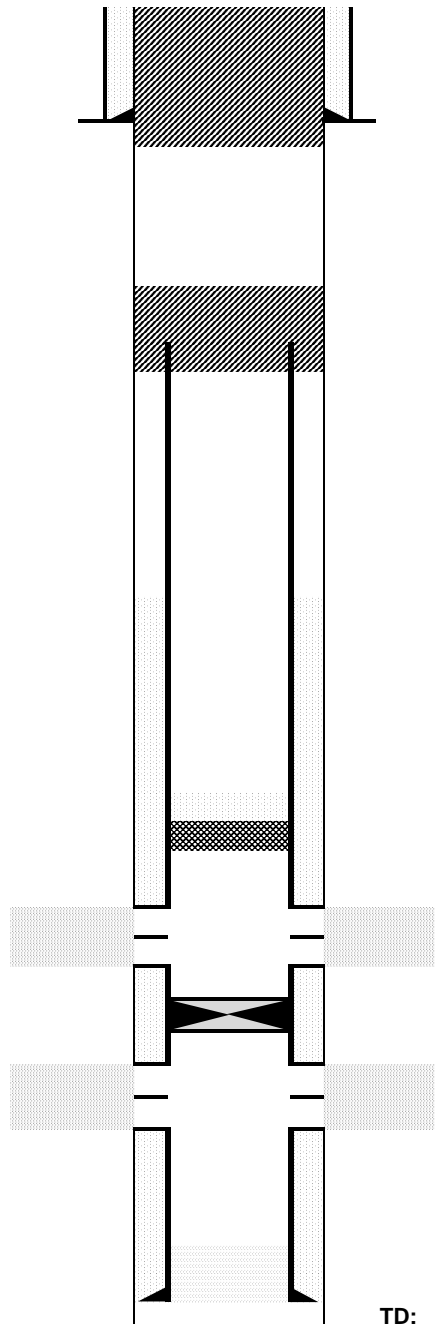

Cut surface casing off 6'-8' below surface.

Pump approx 220 sx shoe plug @ 589'
 Will bring cement to surface
 Deepest waterwell with/in 1 mile is 405'

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6854' w/ 2 sx cement on top

Niobrara Perforations 6904' - 7044'

Cast iron flow through plug
 @7150' - 7152'

Codell Perforations 7204' - 7216'

TD: 7373'