


API:	05-123-18085	ELEVATION:	4814	QTR-QTR:	NENW
WELL NAME:	HSR-Sandlin 3-36	GROUND LEVEL:	4804	SECTION:	36
COUNTY:	WELD	MD:	7462	TOWNSHIP:	3N
LATITUDE:	40.18745	PBMD:	7428	RANGE:	67W
LONGITUDE:	-104.84164	CREATED BY:	S.RIEBE		
		DATE:	12/8/2016		

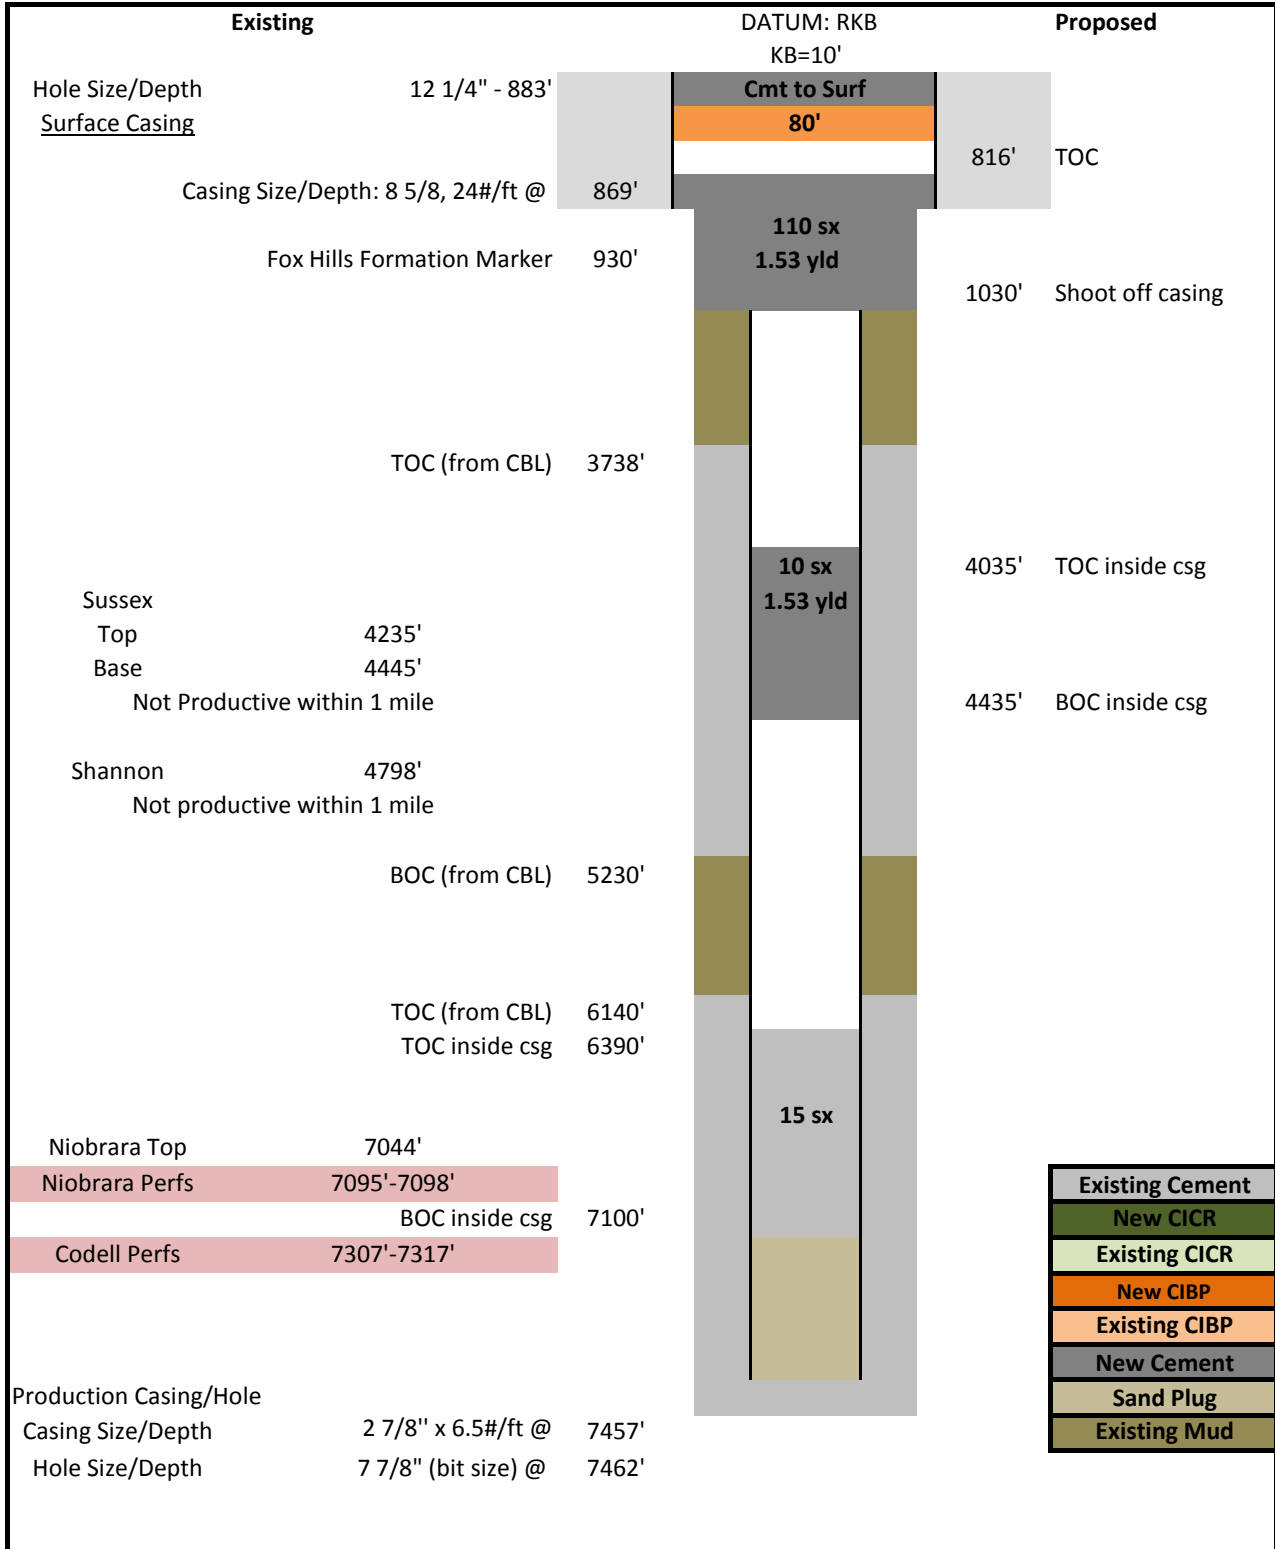

COLOR KEY


GENERAL INPUTS	
Name	Savanna Riebe
Cell Phone Number	970-714-0288
Date	12/8/2016
WELL INPUTS	
Well Name	HSR-Sandlin 3-36
API #	05-123-18085
WINS #	73979
Gyro Date:	3/22/17
Surface Hole Size (in)	12.25
Prod Hole Size (in)	7.88
OH Excess Factor	60
Surface Casing (size/wt)	8-5/8", 24#
Surface Casing Shoe (ft)	869
Prod csg (size/wt)	2-7/8", 6.5#
Tubing OD (in)	1.66"
Tubing Set Depth (ft)	6286
Collar Above CIBP (ft)	6190
Collar Below CIBP (ft)	6250
Niobrara CIBP / BOC (ft)	6200
Niobrara TOC (ft)	6200
Niobrara Cement Vol (sx)	35
SUSX/SH BOC (ft)	4435
SUSX/SH TOC (ft)	4035
SUSX/SH Cement Vol (sx)	10
Bradenhead Issues? (Y/N)	N
Stub Plug BOC (ft)	1130
Cut Casing Depth (ft)	1030
Stub Plug TOC Form6 (ft)	816
Stub Plug TOC Calc (ft)	670
Stub Plug Cement Vol (sx)	110
GEOLOGY INPUTS	
FHM (ft)	930
Sussex Top (ft)	4235
Sussex Base (ft)	4445
Shannon Base (ft)	4798
Niobrara Top (ft)	7044
QUESTIONS?	
Who Drilled Well?	HS Resources
Straight or Deviated Hole?	Straight
Age of well (yr)	22
Any squeeze holes? (Y/N)	N
Details of Integrity Issues?	NONE
SUSX/SH Productive? (Y/N)	N
Gyro Found (Y/N)	Y
CBL Found (Y/N)	Y
Packer Downhole? (Y/N)	N
Packer Depth (ft)	7500

*If No Integrity Issues, Put "NONE"

