

**NOBLE ENERGY INC.**  
**AUSTYN J09-03**  
**NWNW 9-5N-66W**  
**1003 FNL & 1105 FWL**  
**WELD COUNTY, CO**  
**Wattenberg**  
**PROPOSED WELLBORE SCHEMATIC**  
**for P&A**  
**Date: 4/10/17**  
**Drawing not to scale**

API: 05-123-23257

GL Elev: 4759'  
 KB Elev: 4775'

**Spud Date:** 12/28/2005


**Surface Casing:**  
 8.625" 24# J-55 @ 579' KB  
 Cement: 385 sx  
 TOC: Surface

|                       |     |            |
|-----------------------|-----|------------|
| Water Well            | 500 | 700        |
| FH:                   | 312 | 512        |
| Sfc Casing            | 579 | 779        |
| Min. shoe plug depth: |     | <b>779</b> |

**TOC @ 1421'**

**Nio Log Top: 7026'**

**Production Casing:**  
 4.5" 11.6# M-80 @ 7504' KB  
 Cement: 920 sx  
 TD: 1/2/2006

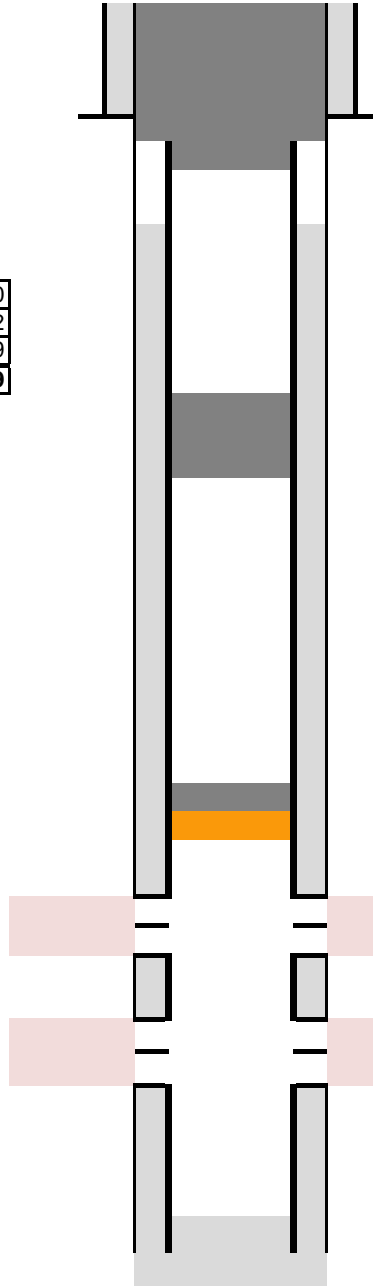

Cut surface casing off 6'-8' below surface.

TOC @ Surface

Cut production casing @ 779'  
 Pump 295sx cement @ 829' (50' into casing top)

Pump 40sx Cement @ 2500'  
 TOC: 2000'

TOC: 6975'  
 Set CIBP @ 6998' w/ 2sx cement on top

Niobrara Perforations: 7048-7202' KB

Codell Perforations: 7377-7395' KB

TD: 7686' KB

| LEGEND          |  |
|-----------------|--|
| Existing Cement |  |
| New Cement      |  |
| CICR            |  |
| CIBP            |  |
| Existing BP     |  |
| Sand Plug       |  |
|                 |  |
|                 |  |