




COLORADO OIL AND GAS CONSERVATION COMMISSION  
SUNDRY NOTICES AND REPORTS OF WELLS

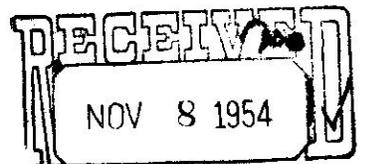

OIL & GAS  
CONSERVATION COMMISSION

(Indicate nature of data by checking below)

- Notice of intention to drill (attach plat) \_\_\_\_\_
- Notice of intention to change plans \_\_\_\_\_
- Notice of date for test of water shut-off \_\_\_\_\_
- Report on result of test of water shut-off \_\_\_\_\_
- Notice of intention to re-drill or repair well \_\_\_\_\_
- Notice of intention to clean out well \_\_\_\_\_
- Statement of shooting \_\_\_\_\_
- Statement of perforating \_\_\_\_\_
- Notice to pull or otherwise alter casing \_\_\_\_\_
- Notice of intention to abandon well XXX
- Report of work done on well since previous report \_\_\_\_\_

Locate Well Correctly

x			
		2	

14-S

65-W

Notice to do work   
Report of work done

Land: Fee and Patented   
State

Lease No. \_\_\_\_\_

Colorado  
State

El Paso  
County

Field \_\_\_\_\_

AJJ	
DVR	
FJK	
OPS	
HH/A	
AH	
JJD	✓
FILE	

1 Raymond W. Lewis NW/4 2 14-S 65-W  
 (Well No.) (Lease) (1/4 Sec.) (Sec.) (Twp.) (Range) (Meridian)

The Well is located 150 Ft. NW of Section Line and 120 Ft. (E) of NW Section Line.

The elevation above sea level is 6548 Ft.

Details of Plan of Work: (State names of and expected depths to objective sands. Show sizes, weights, and length of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work.)

- 10- 5-54 Commenced drilling with rotary tools at 4:30 P.M.
- 10- 6-54 Having drilled to 235', ran and cemented 10-3/4" Casing at 230' with 200 sacks.
- 10-29-54 Cored 7404-15, possible Graneros, recovered 11 ft. sandy shale.
- 10-31-54 Cored 7465-98, "D" sand, recovered 33 ft. - 1 ft. black shale, 17-1/2 ft. fine grained sand - no show, 1/2 ft. gray shale, 8-1/2 ft. fine grained sand - no show 3 ft. alt. sand and shale, and 2-1/2 ft. dark gray silty shale. Top "D" 7456'.
- 11- 1-54 DST 7468-7500, "D" sand, 1/2" bottom choke, open 1 hour, recovered 90 ft. muddy water FP-O-SIP-15"-975#.
- 11- 2-54 Cored 7500-50, recovered 48 ft. - 7-1/2 ft. black silty shale, 15-1/2 ft. reworked sand and shale, 2 ft. dark gray shale, 2-1/2 ft. very fine grained sand, no show and 20-1/2 ft. alt. sand and shale. Top "J" sand - 7504.
- 11- 3-54 Cored 7550-7600, recovered 50 ft. - 6 ft. very fine grained sand, no show, 2 ft. alt. sand and shale, 2-1/2 ft. black hard silty shale, 7 ft. fine grained shaley sand, found odor, 2-1/2 ft. reworked sand and shale, 7 ft. black fissile shale and 23 ft. hard black silty shale. Top Skull Creek 7570.
- 11- 4-54 Ran electric log and micro log with depth 7600 feet.

(CONCLUDED ON REVERSE SIDE)

Approved: NOV 8 1954

Date November 4, 1954 ✓

[Signature]  
Director

Company Sinclair Oil & Gas Company  
 Address 402 Mercantile Building  
Denver 2, Colorado

By [Signature]  
 Title Division Superintendent

Submit reports of proposed work, for approval, on this form in Duplicate for patented lands and in Triplicate for school and state lands.

Having drilled to 7600-TD, having cored, tested and run electric logs and having found no oil or <sup>gas</sup> commercial quantities in any zone, we now propose to plug and abandon as follows:

Spot 25 sack cement, plug 7500-7435; spot 20 sack cement, plug approximately 250-198; cut off the 10-3/4" casing 3' below surface, dump 5 sack cement in top of surface pipe and weld steel plate on top of surface pipe; the intervening spaces to be filled with heavy mud. We will backfill the pits with earth and clean the well site. This is as per verbal arrangements out Mr. Kadel with your Mr. Jersin this date.