

Company: Crestone Peak Resources and Operating LLC

Well: File #3S-32H-K268

Field: Wattenberg

County: Weld State: Colorado

Isolation Scanner
Cement Evaluation
Gamma Ray - CCL Log

County:	Weld
Field:	Wattenberg
Location:	NESW SEC: 32, T2n, R68w
Well:	File #3S-32H-K268
Company:	Crestone Peak Resources and Operating LLC
Location:	
NESW SEC: 32, T2n, R68w	Elev.: K.B. 4993.00 ft
SHL: 1760' FFSL & 2280' FFWL	G.L. 4970.00 ft
Lat/Long: 40.092573/-105.030574	D.F. 4993.00 ft
Permanent Datum:	Ground Level
Log Measured From:	Kelly Bushing
Drilling Measured From:	Kelly Bushing
API Serial No. 05-123-45829	Section: 32
	Township: 2N
	Range: 68W

Logging Date	03-Mar-2018
Run Number	1A
Depth Driller	18900.00 ft
Schlumberger Depth	18900.00 ft
Bottom Log Interval	6882.00 ft
Top Log Interval	84.00 ft
Casing Fluid Type	Water
Salinity	
Density	8.4 lbm/gal
Fluid Level	8.00 ft
BIT/CASING/TUBING STRING	
Bit Size	8.75 in
From	1945.00 ft
To	18900.00 ft
Casing/Tubing Size	5.5 in
Weight	20 lbm/ft
Grade	P110
From	0.00 ft
To	18900.00 ft
Max Recorded Temperatures	180 degF
Logger on Bottom	03-Mar-2018
Unit Number	9115
Recorded By	Richard Woods
Witnessed By	Keith Kershnik

Disclaimer

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

Contents

1. Header

2. Disclaimer

3. Contents

4. Well Sketch

5. Borehole Size/Casing/Tubing Record

6. Remarks and Equipment Summary

7. Depth Summary

8. IBC Fluid Properties Measurement

9. 1A IBC SLG

9.1 Integration Summary

9.2 Software Version

9.3 Composite Summary

9.4 Log (IBC SLG)

9.5 Parameter Listing

10. 1A IBC SLG Composite

10.1 Integration Summary

10.2 Composite Summary
- 12.1 Integration Summary

12.2 Software Version

12.3 Composite Summary

12.4 Log (IBC SLG)

12.5 Parameter Listing

13. 1A IBC SLG Composite

13.1 Integration Summary

13.2 Composite Summary

13.3 Log (IBC SLG Composite)

13.4 Parameter Listing


14. XYZ (IBC Fluid Acoustic Slowness vs Depth 6.0 in)


15. XYZ (IBC Acoustic Impedance of Mud vs Depth 6.0 in)

16. Tail

- 10.3 Log (IBC SLG Composite)
- 10.4 Parameter Listing
- 11. 1A IBC Goodwin Compressed
 - 11.1 Integration Summary
 - 11.2 Composite Summary
 - 11.3 Log (IBC Goodwin)
- 12. 1A IBC SLG

Well Sketch

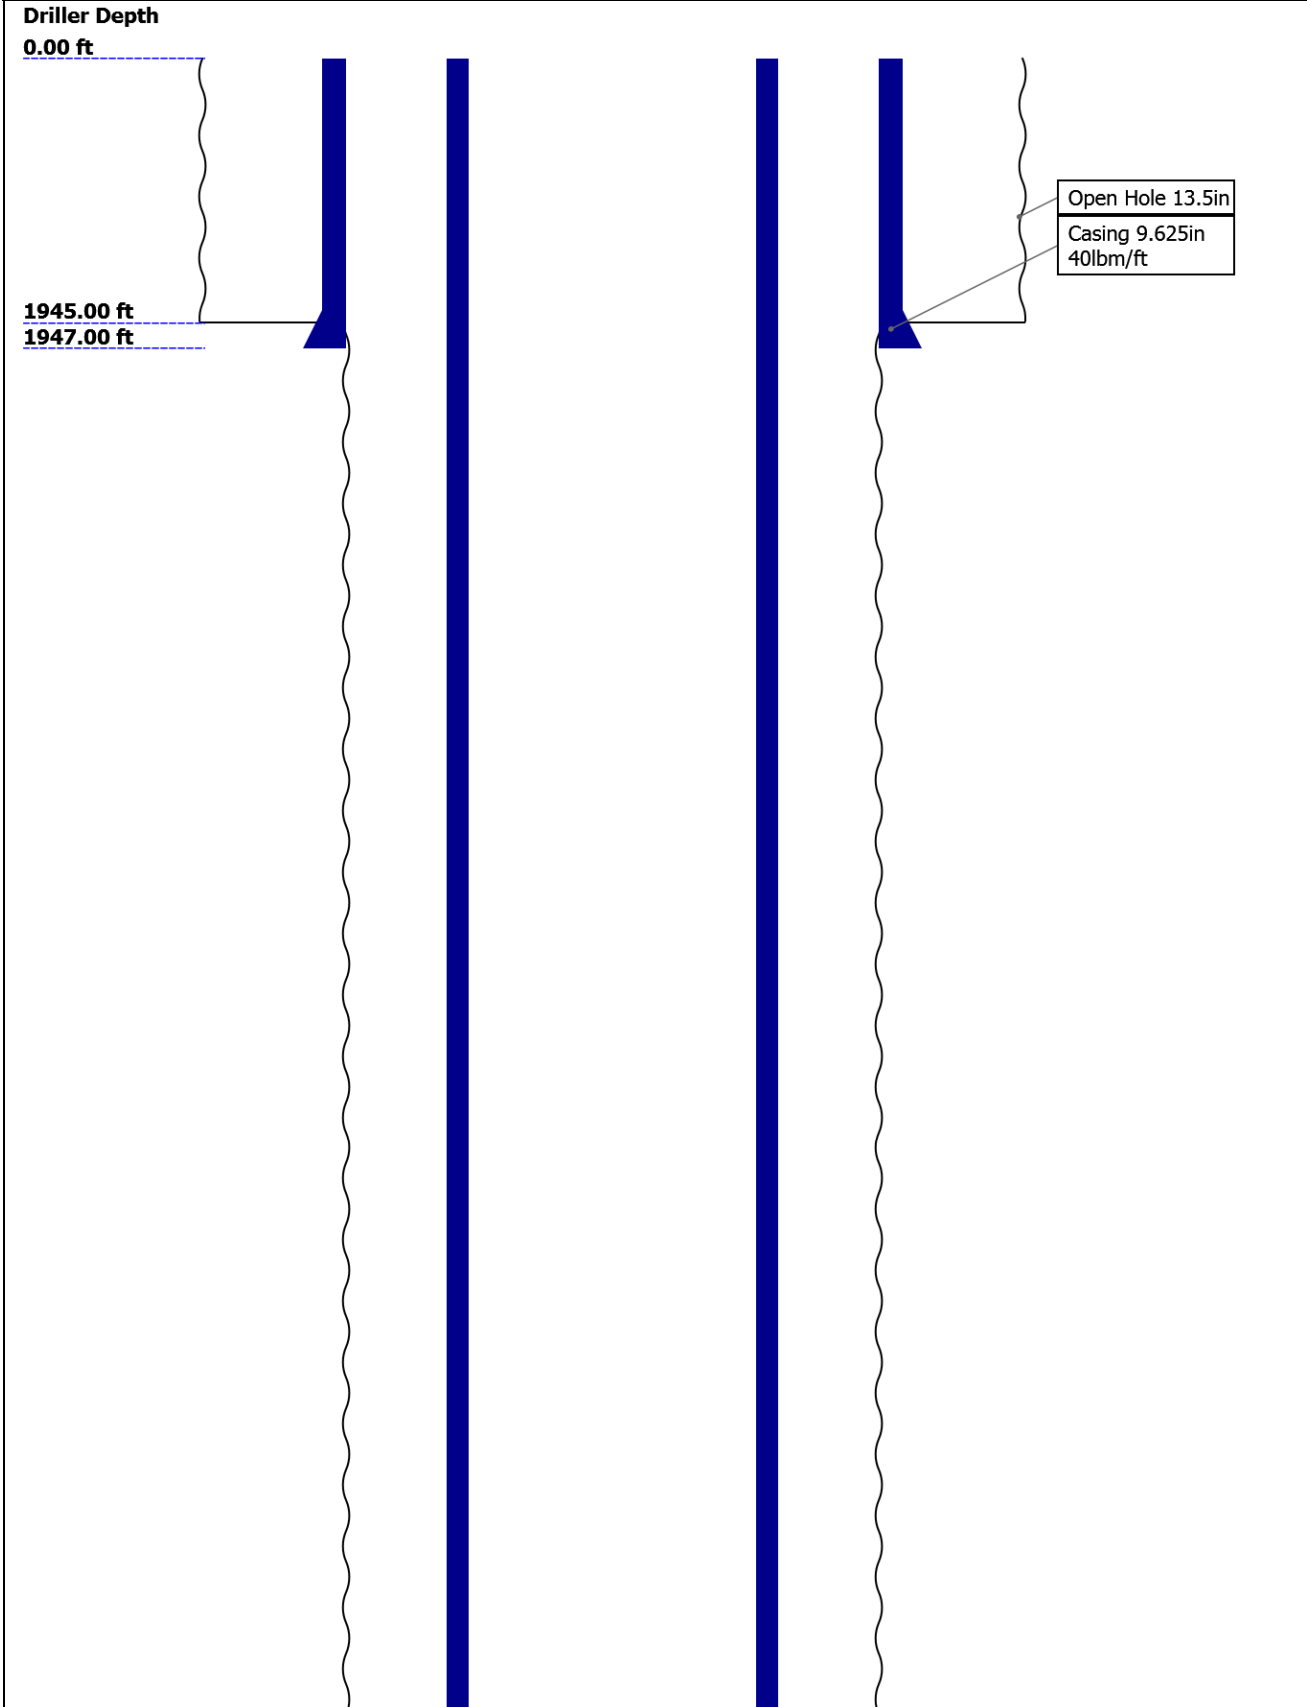


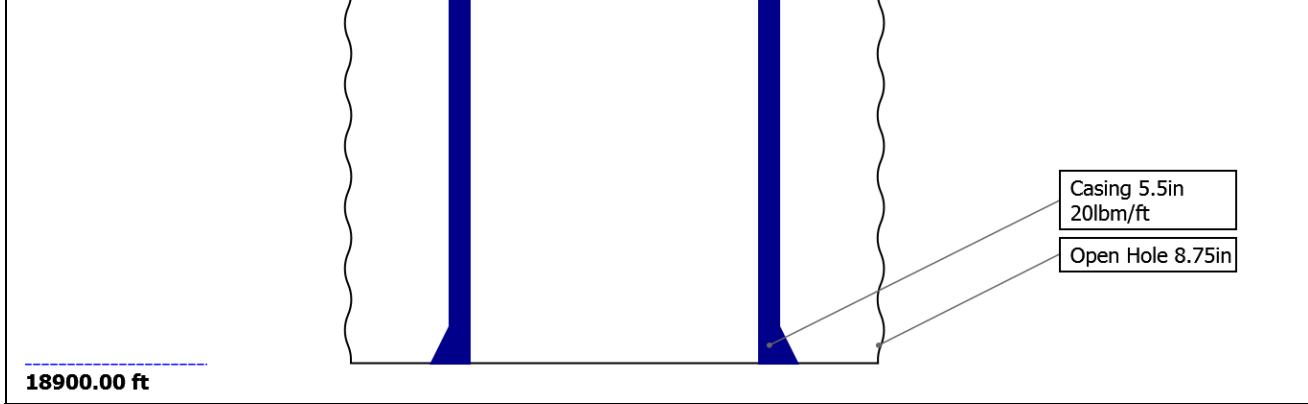


Borehole Size/Casing/Tubing Record

Bit						
Bit Size (in)	13.5	8.75				
Top Driller (ft)	0	1945				
Top Logger (ft)	0	1945				
Bottom Driller (ft)	1945	18900				
Bottom Logger (ft)	1945	18900				
Casing						
Size (in)	9.625	5.5				
Weight (lbm/ft)	40	20				
Inner Diameter (in)	8.835	4.778				
Grade	J55	P110				
Top Driller (ft)	0	0				
Top Logger (ft)	0	0				
Bottom Driller (ft)	1947	18900				
Bottom Logger (ft)	1947	18900				

Remarks and Equipment Summary

1A: Toolstring				1A: Remarks		
<div><div><div>Equip nameLength</div><div>LEH-QT30.16</div><div>LEH-QT</div></div><div><div>MP nameOffset</div><div></div><div></div></div></div> <div><div>EDTC-B:827.24</div><div>478</div><div>EDTH-B:84</div><div>70</div><div>EDTG-A:7</div><div>7347</div><div>EDTC-B:84</div><div>78</div></div> <div><div>AH-107:820.74</div><div>66</div></div> <div><div>AH-184:318.74</div><div>709</div></div> <div><div>USIT-E:9316.74</div><div>0</div><div>ECH-MFA:</div><div>1924</div><div>USAC-A:9</div><div>30</div><div>USIT-A:10</div></div> <div><div>CTEM23.74</div><div>ACCZ0.00</div><div>HV0.00</div><div>Gamma21.87</div><div>Ray</div><div>TelStatu20.74</div><div>s</div></div> <div></div>				<div>Thank you for choosing Schlumberger!</div> <div>Tool string run as per tool sketch and client logging program.</div> <div>Gemcos and in-line centralizers used for centralization.</div> <div>All passes run under 0 PSI</div> <div>Lead: 11 ppg</div> <div>Tail: 13.5 ppg</div> <div>Spacer: 9 ppg</div>		

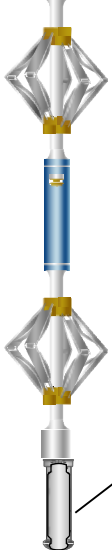USSS-A:19 94 USSC-B:92 5 IBCS-A:77 0 FAR-SENS OR:3812 IBC-TX NEAR-SEN SOR:4556 IBC-TX USI-SENS OR:4614 IBC-TX EMITTER- SENSOR:4 515 IBC-TX	 <p>USI Sen 0.84 sor Head Te nsion</p> <p>TOOL_ZERO</p> <p>Lengths are in ft Maximum Outer Diameter = 5.000 in Line: Sensor Location, Value: Gating Offset All measurements are relative to TOOL_ZERO</p>	
--	---	--

Depth Summary			
	1A		
Depth Measuring Device			
Type	IDW-JA		
Serial Number	6527		
Calibration Date	28-Sep-2017		
Calibrator Serial Number	IDWC-C-57		
Calibration Cable Type	7-46AXS		
Wheel Correction 1	-2		
Wheel Correction 2	-2		
Tension Device			
Type	CMTD-B/A		
Serial Number	147		
Calibration Date	24-Feb-2018		
Calibrator Serial Number	107		
Number of Calibration Points	10		
Calibration Root Mean Square Error	15		
Calibration Peak Error	28		
Logging Cable			
Type	7-46PI-XS		
Serial Number	F715040		
Length	22000.00 ft		
Conveyance Type	Wireline		
Rig Type	MAST		
1A:Depth Control Parameters		Depth Control Remarks	
Log Sequence	First Log In the Well	All Schlumberger Depth control policies followed. IDW used for primary depth control. zchart used for secondary depth control	
Rig Up Length At Surface			
Rig Up Length At Bottom			
Rig Up Length Correction			

Stretch Correction
Tool Zero Check At Surface

USIT - Fluid Properties Measurement

Run Name	Pass Name	Start Depth(ft)	Stop Depth(ft)
Run 1	Log[3]:Up	6885.58	70.19

Fluid Velocity = "Automatic".
CFVL equals DFSL channel

Start Depth(ft)	Stop Depth(ft)	Start Value(us/ft)	End Value(us/ft)
-----------------	----------------	--------------------	------------------

Mud Impedance = "Inversion Norm."
IBC Inversion normalization zone is : 211.43m(693.66ft) to 214.73m(704.50ft)
MUD_N_INV = 1.22
DFD = 1.01g/cm3(8.40lbm/gal)
CZMD median computed in inversion normalization interval = 1.69 MRayl

Start Depth(ft)	Stop Depth(ft)	Start Value(Mrayl)	End Value(Mrayl)
-----------------	----------------	--------------------	------------------

1A

IBC SLG

Software Version

Acquisition System	Version
Maxwell 2017 SP3	7.3.92069.3100
Application Patch	Wireline_Hotfix-RTDLIS-2017SP3_7.3.92363
	Wireline_NPD-ICE2-2017SP3_7.3.93033

Pass Summary

Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
1A	Log[3]:Up	Up	70.19 ft	6885.58 ft	03-Mar-2018 1:01:25 PM	03-Mar-2018 2:47:52 PM	ON	4.93 ft	Yes

All depths are referenced to toolstring zero

Log	Company:Crestone Peak Resources and Operating LLC Well:File #3S-32H-K268 1A: Log[3]:Up:S003
-----	---

Description: USI IBC SLG Format: Log (IBC SLG) Index Scale: 5 in per 100 ft Index Unit: ft Index Type: Measured Depth Creation Date: 03-Mar-2018 15:53:32

USIT Processing Flags (UFLG[0]) USIT-E

1 - UFLG 1 Value within [0.0 - 1.5] - :

2 - UFLG 2 Value within [1.5 - 2.5] - :

3 - UFLG 3 Value within [2.5 - 3.5] - :

4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :

5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :

UTIM Error


Pulse Origin Not Detected


WINLEN Error


Casing Thickness Error


Loop Processing Error


TIME_1900 - Time Marked every 60.00 (s)

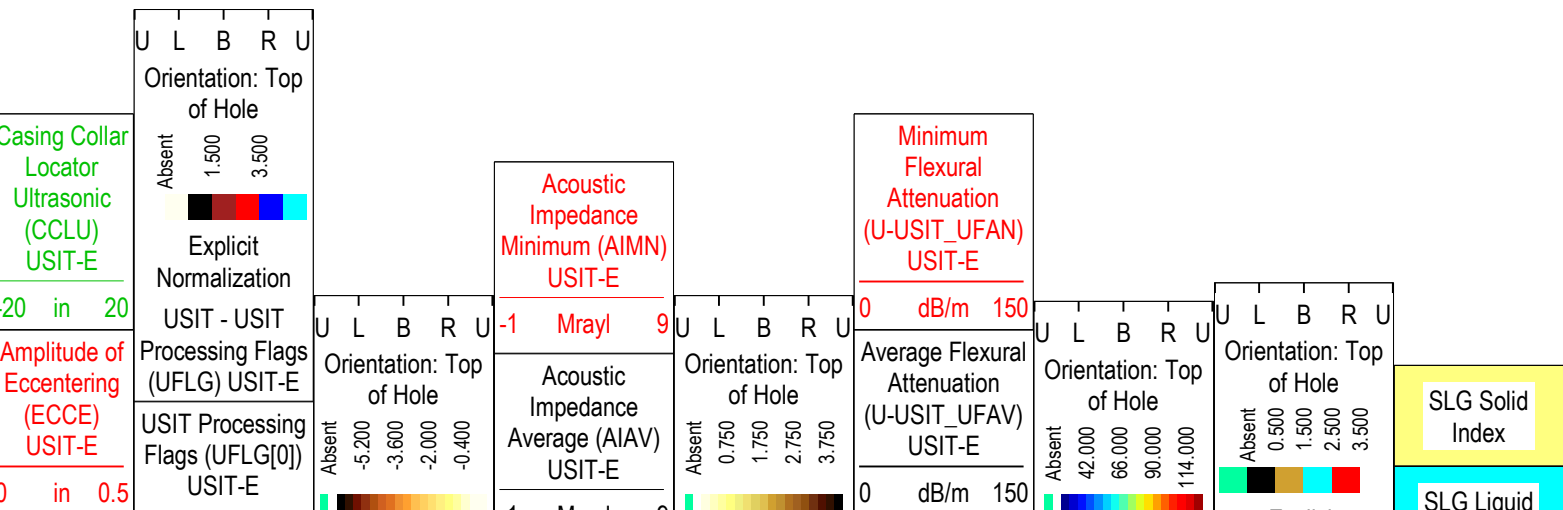


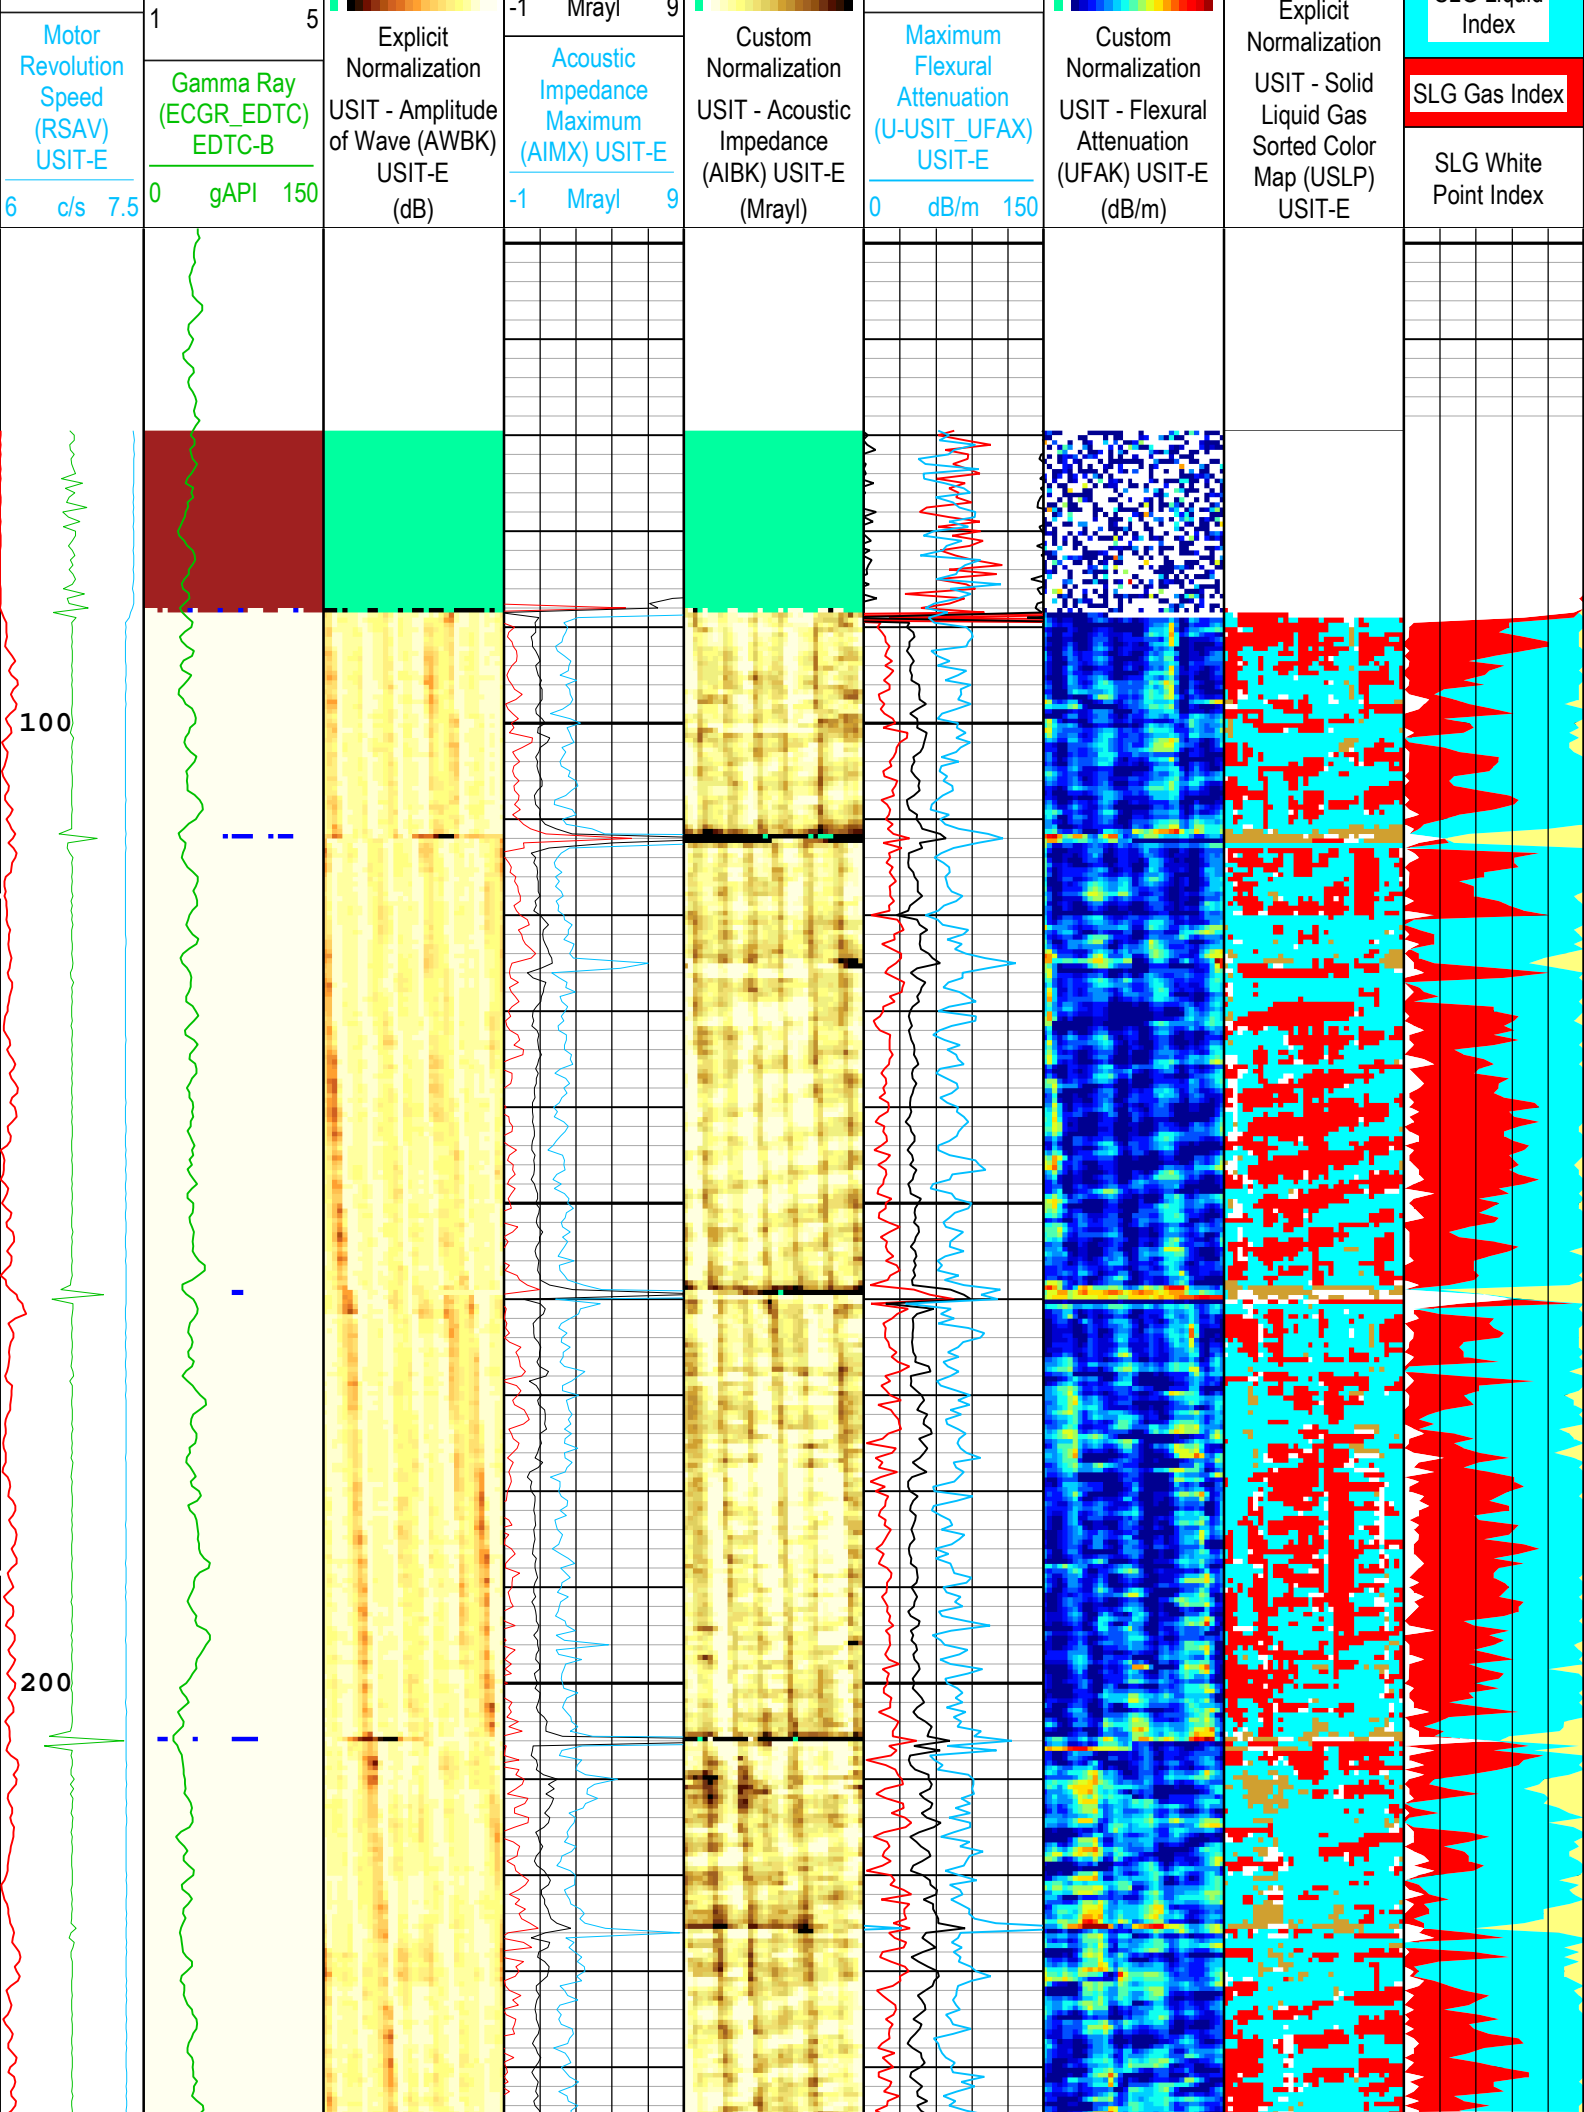


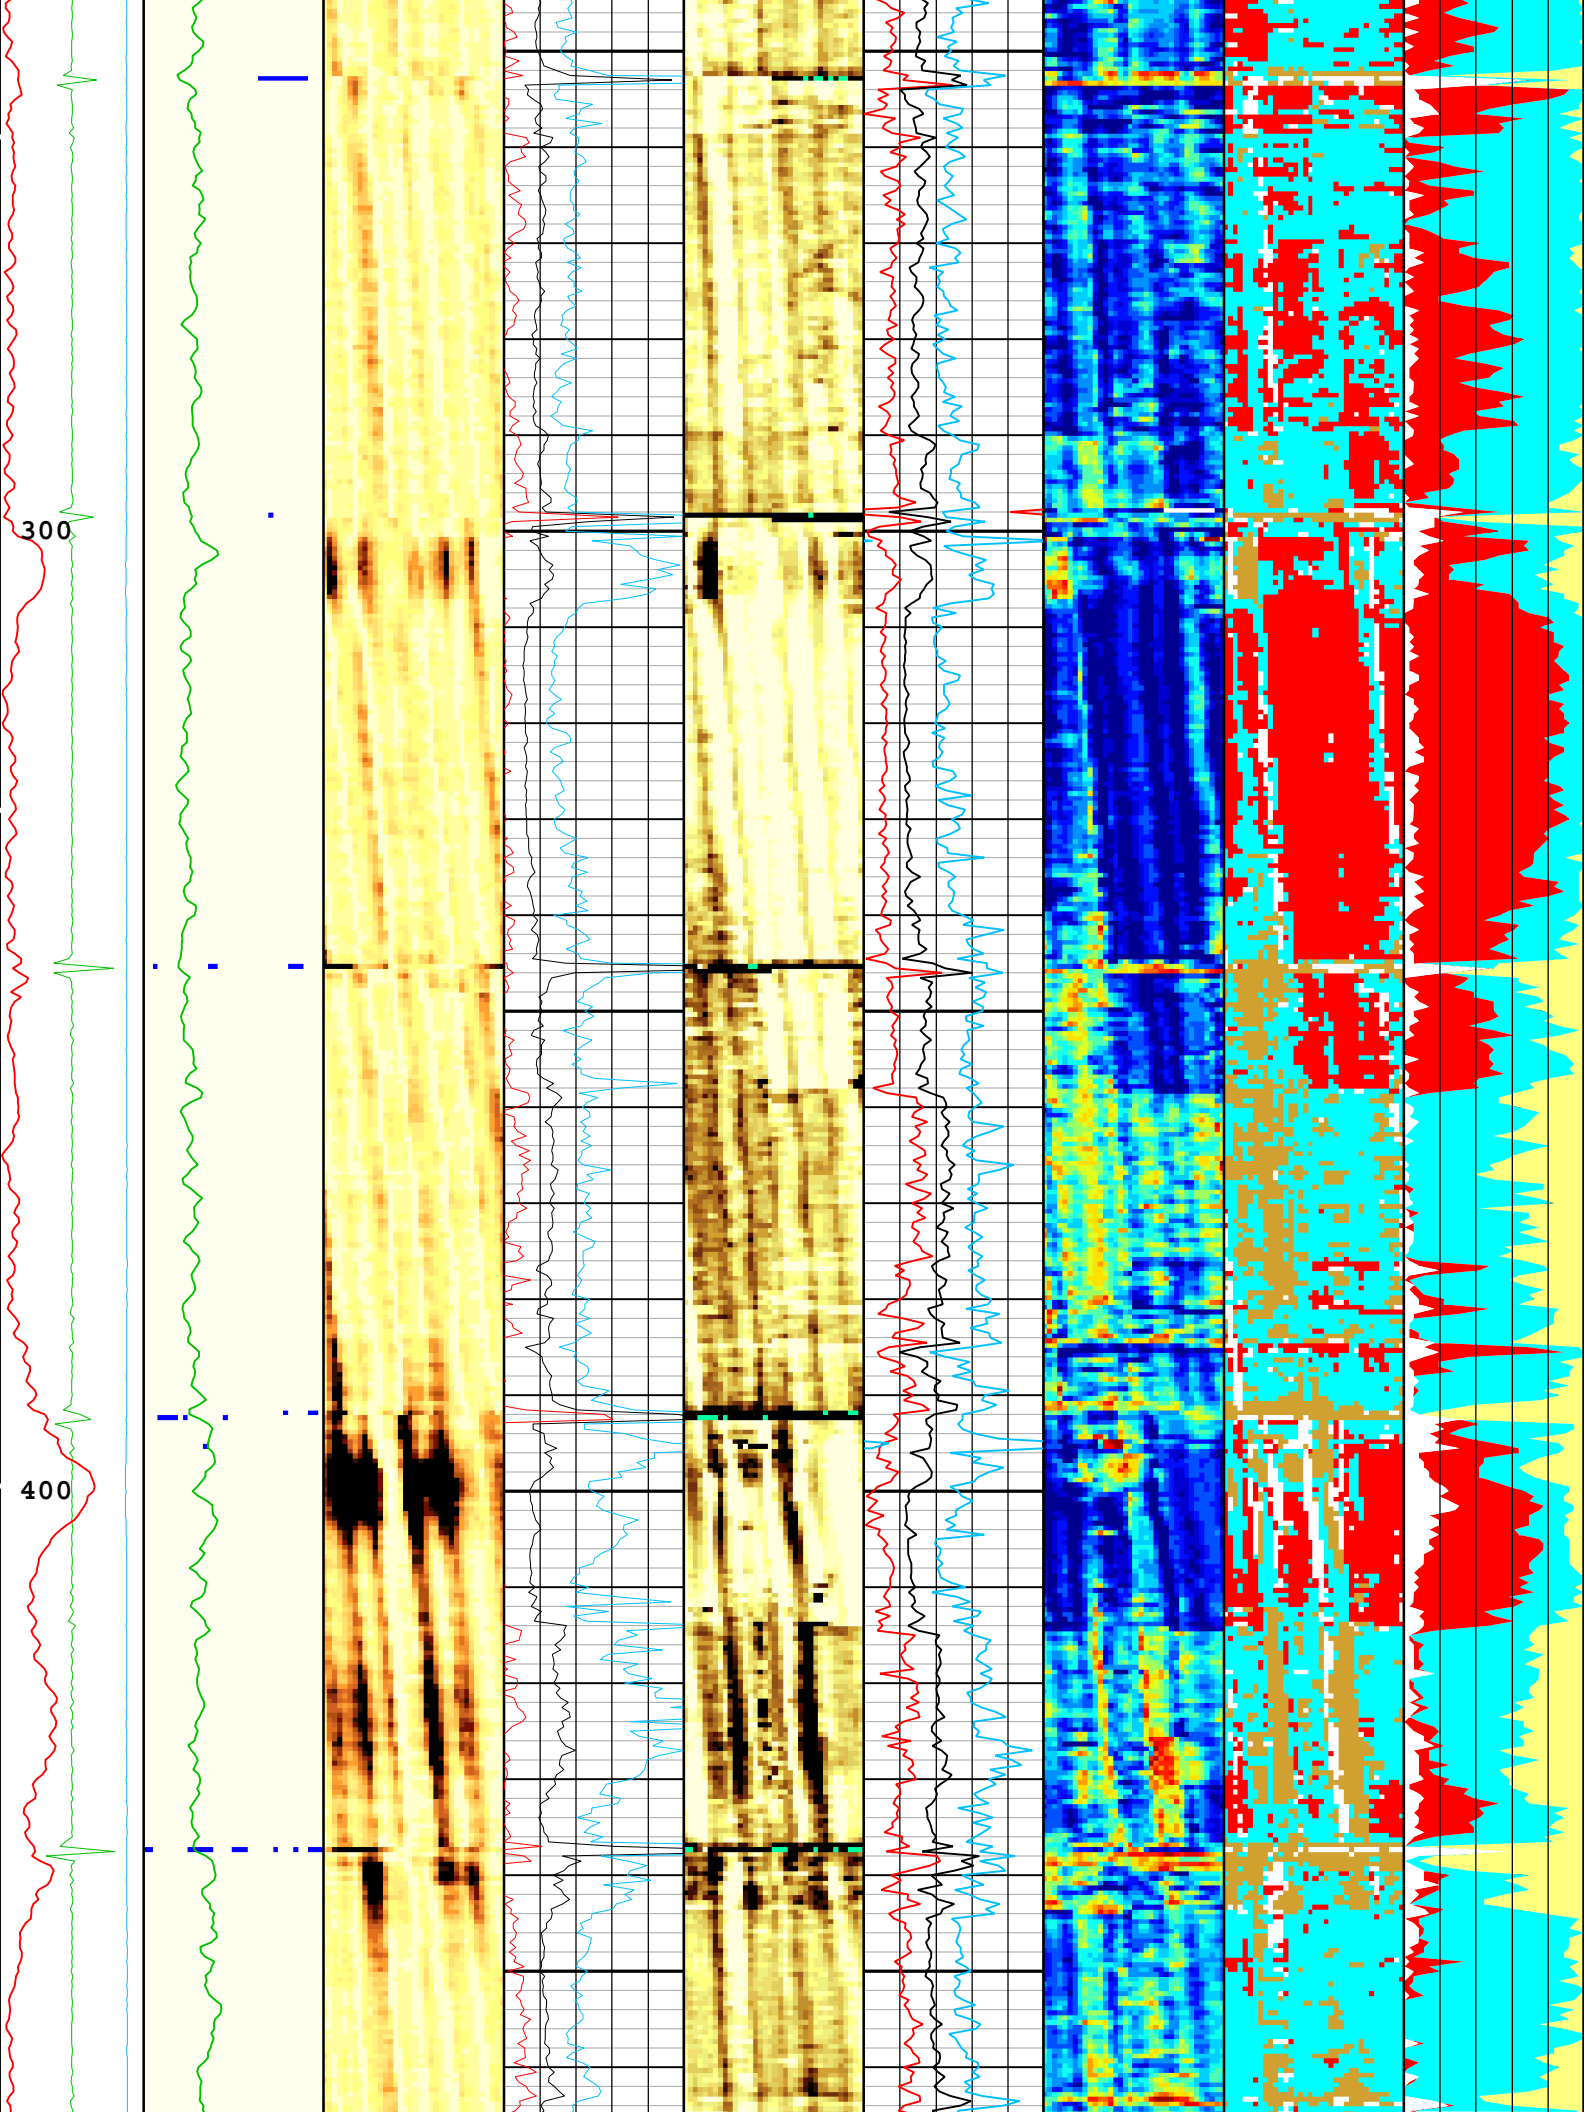


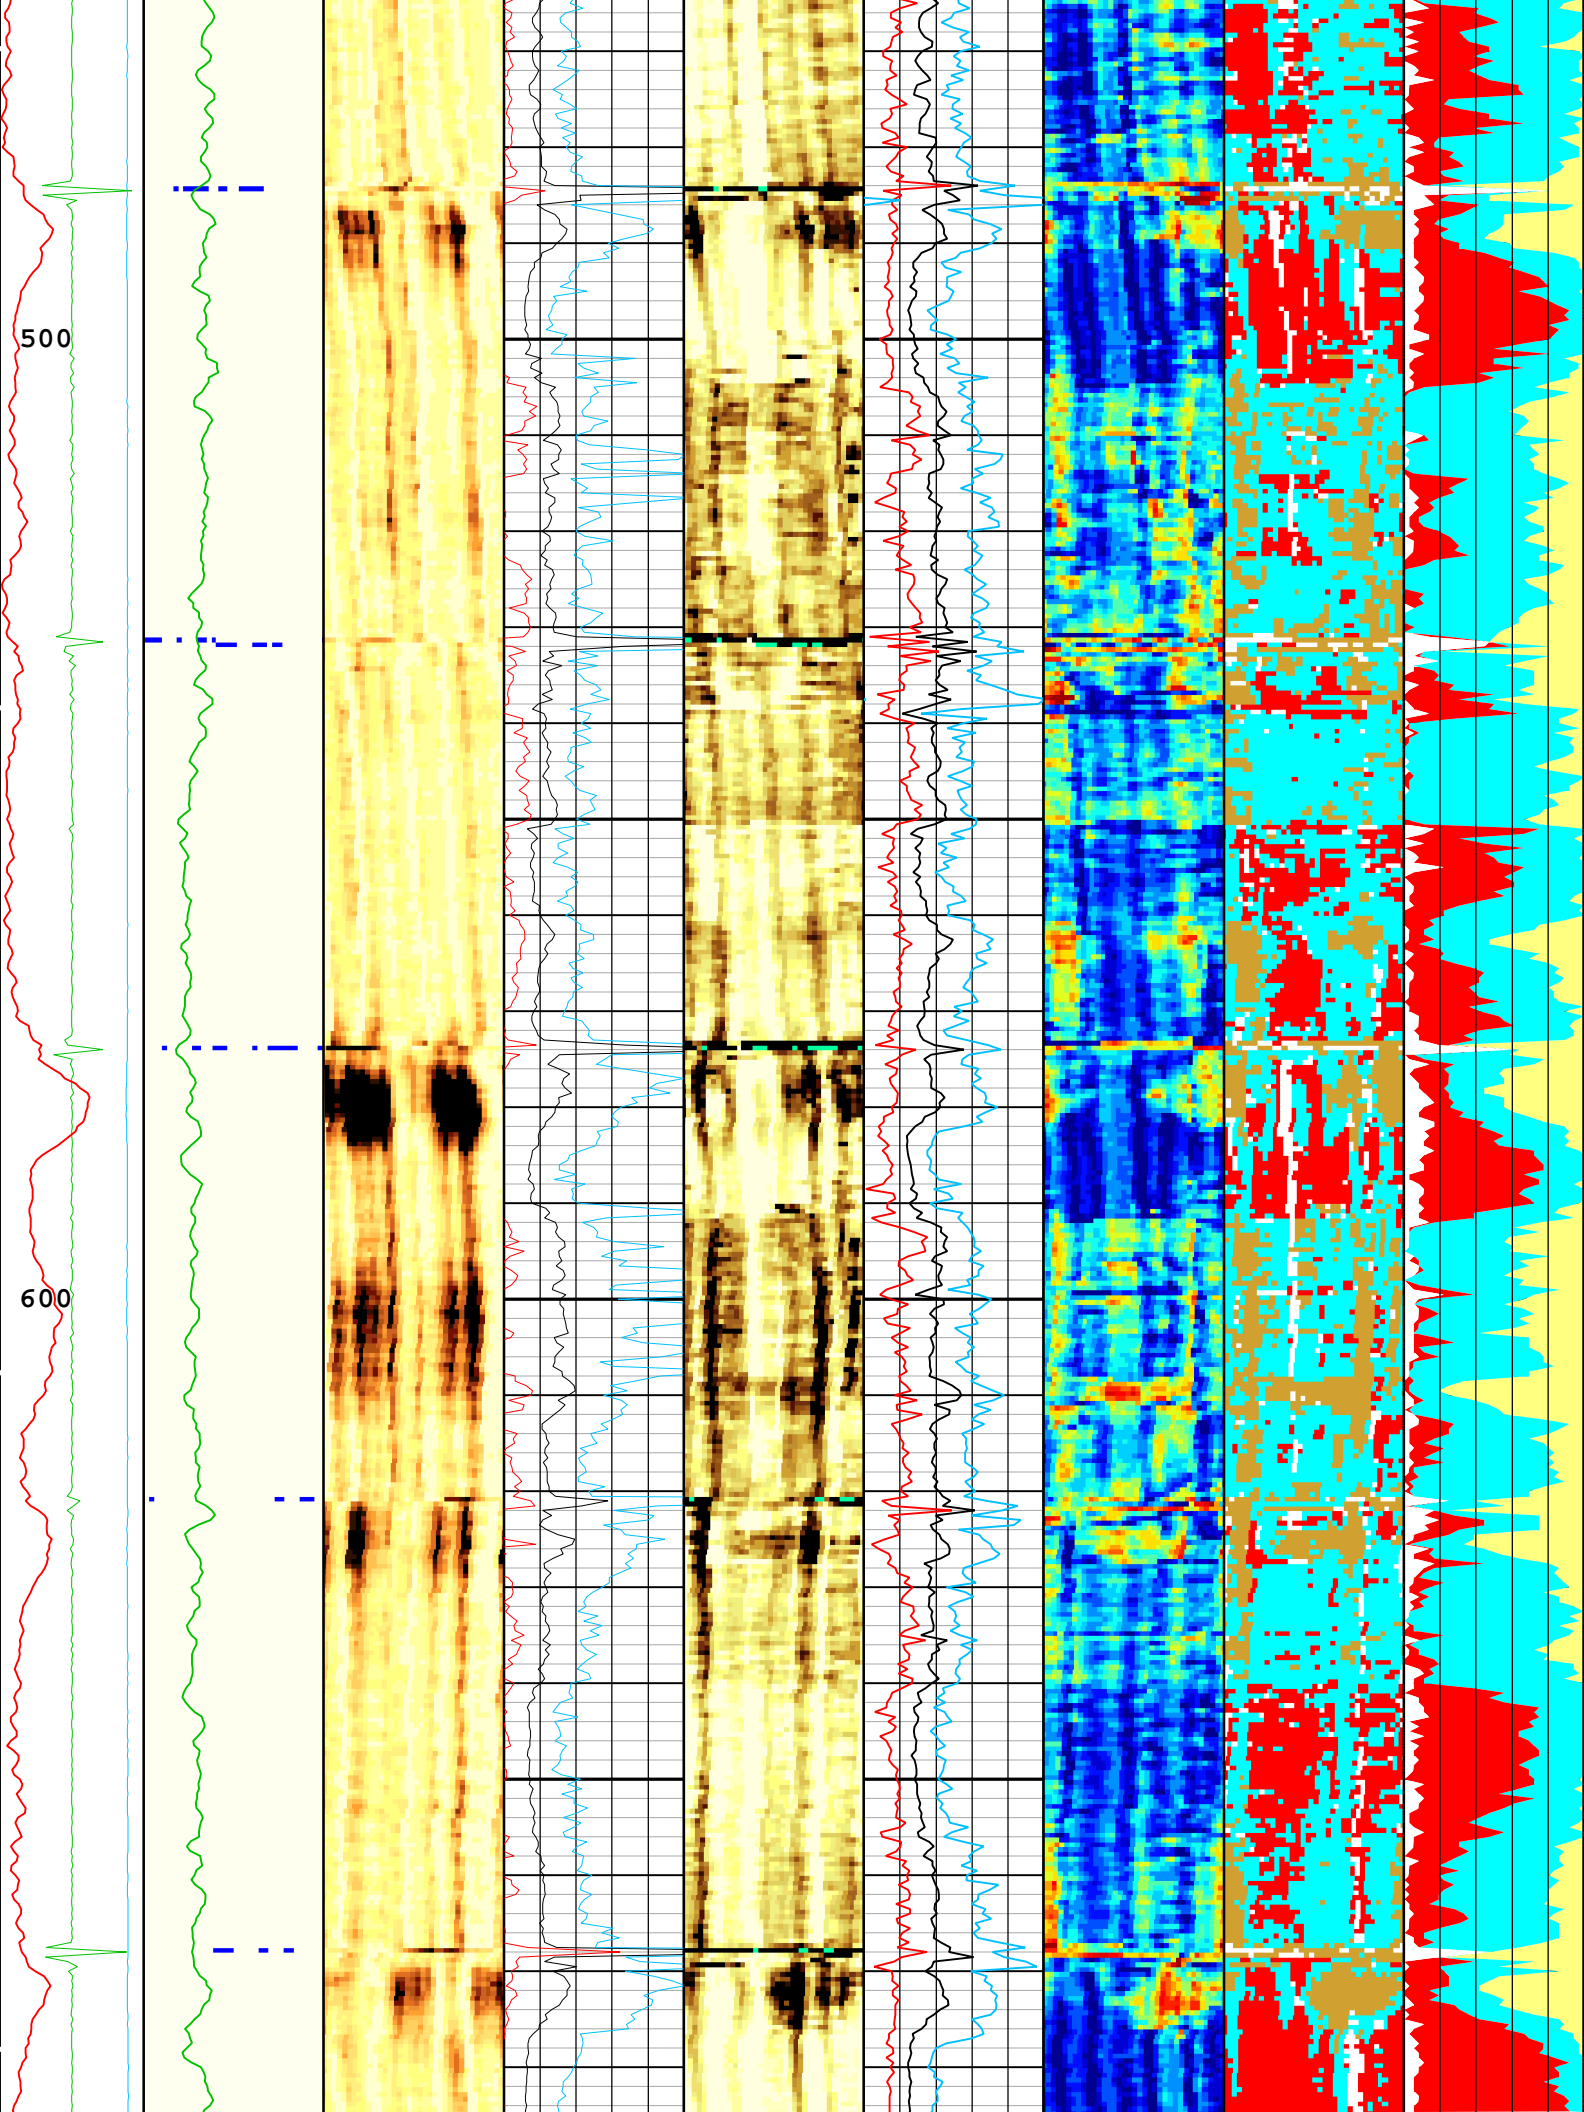


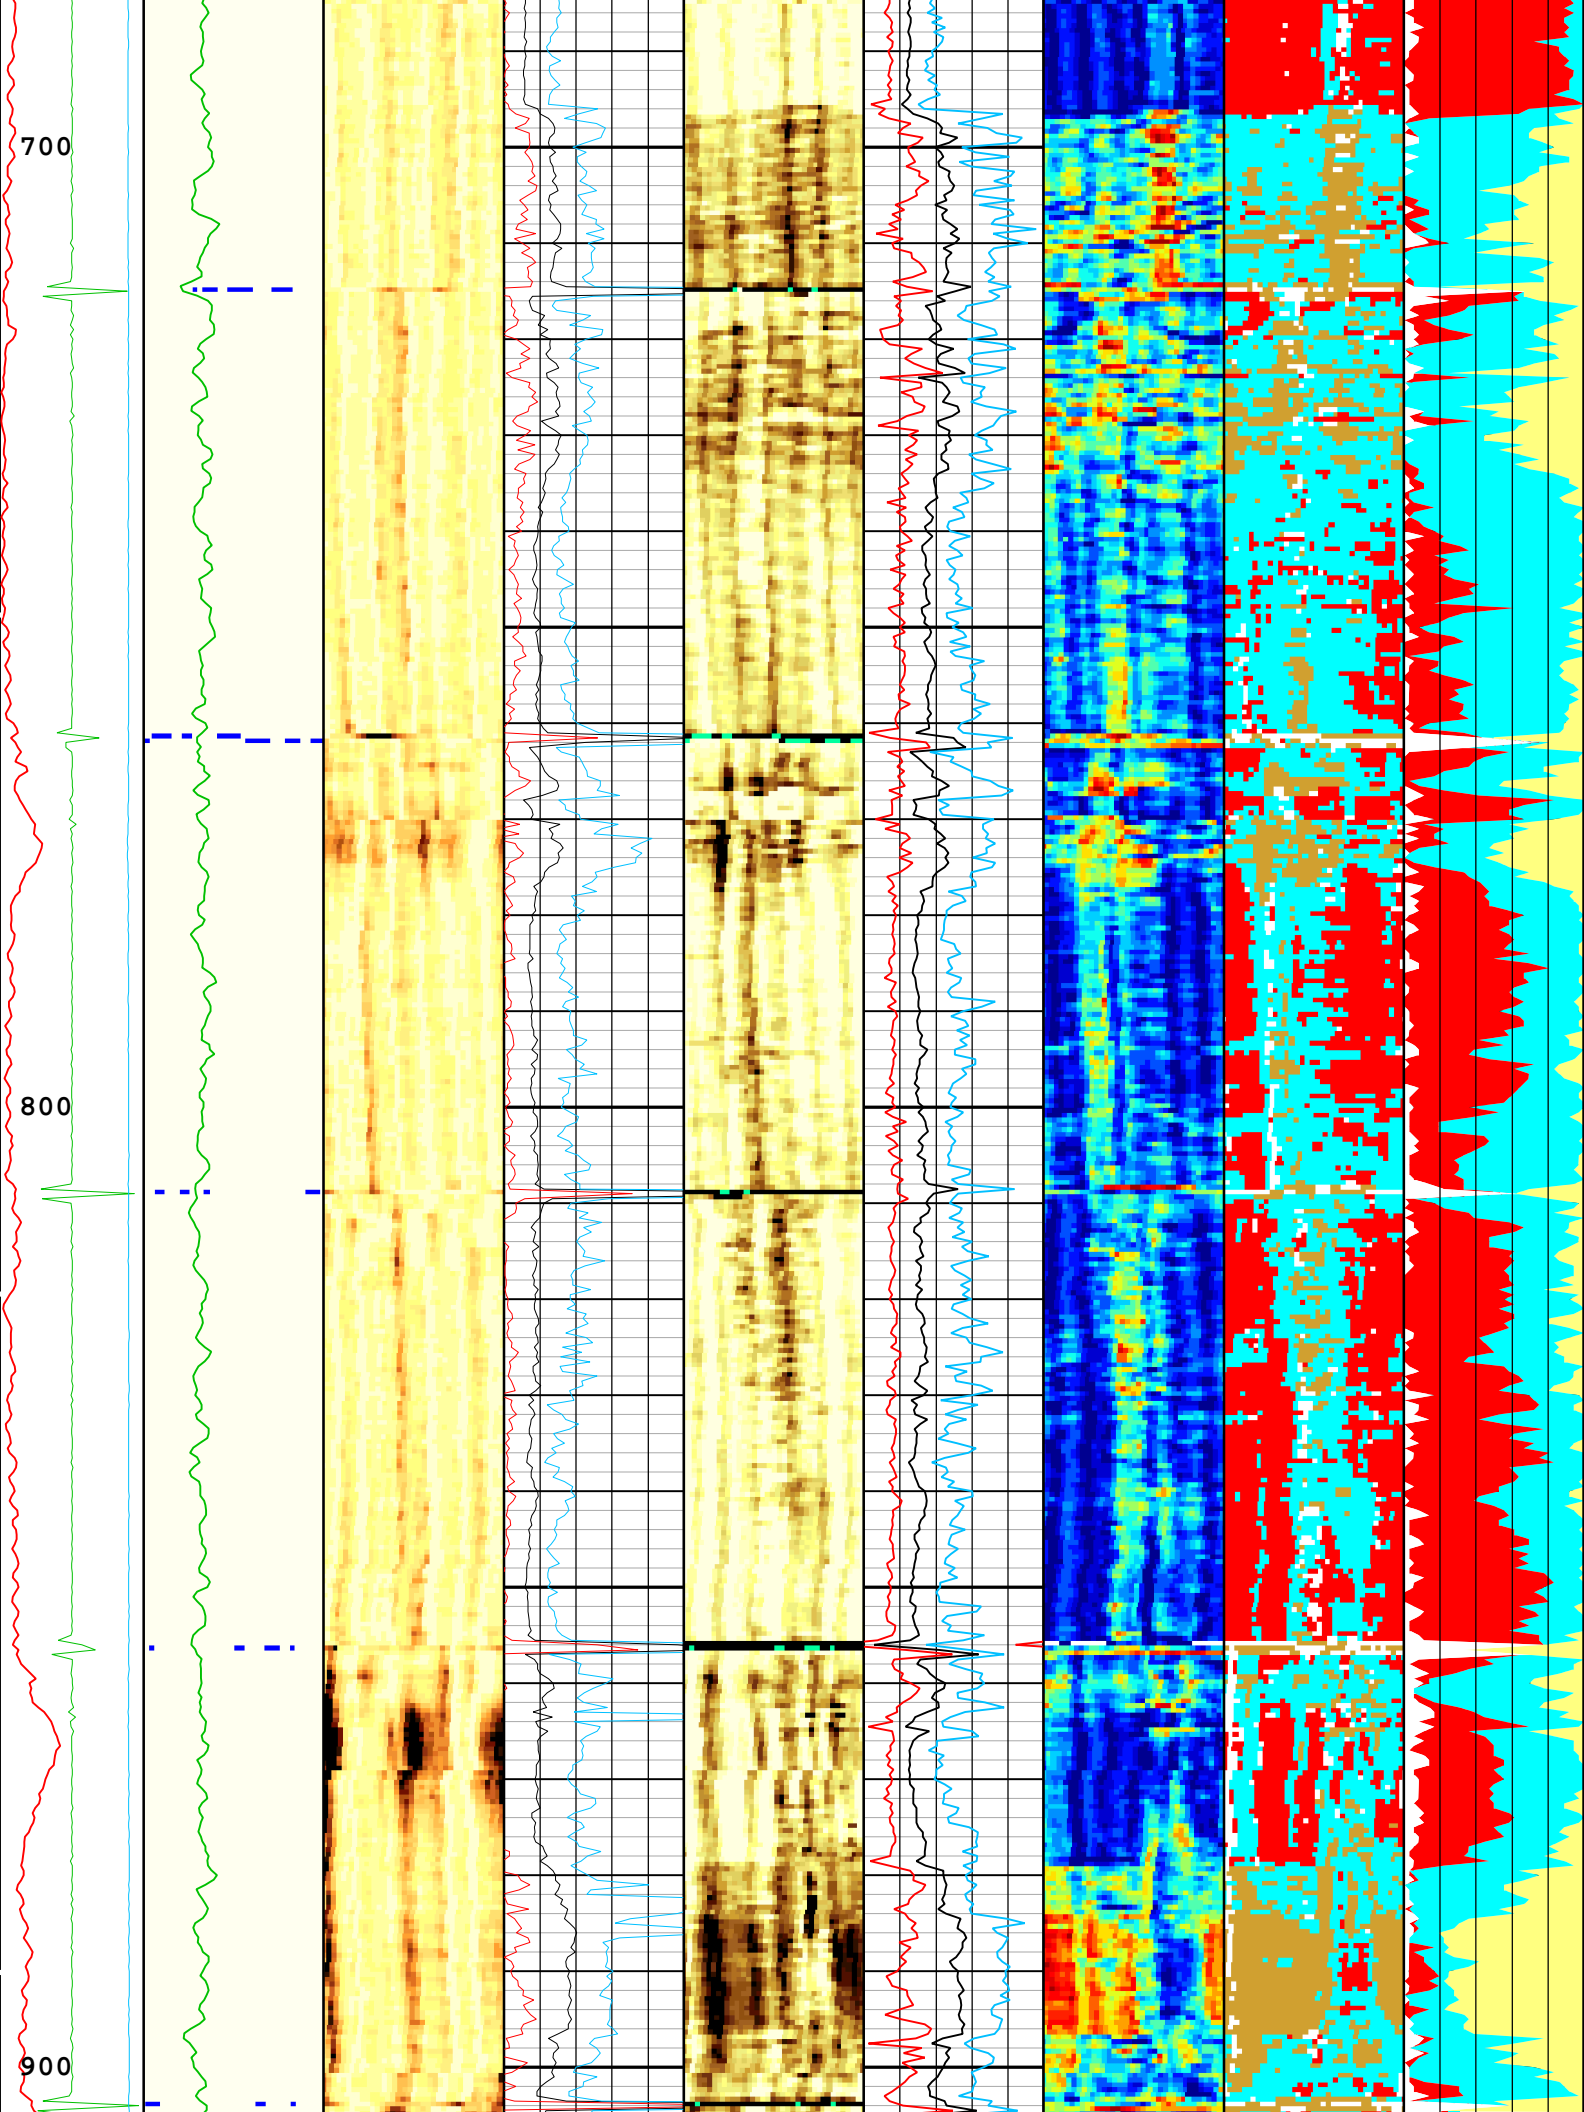


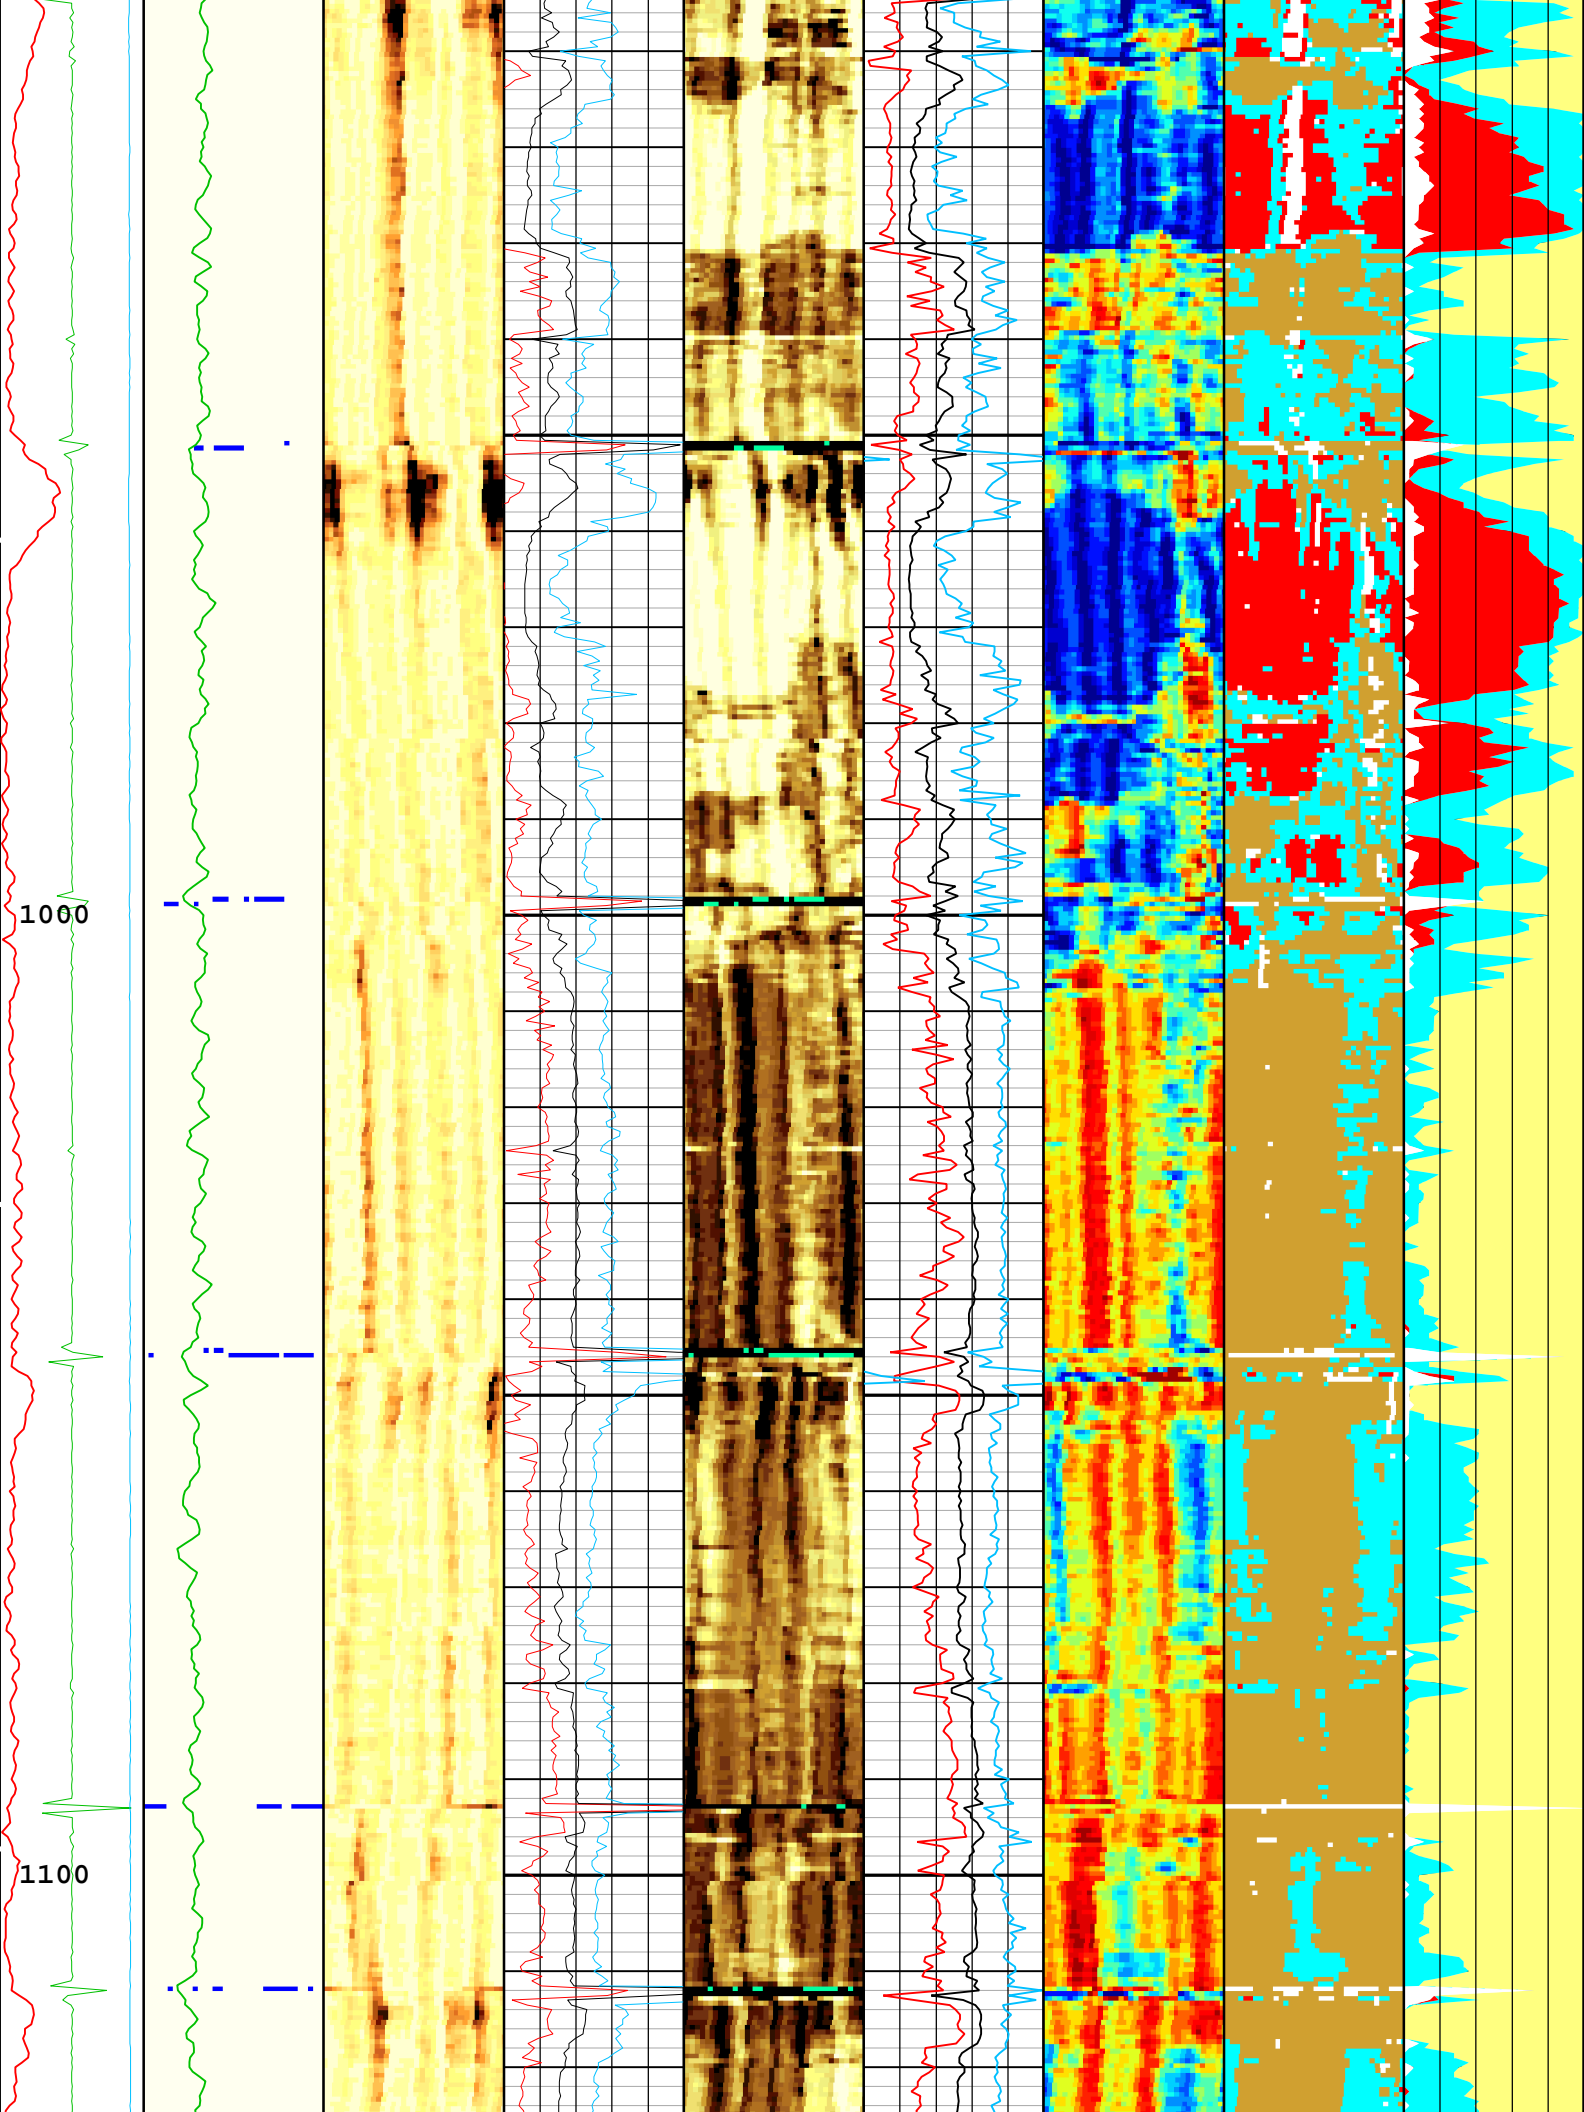


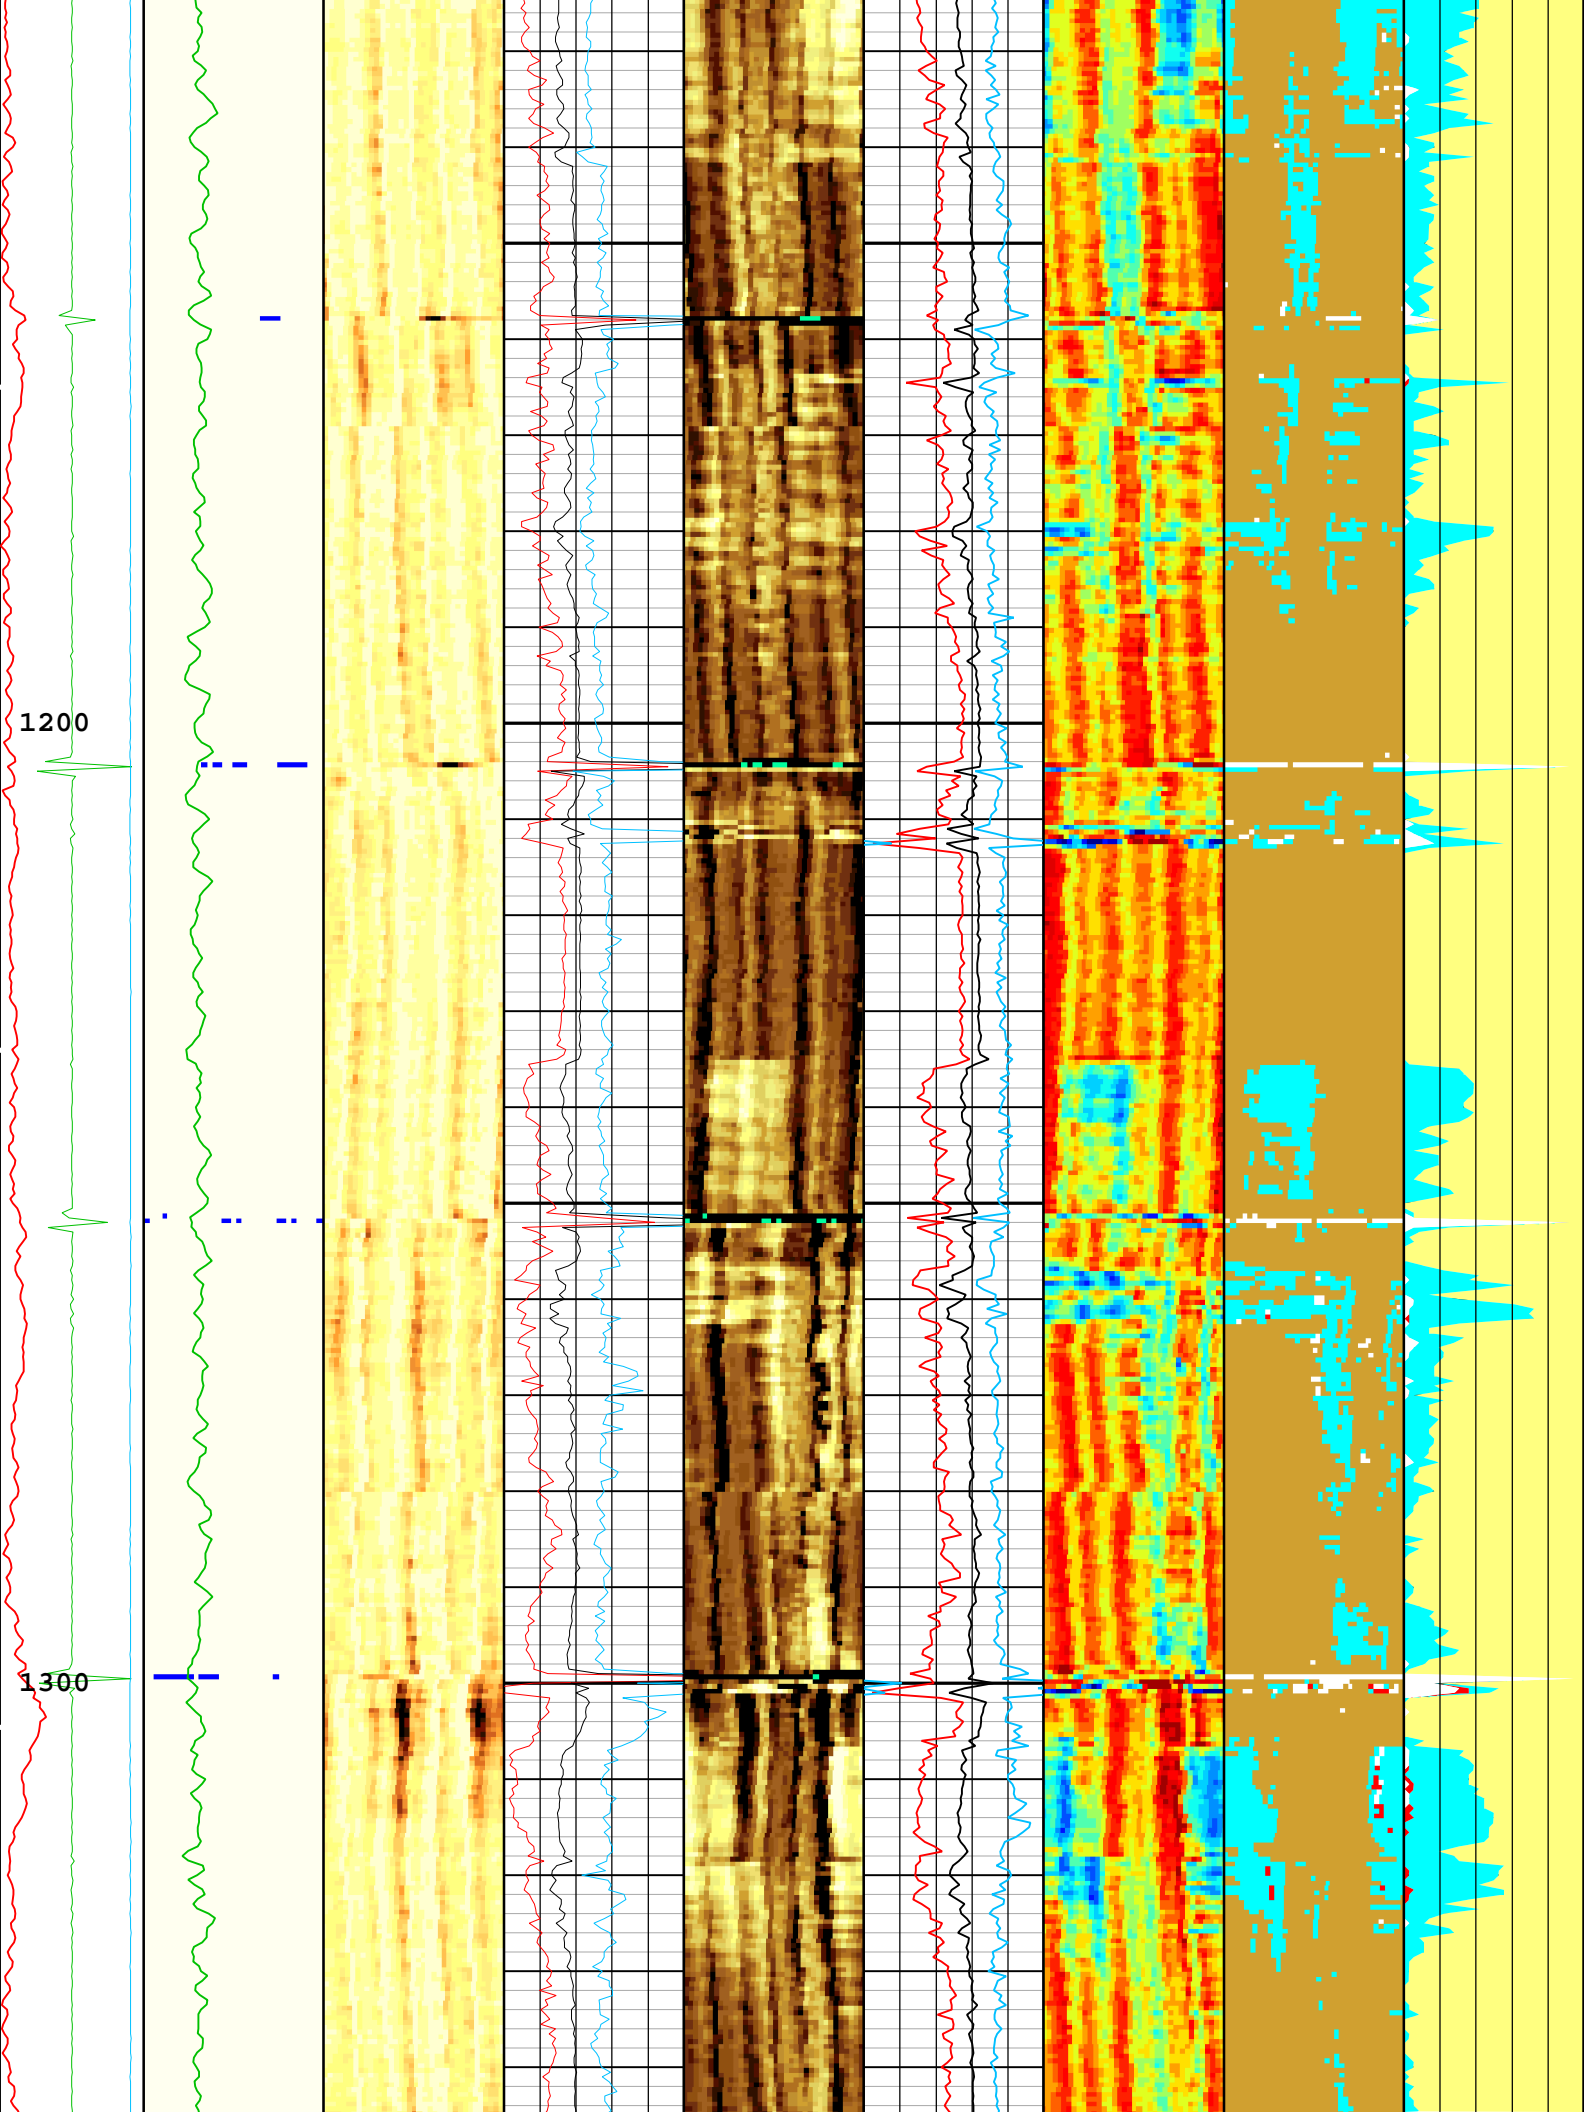


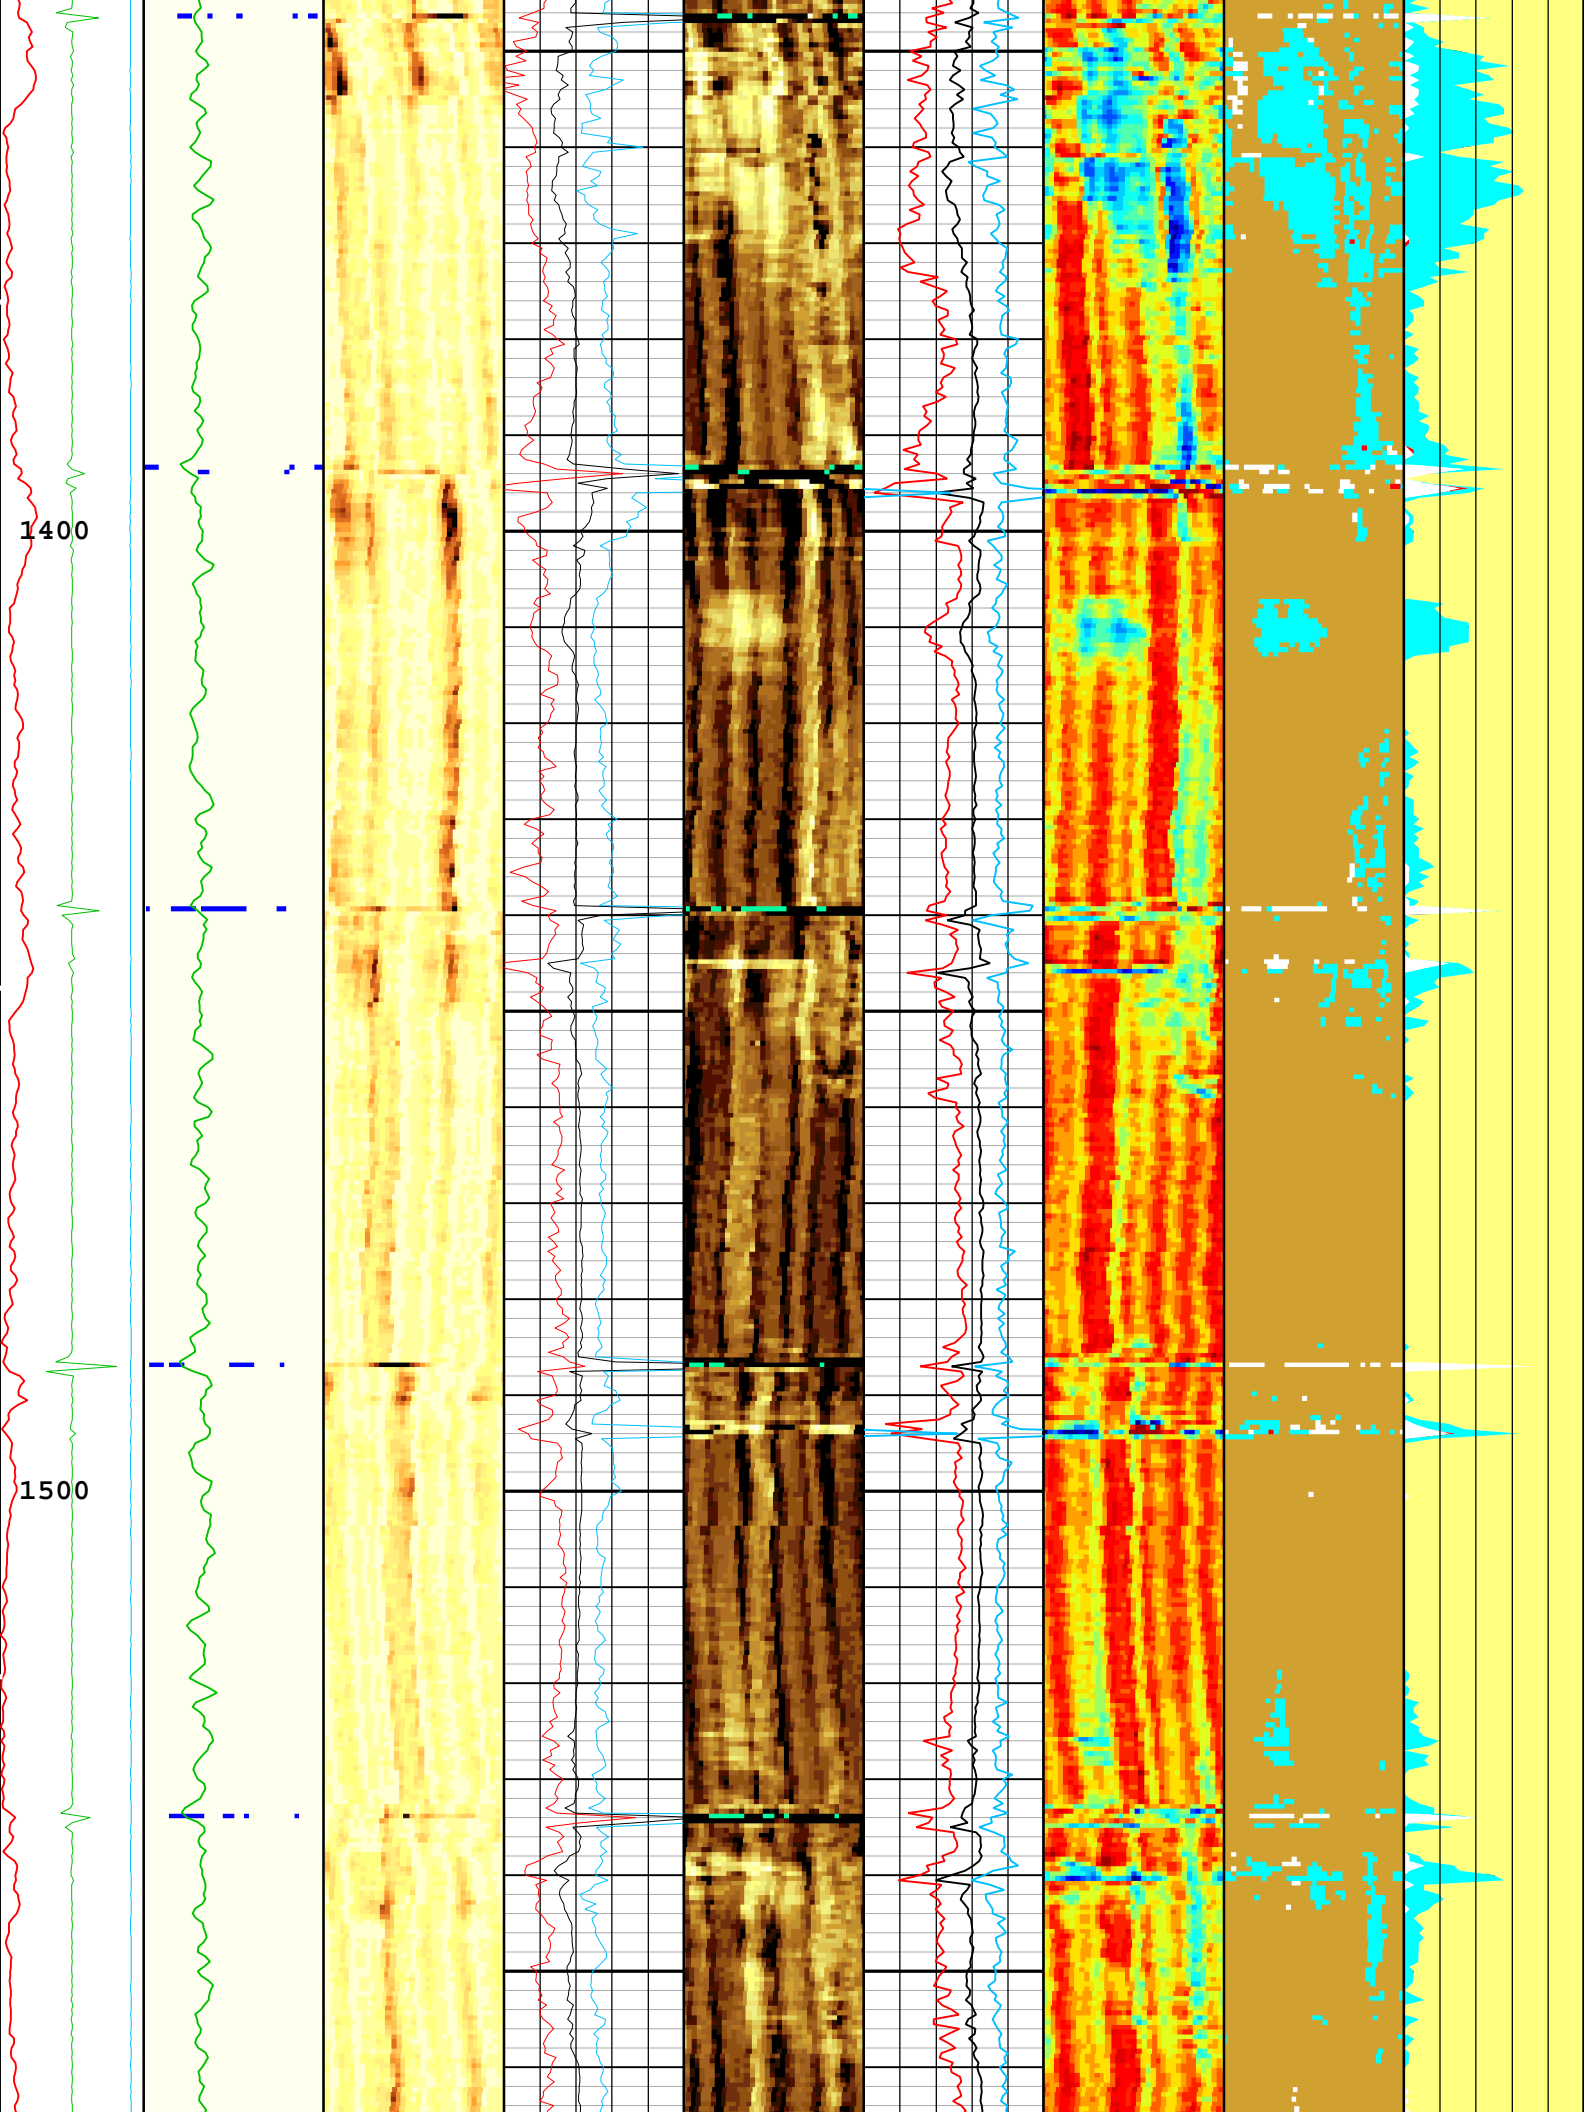


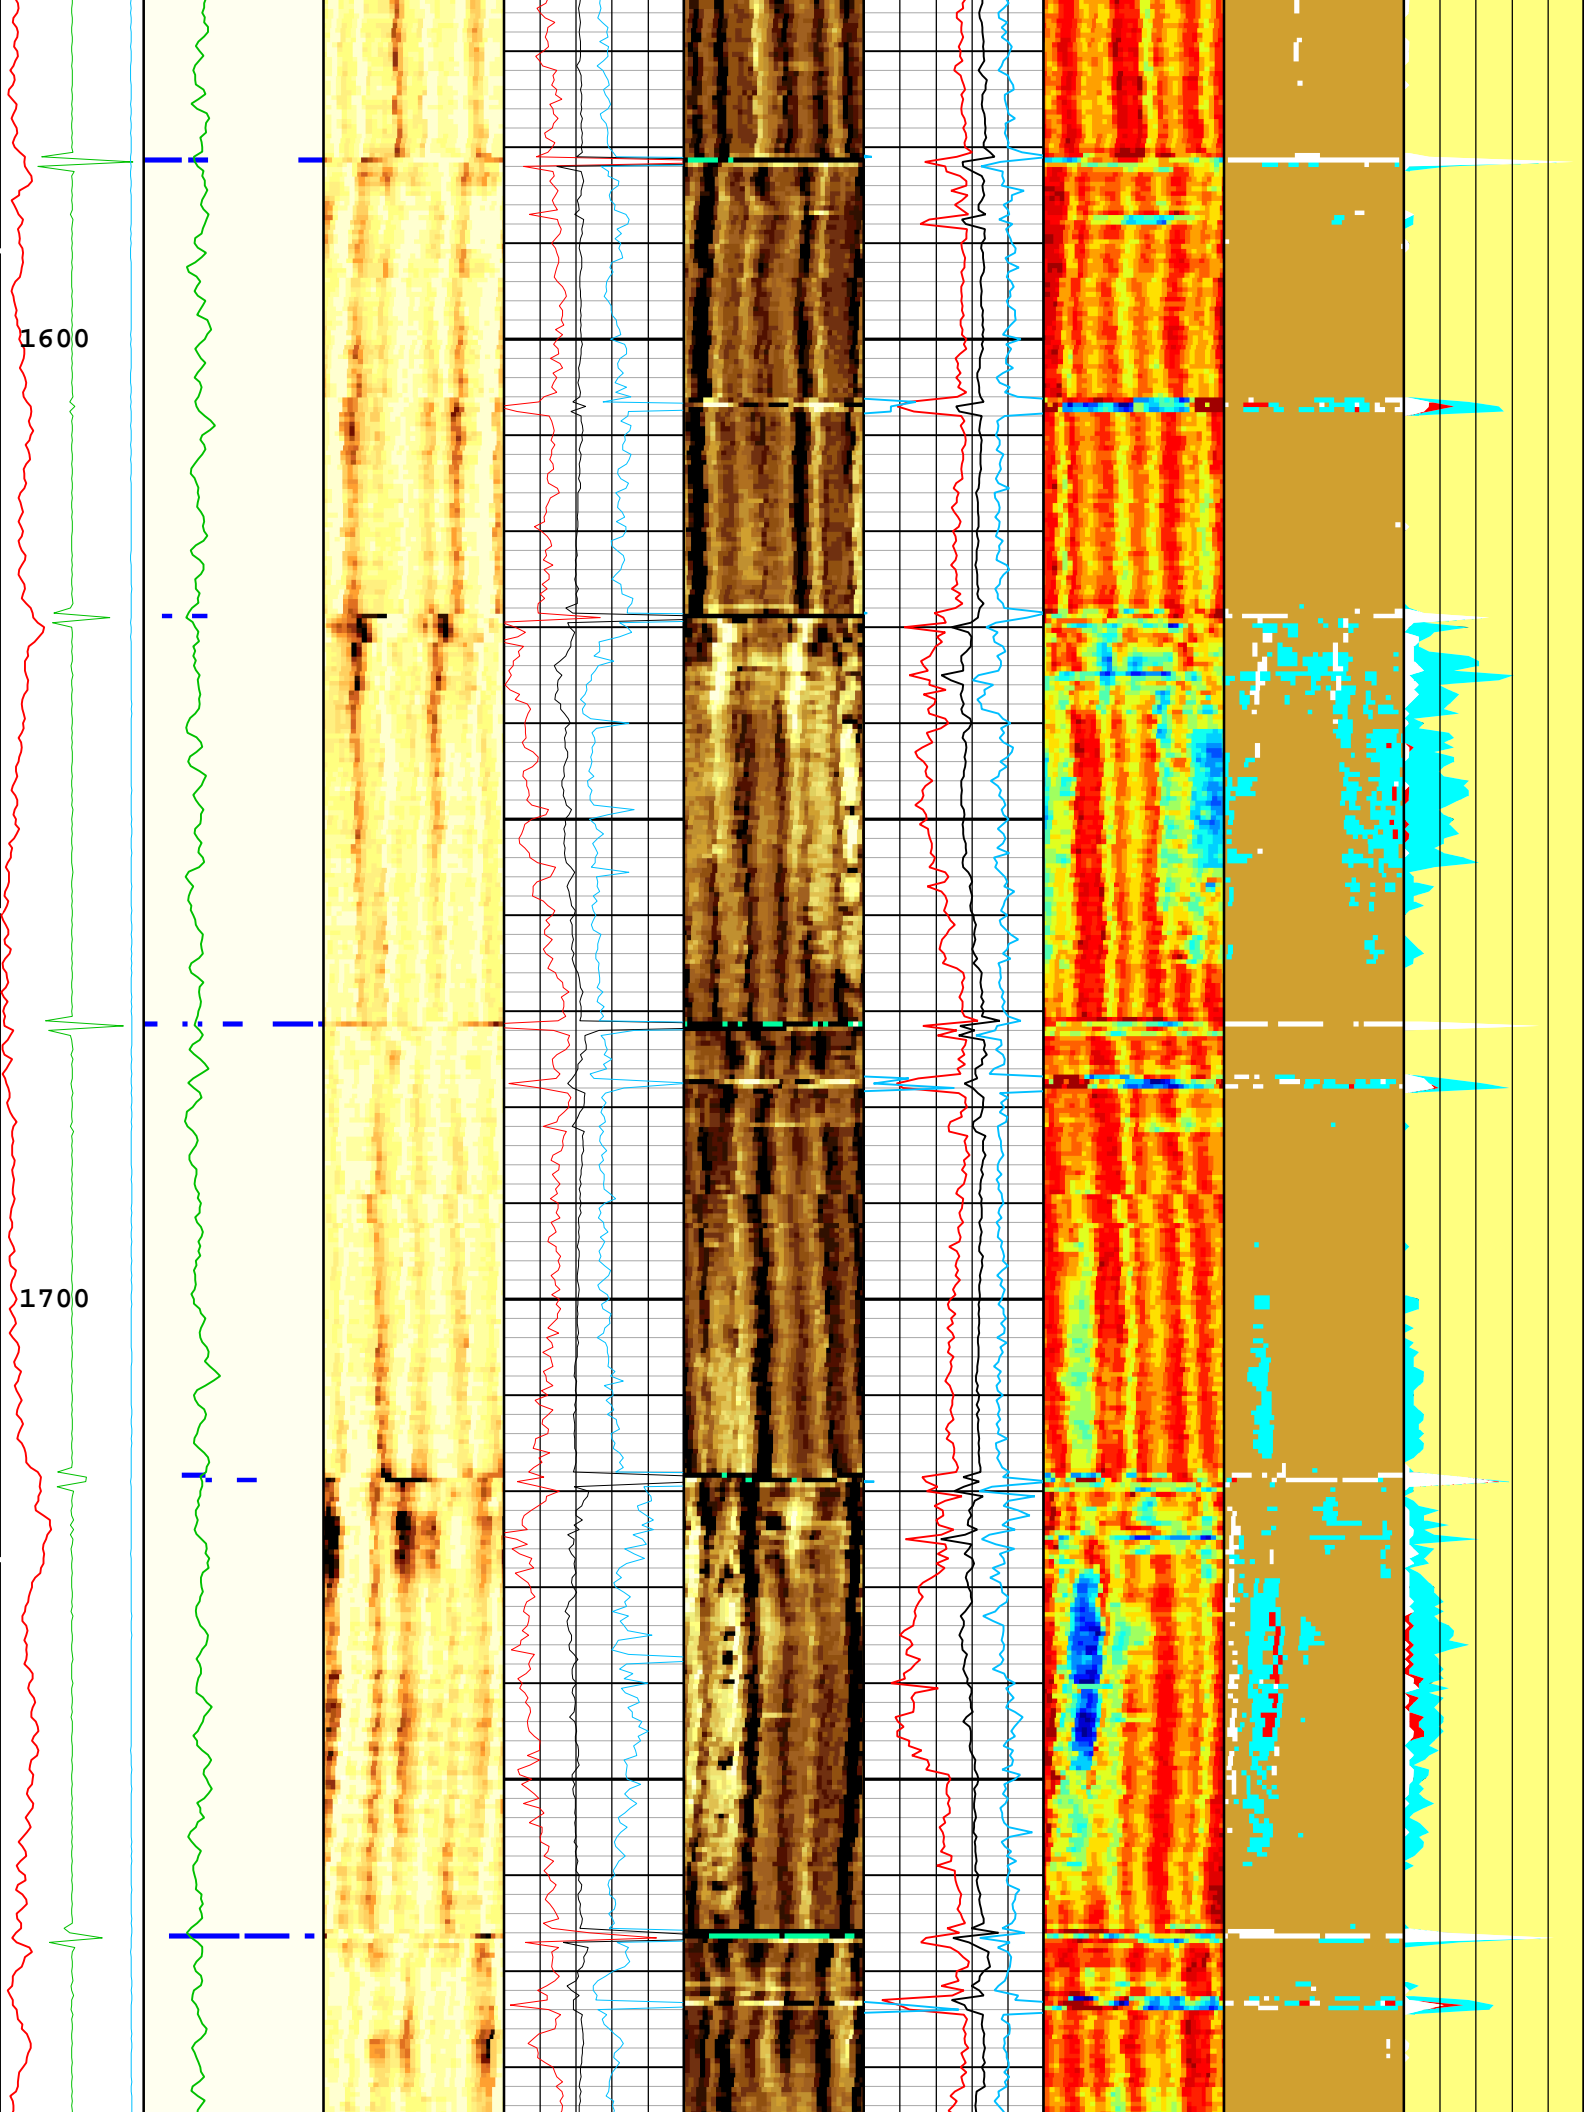


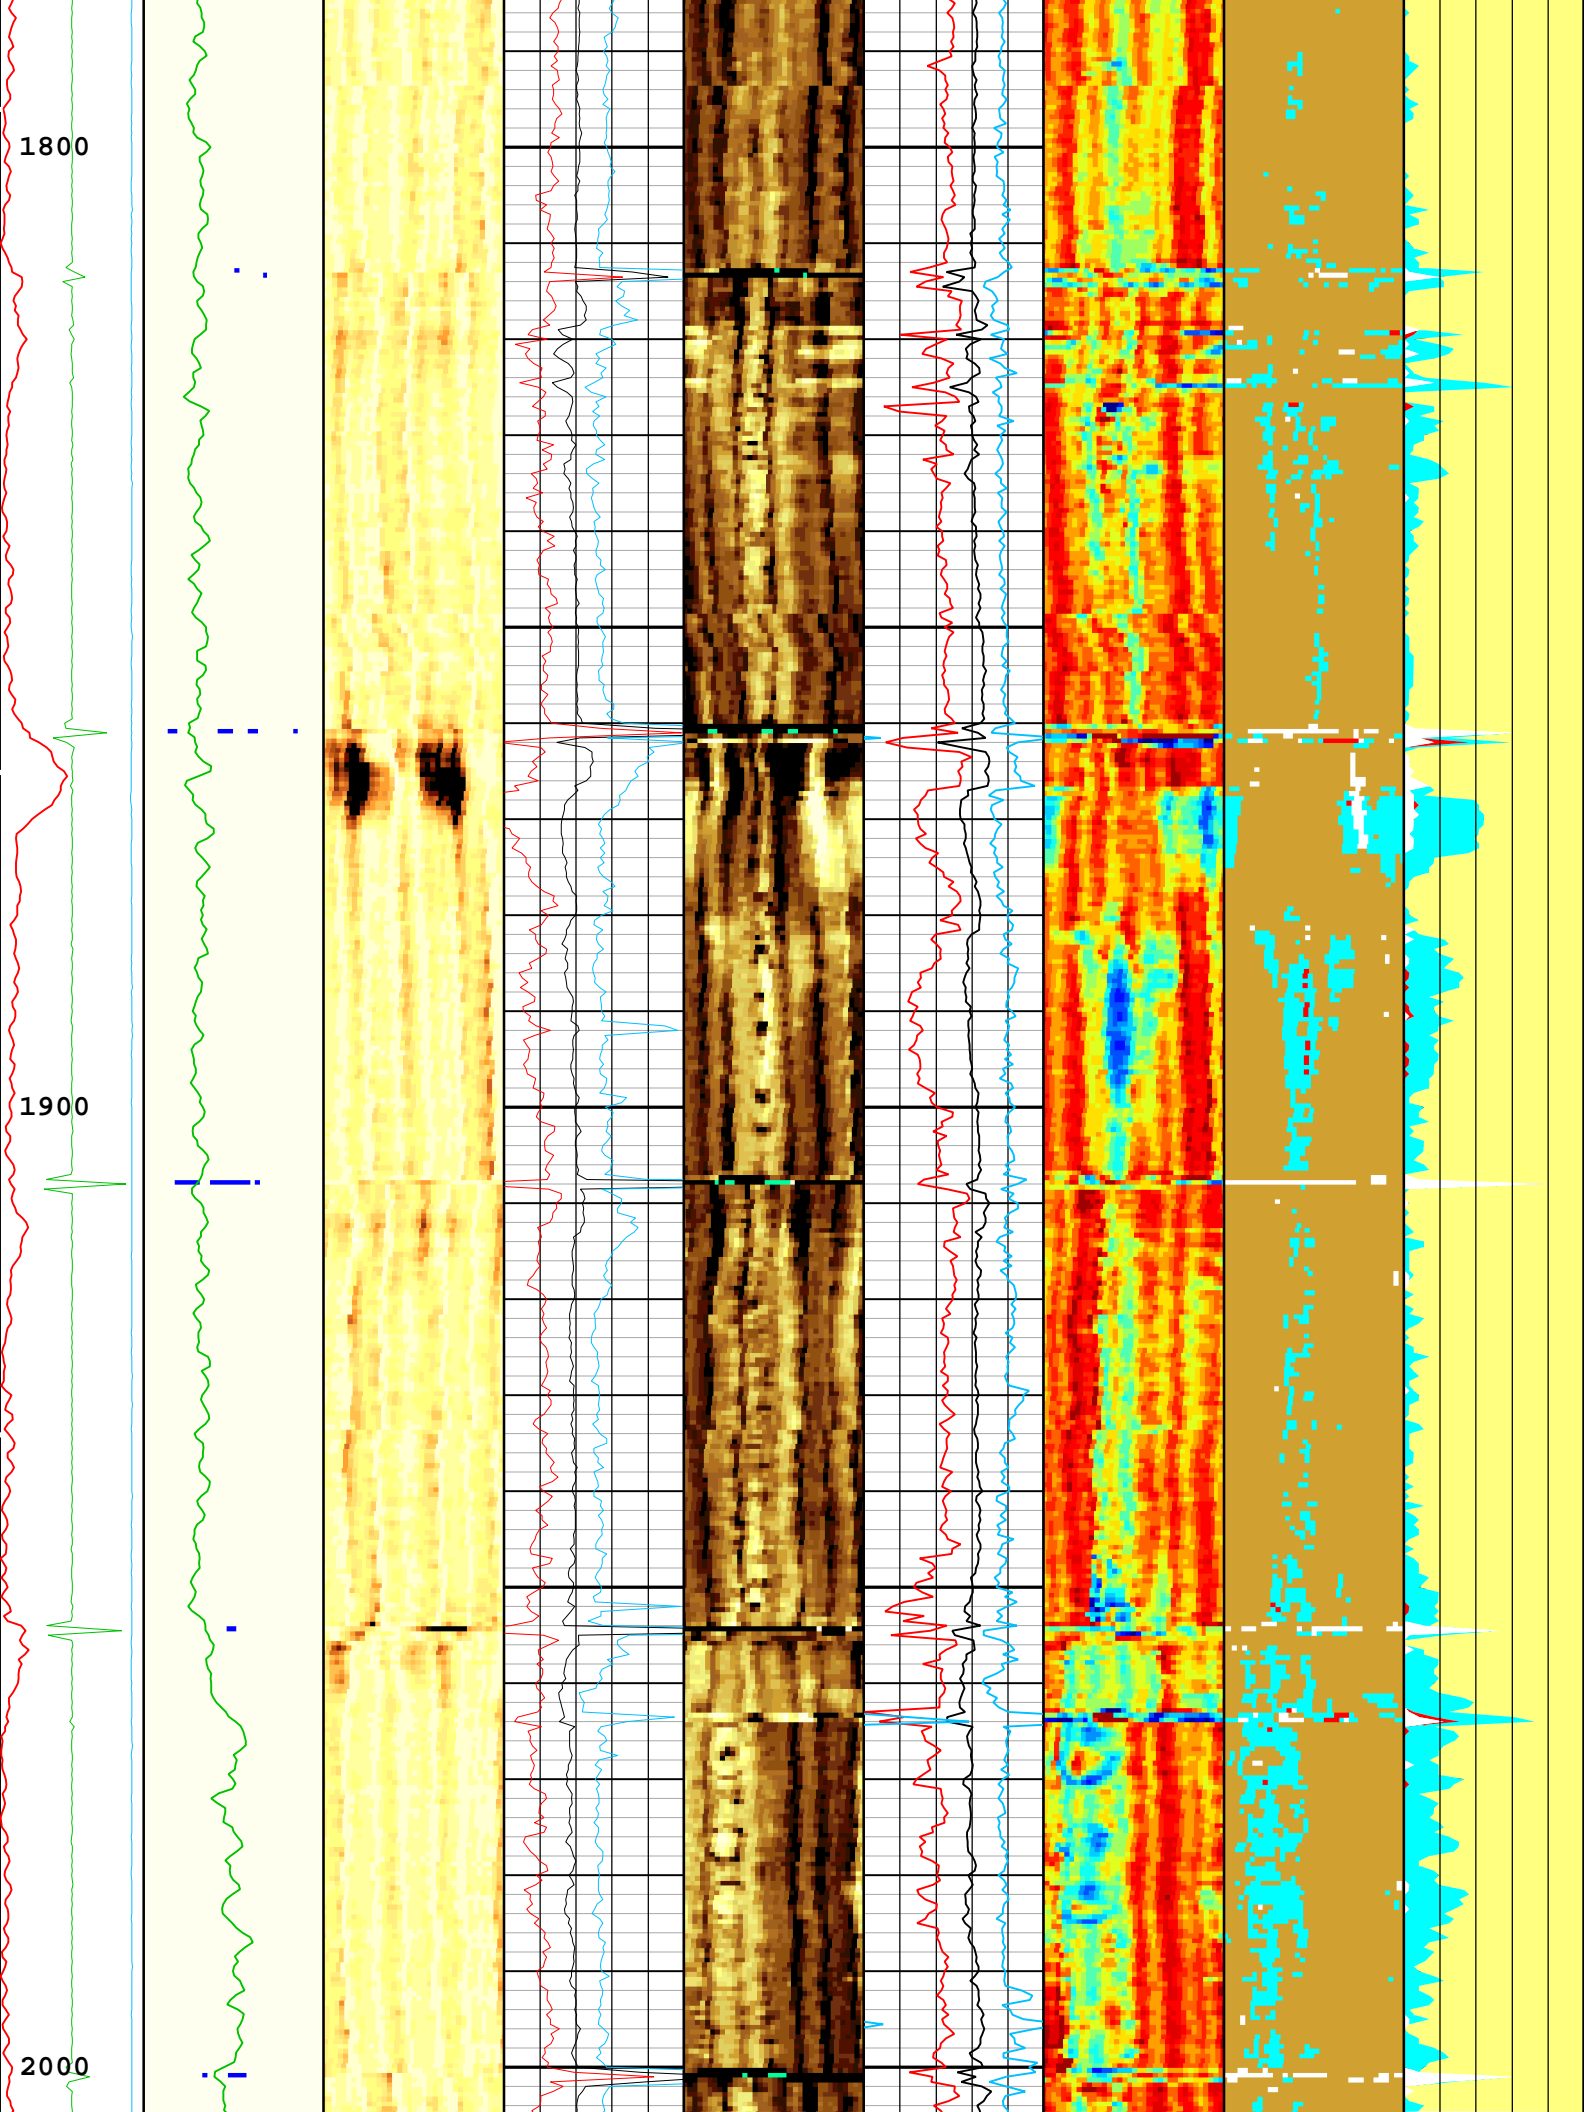


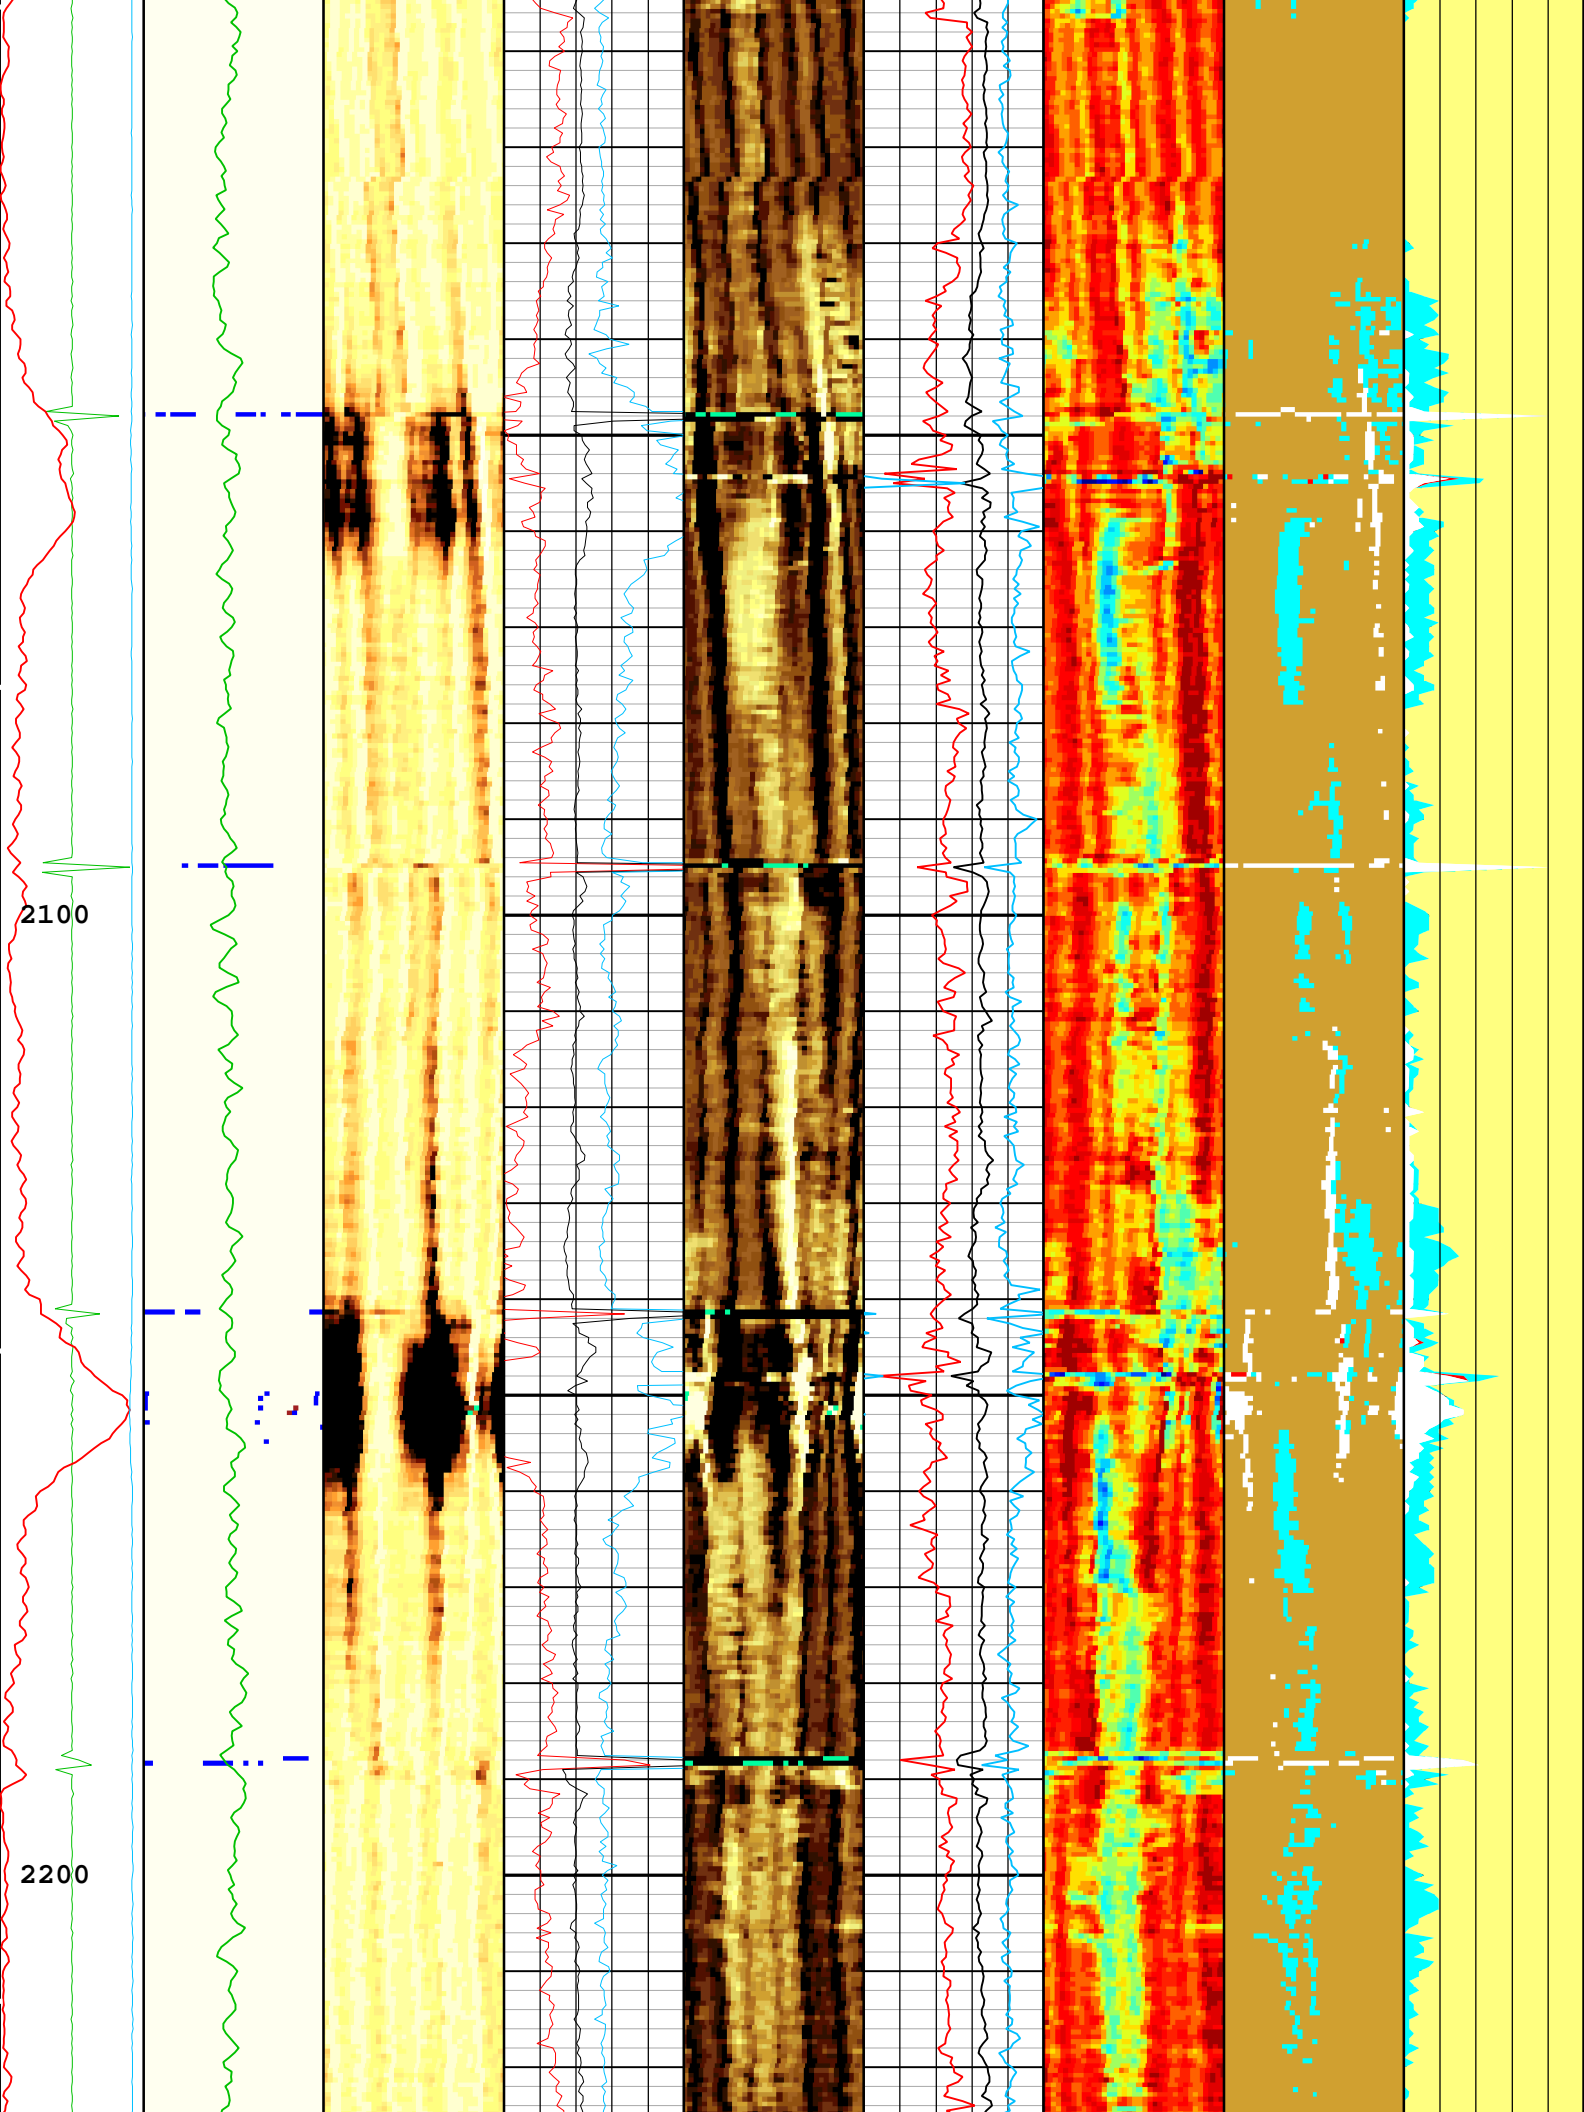


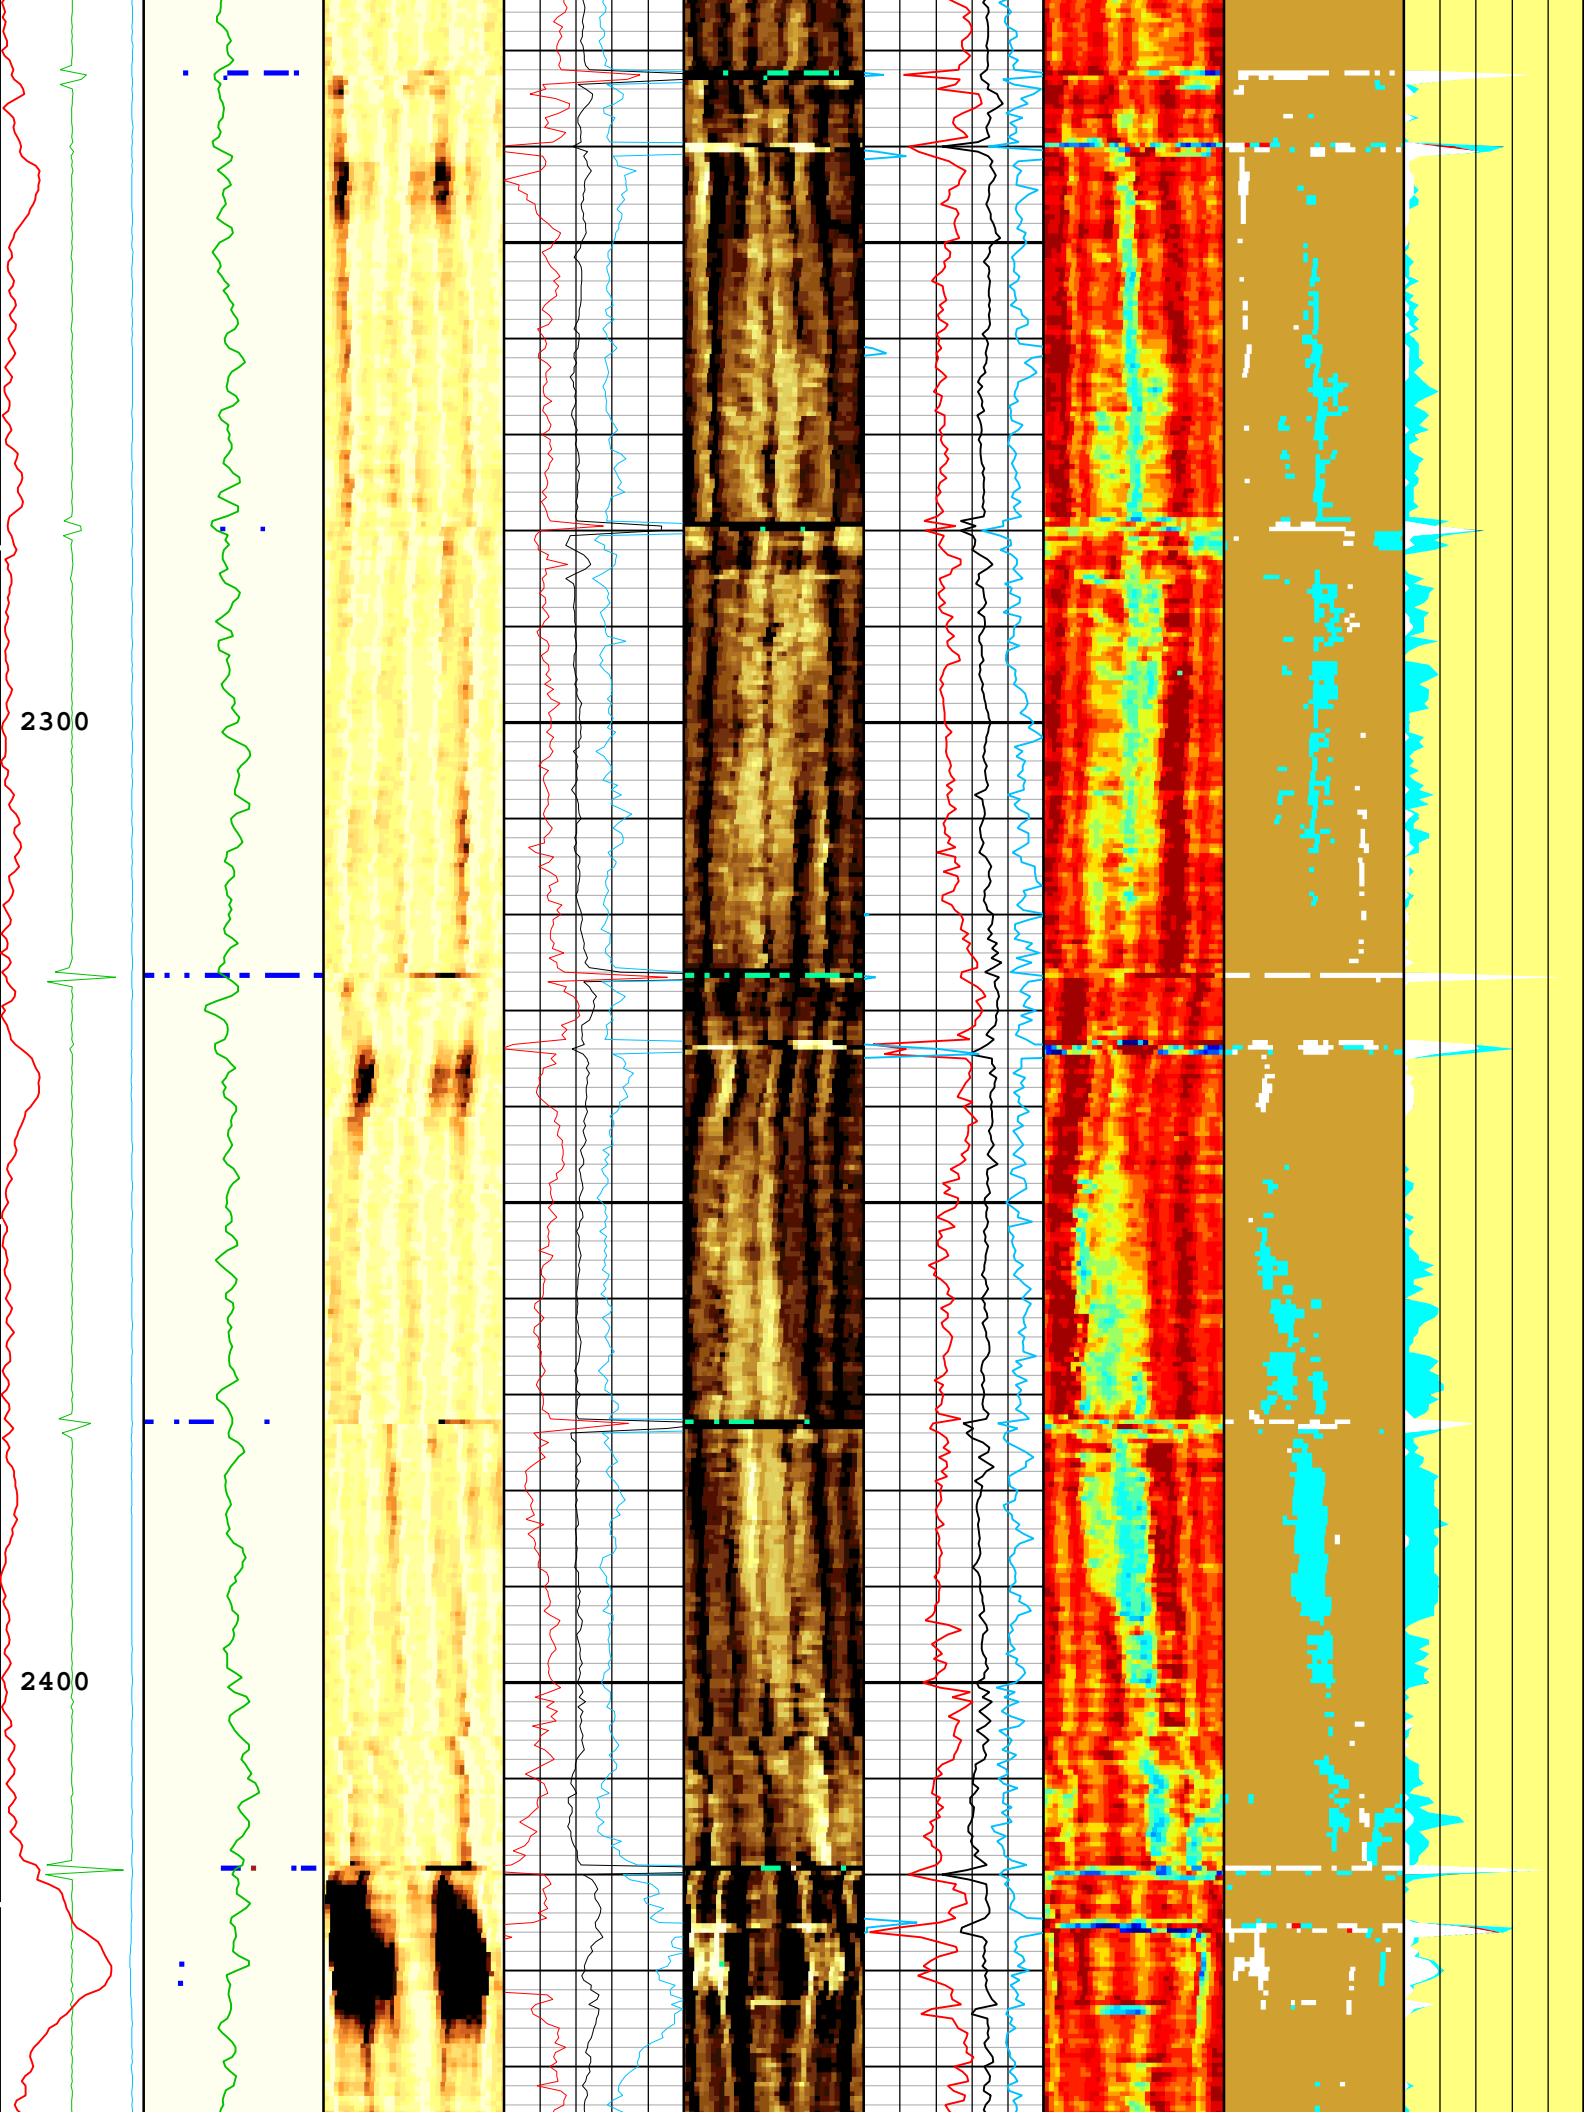


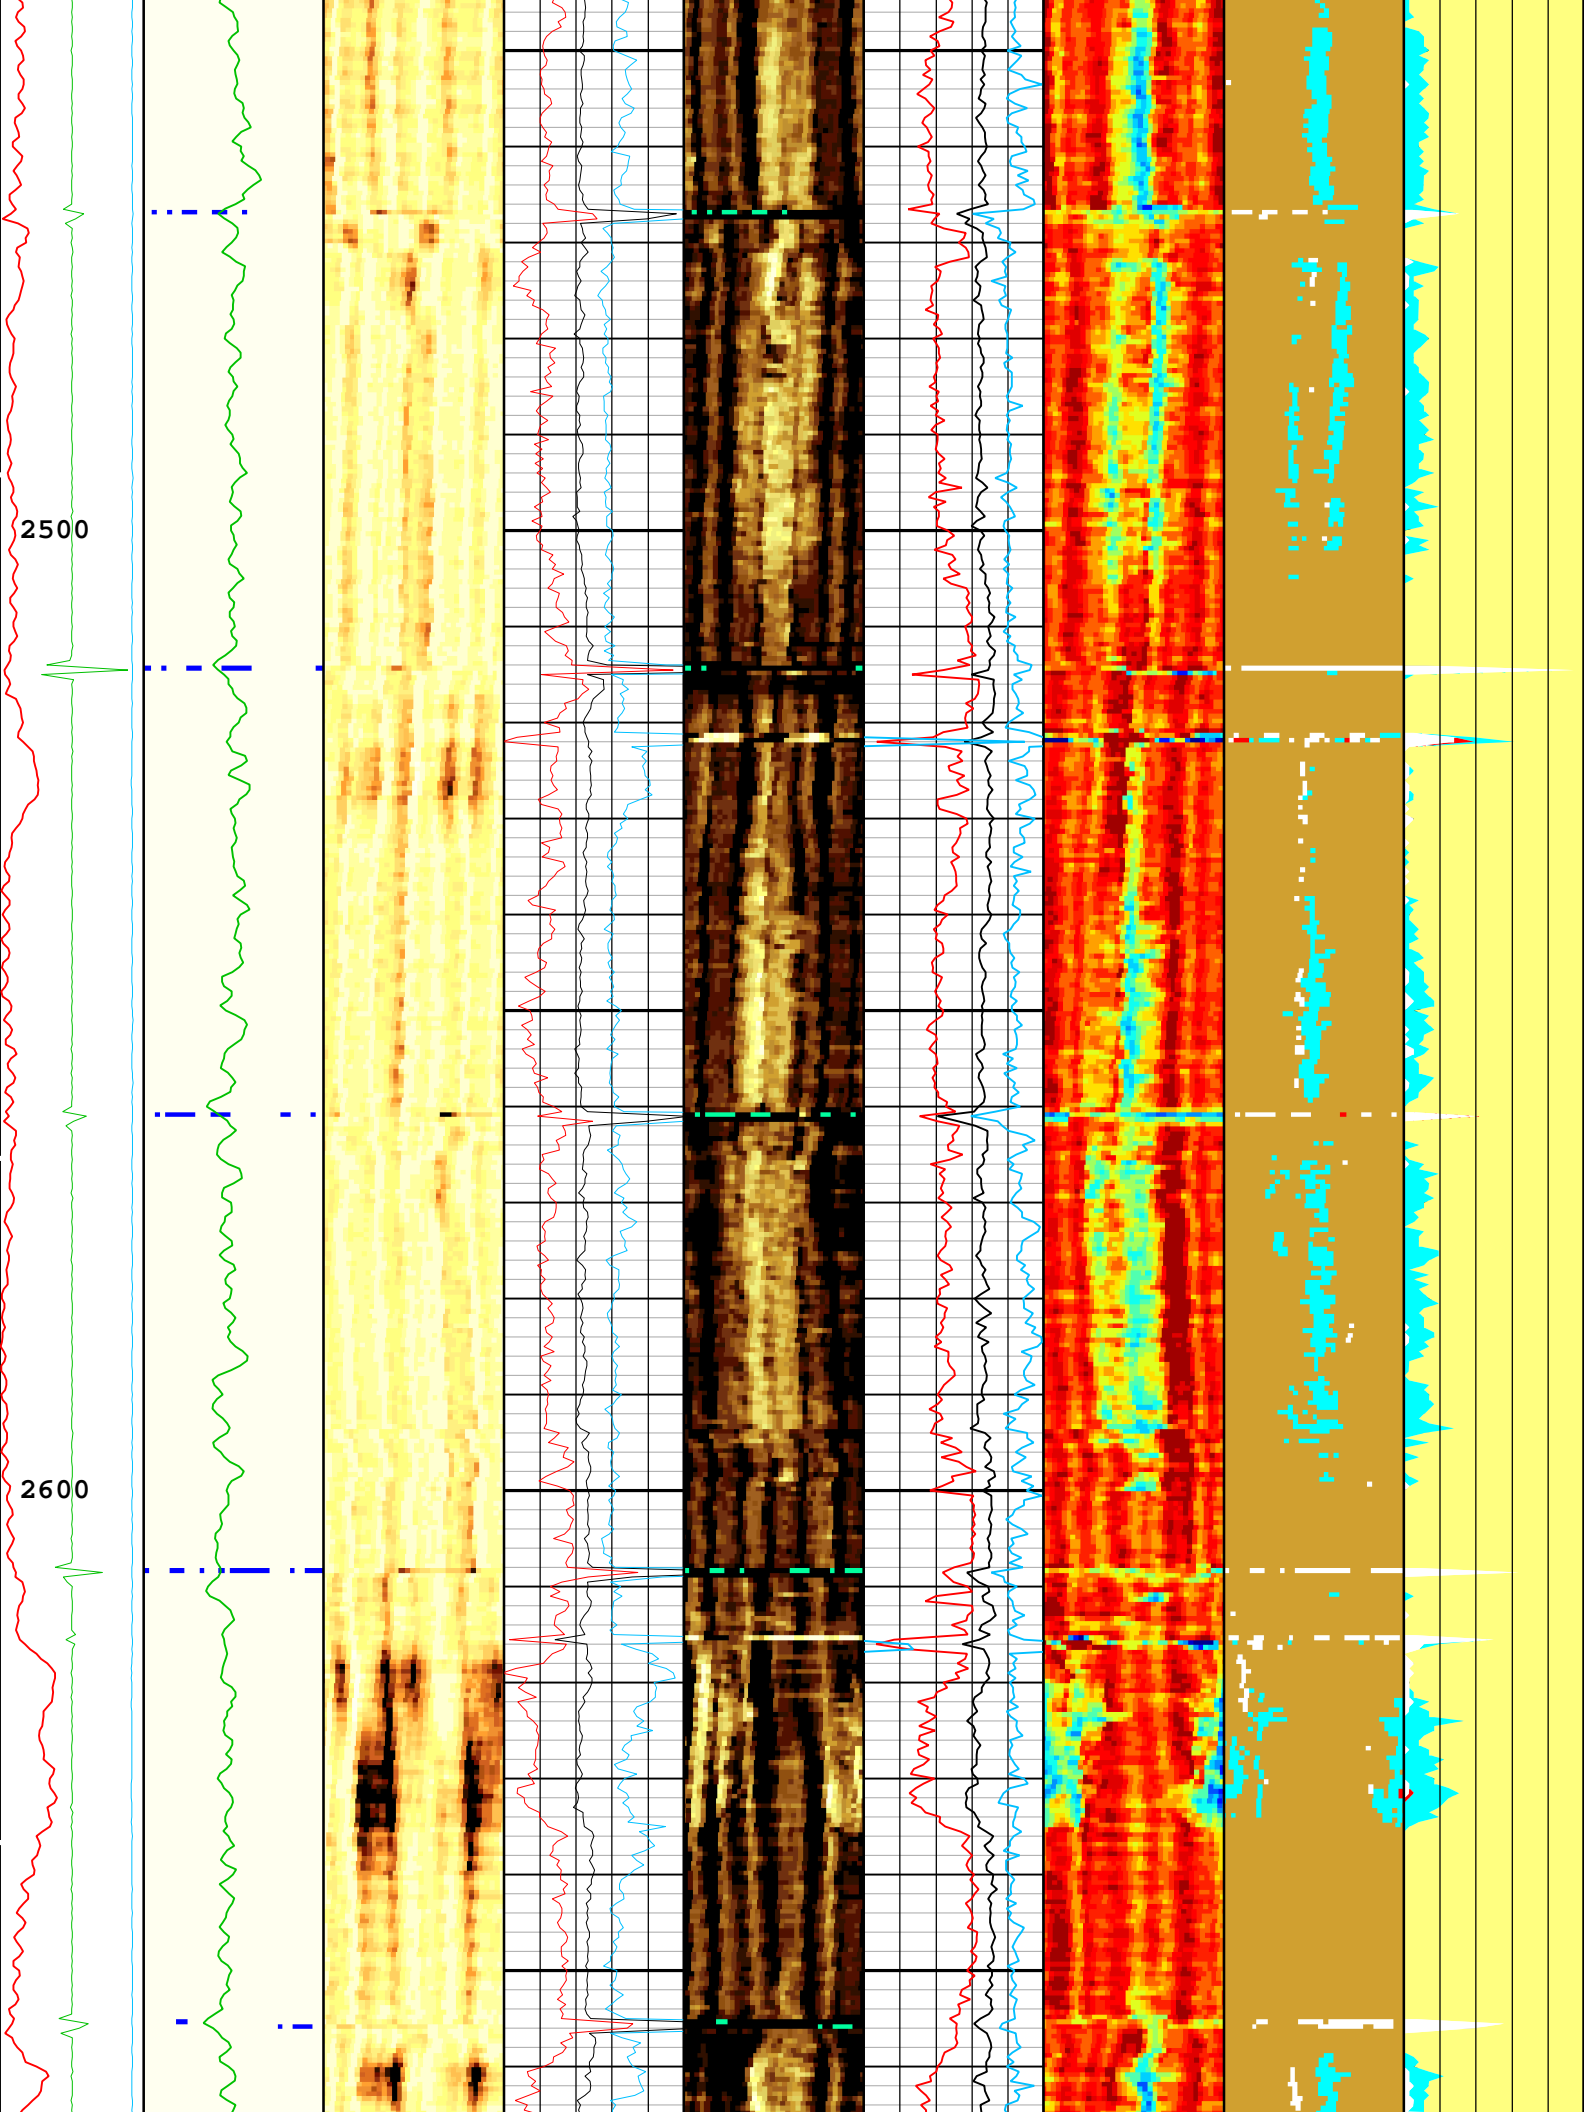


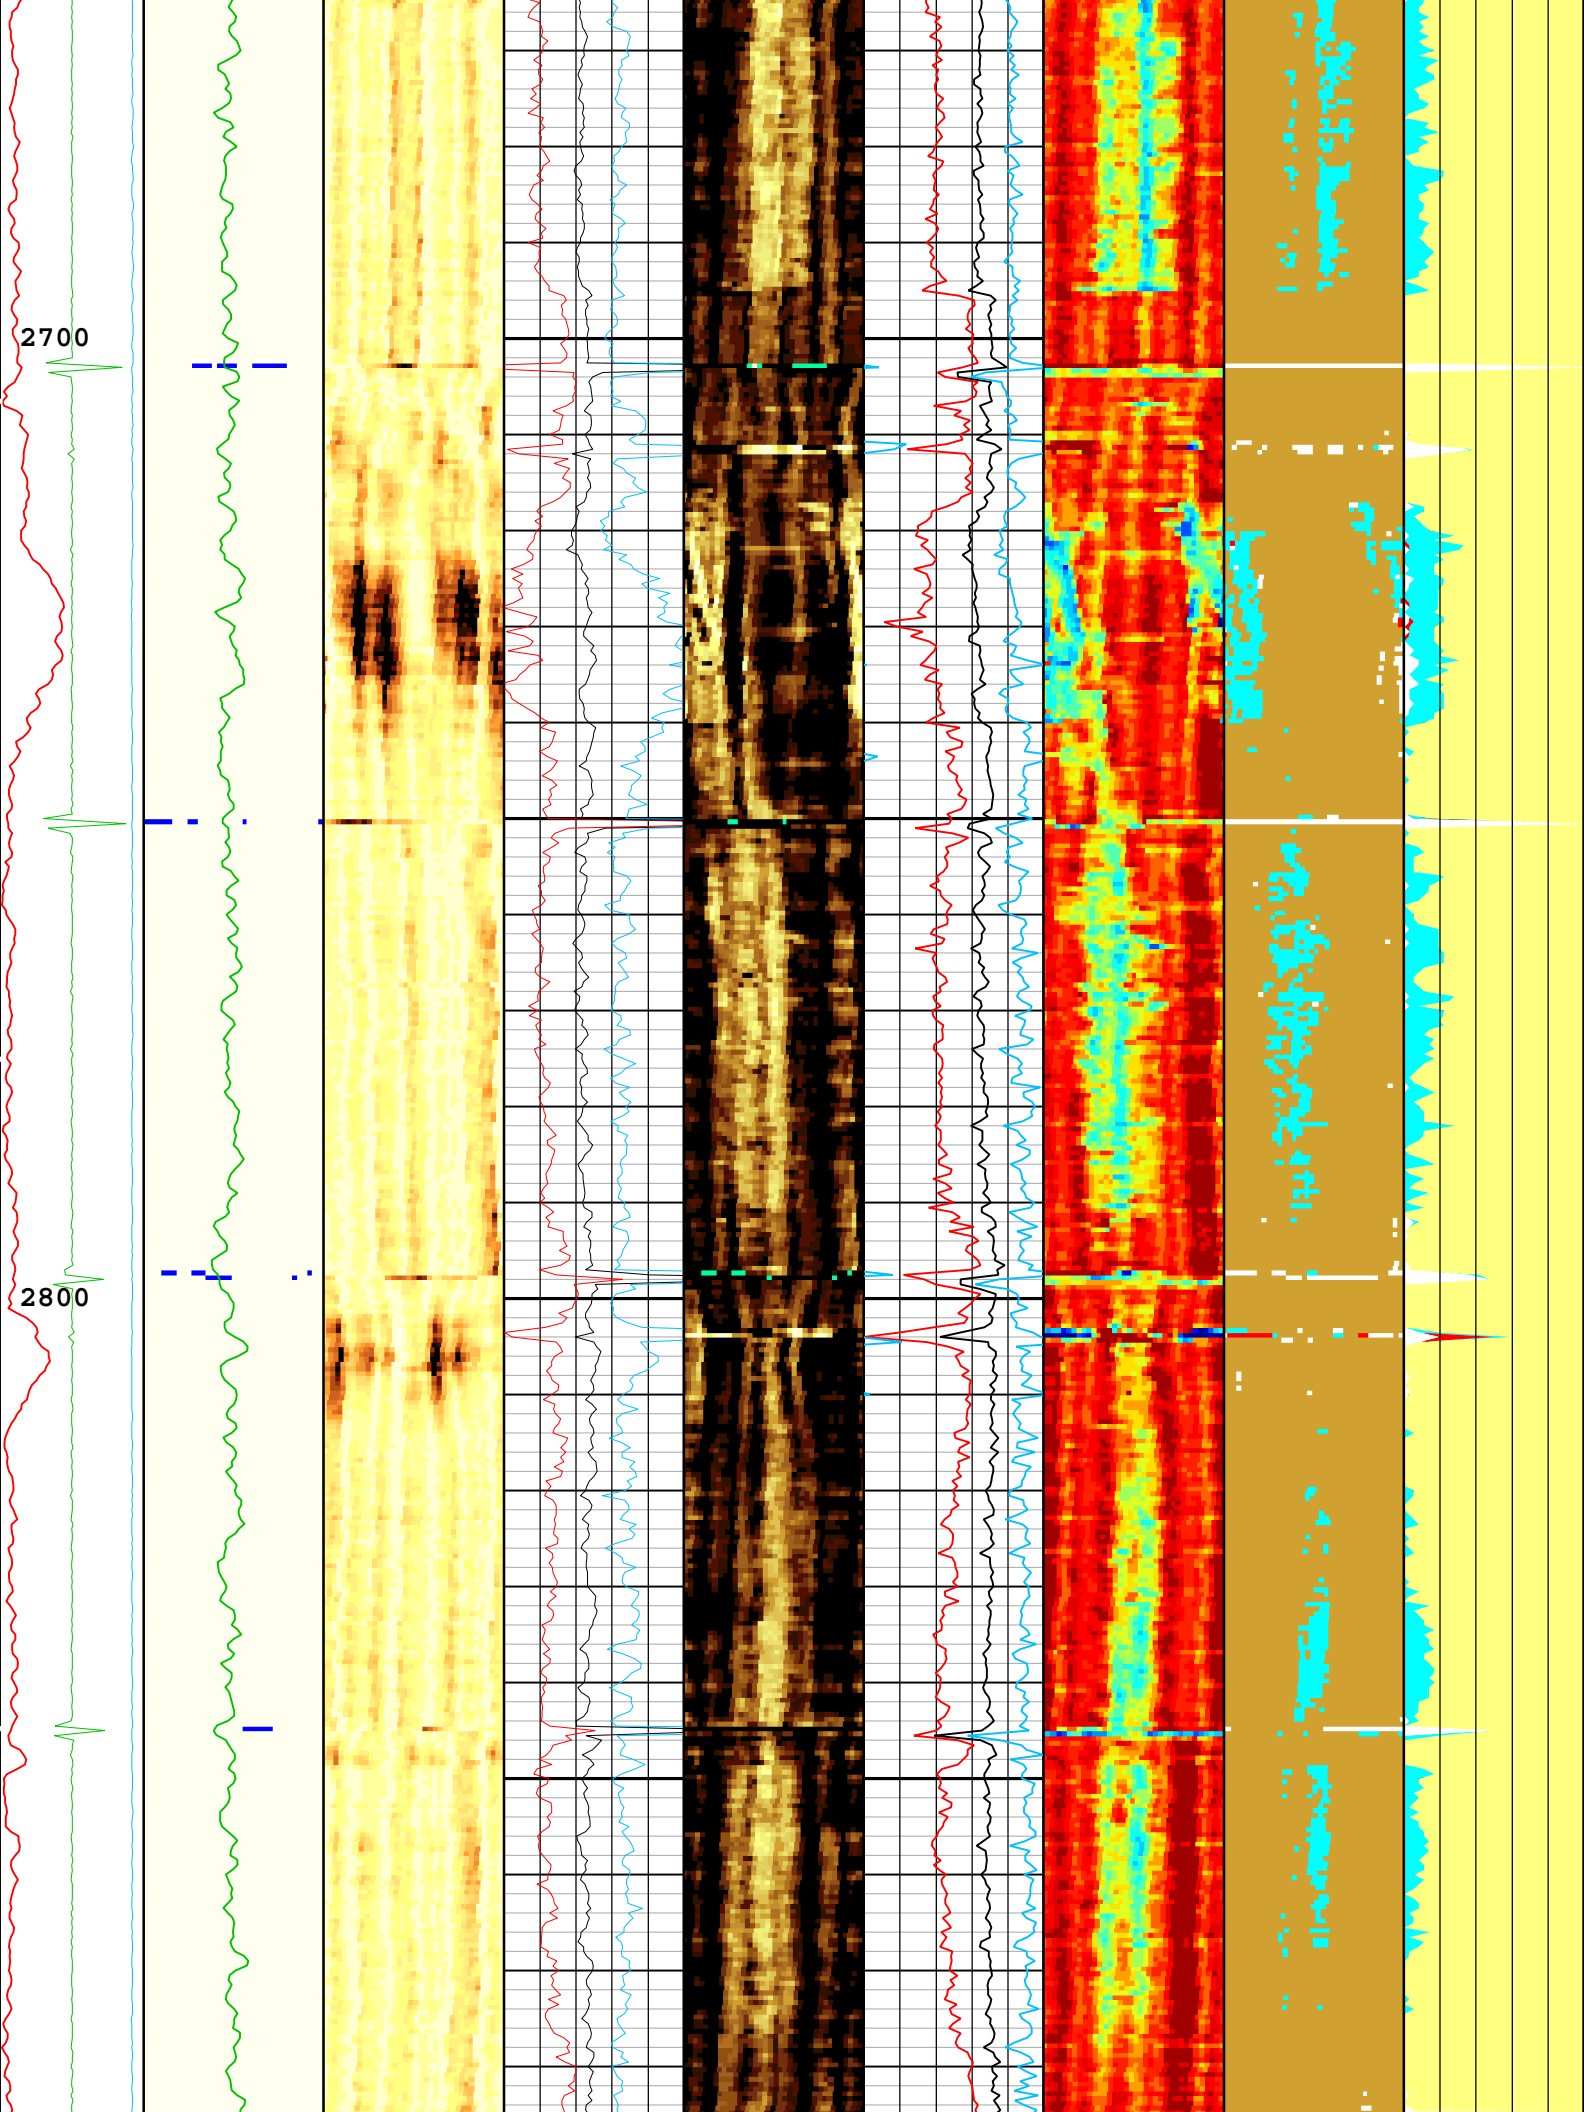


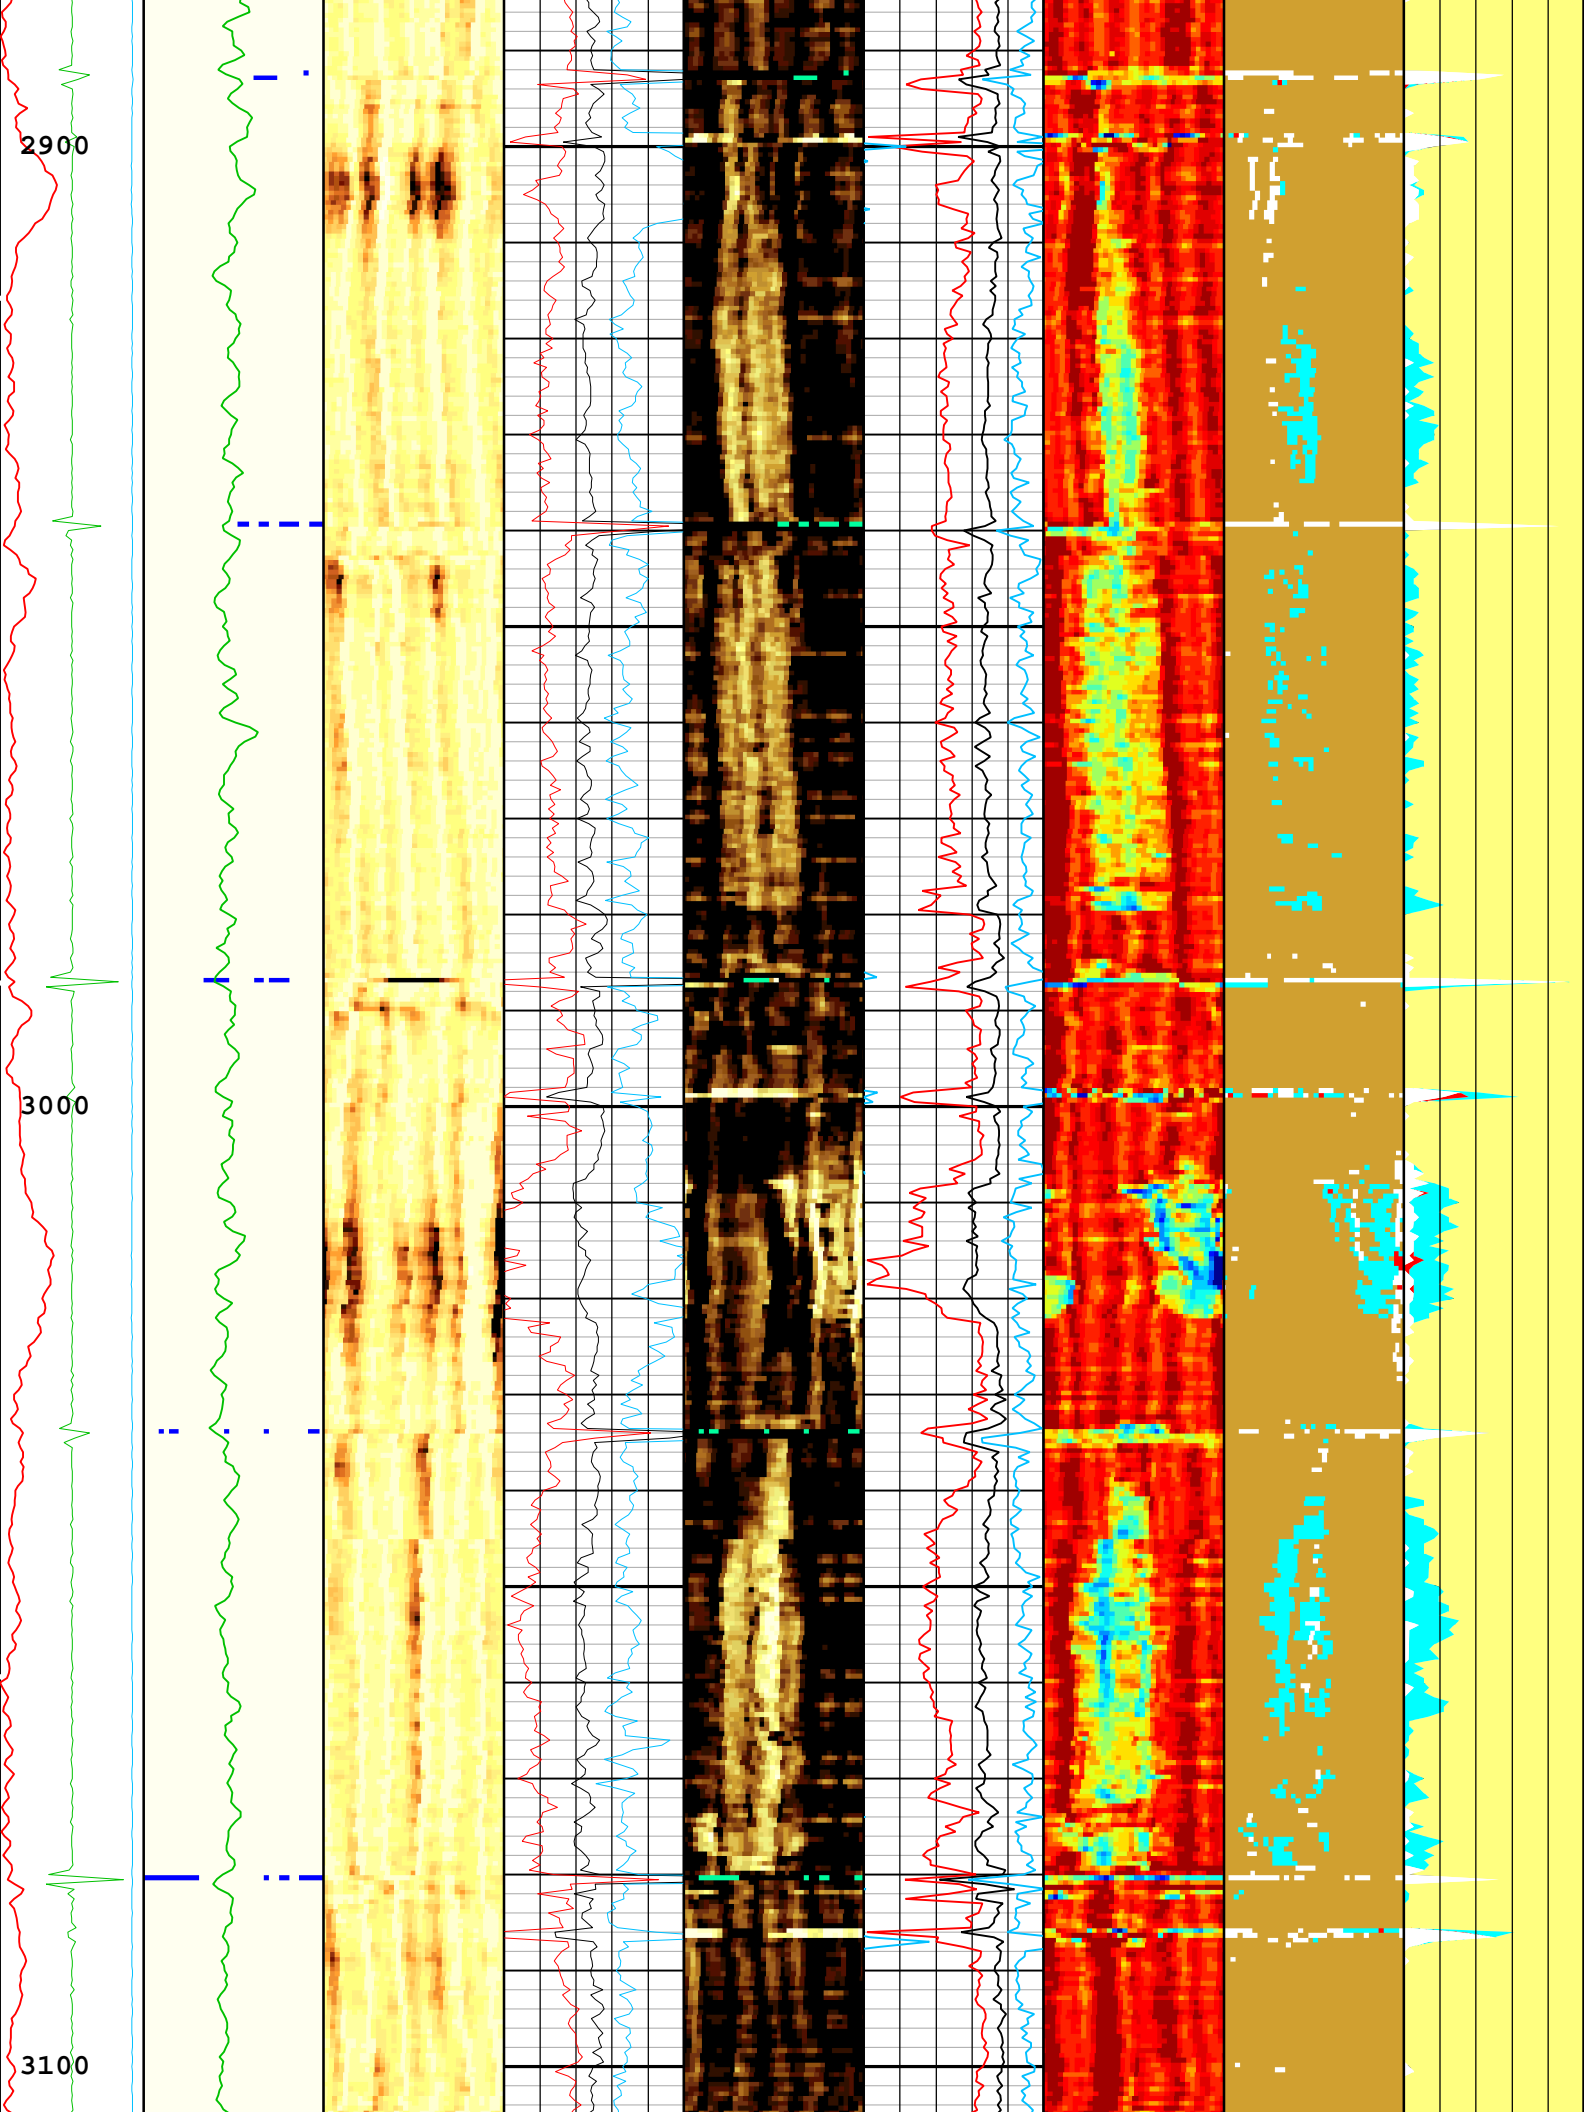


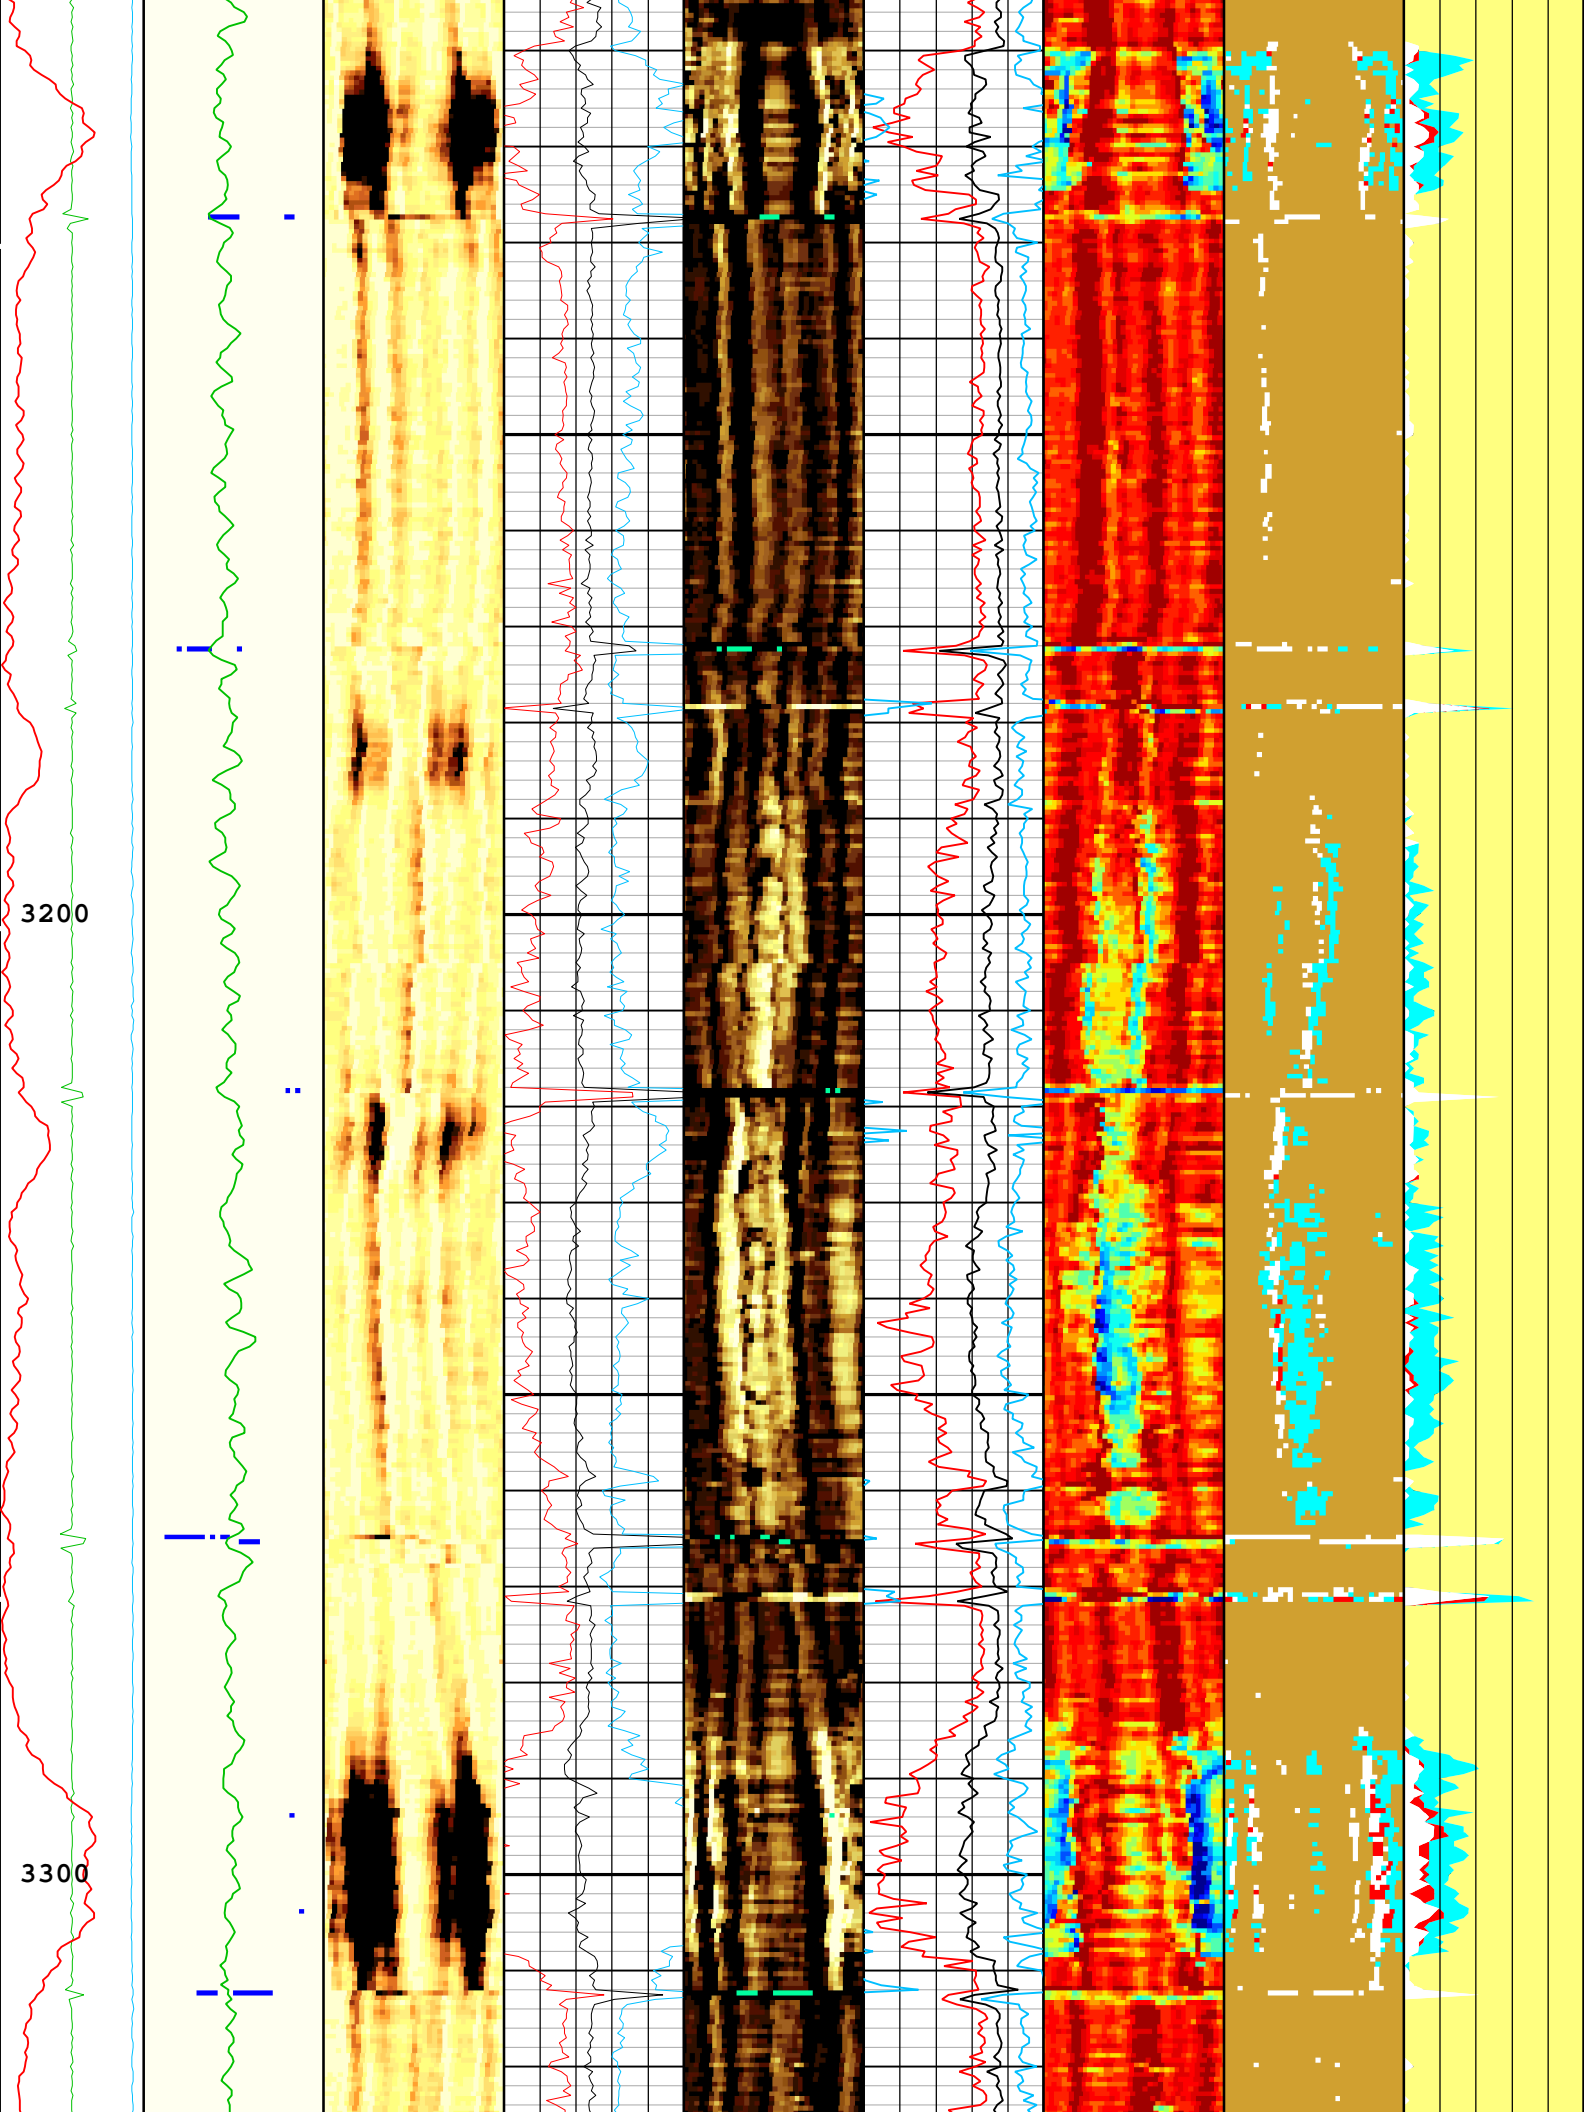


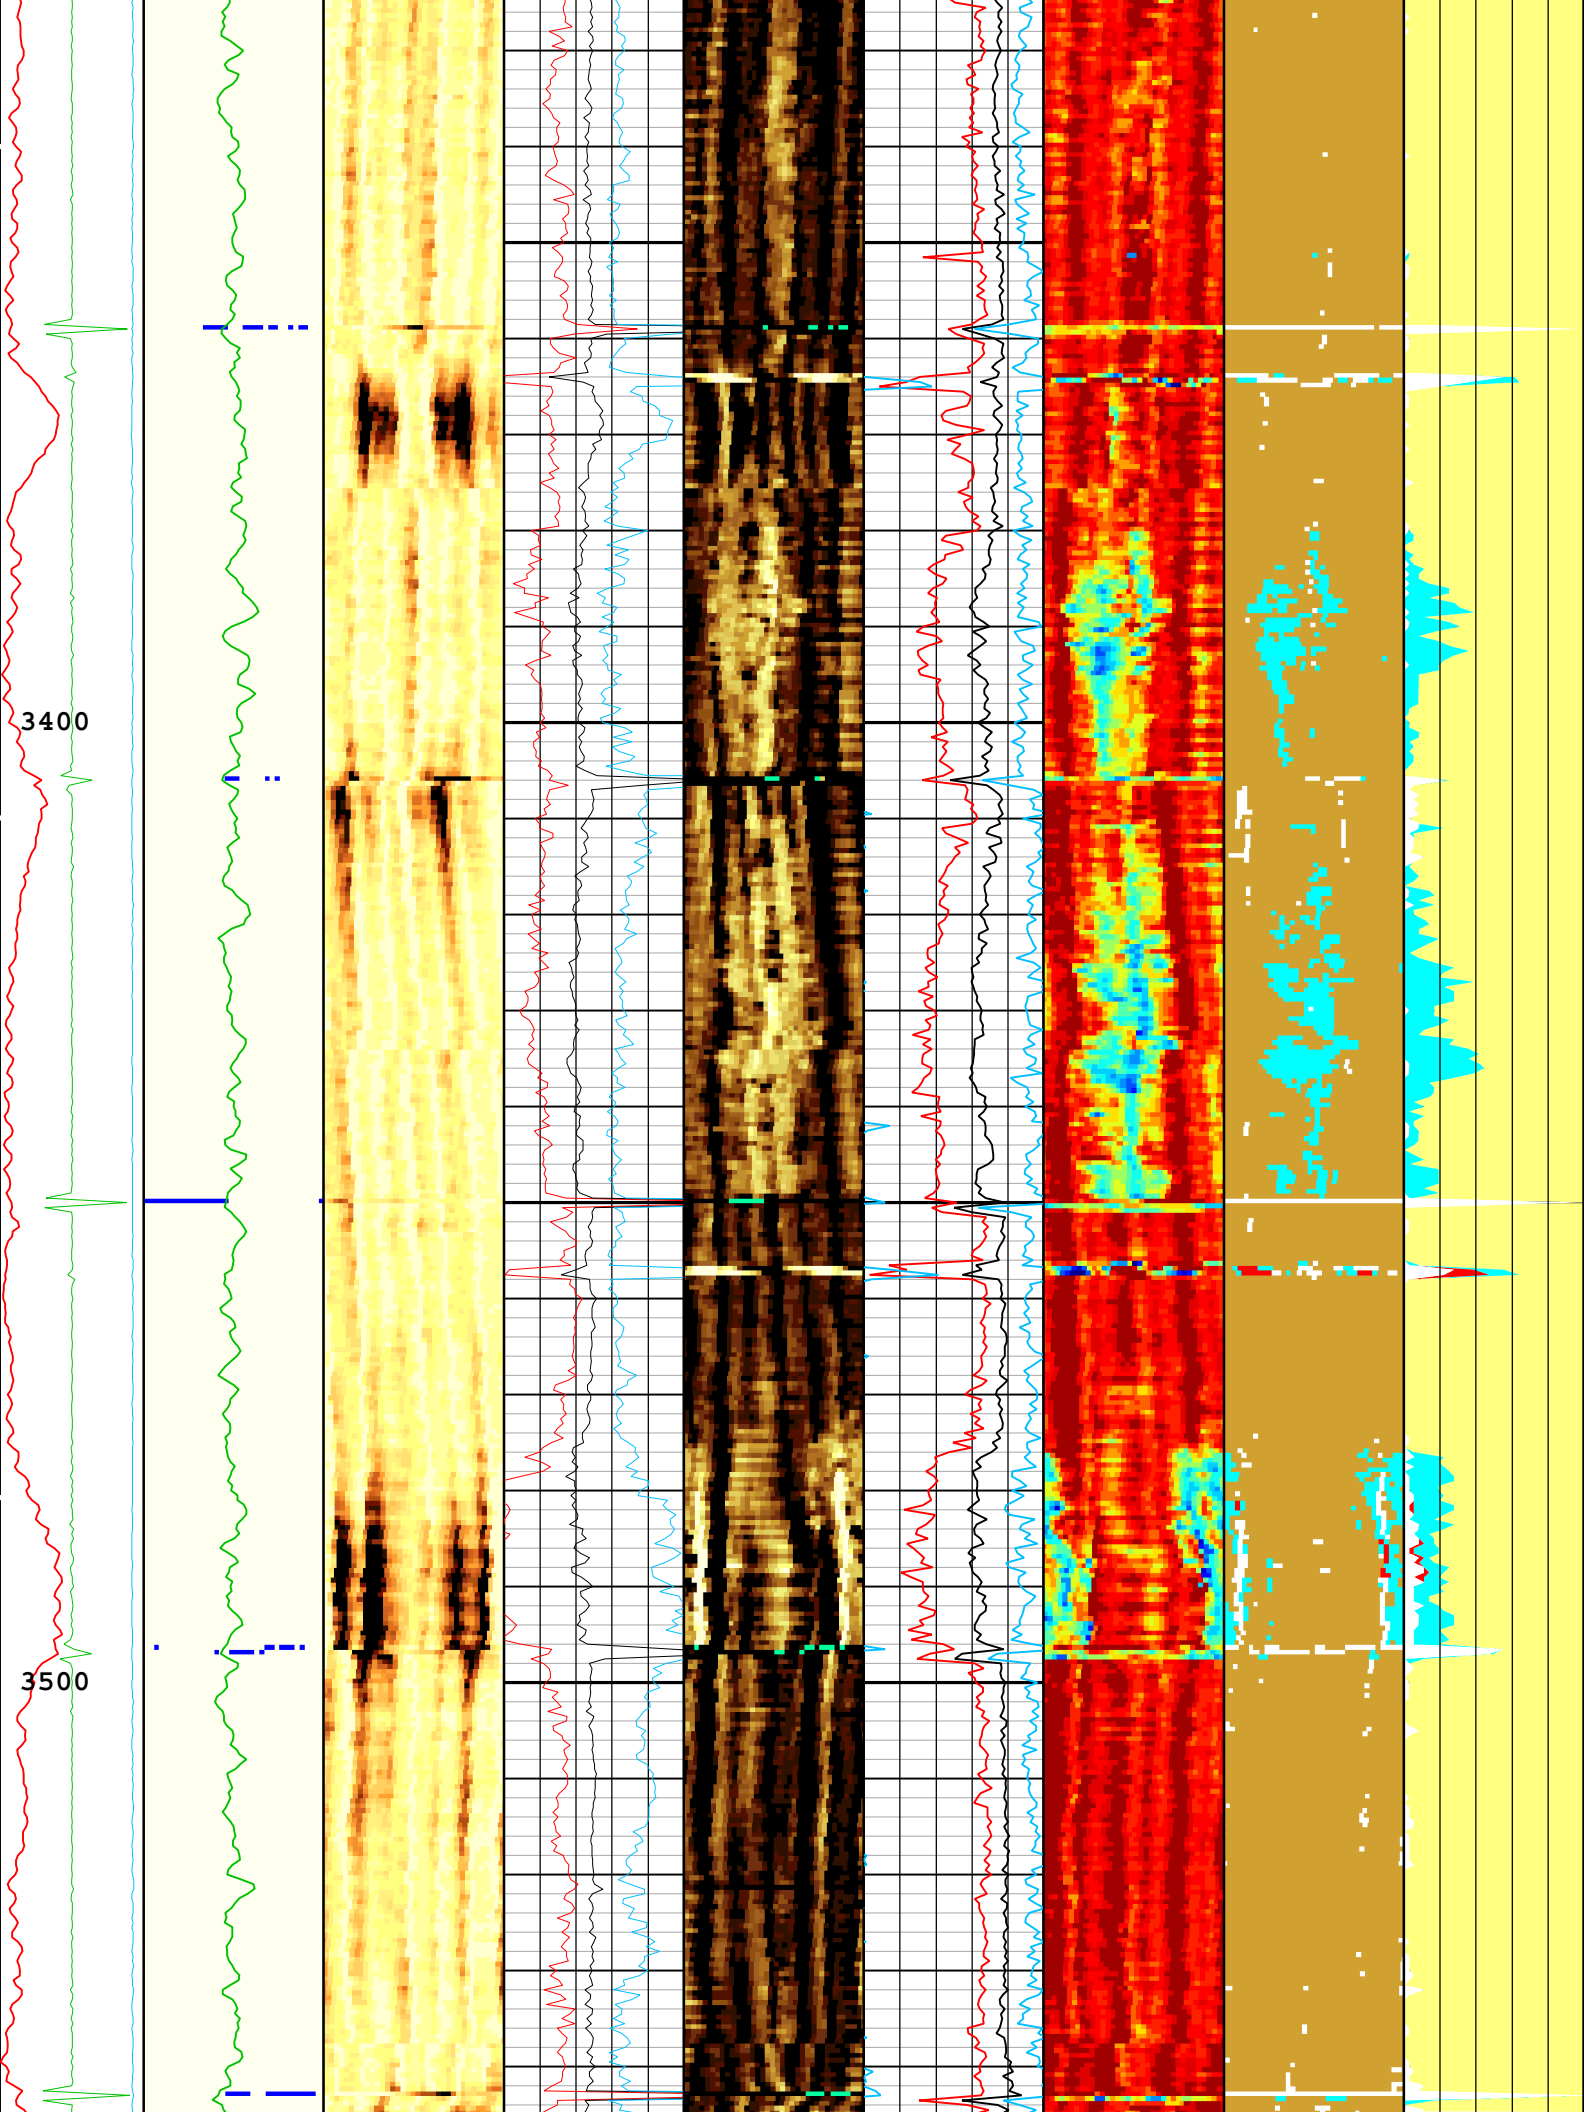


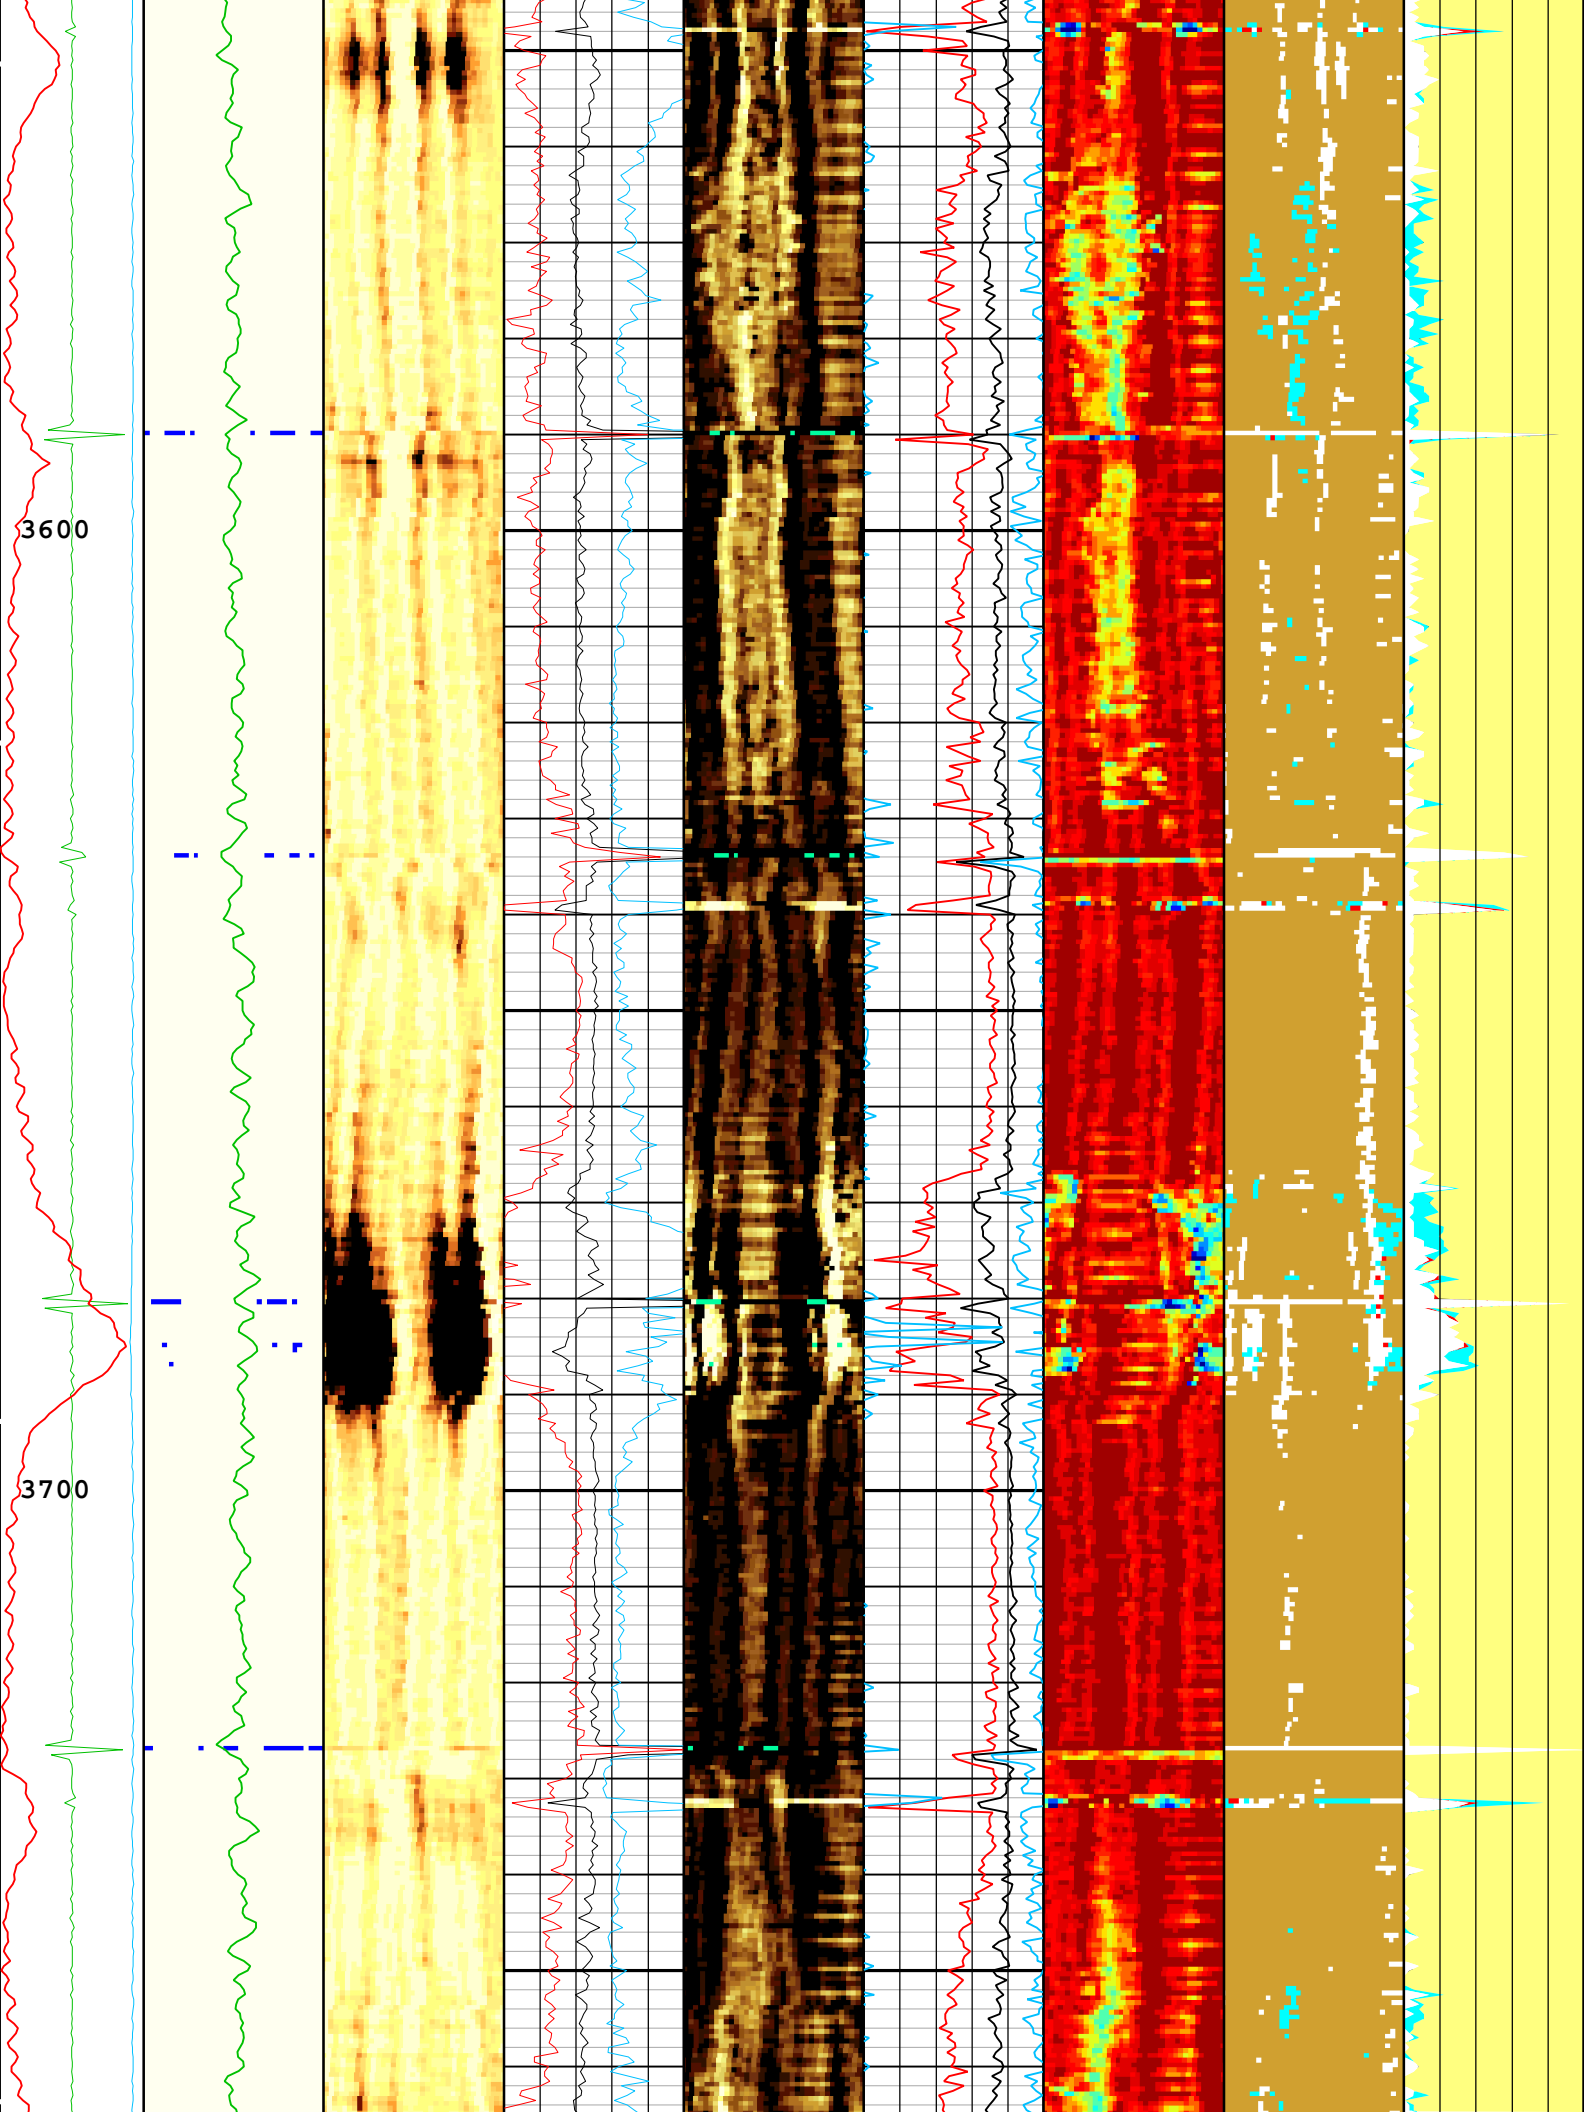


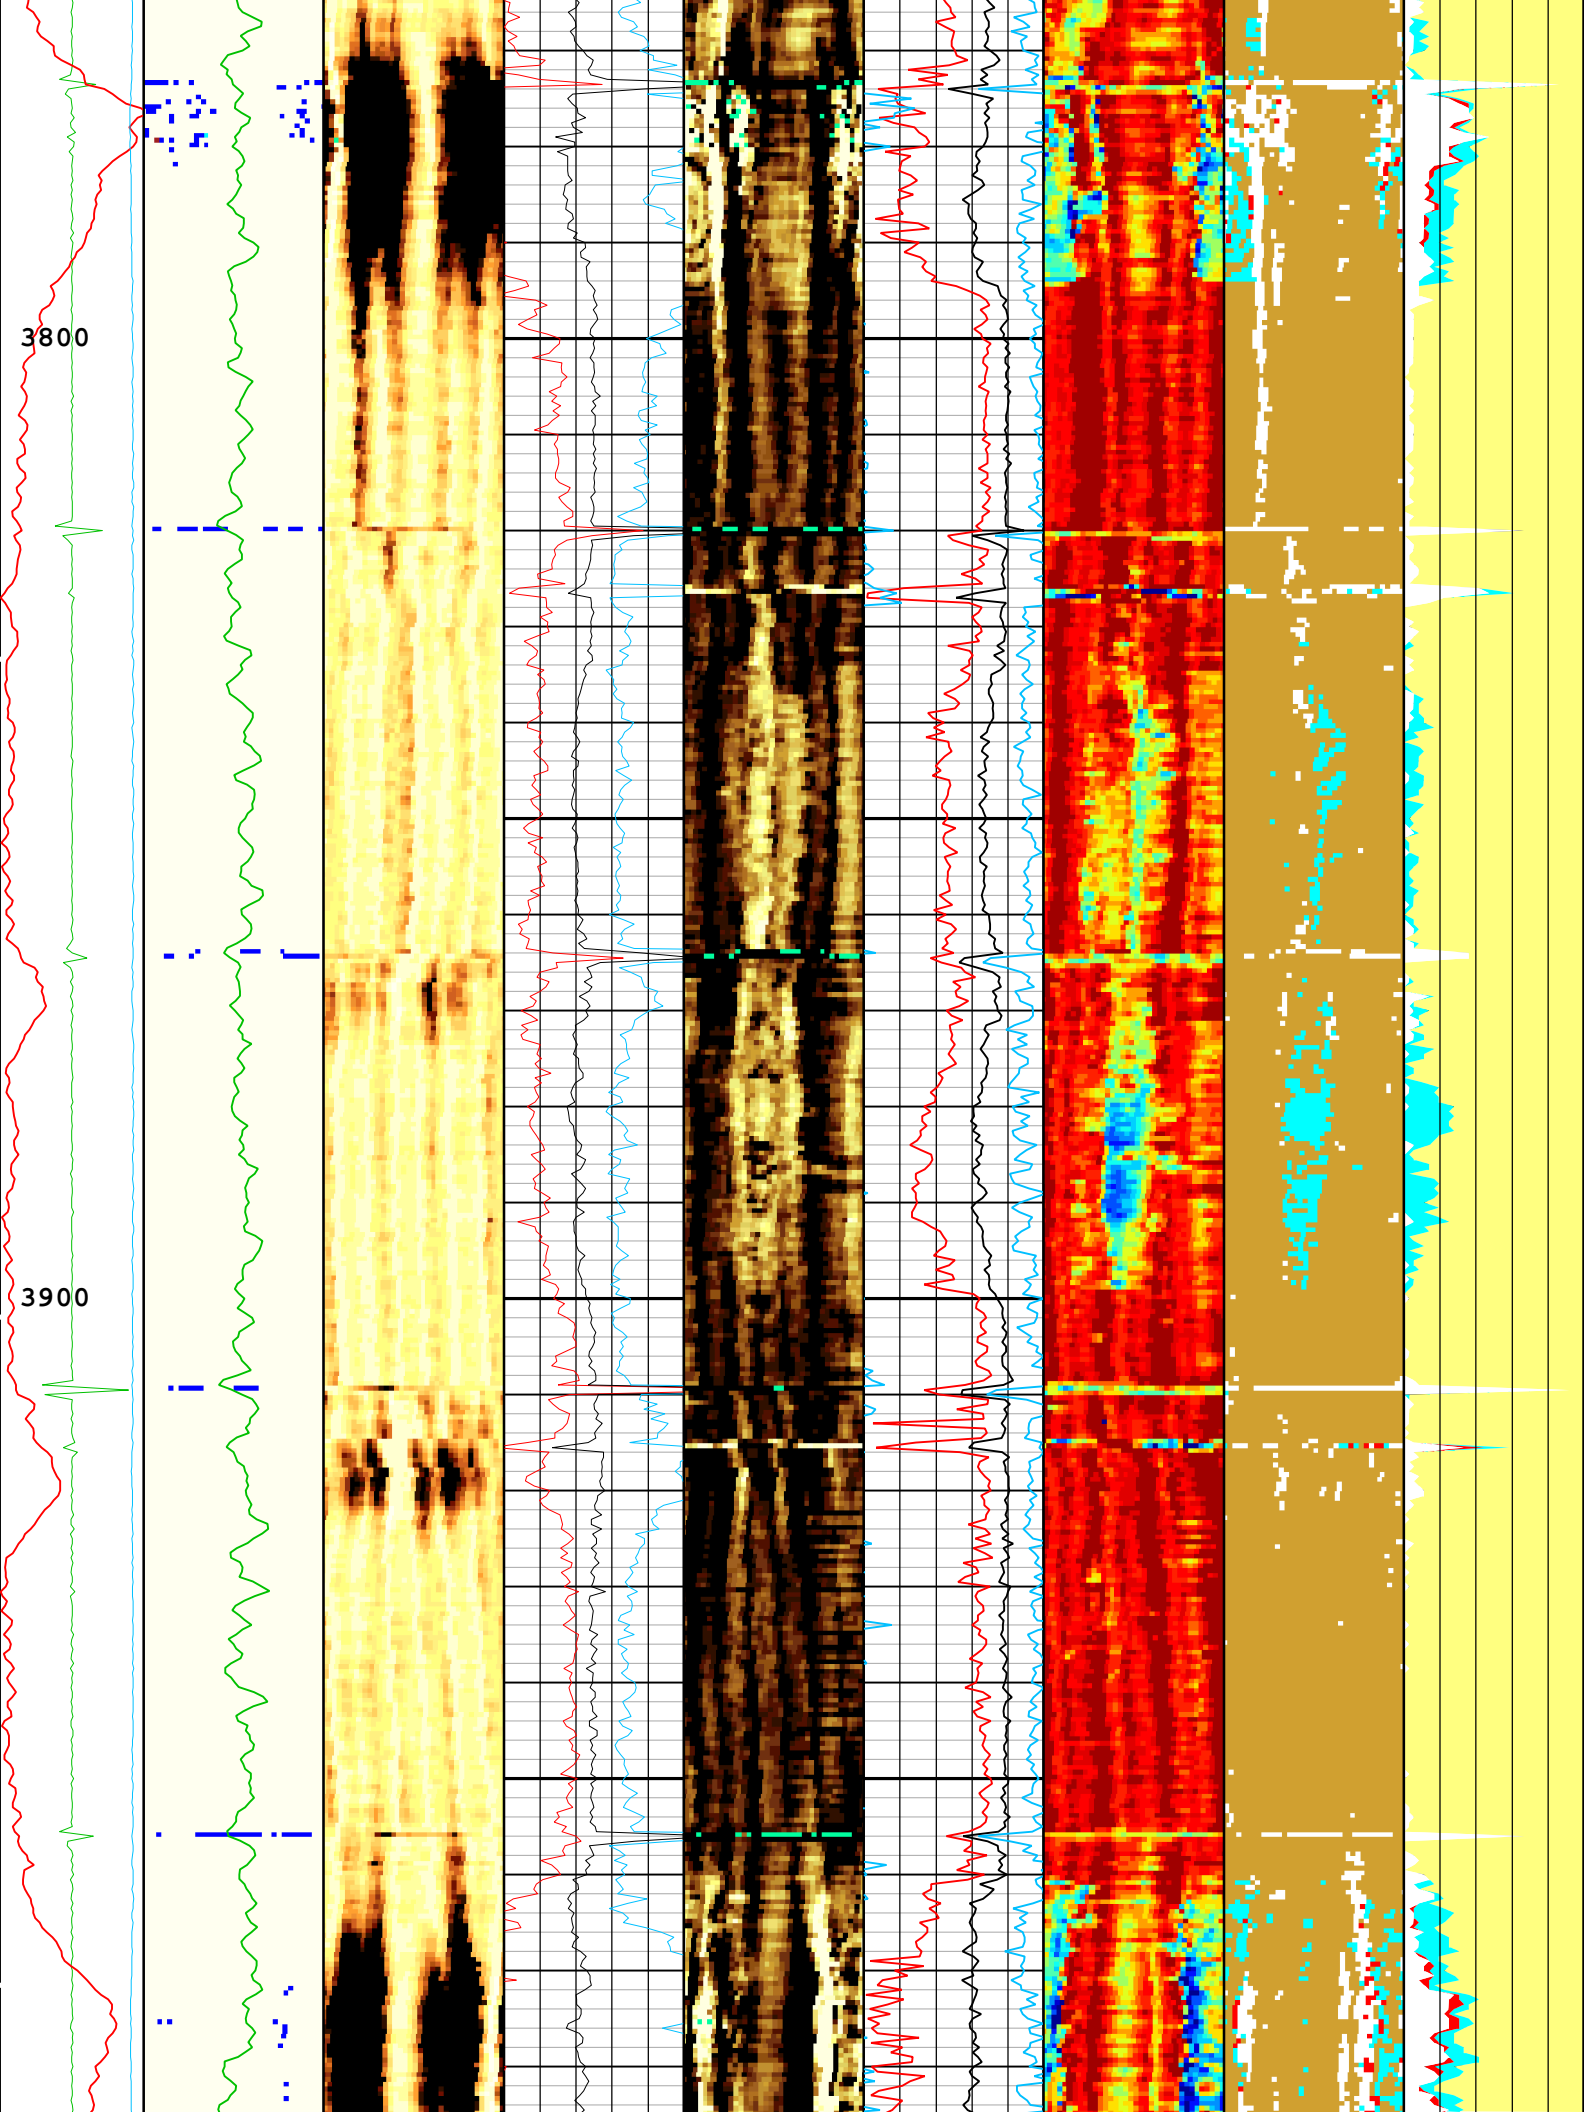


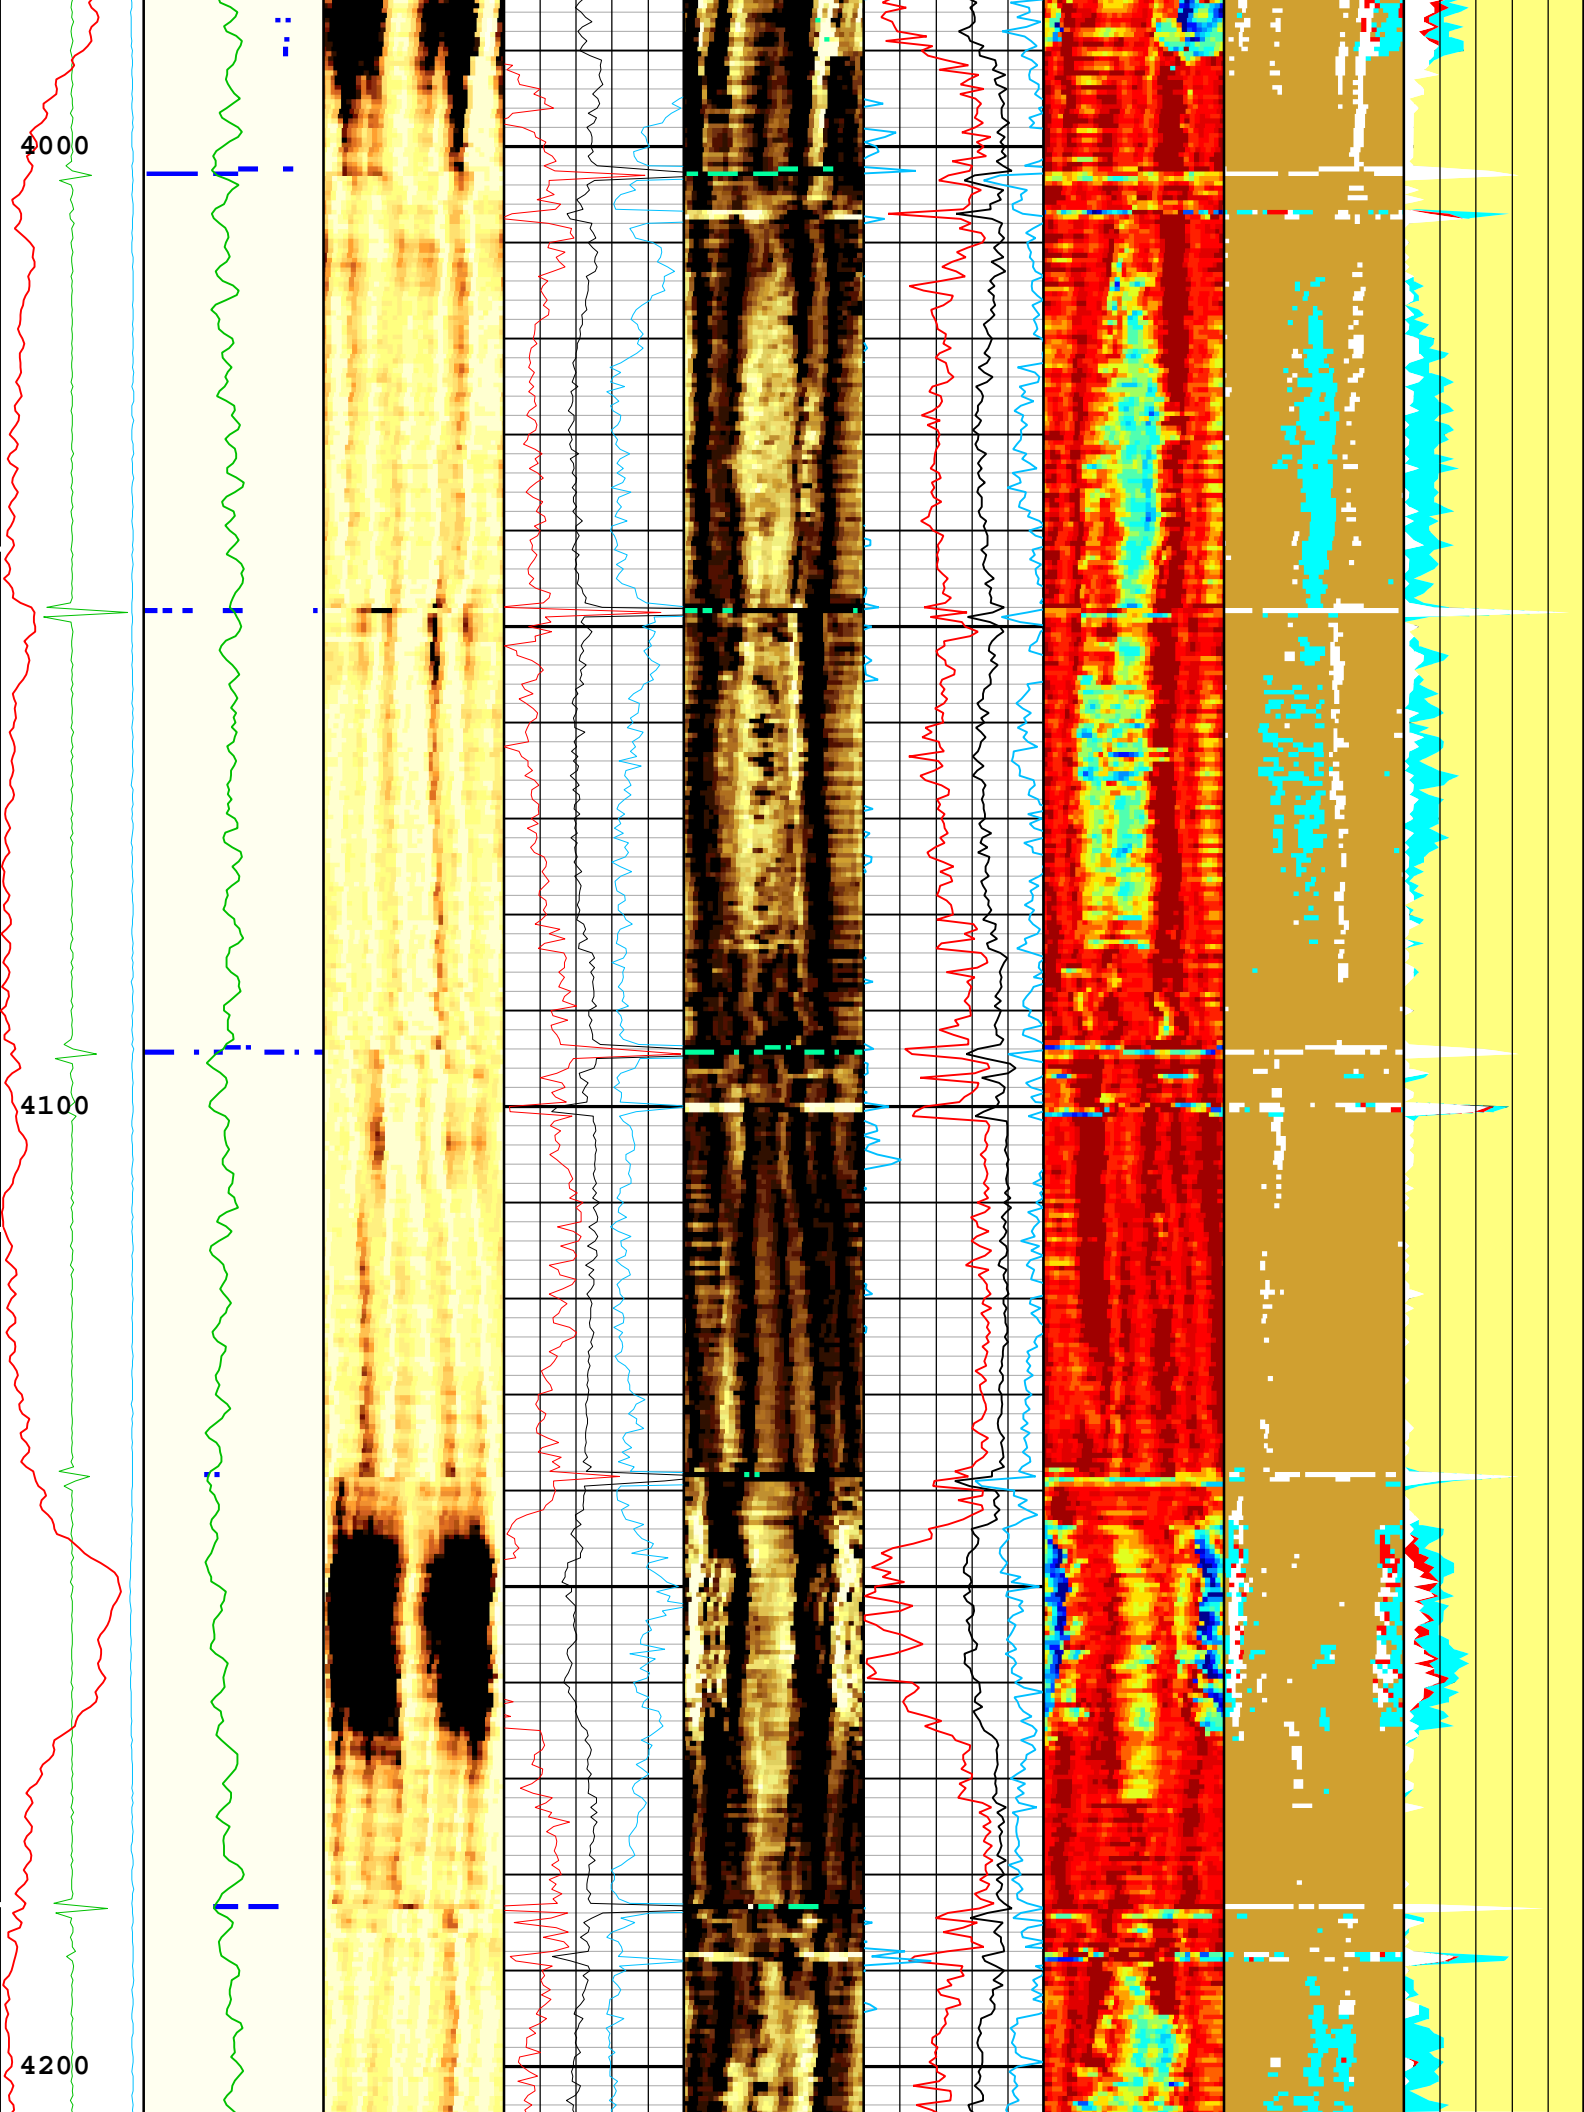


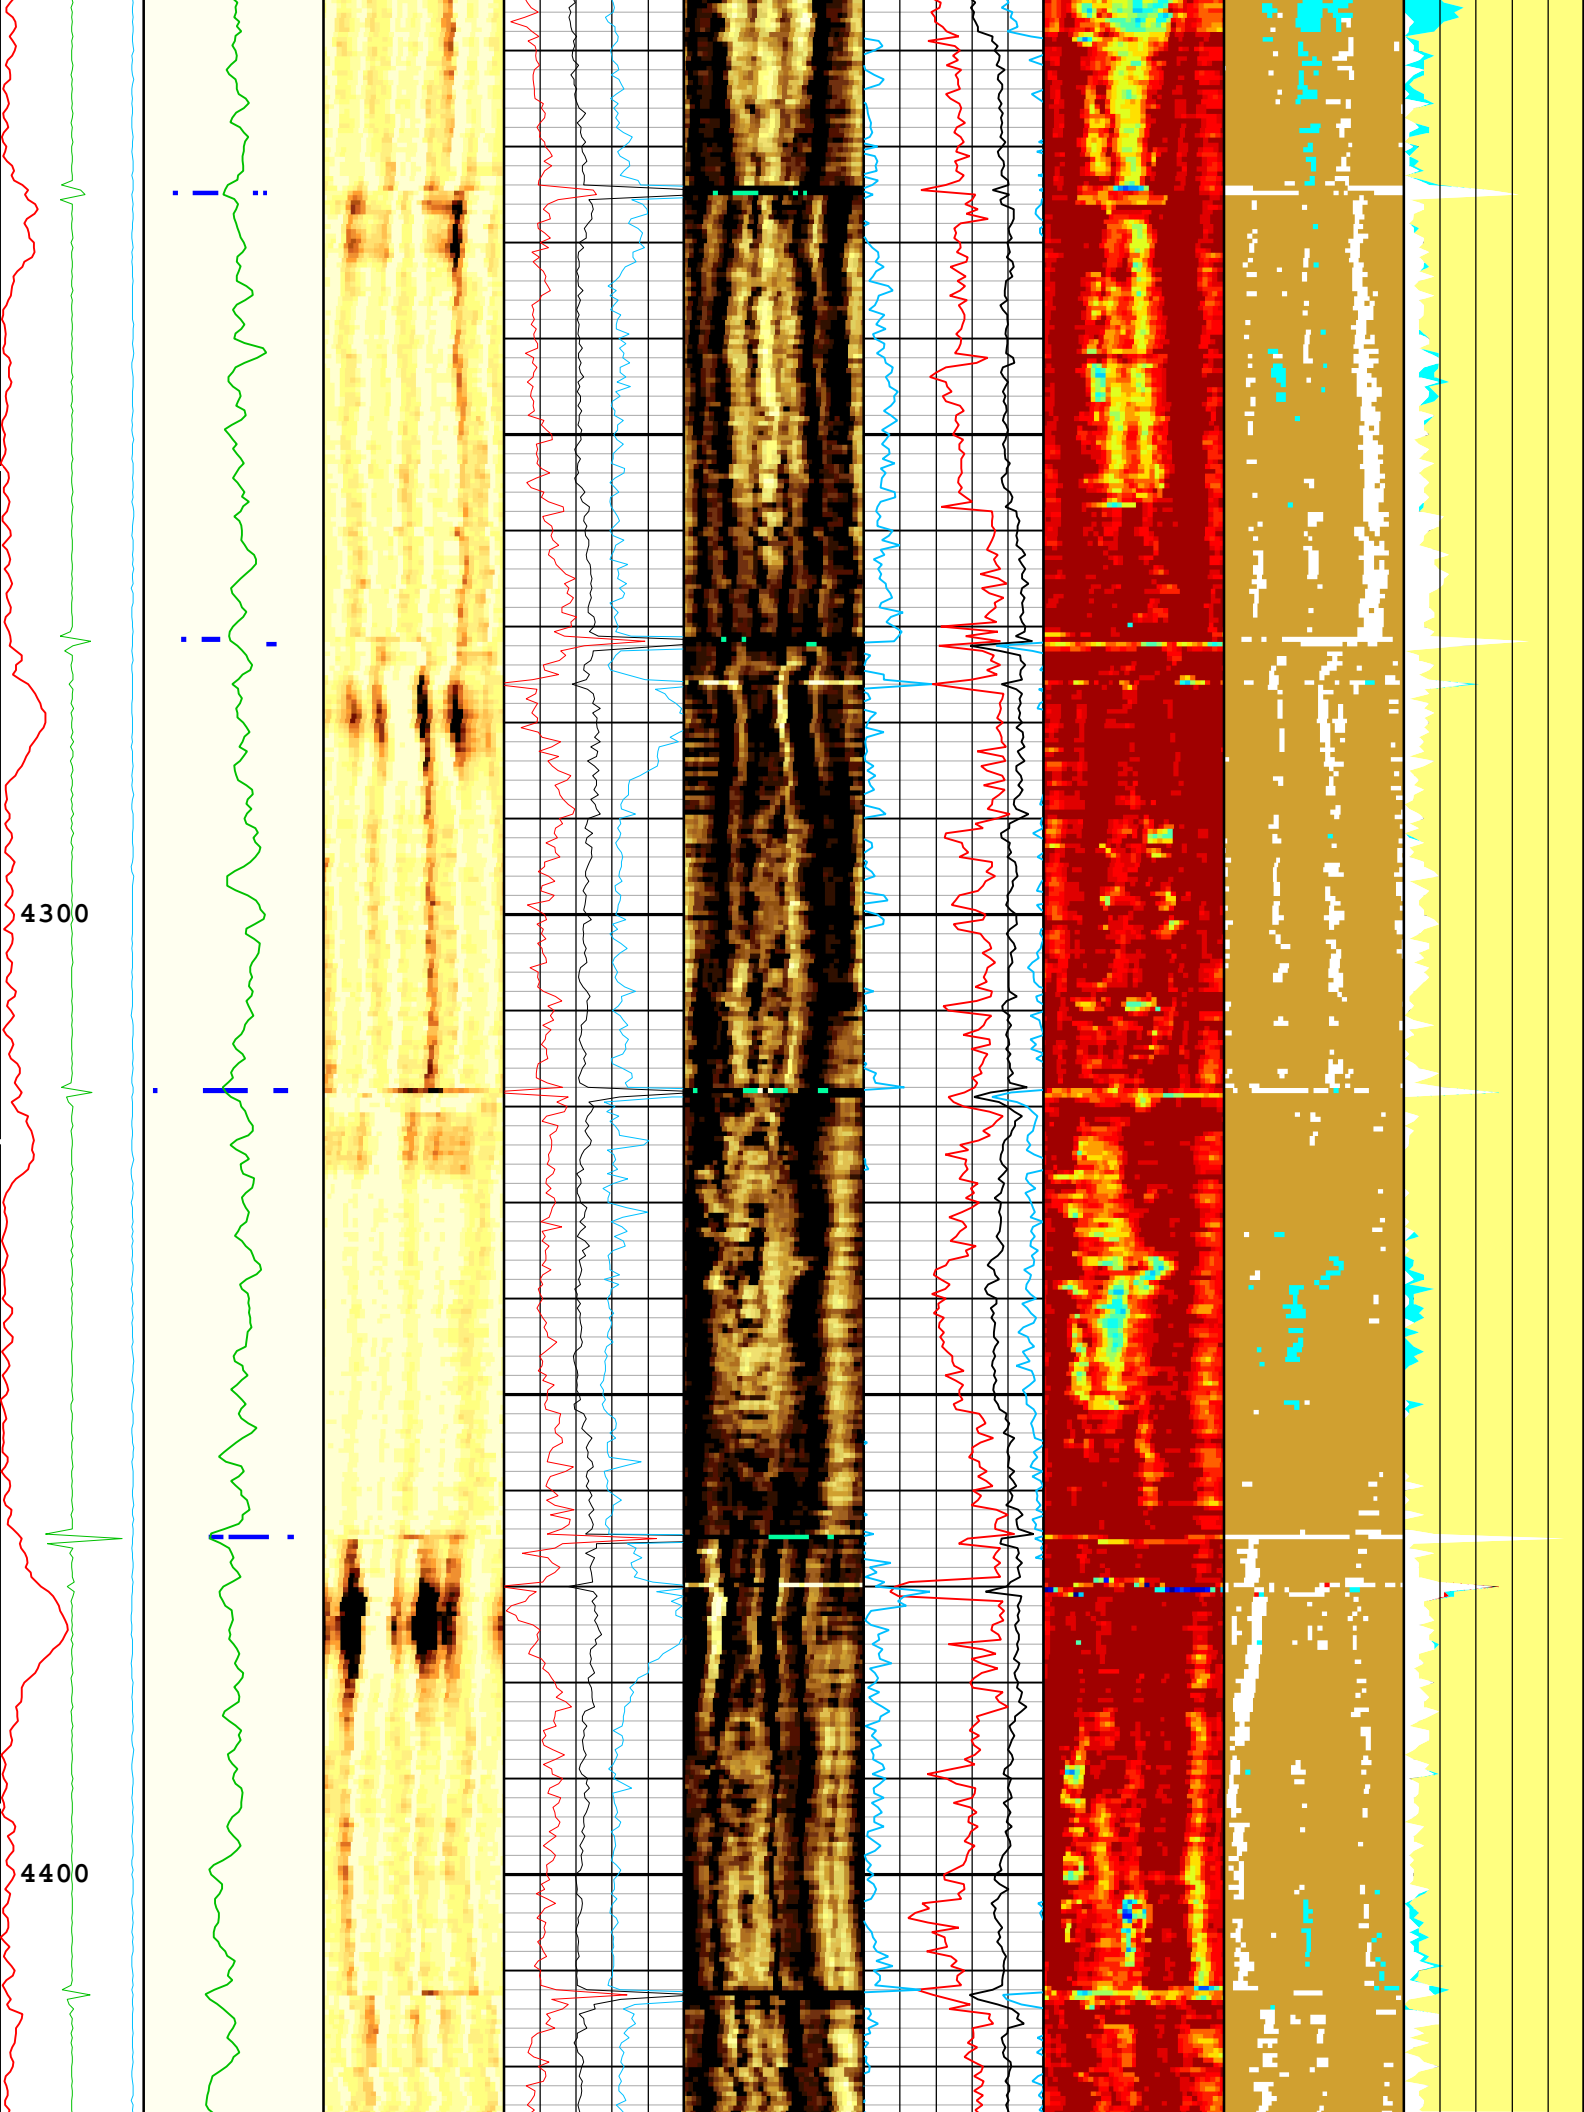


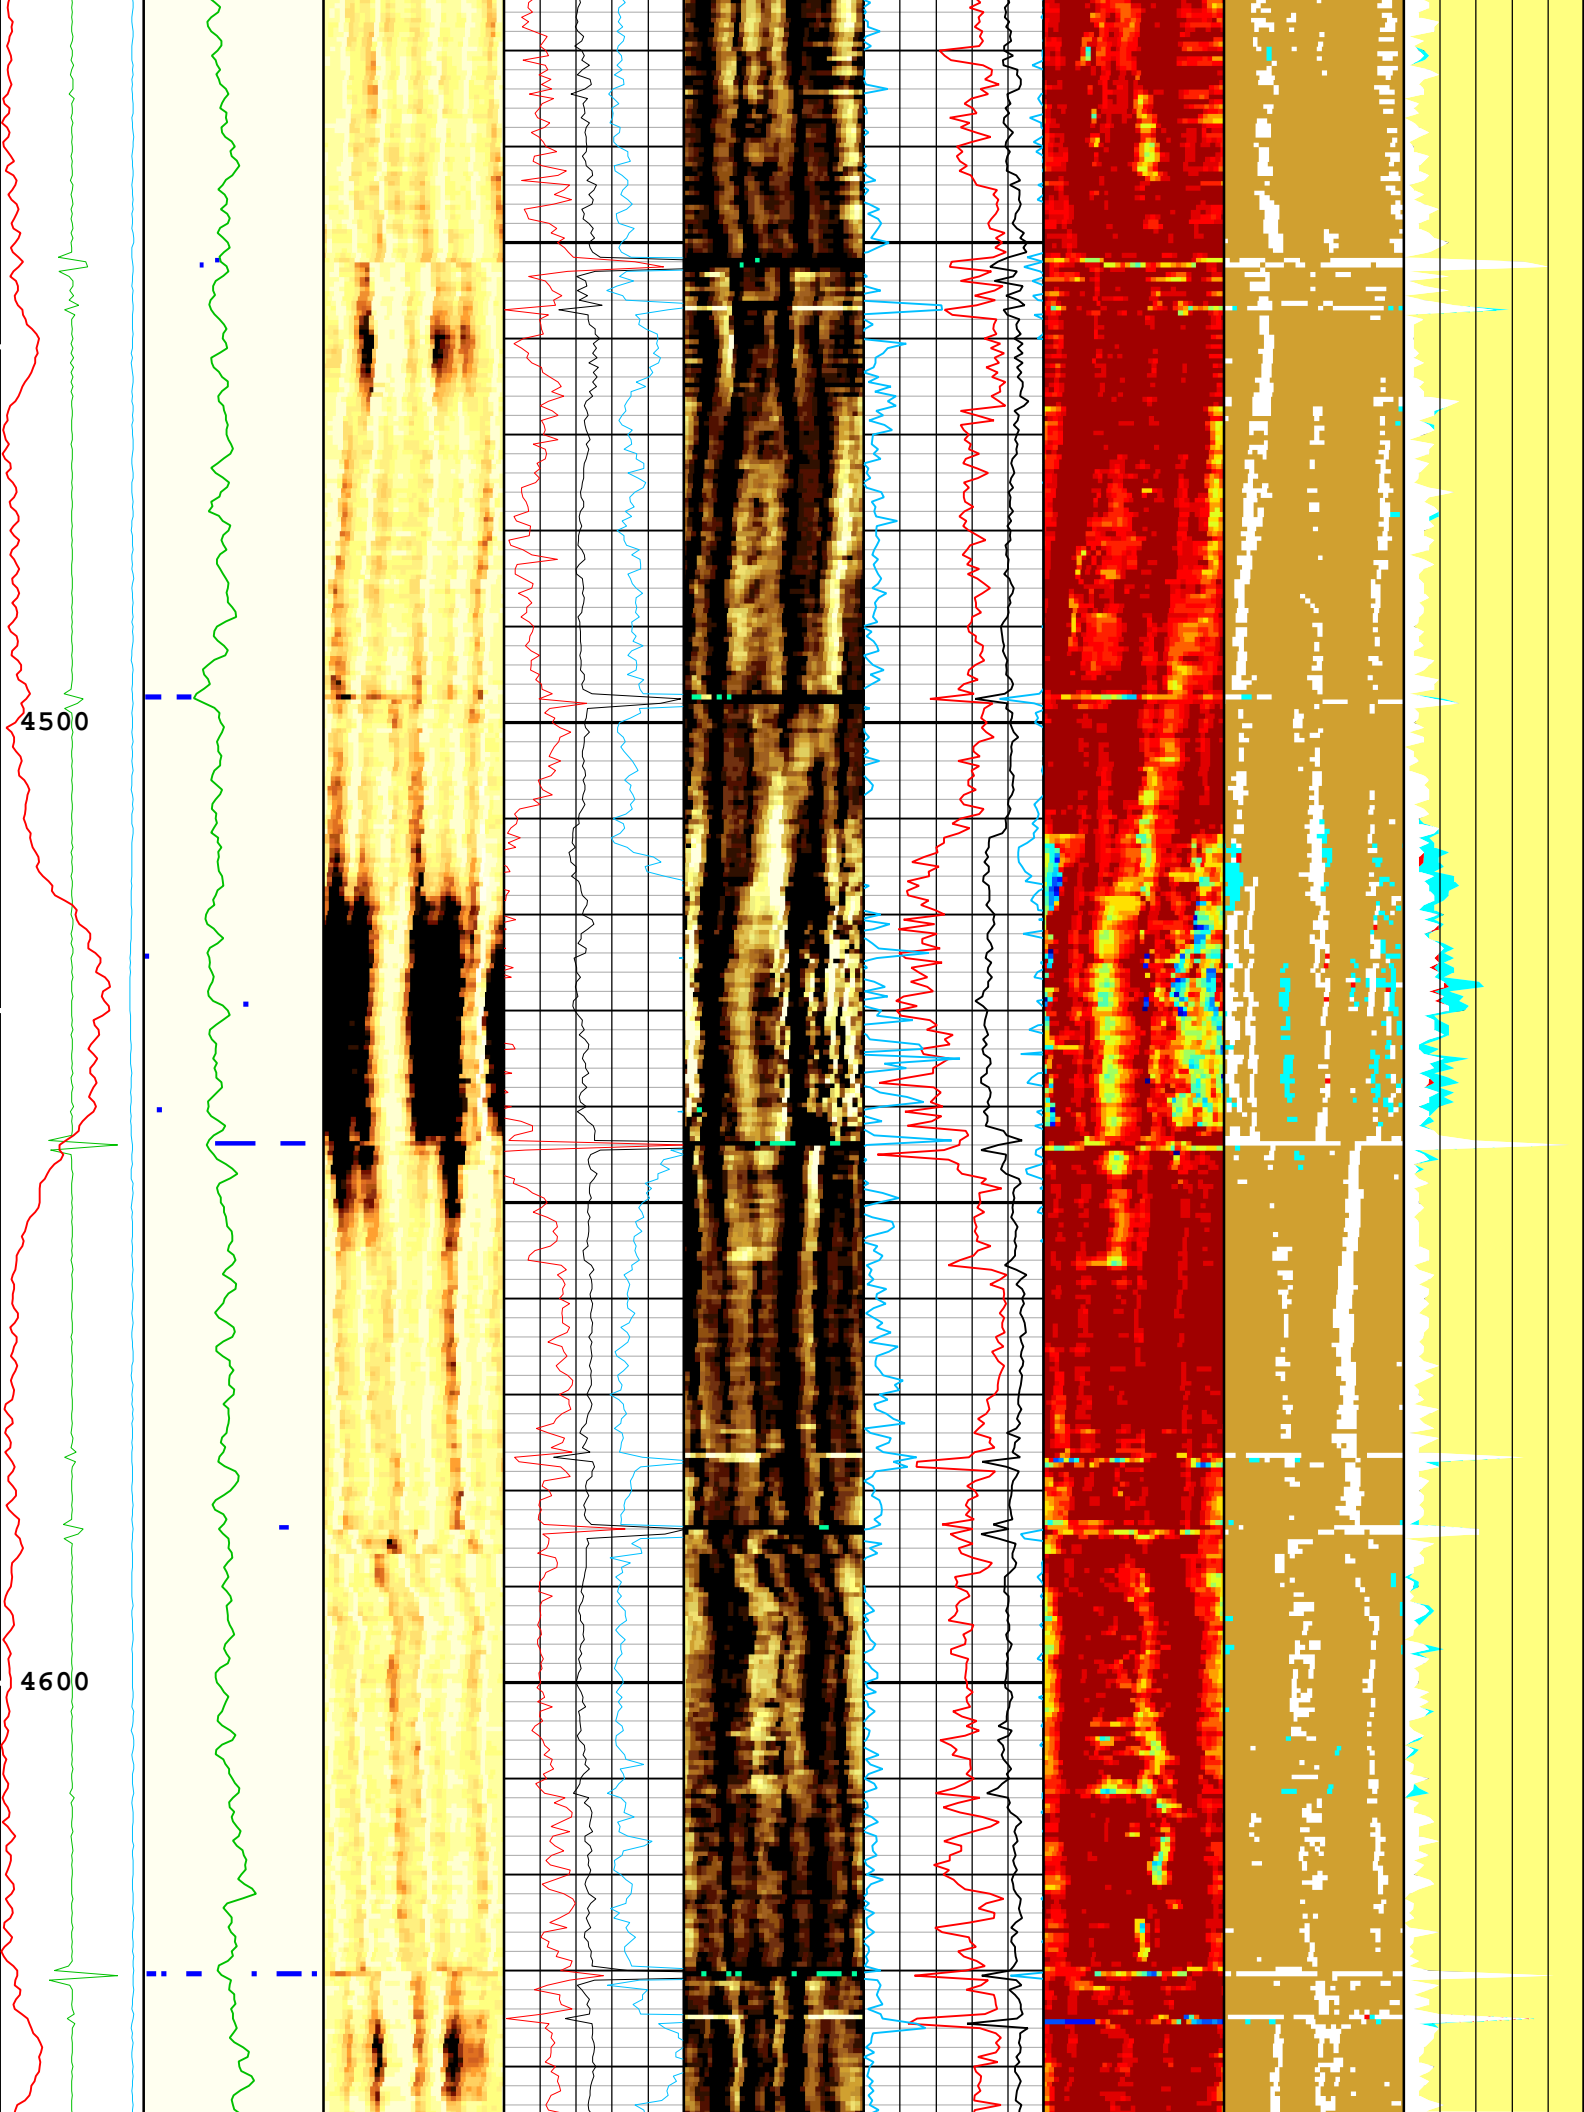


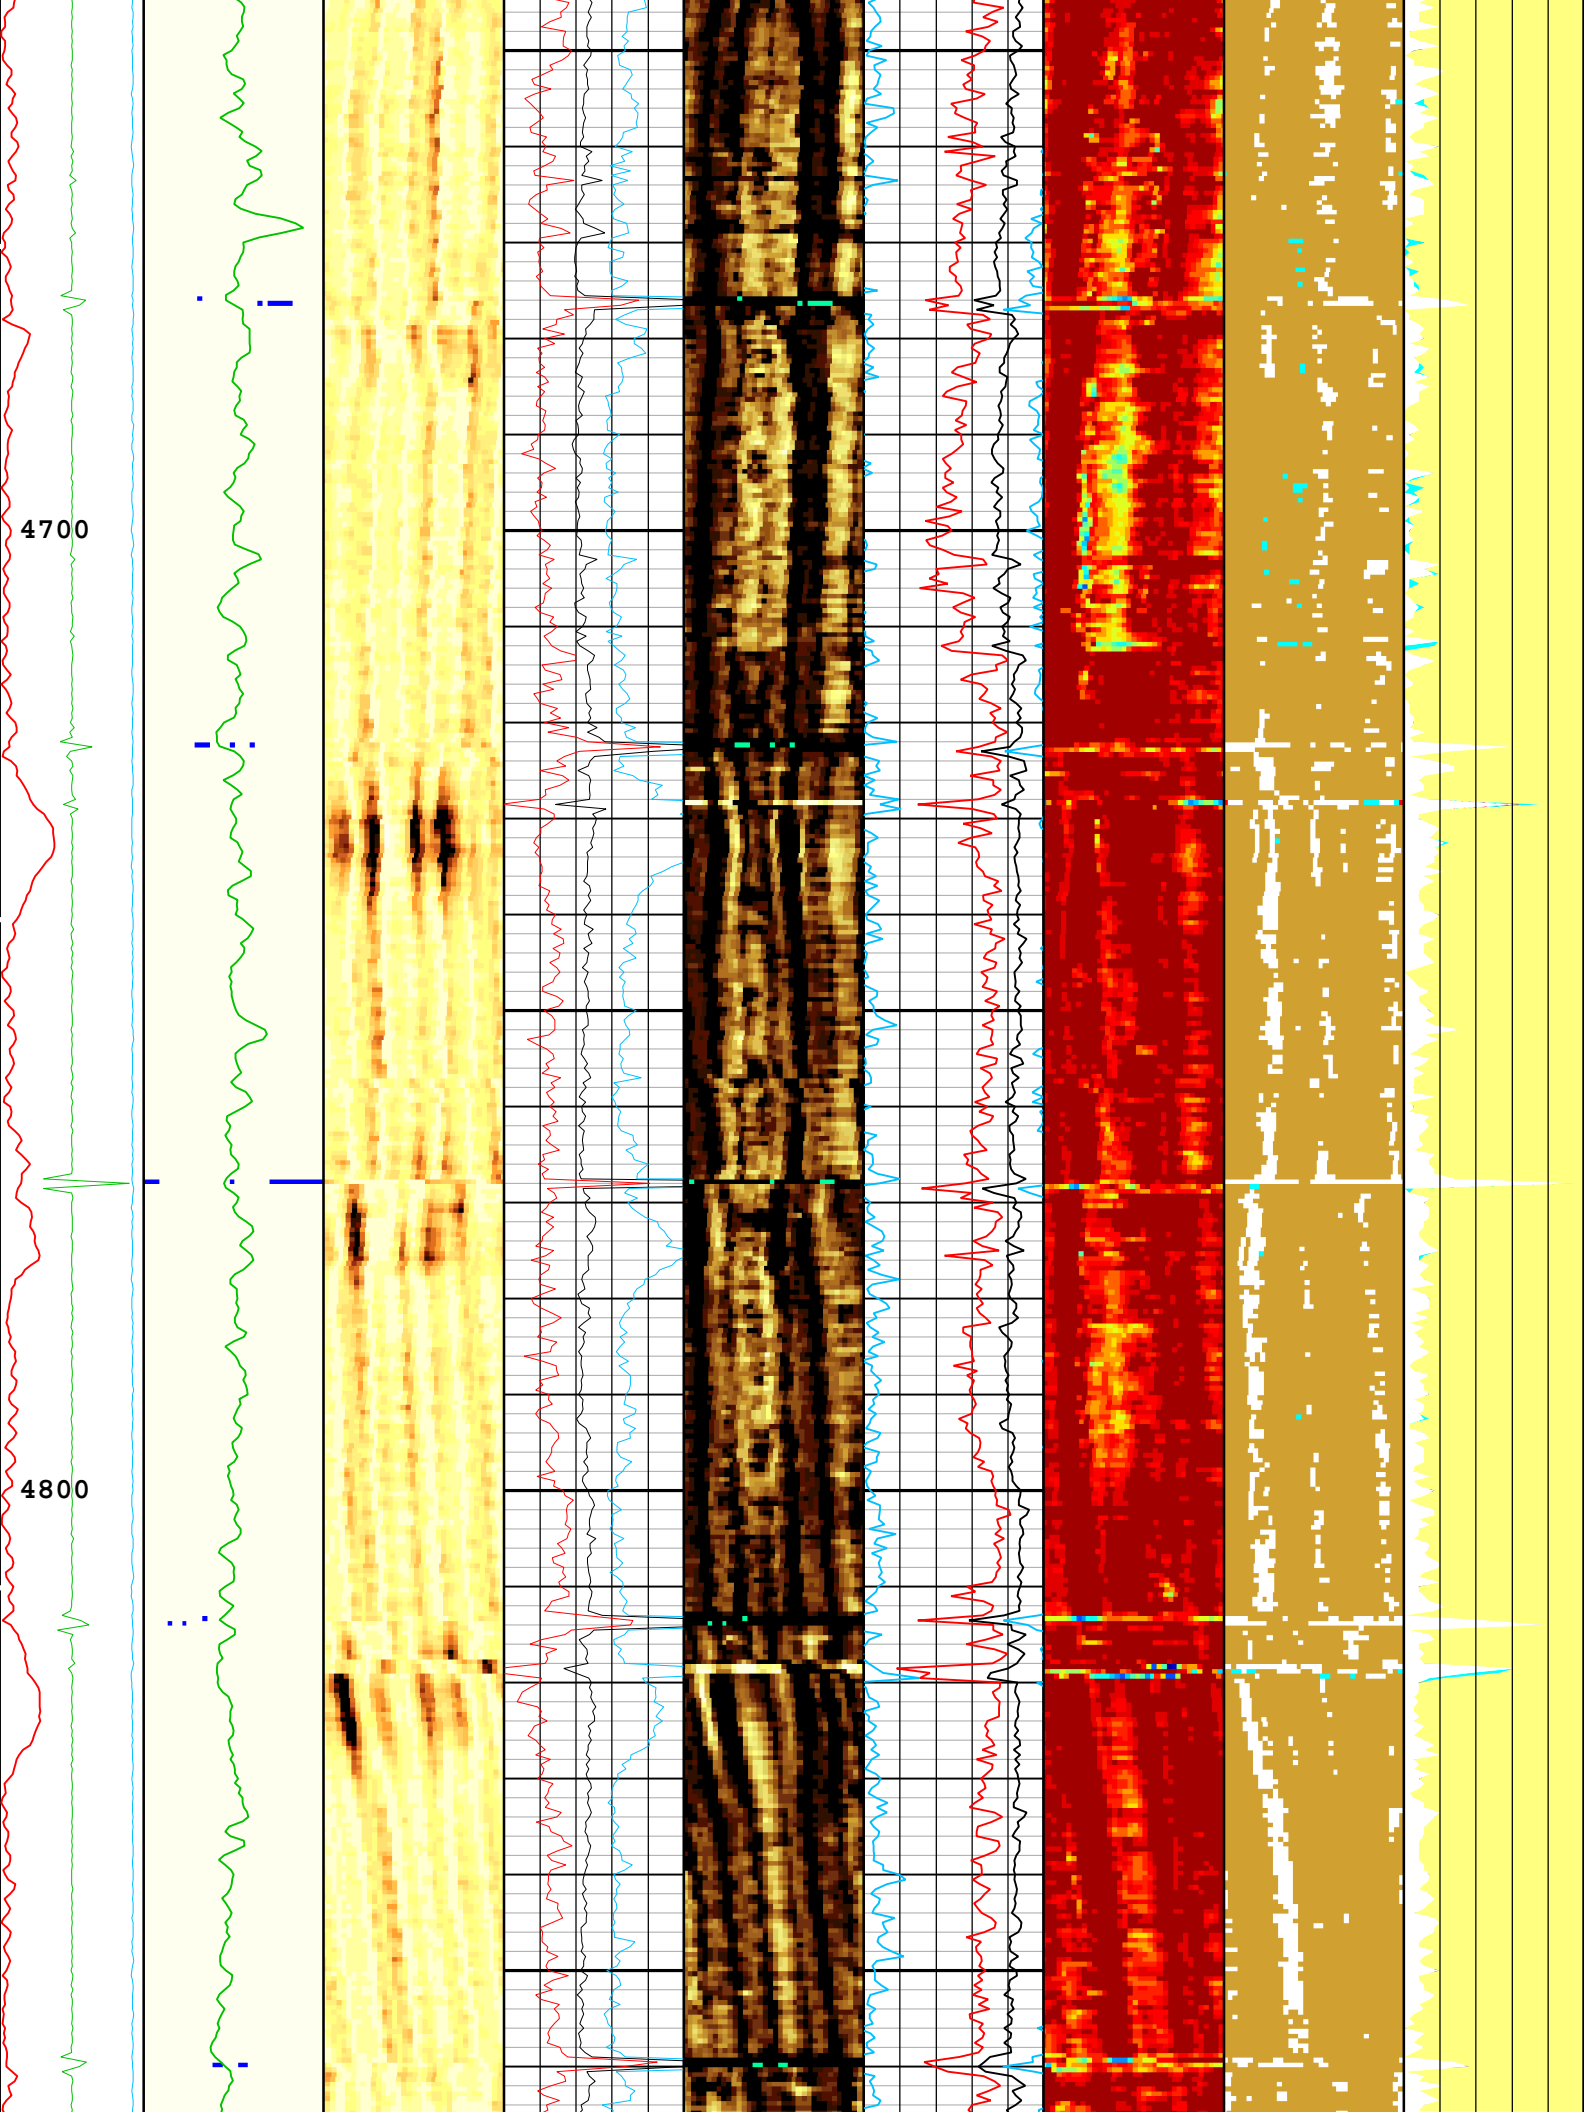


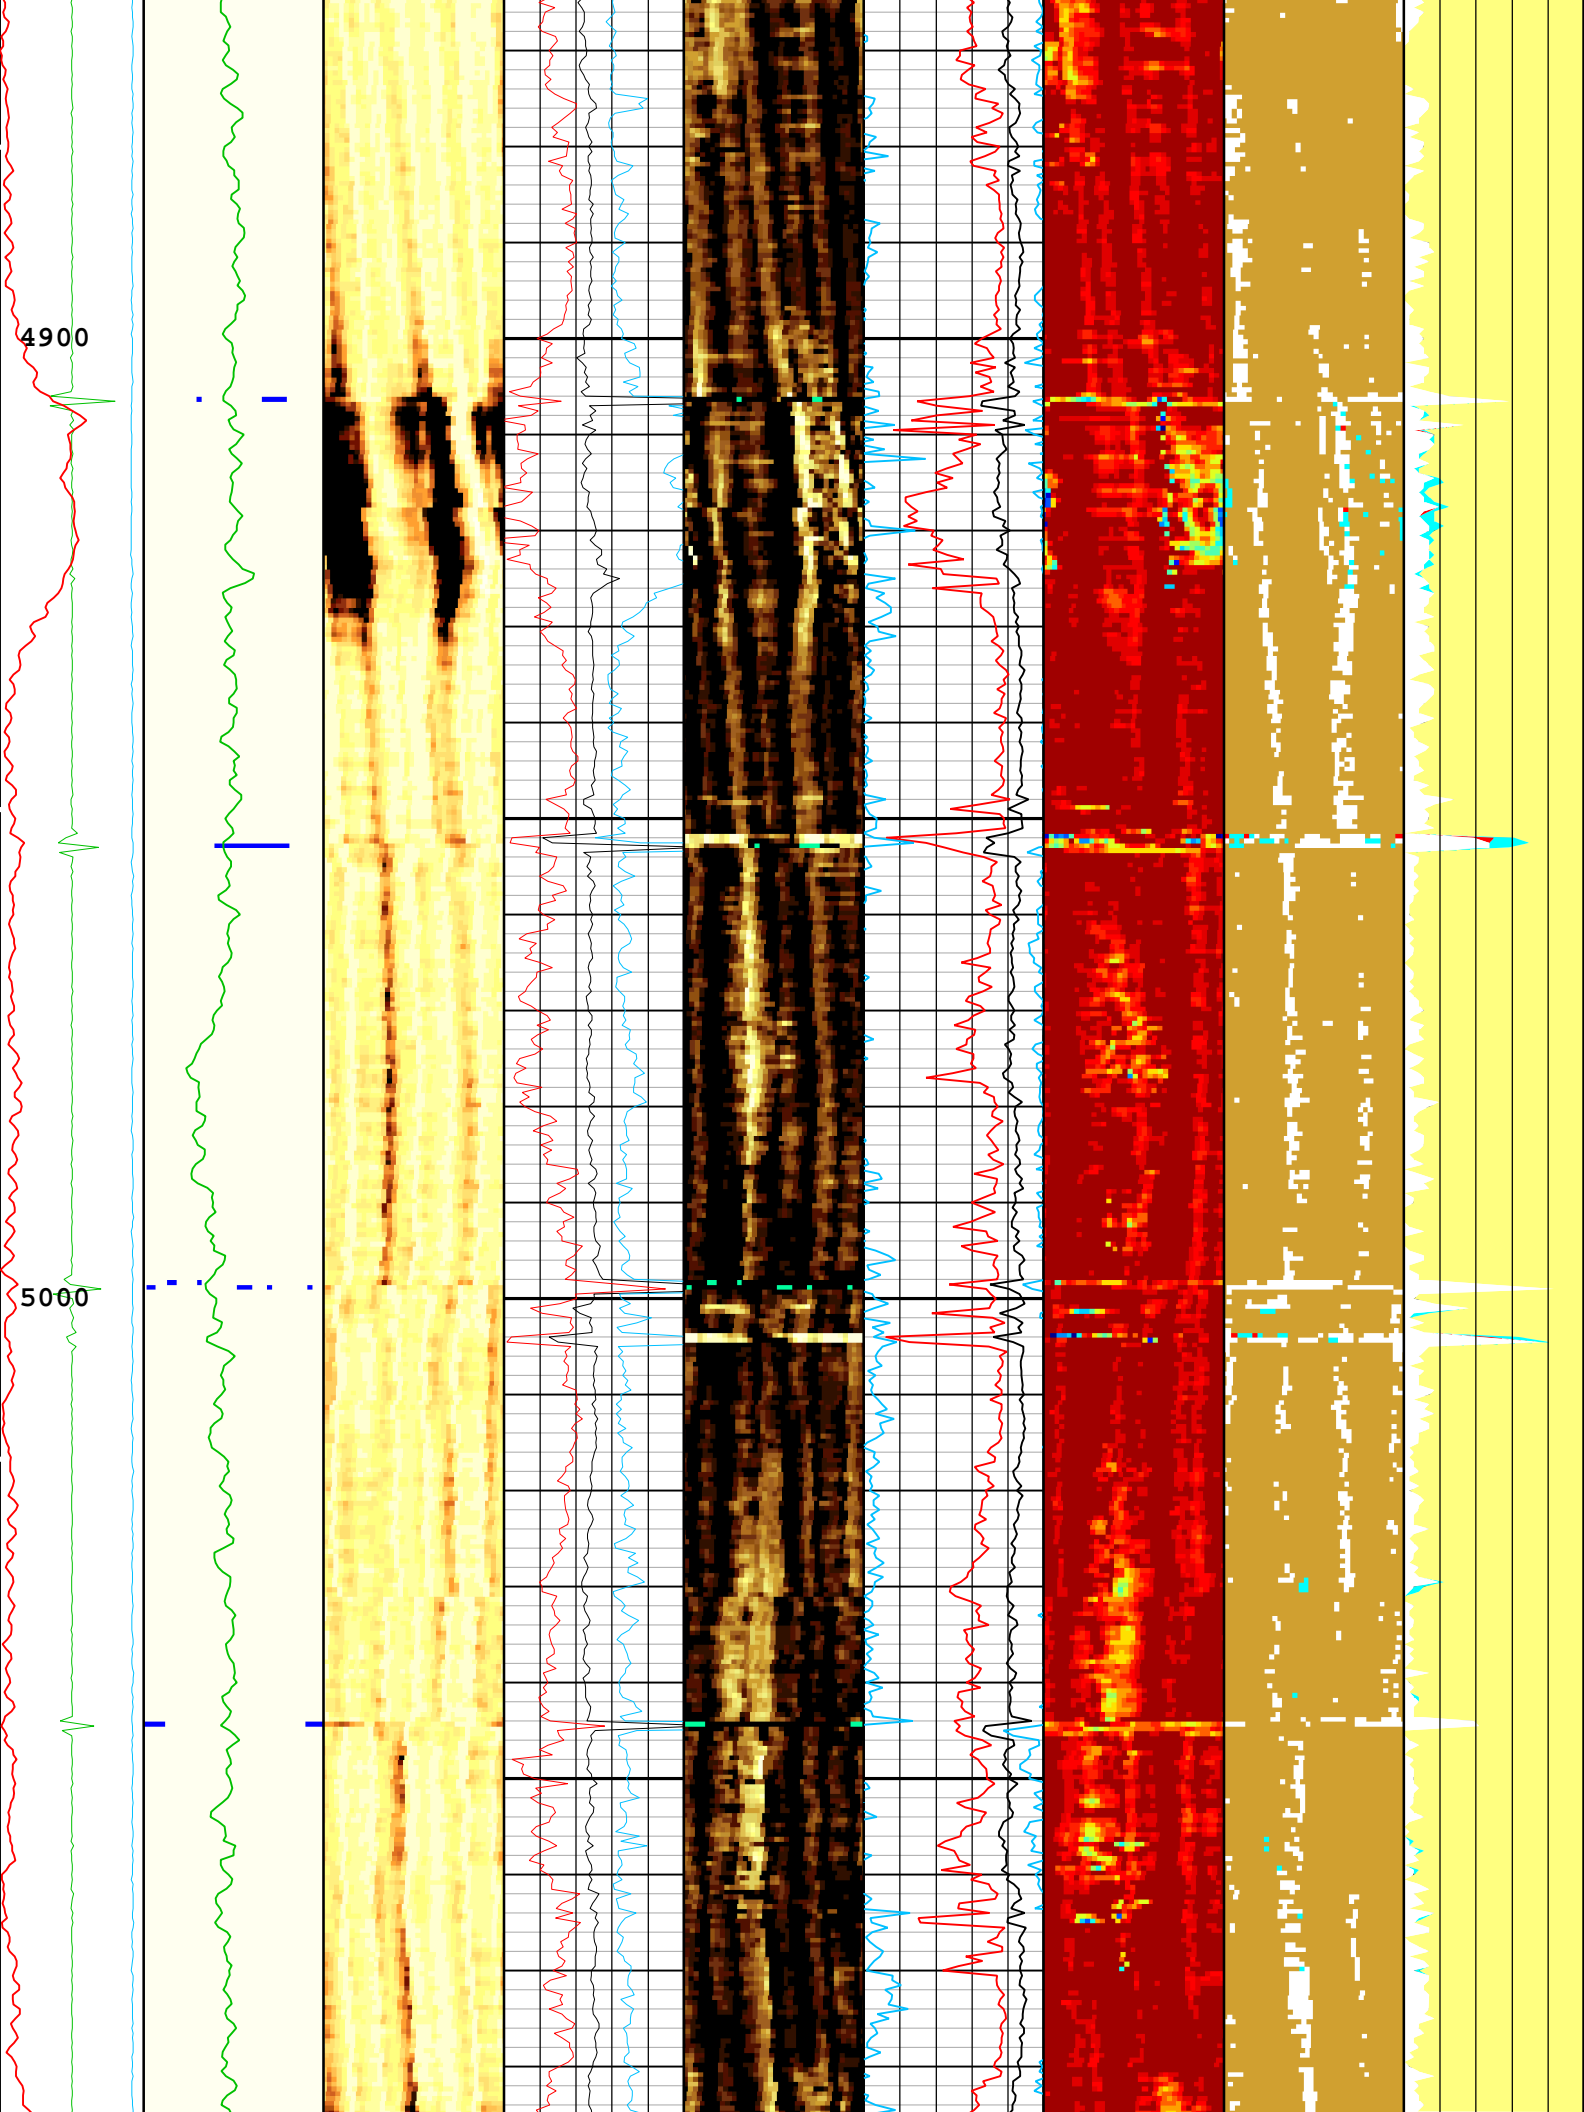


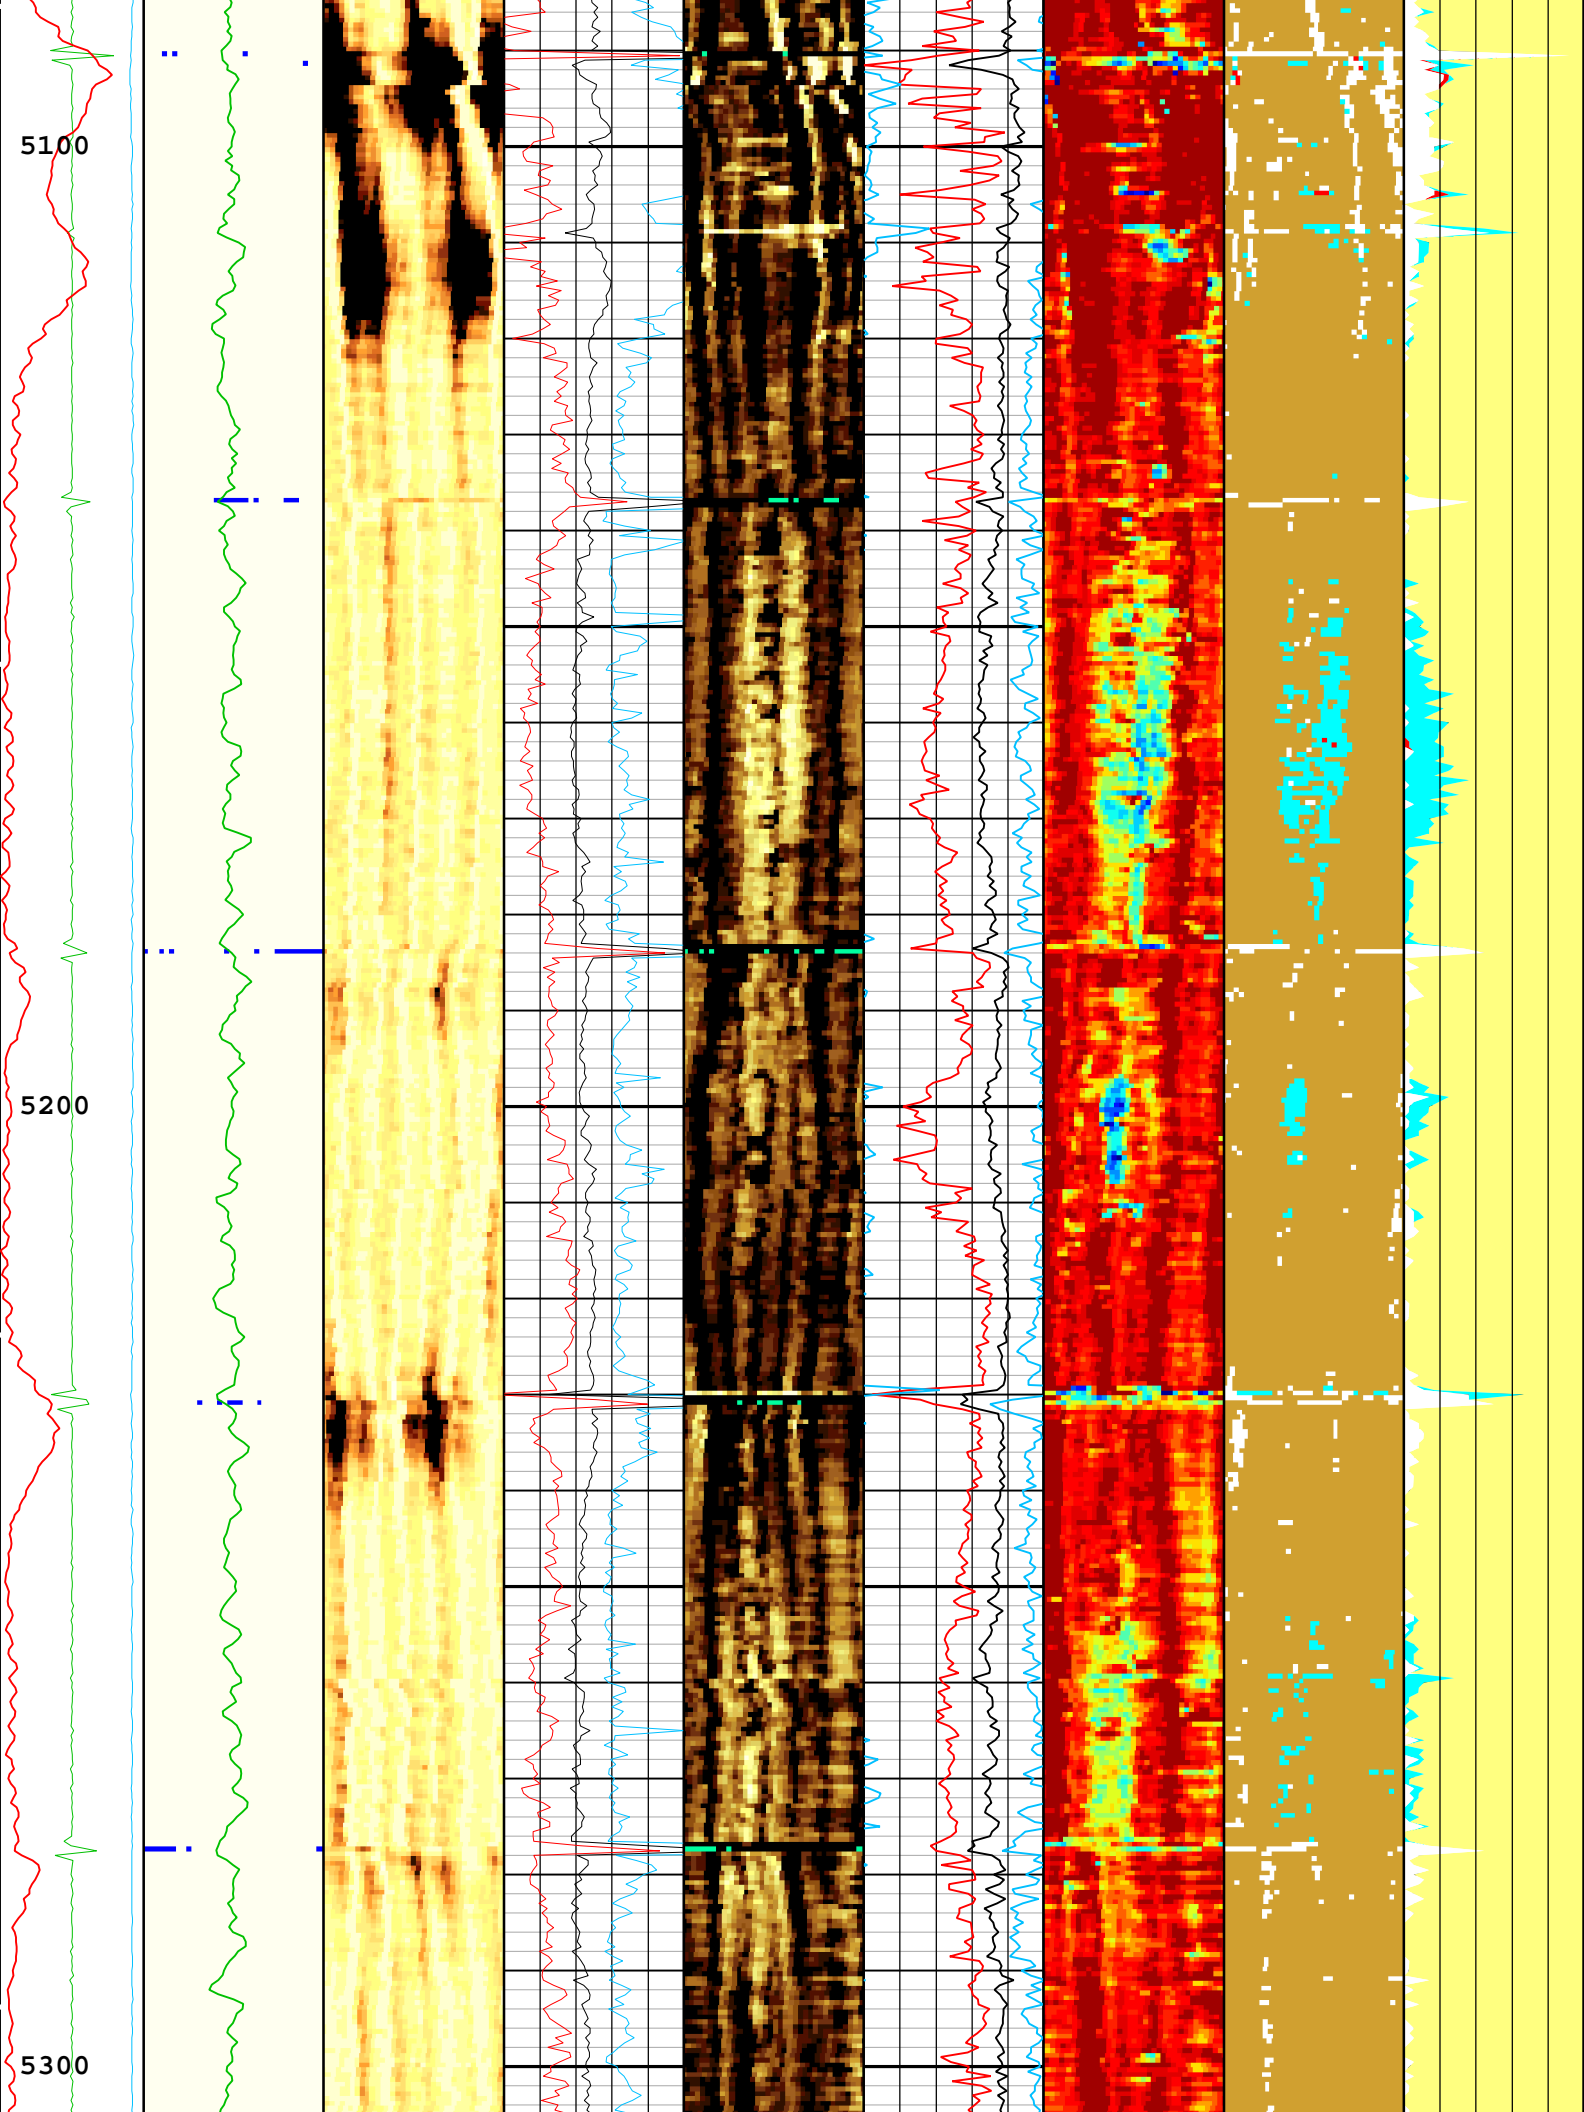


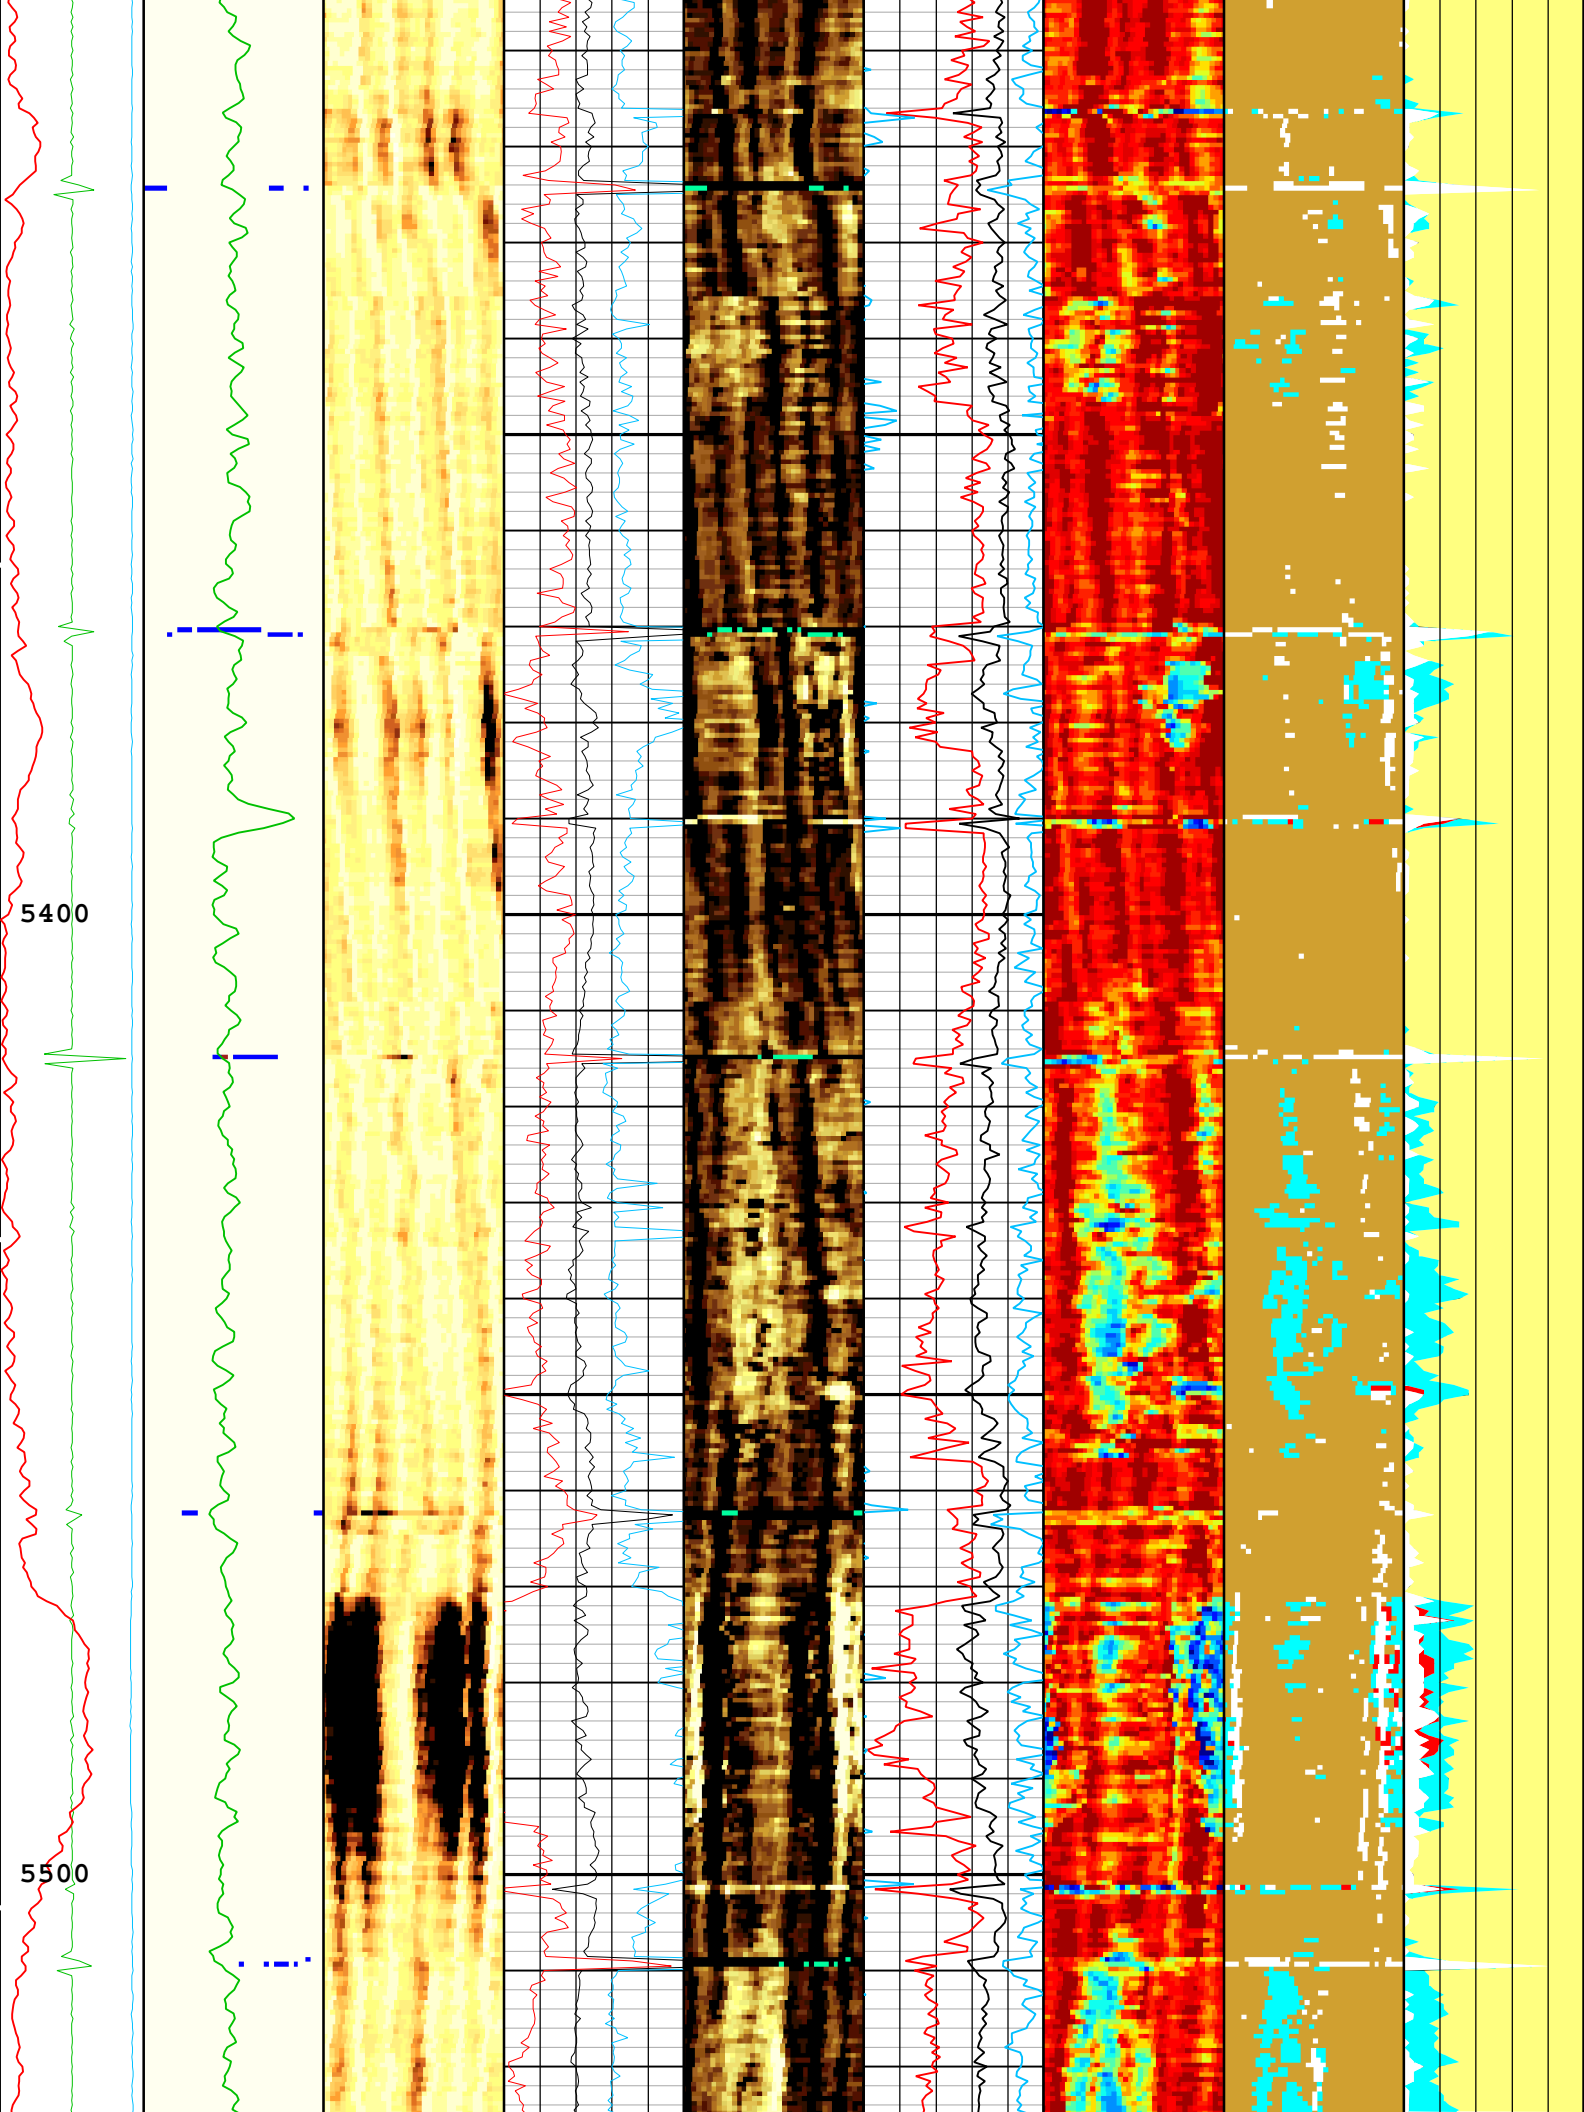


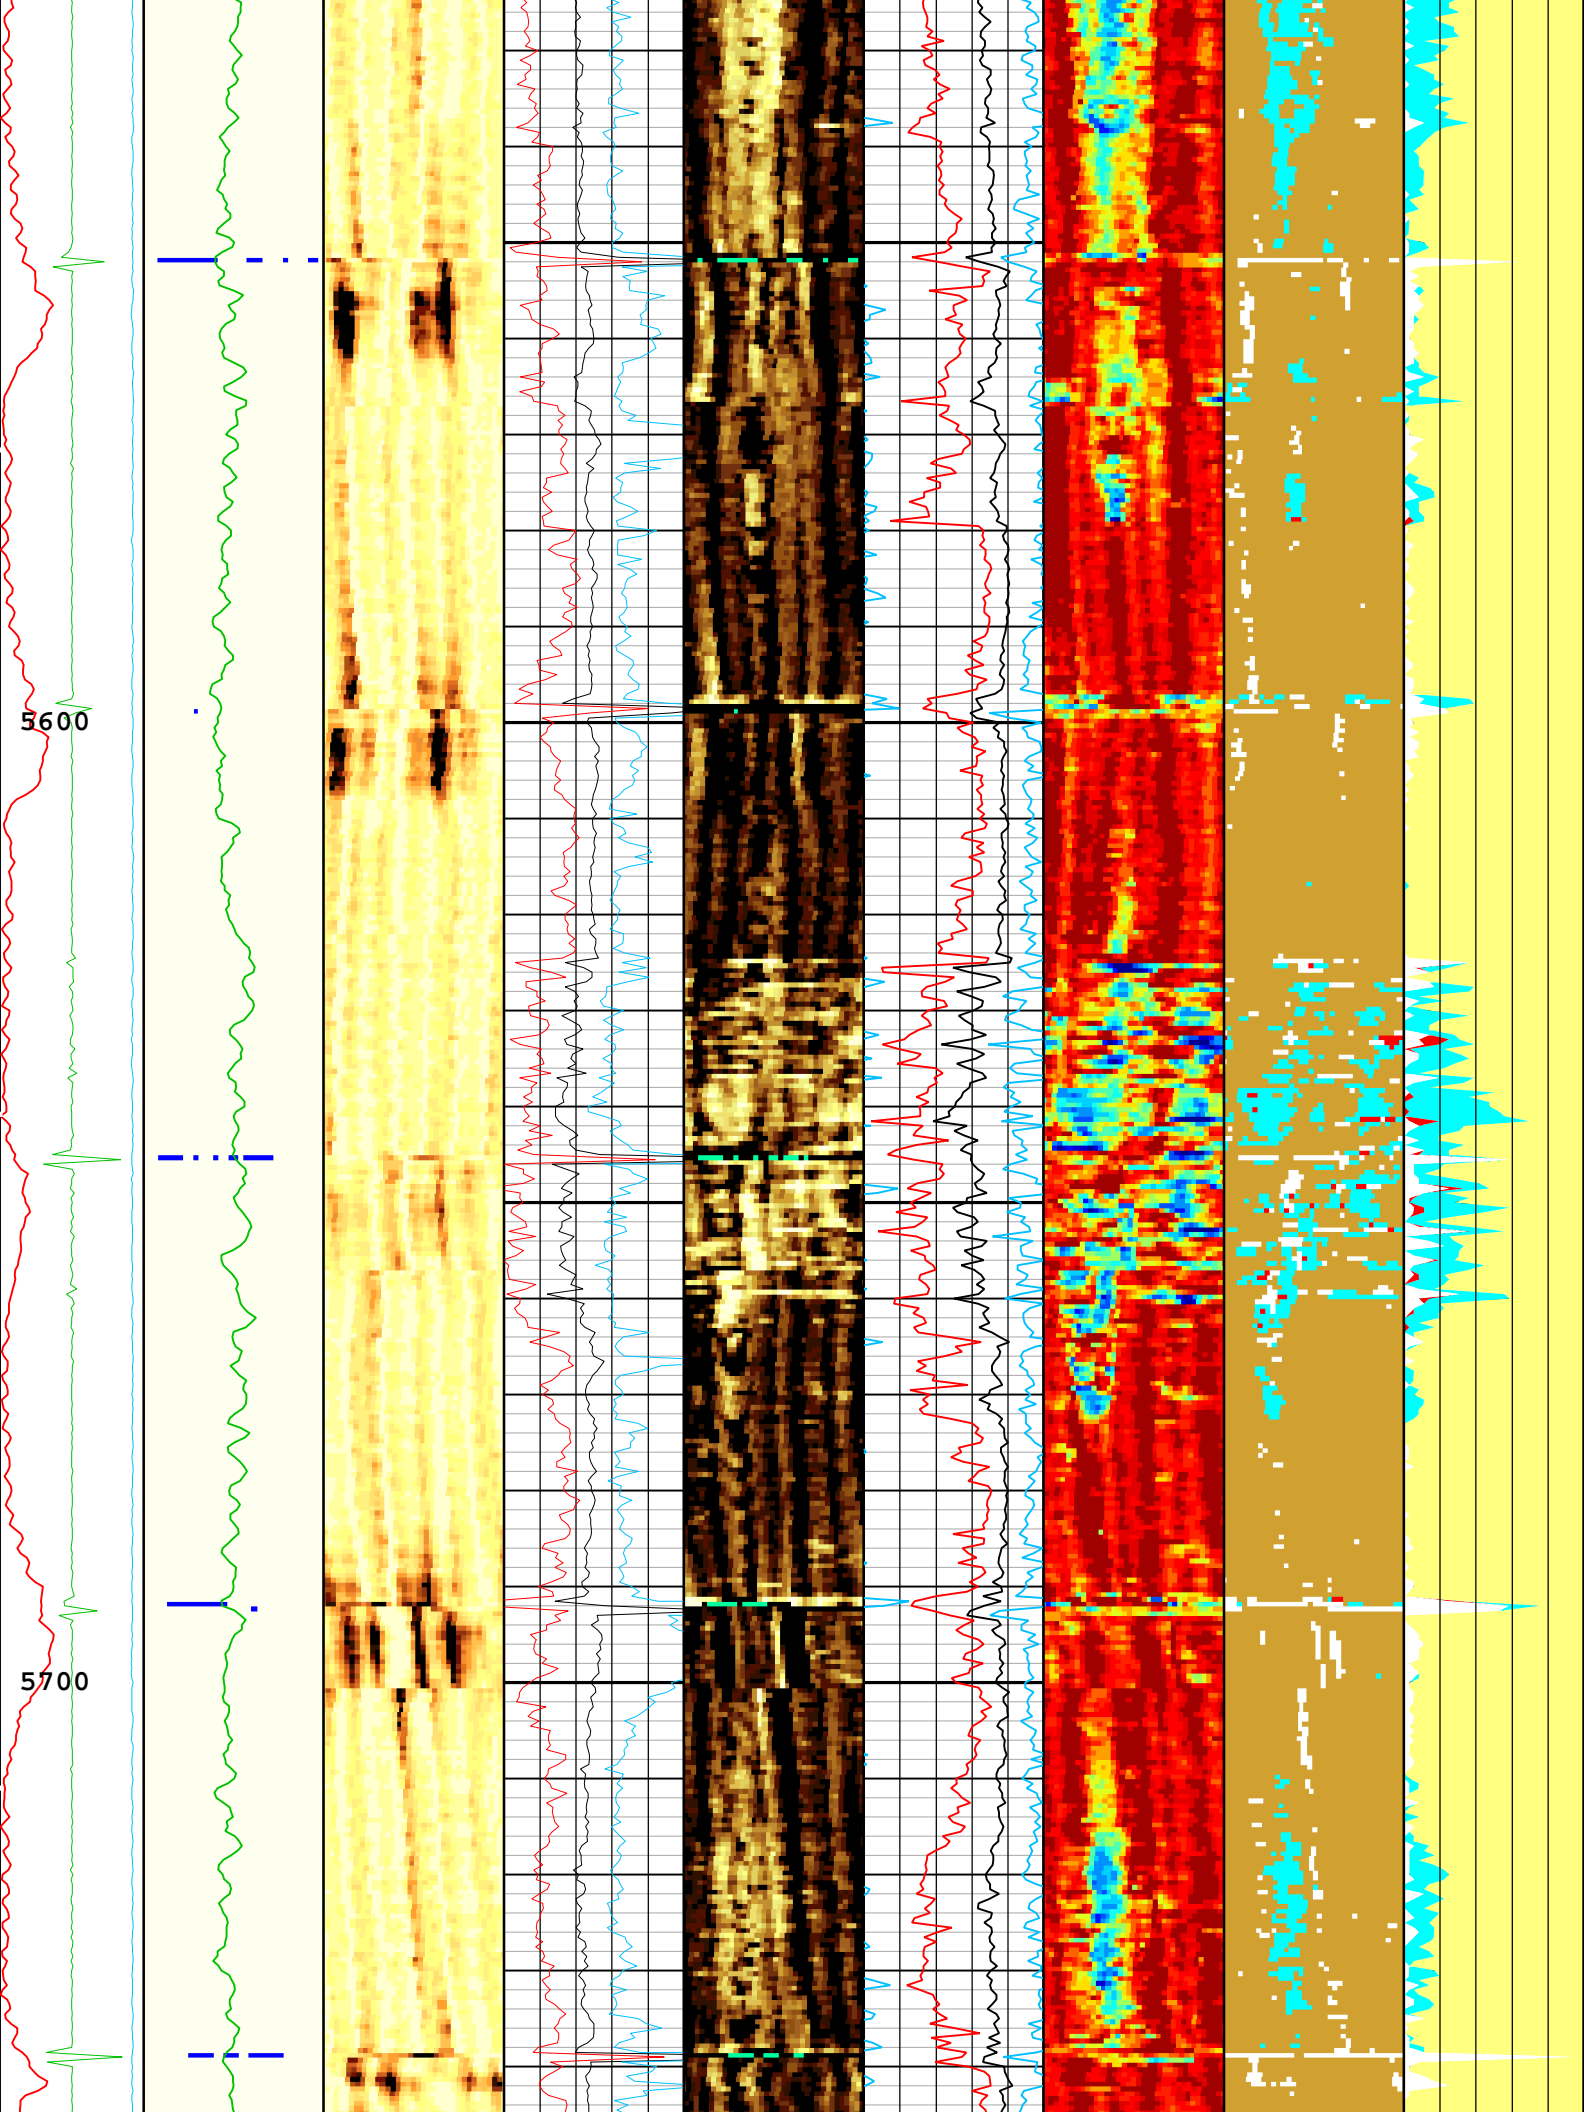


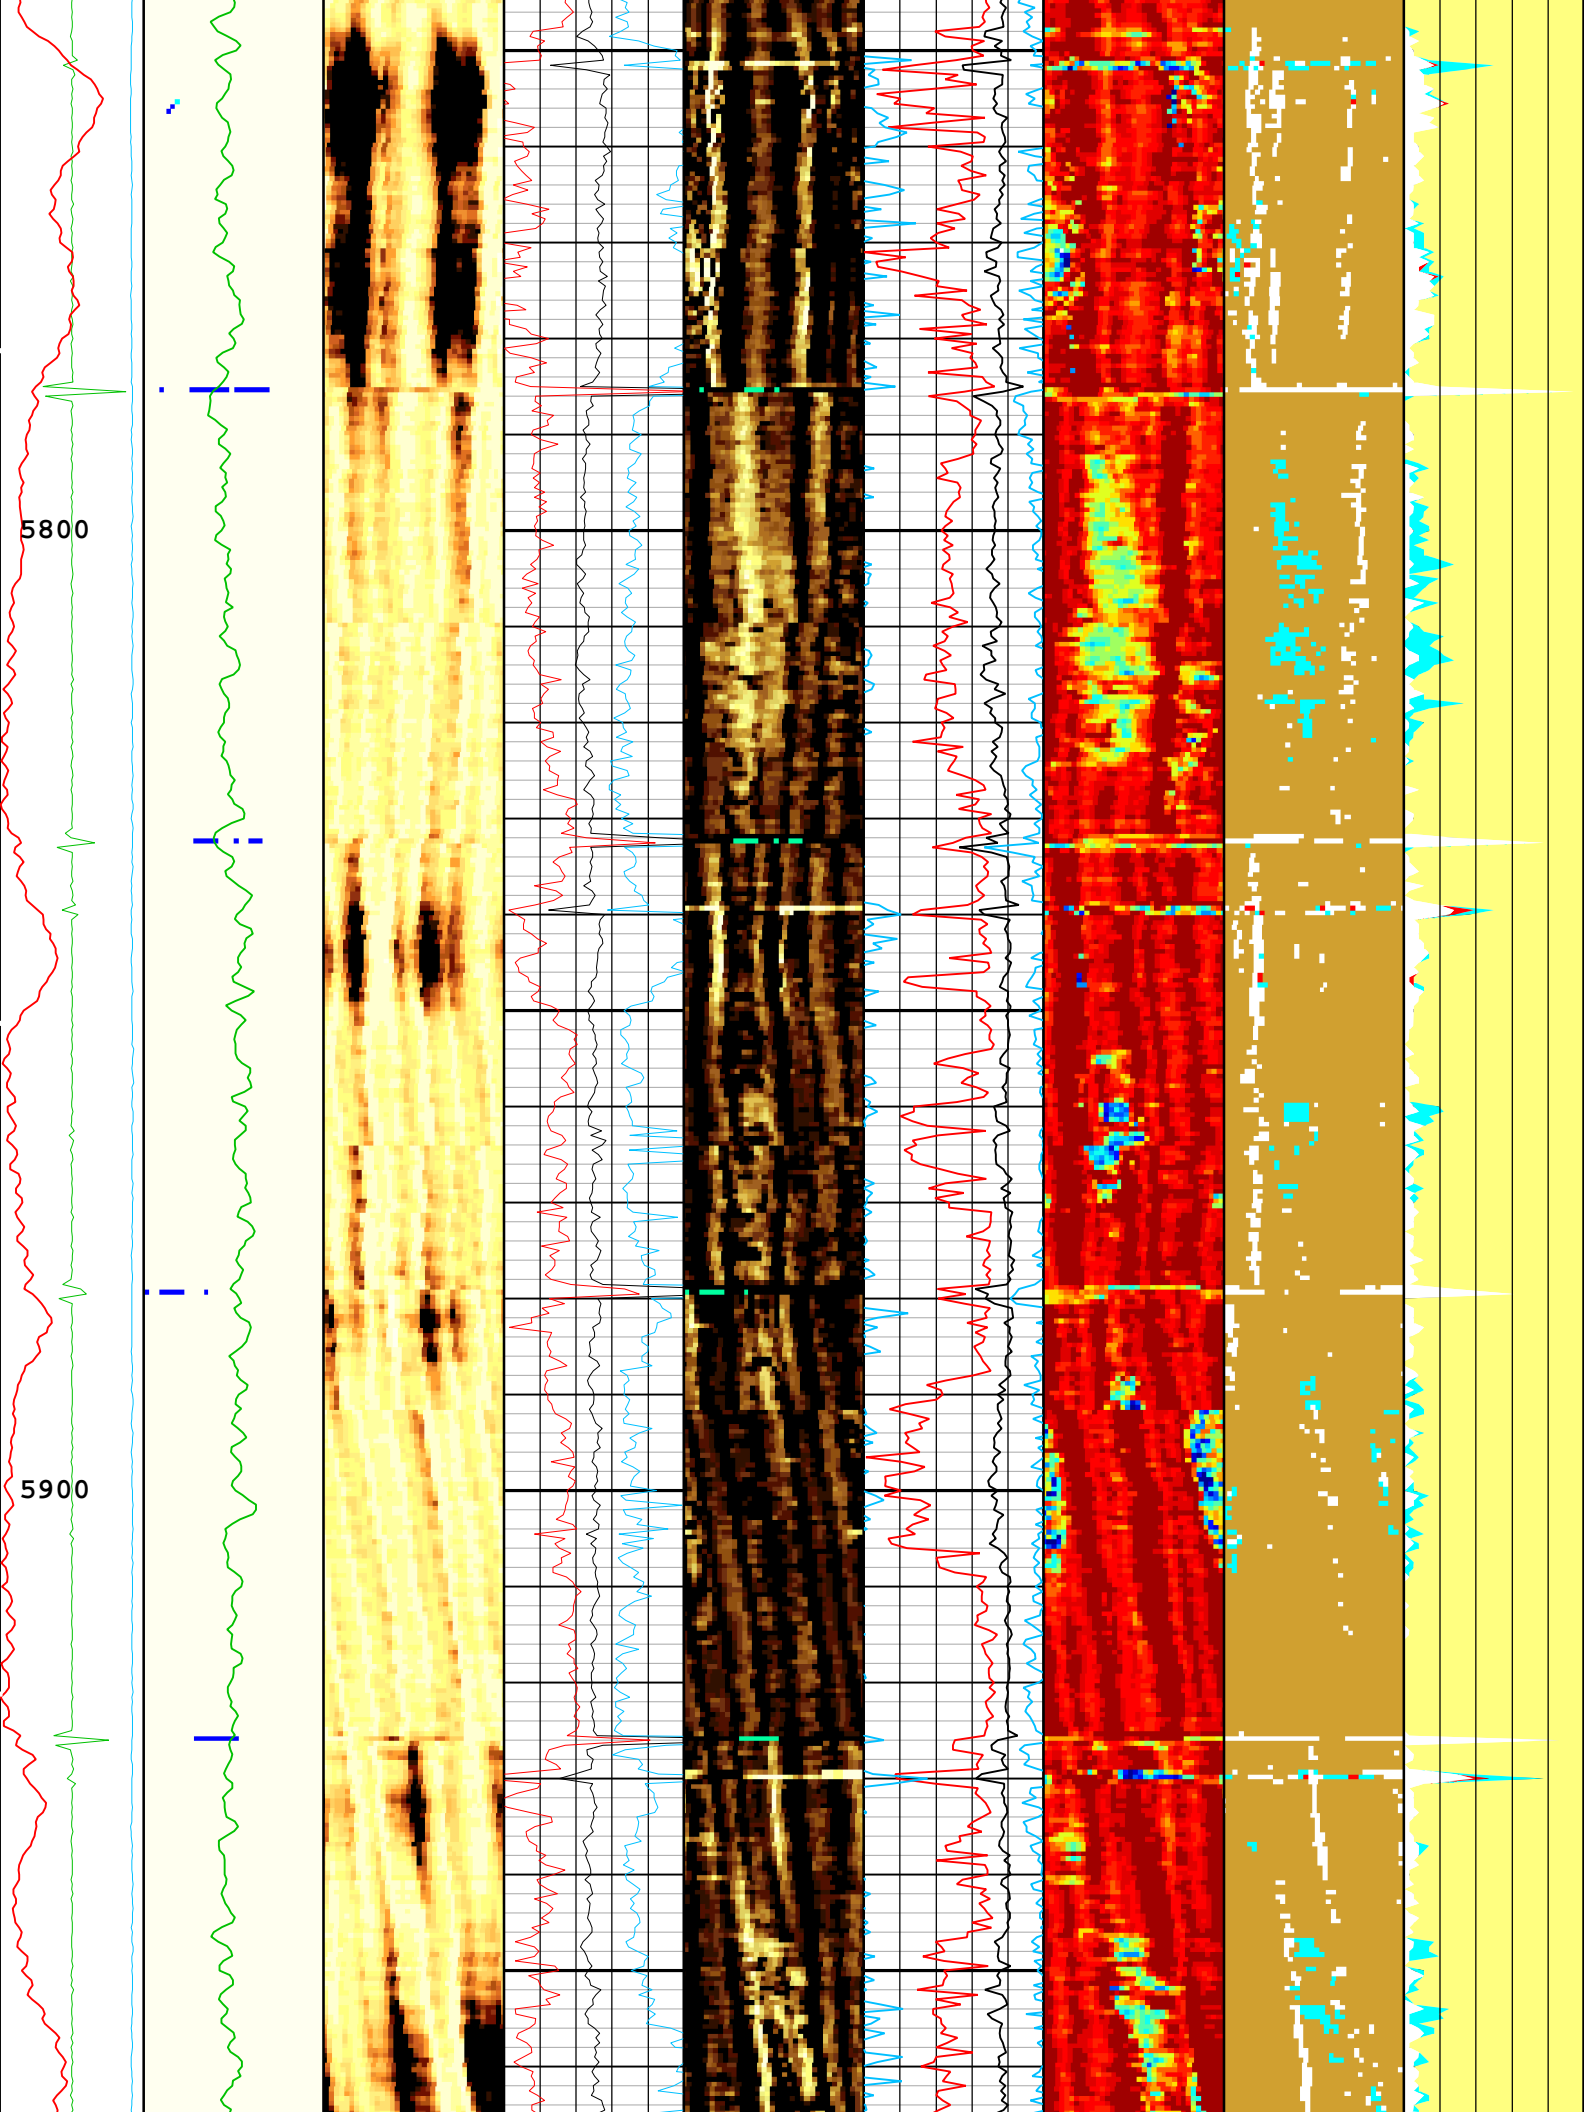


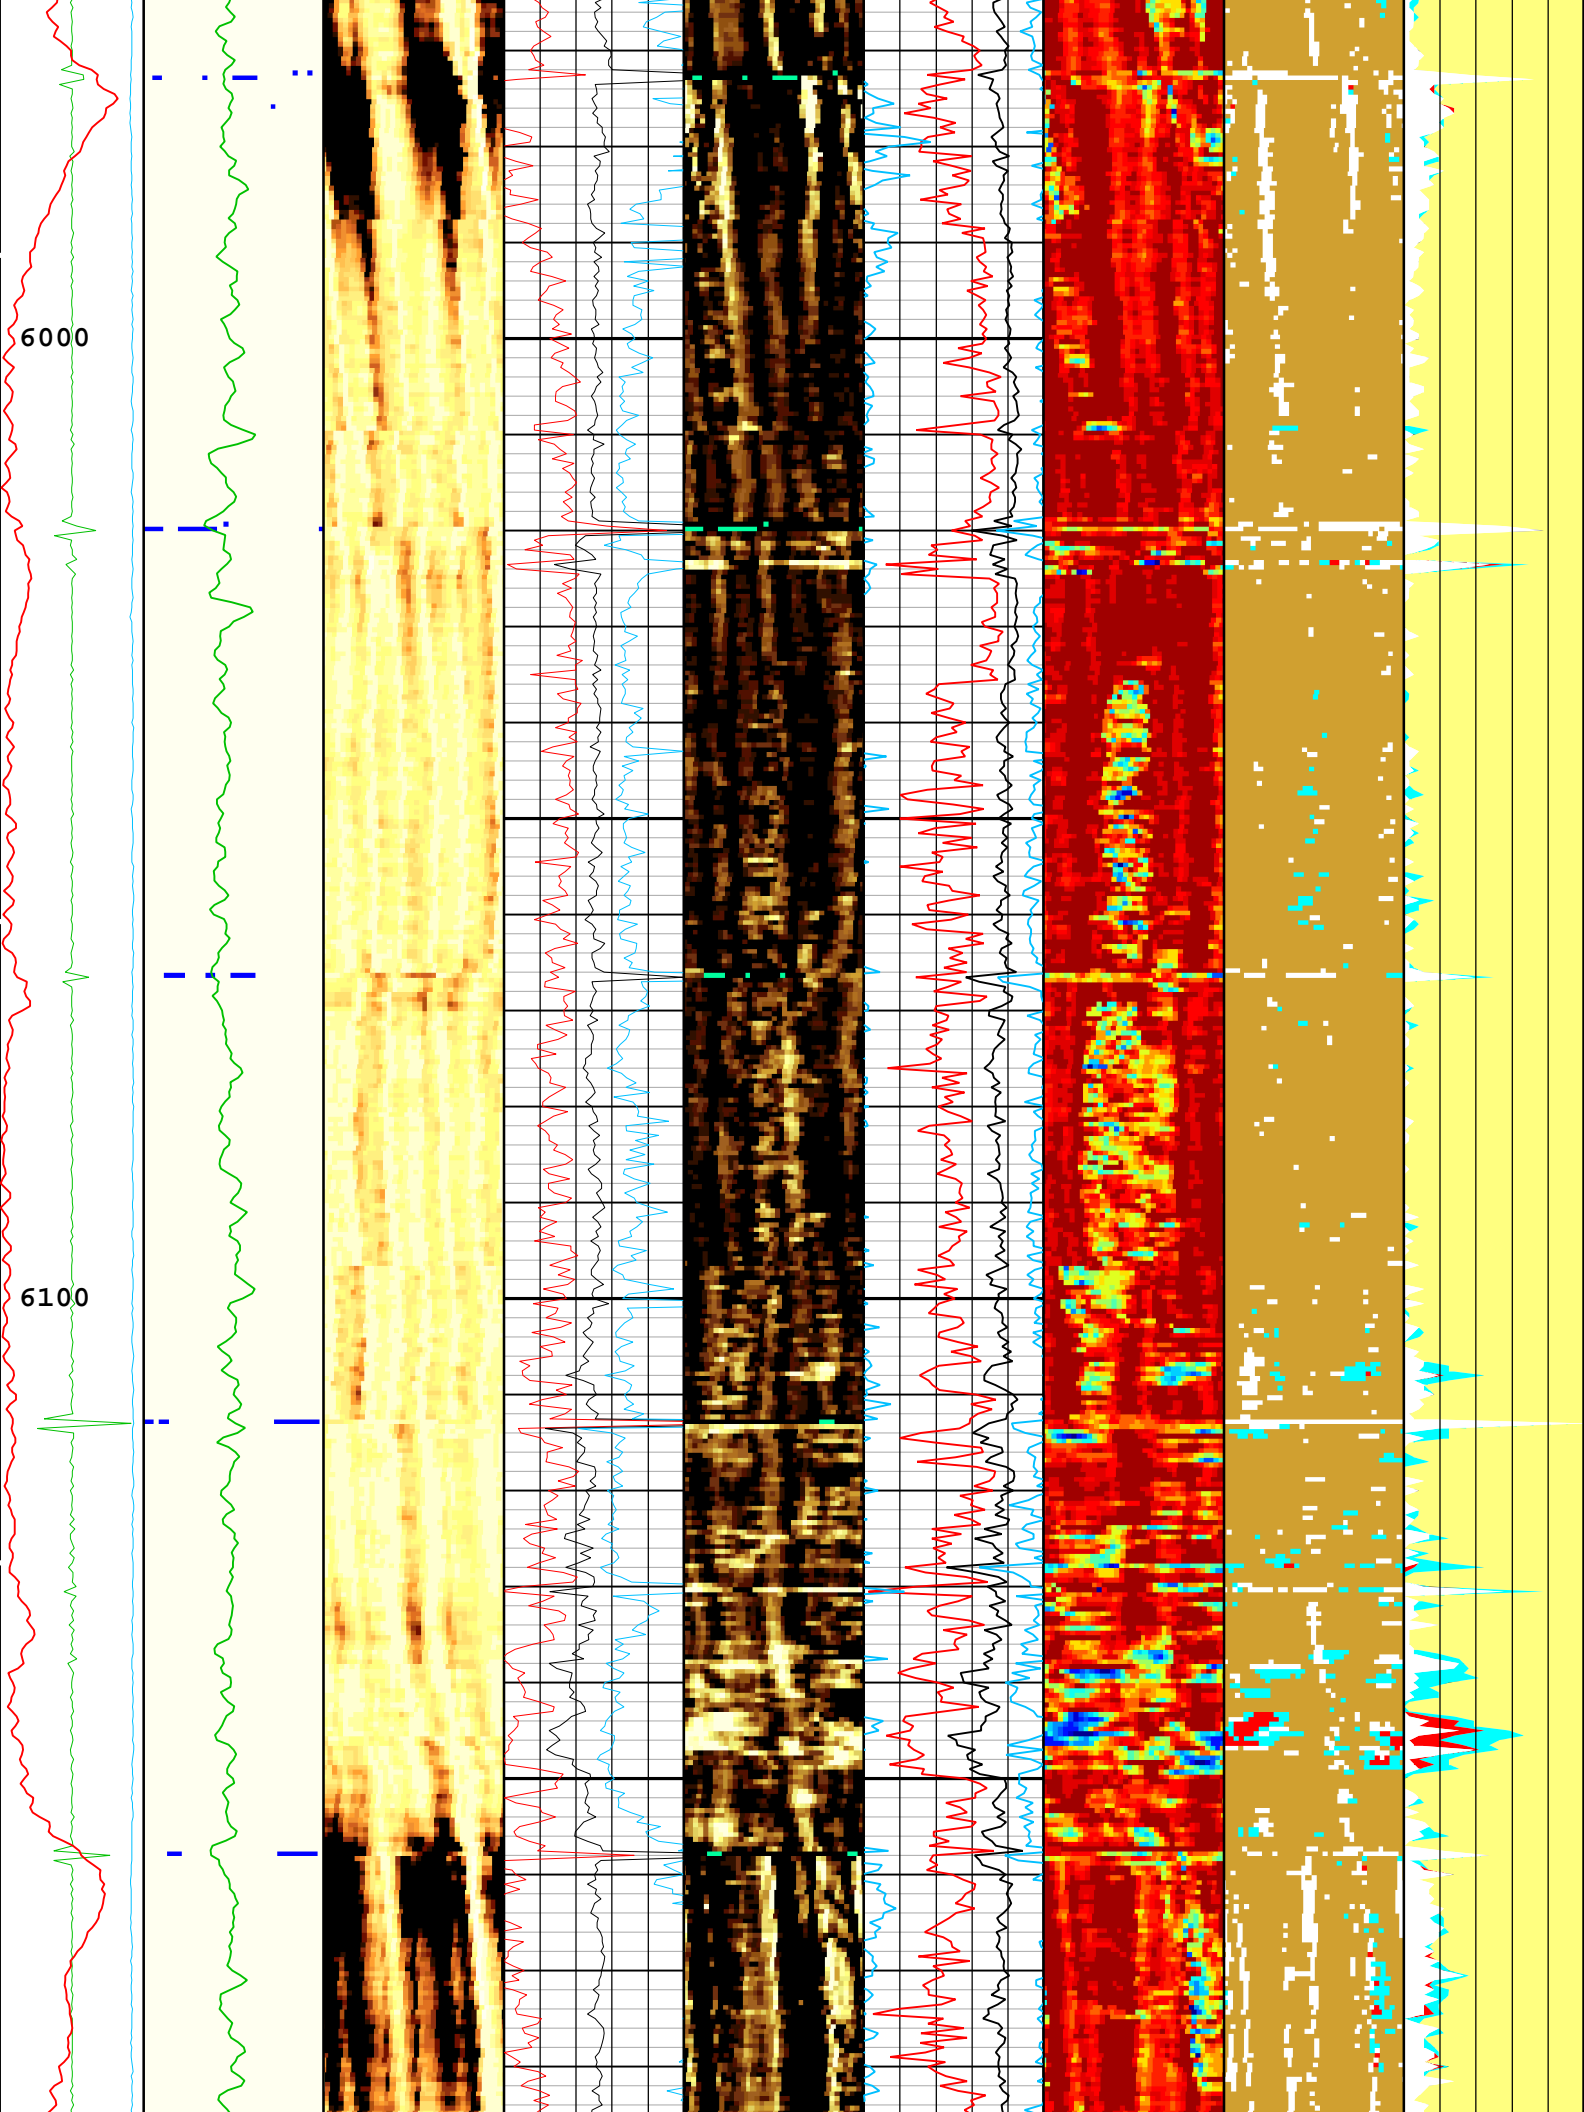

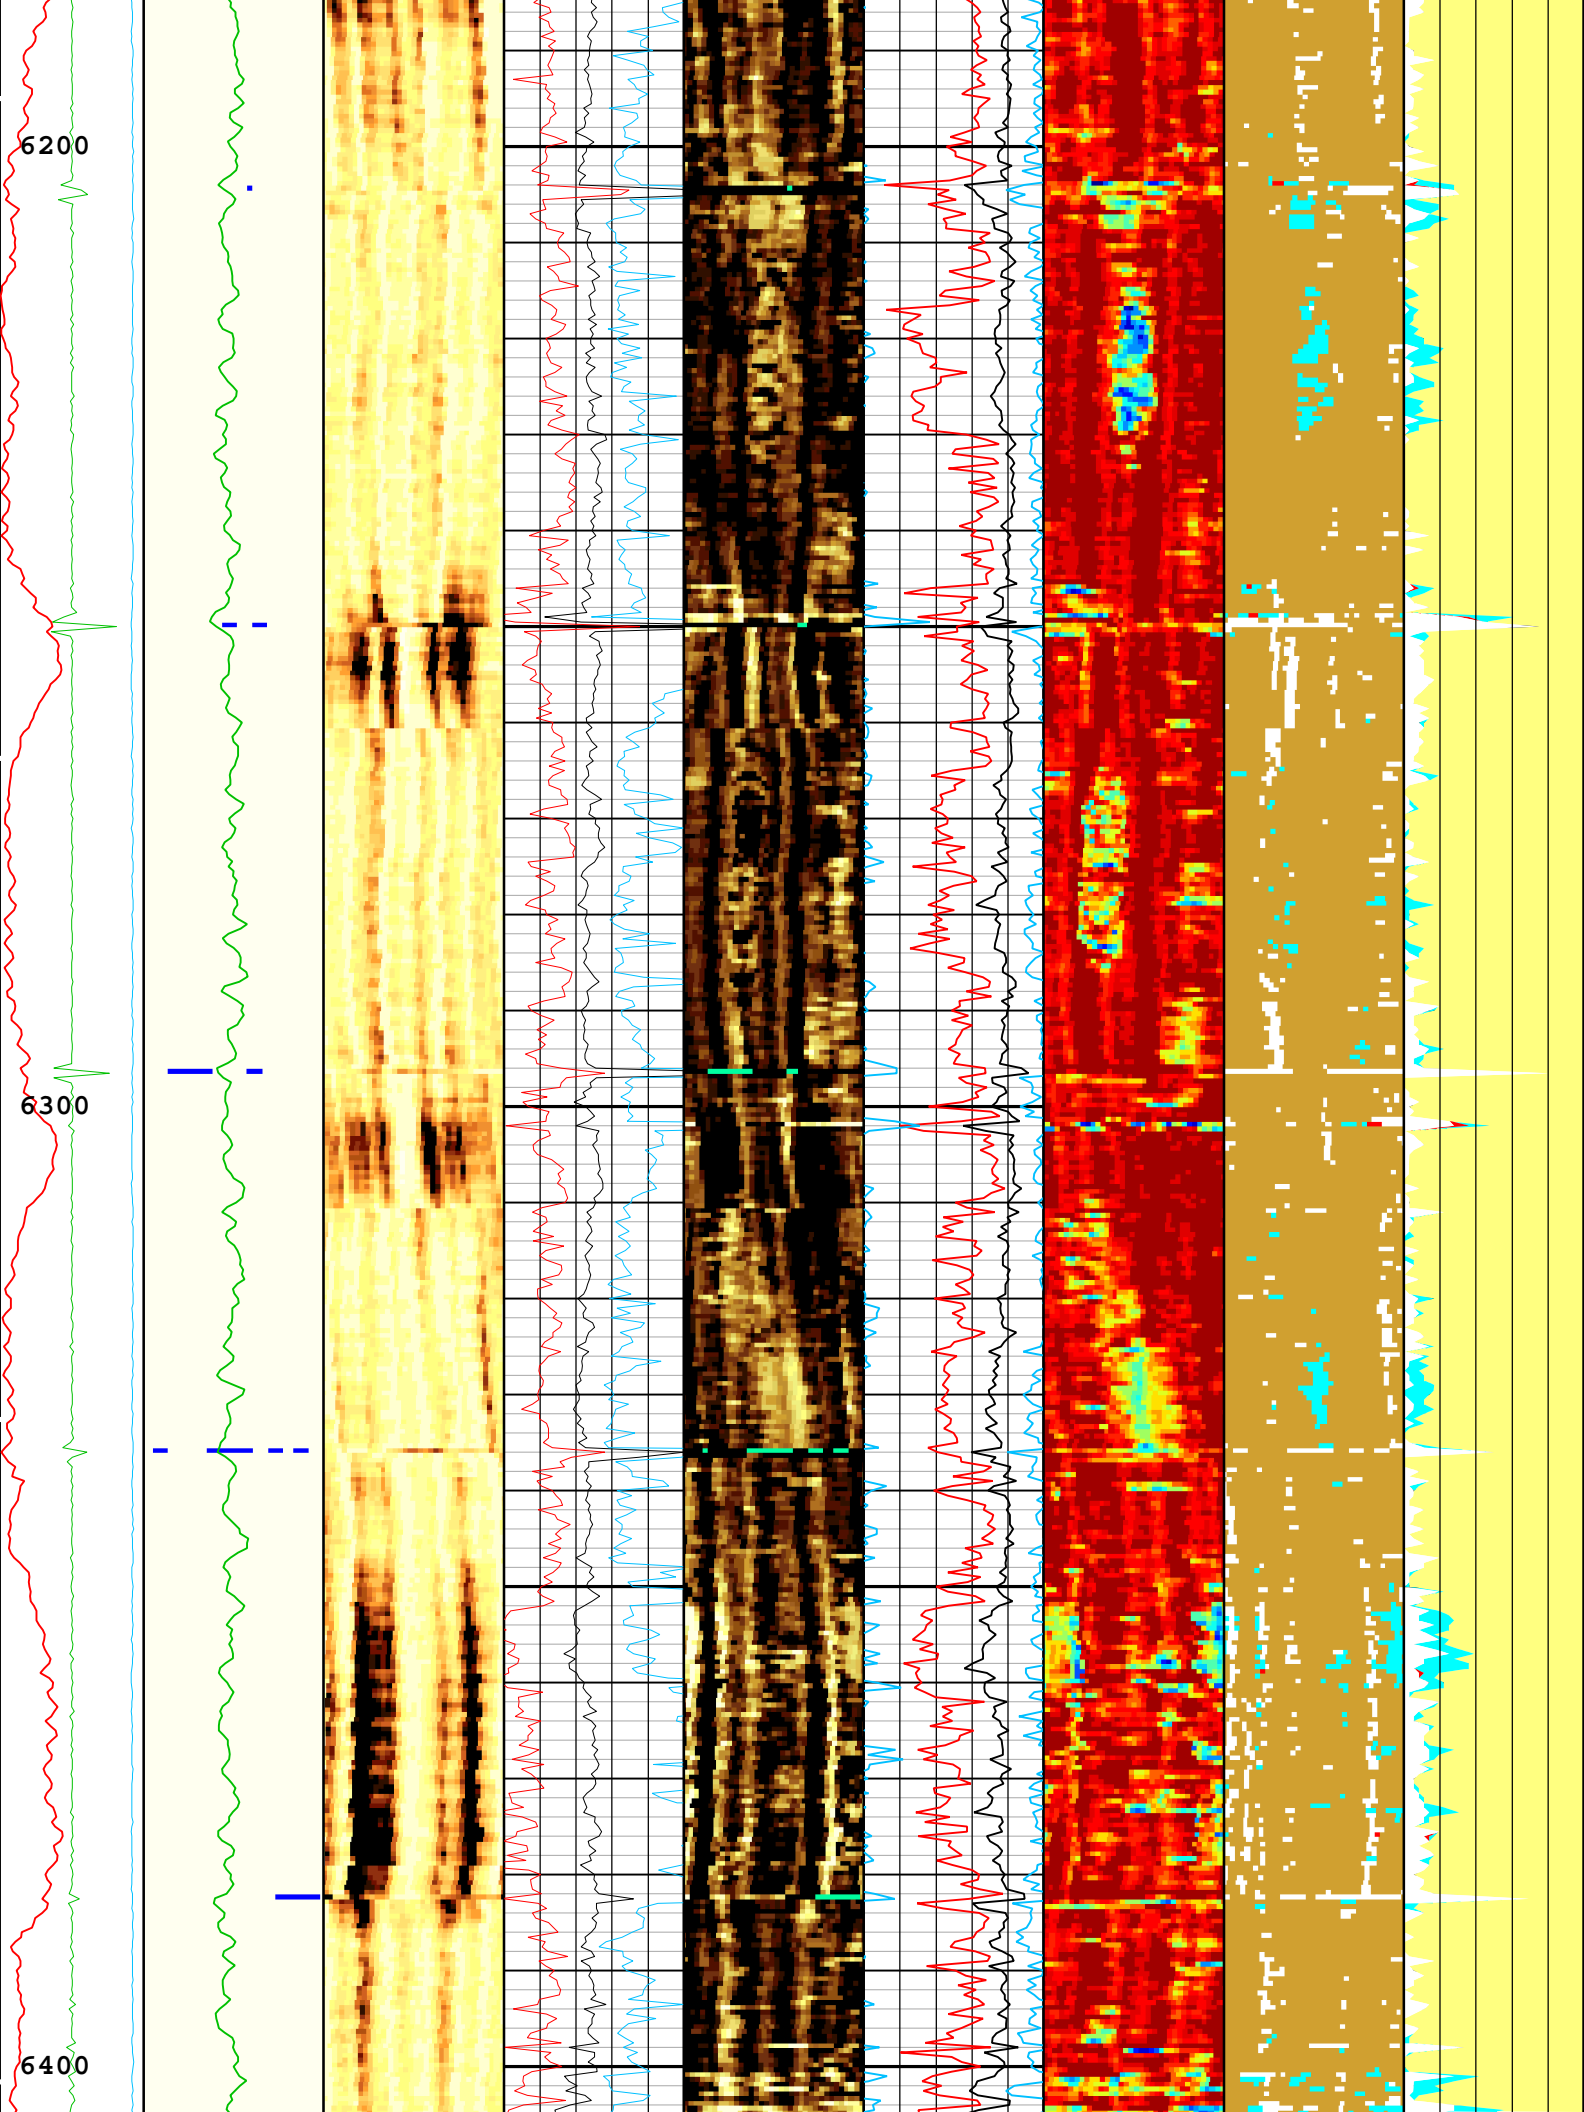

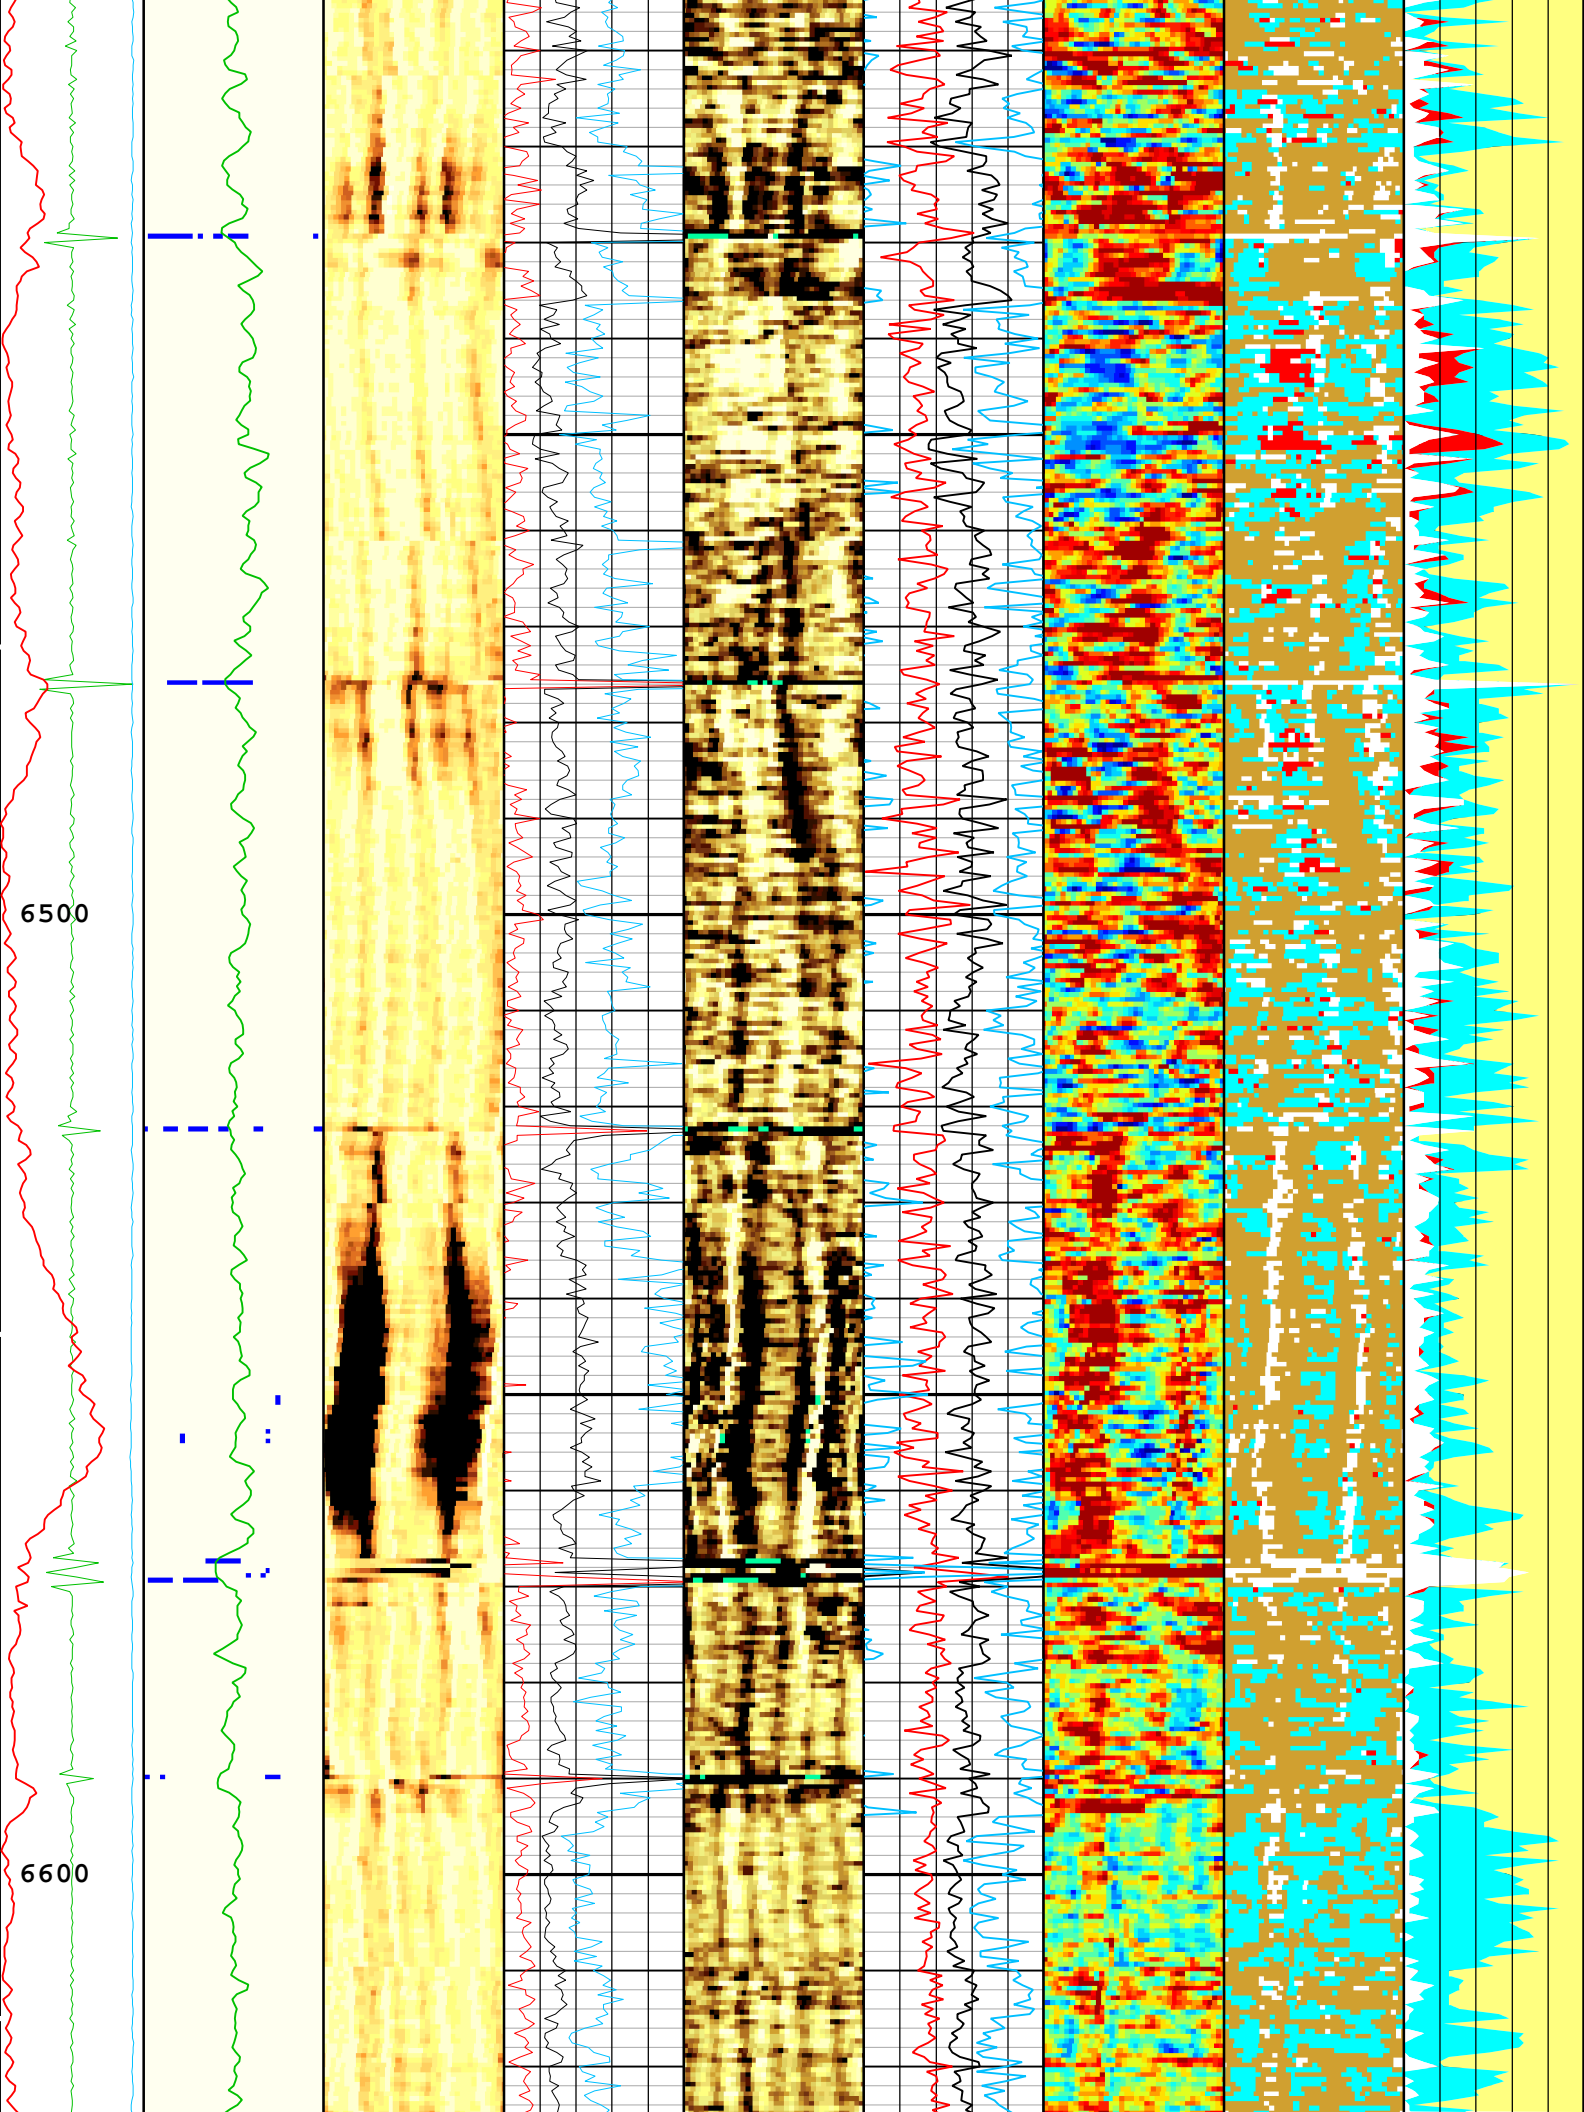

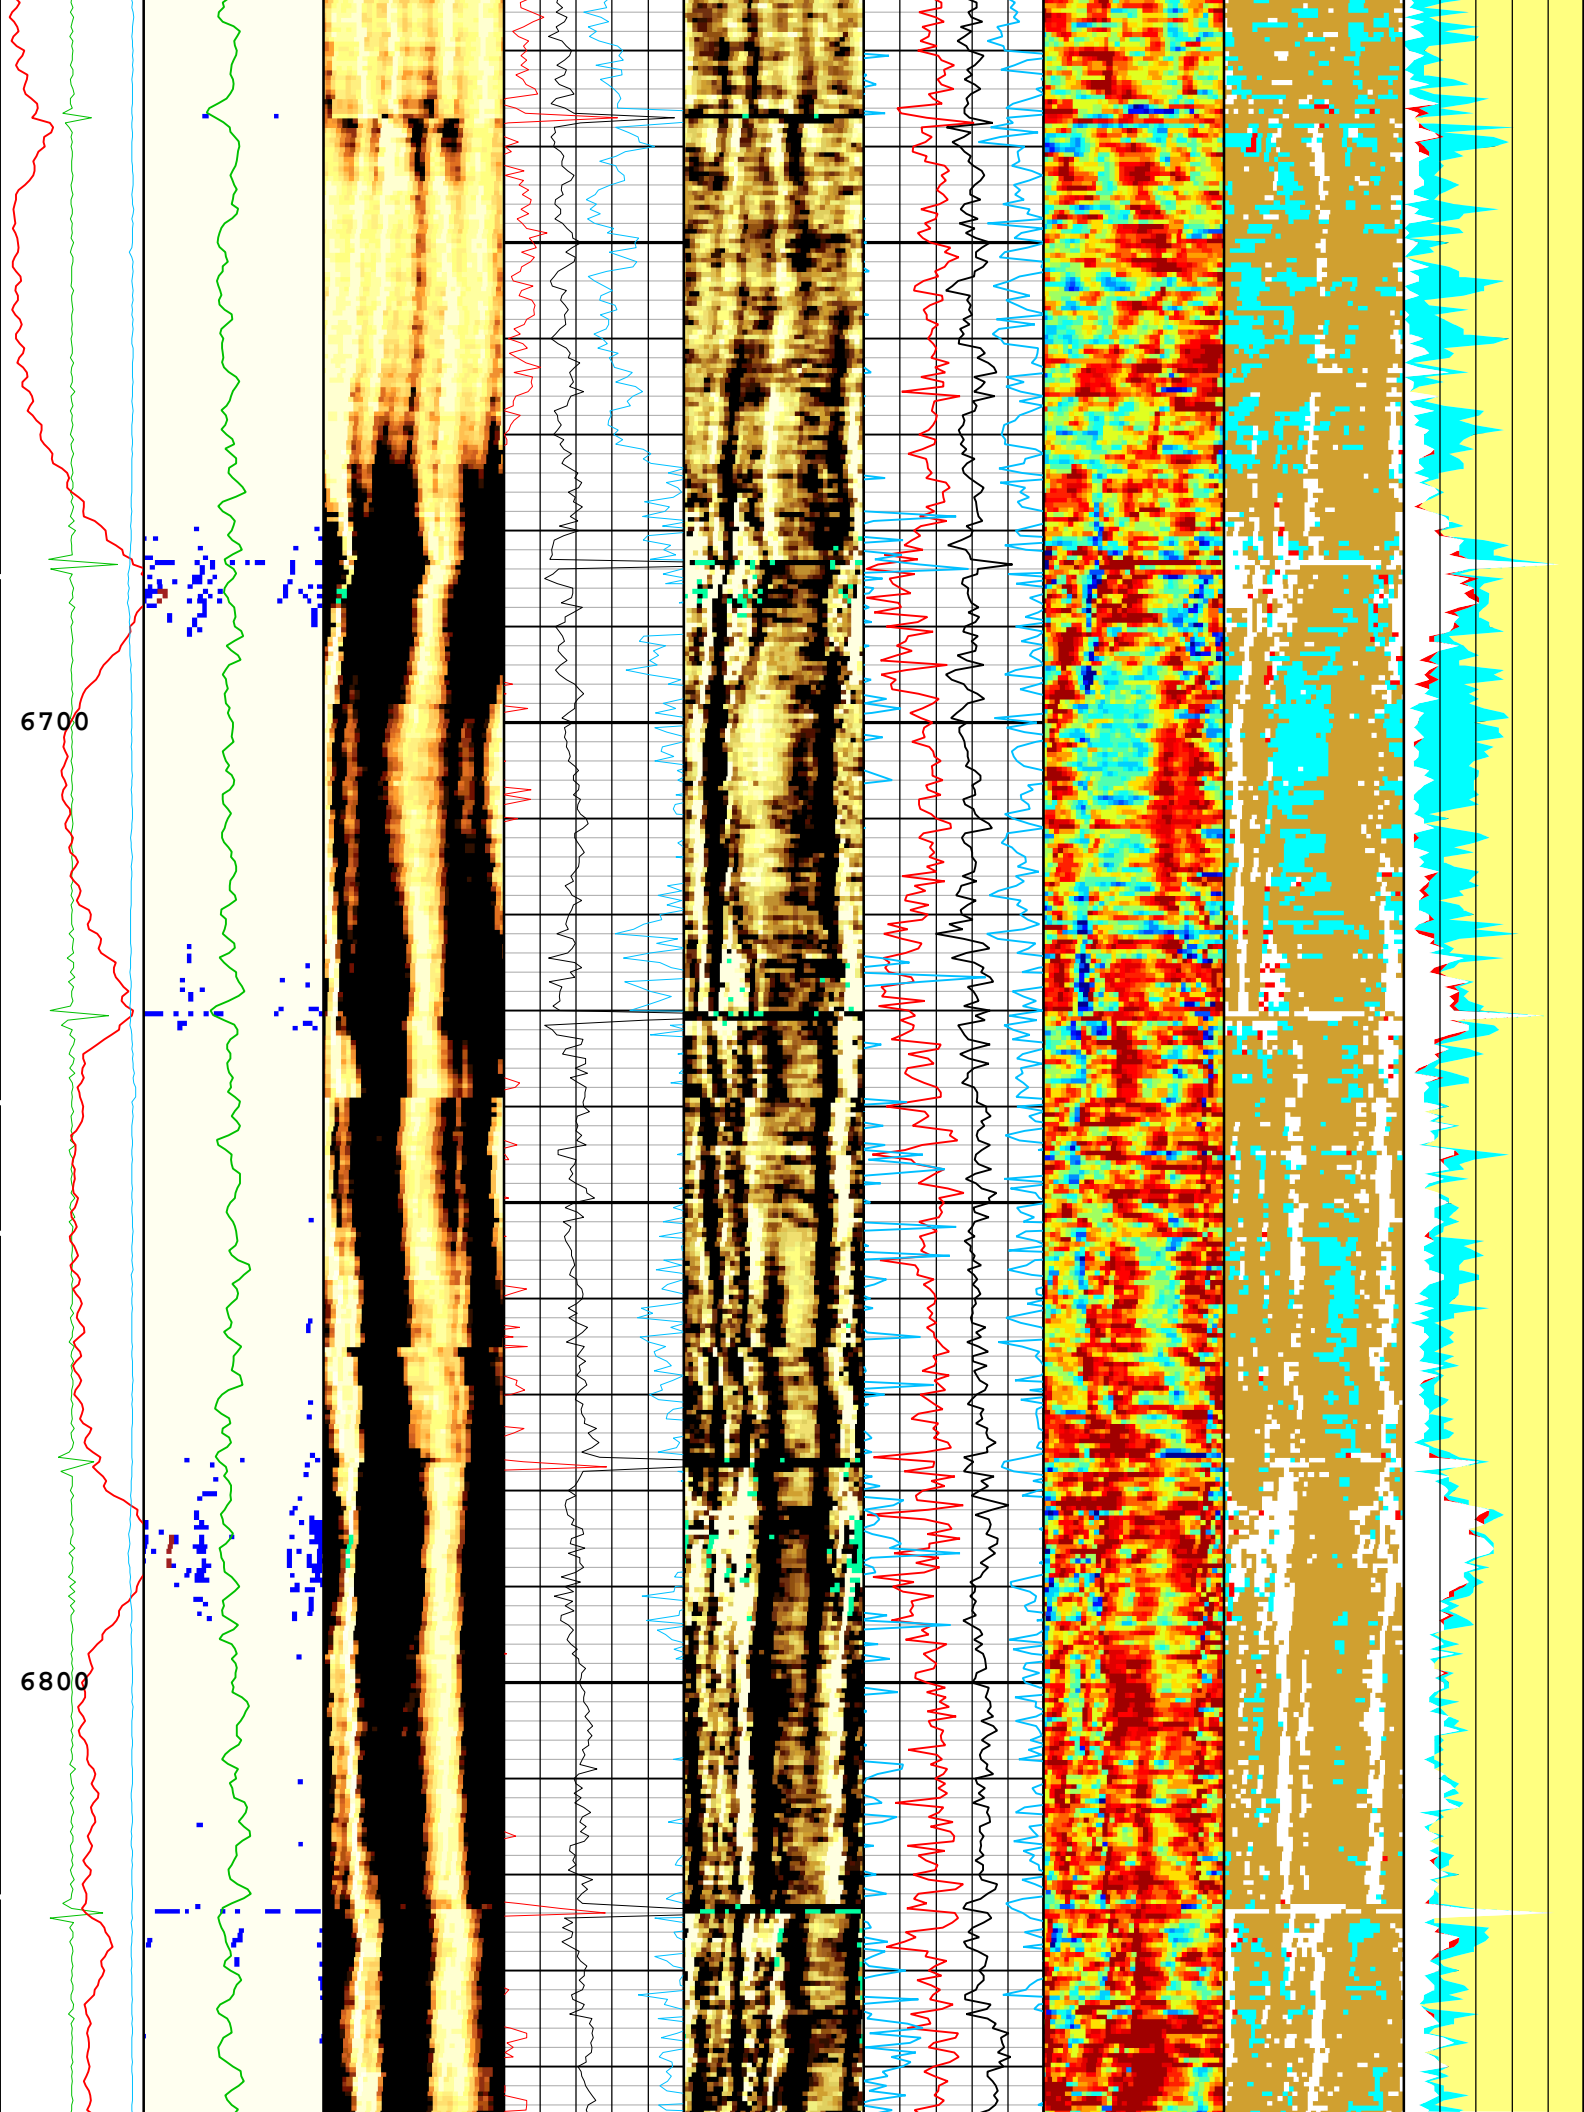

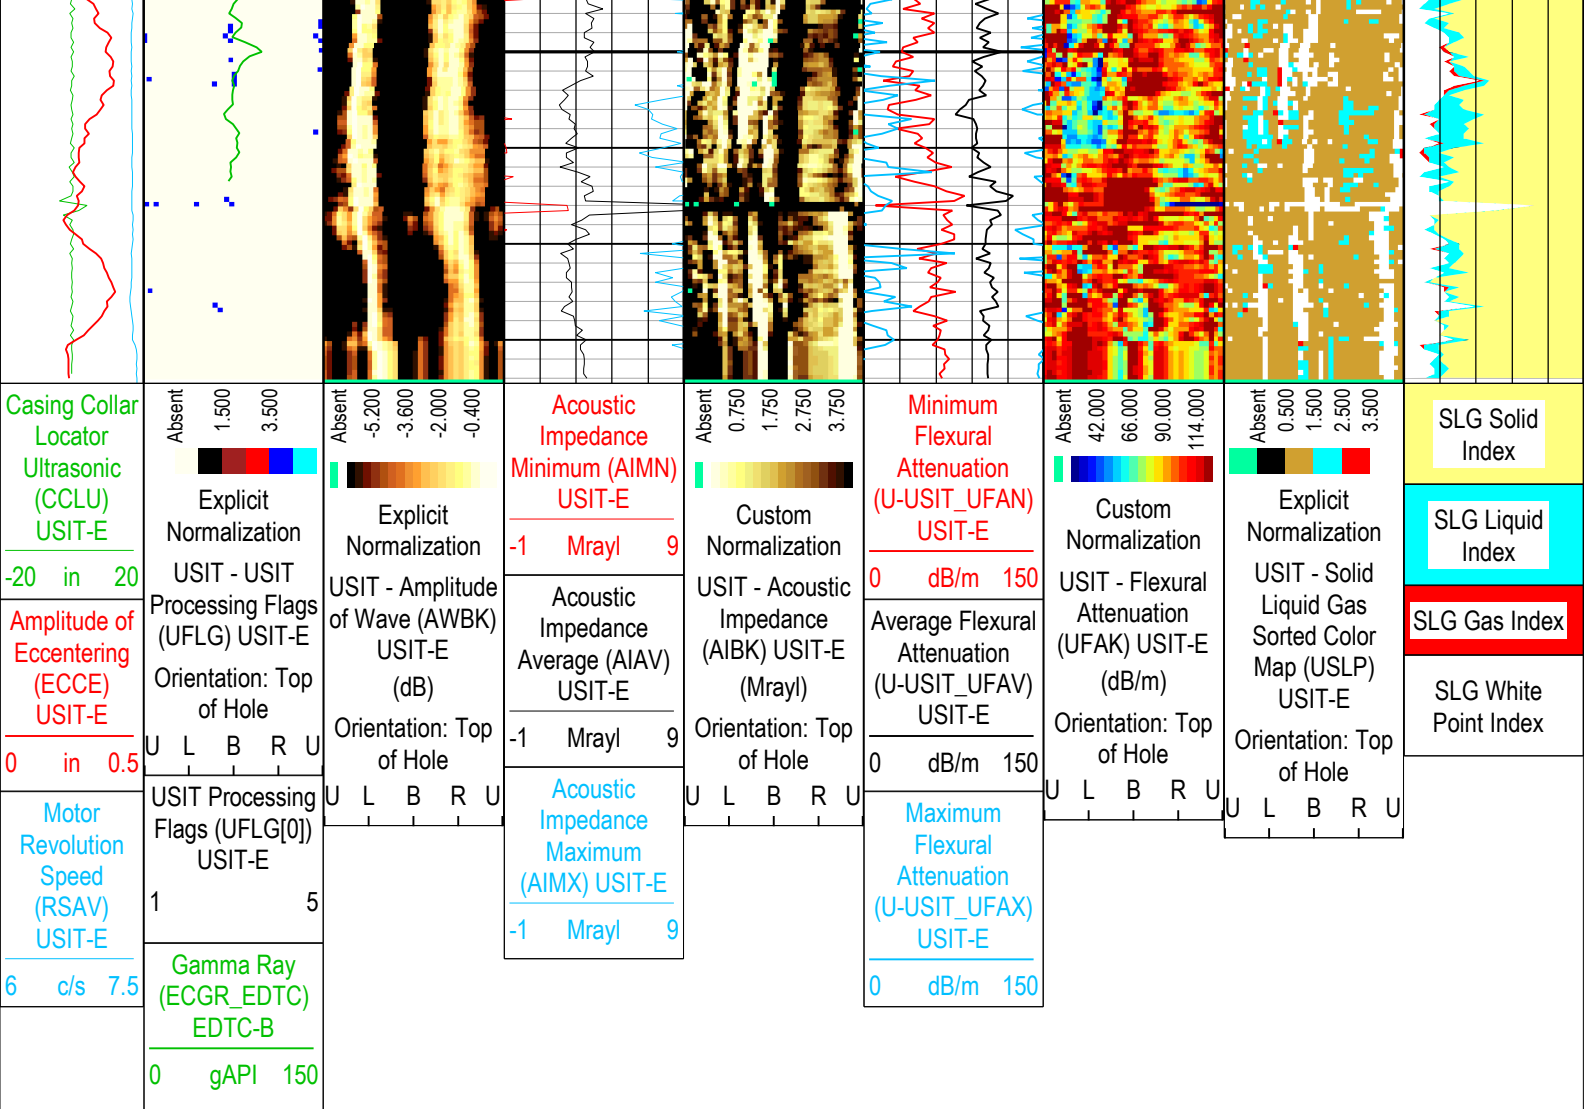

TIME_1900 - Time Marked every 60.00 (s)

USIT Processing Flags (UFLG[0]) USIT-E

- | | |
|---|-----------------------------|
| 1 - UFLG 1 Value within [0.0 - 1.5] - : | ■ UTIM Error |
| 2 - UFLG 2 Value within [1.5 - 2.5] - : | ■ Pulse Origin Not Detected |
| 3 - UFLG 3 Value within [2.5 - 3.5] - : | ■ WINLEN Error |
| 4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - : | ■ Casing Thickness Error |
| 5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - : | ■ Loop Processing Error |

Description: USI IBC SLG Format: Log (IBC SLG) Index Scale: 5 in per 100 ft Index Unit: ft Index Type: Measured Depth Creation Date: 03-Mar-2018 15:53:32

Channel Processing Parameters

1A: Parameters

Parameter	Description	Tool	Value	Unit
ISSBAR	Barite Mud Presence Flag	Borehole	No	
BERJ	Bad Echo Rejection	USIT-E	On	
BHS	Borehole Status (Open or Cased Hole)	Borehole	Cased	
BS	Bit Size	WLSESSION	Depth Zoned	in
CASING_PRATIO	Casing Poisson Ratio	USIT-E	Standard Poisson Ratio	
CBLO	Casing Bottom (Logger)	WLSESSION	18900	ft
CDEN	Cement Density	USIT-E	11	lbm/gal
CDEN	Cement Density	EDTC-B	16.69	lbm/gal
CMTY(U-USIT_CEMT)	Cement Type	USIT-E	Light Cement	
DFD	Drilling Fluid Density	Borehole	8.4	lbm/gal
DFT_CATEGORY	Drilling Fluid Type	Borehole	Water	

DTMD	Borehole Fluid Slowness	Borehole	206	us/ft
FD	Fluid Density	USIT-E	10.4	lbm/gal
FDII	FPM Data Interpolation Interval	USIT-E	0	ft
GCSE_DOWN_PASS	Generalized Caliper Selection for WL Log Down Passes	Borehole	BS(RT)	
GCSE_UP_PASS	Generalized Caliper Selection for WL Log Up Passes	Borehole	BS(RT)	
GR_MULTIPLIER	Gamma Ray Multiplier	EDTC-B	1	
HEMA	Hematite Presence Flag	Borehole	No	
IBC_FRP_OFFSET	IBC Flexural Offset from Free Pipe	USIT-E	0	dB/m
IBC_FVEL_SEL	IBC Fluid Velocity Selection	USIT-E	Automatic	
IBC_OFFSET_SEL	IBC Flexural Offset Selector	USIT-E	UFAO	
IBC_ZMUD_SEL	IBC Mud Impedance Selection	USIT-E	Inversion Norm.	
ICE_PROCESS	ICE Processing	USIT-E	Yes	
IMAR	Image Rotation	USIT-E	RB	
MEAS_WLEN	Tcube Processing Window Length in Measurement Mode	USIT-E	22.44	us
MUD_N_INV	IBC Inversion Mud Normalization Factor	USIT-E	1.22	
MUD_N_THE	Theoretical Mud Normalization Factor	USIT-E	1.15	
RCOD	Reference Calibrator Outer Diameter	USIT-E	4.5	in
RCSO	Reference Calibrator Standoff	USIT-E	0.842	in
RCTH	Reference Calibrator Thickness	USIT-E	0.216	in
RPLUS_PROCESS	Ultrasonic R+ Processing	USIT-E	No	
SOCN	Standoff Distance	EDTC-B	0.125	in
SOCO	Standoff Correction Option	EDTC-B	No	
THDH	Maximum Search Thickness (percentage of nominal)	USIT-E	130	%
THDL	Minimum Search Thickness (percentage of nominal)	USIT-E	70	%
TPOS_EDTC	Tool Position: Centered or Eccentered	EDTC-B	Eccentered	
U-USIT_DFSZ	Drilling Fluid Specific Acoustic Impedance	USIT-E	1.67	Mrayl
U-USIT_UFAO	SIT Flexural Attenuation Offset	USIT-E	-10.05	dB/m
U-USIT_UIAP	IBC Answer Product Enabled	USIT-E	SolidLiquidGasMap	
THDP	Thickness Detection Policy	USIT-E	Fundamental	
VCAS	Ultrasonic Transversal Velocity in Casing	USIT-E	51.4	us/ft
ZCAS	Acoustic Impedance of Casing	USIT-E	46.25	Mrayl
ZINI	Initial Estimate of Cement Impedance	USIT-E	-1	Mrayl
ZMUD	Acoustic Impedance of Mud	Borehole	1.75	Mrayl
ZTCM	Acoustic Impedance Threshold for Cement	USIT-E	2.6	Mrayl
ZTGS	Acoustic Impedance Threshold for Gas	USIT-E	0.3	Mrayl

Depth Zone Parameters

Parameter	Value	Start (ft)	Stop (ft)
BS	13.5	48.5	1945
BS	8.75	1945	6884.5

All depth are actual.

Tool Control Parameters

1A: Parameters

Parameter	Description	Tool	Value	Unit
AGMN	Minimum Gain of Cartridge	USIT-E	-12	dB
AGMX	Maximum Gain of Cartridge	USIT-E	48	dB
U-USIT_DDT5	USIC Downhole Decimation for T5 only	USIT-E	0_NONE	
DOT(DOS)	Distance between Opposite Transducer Faces	USIT-E	1.756	in
EMXV	EMEX Voltage	USIT-E	Time Zoned	V
HRES	Horizontal Resolution	USIT-F	10 deg	

IBC_ACQTYPE	IBC Acquisition type	USIT-E	1 MHz	
IBC_FLEXDBP	IBC Flex Duration Before Peak	USIT-E	30	us
MOTOR_PROTECT	Motor Protection	USIT-E	On	
UACLV_PERM	Ultrasonic ACLV Permanent	USIT-E	Yes	
U-USIT_UFWB	Far Receiver Window Begin Time	USIT-E	136	us
U-USIT_UFWE	Far Receiver Window End Time	USIT-E	176	us
U-USIT_UNWB	Near Receiver Window Begin Time	USIT-E	105	us
U-USIT_UNWE	Near Receiver Window End Time	USIT-E	145	us
USFR	Ultrasonic Sampling Frequency	USIT-E	666667	Hz
UPAT	USIT Emission Pattern	USIT-E	Pattern 375 KHz	
UWKM	USIT Working Mode	USIT-E	10 deg at 6.0 in	
USSP	Ultrasonic Service	USIT-E	IBC	
U-USIT_UTAN	Transducer Angles	USIT-E	33_DEG	
VRES	Vertical Resolution	USIT-E	6.0 in	
WINB	Window Begin Time	USIT-E	31.17	us
WINE	Window End Time	USIT-E	71.17	us

Time Zone Parameters					
Parameter	Value	Start Time	Stop Time	Start Depth (ft)	Stop Depth (ft)
EMXV	50	03-Mar-2018 13:01:25	03-Mar-2018 13:03:32	6885.58	6784.27
EMXV	60	03-Mar-2018 13:03:32	03-Mar-2018 13:13:54	6784.27	6621.7
EMXV	50	03-Mar-2018 13:13:54	03-Mar-2018 13:43:20	6621.7	4575.76
EMXV	45	03-Mar-2018 13:43:20	03-Mar-2018 14:47:52	4575.76	70.19
All depth are at tool zero.					

1A									
IBC SLG Composite									

Pass Summary									
Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
1A	Log[3]:Up	Up	70.19 ft	6885.58 ft	03-Mar-2018 1:01:25 PM	03-Mar-2018 2:47:52 PM	ON	4.93 ft	Yes

All depths are referenced to toolstring zero									
Log	Company:Crestone Peak Resources and Operating LLC						Well:File #3S-32H-K268		
	1A: Log[3]:Up:S003								

Description: USI IBC SLG Composite
Format: Log (IBC SLG Composite)
Index Scale: 2 in per 100 ft
Index Unit: ft
Index Type: Measured Depth
Creation Date: 03-Mar-2018 15:53:45

TIME_1900 - Time Marked every 60.00 (s)

USIT Processing Flags (UFLG[0]) USIT-E

1 - UFLG 1 Value within [0.0 - 1.5] - :
2 - UFLG 2 Value within [1.5 - 2.5] - :
3 - UFLG 3 Value within [2.5 - 3.5] - :
4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :
5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :

UTIM Error


Pulse Origin Not Detected


WINLEN Error


Casing Thickness Error


Loop Processing Error


<div><div>U L B R U</div><div>Orientation: Top of Hole</div><div>Absent 1.500 3.500</div><div><div></div><div></div><div></div><div></div></div></div>	External Radii Average (ERAV) USIT-E		External Radii Average (ERAV) USIT-E		<div>Thickness</div>
	3 in 2	2 in 3			
	Internal	Internal			

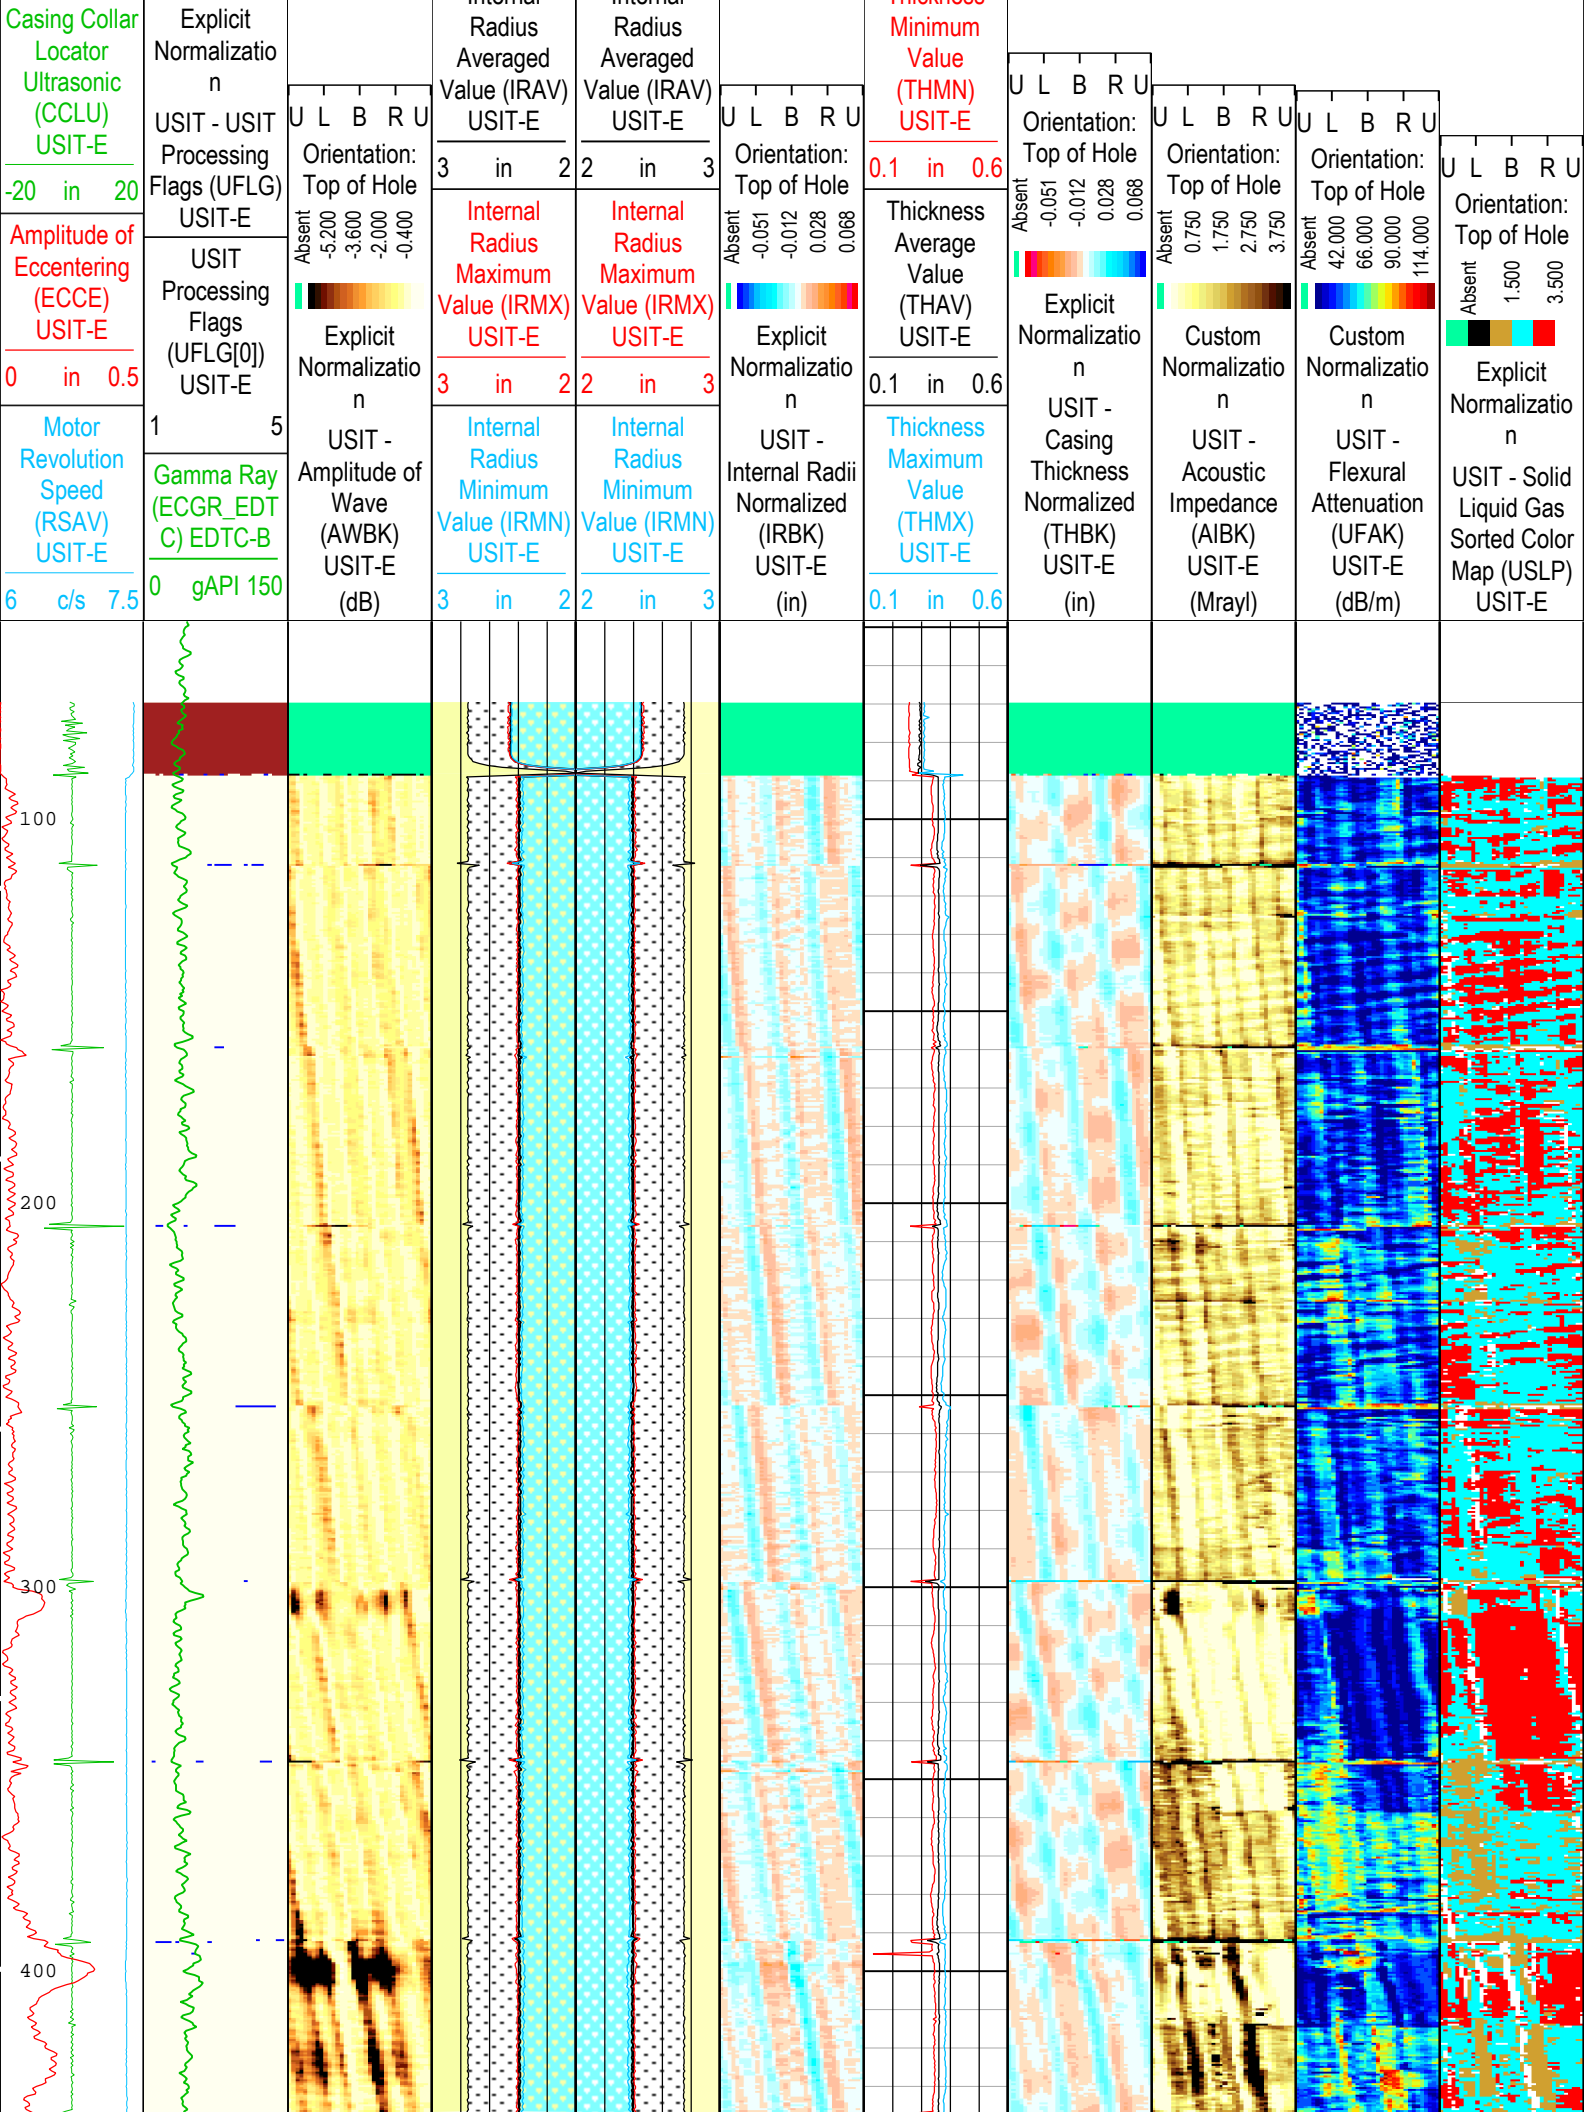


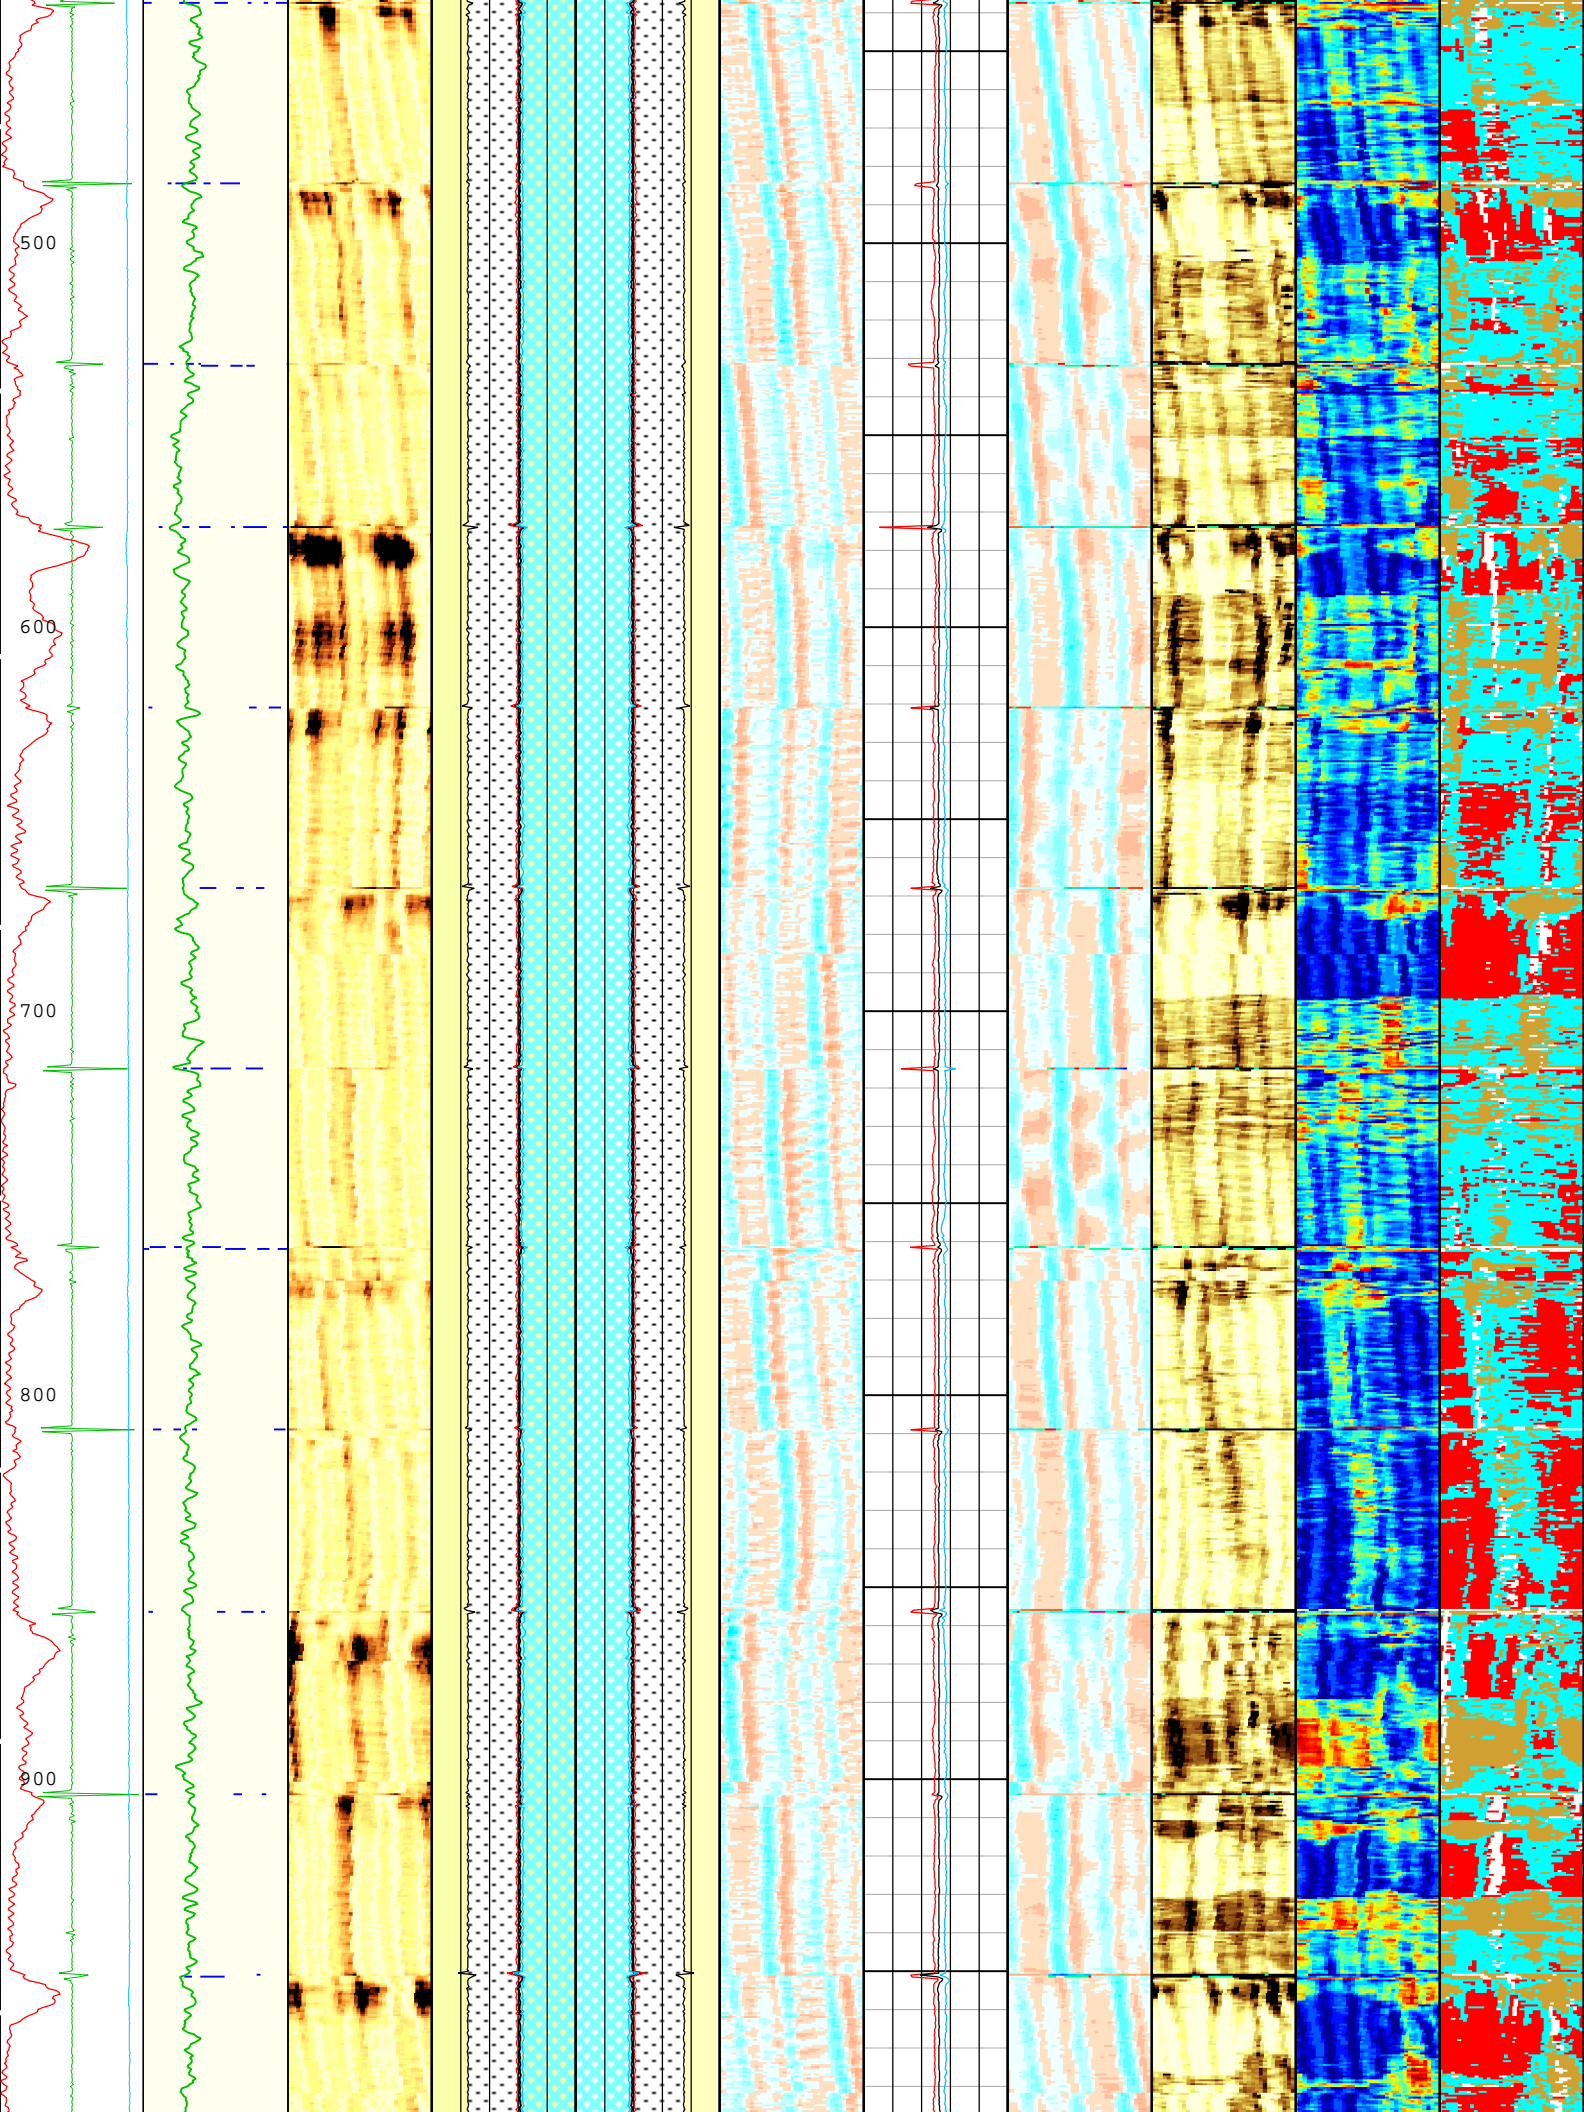


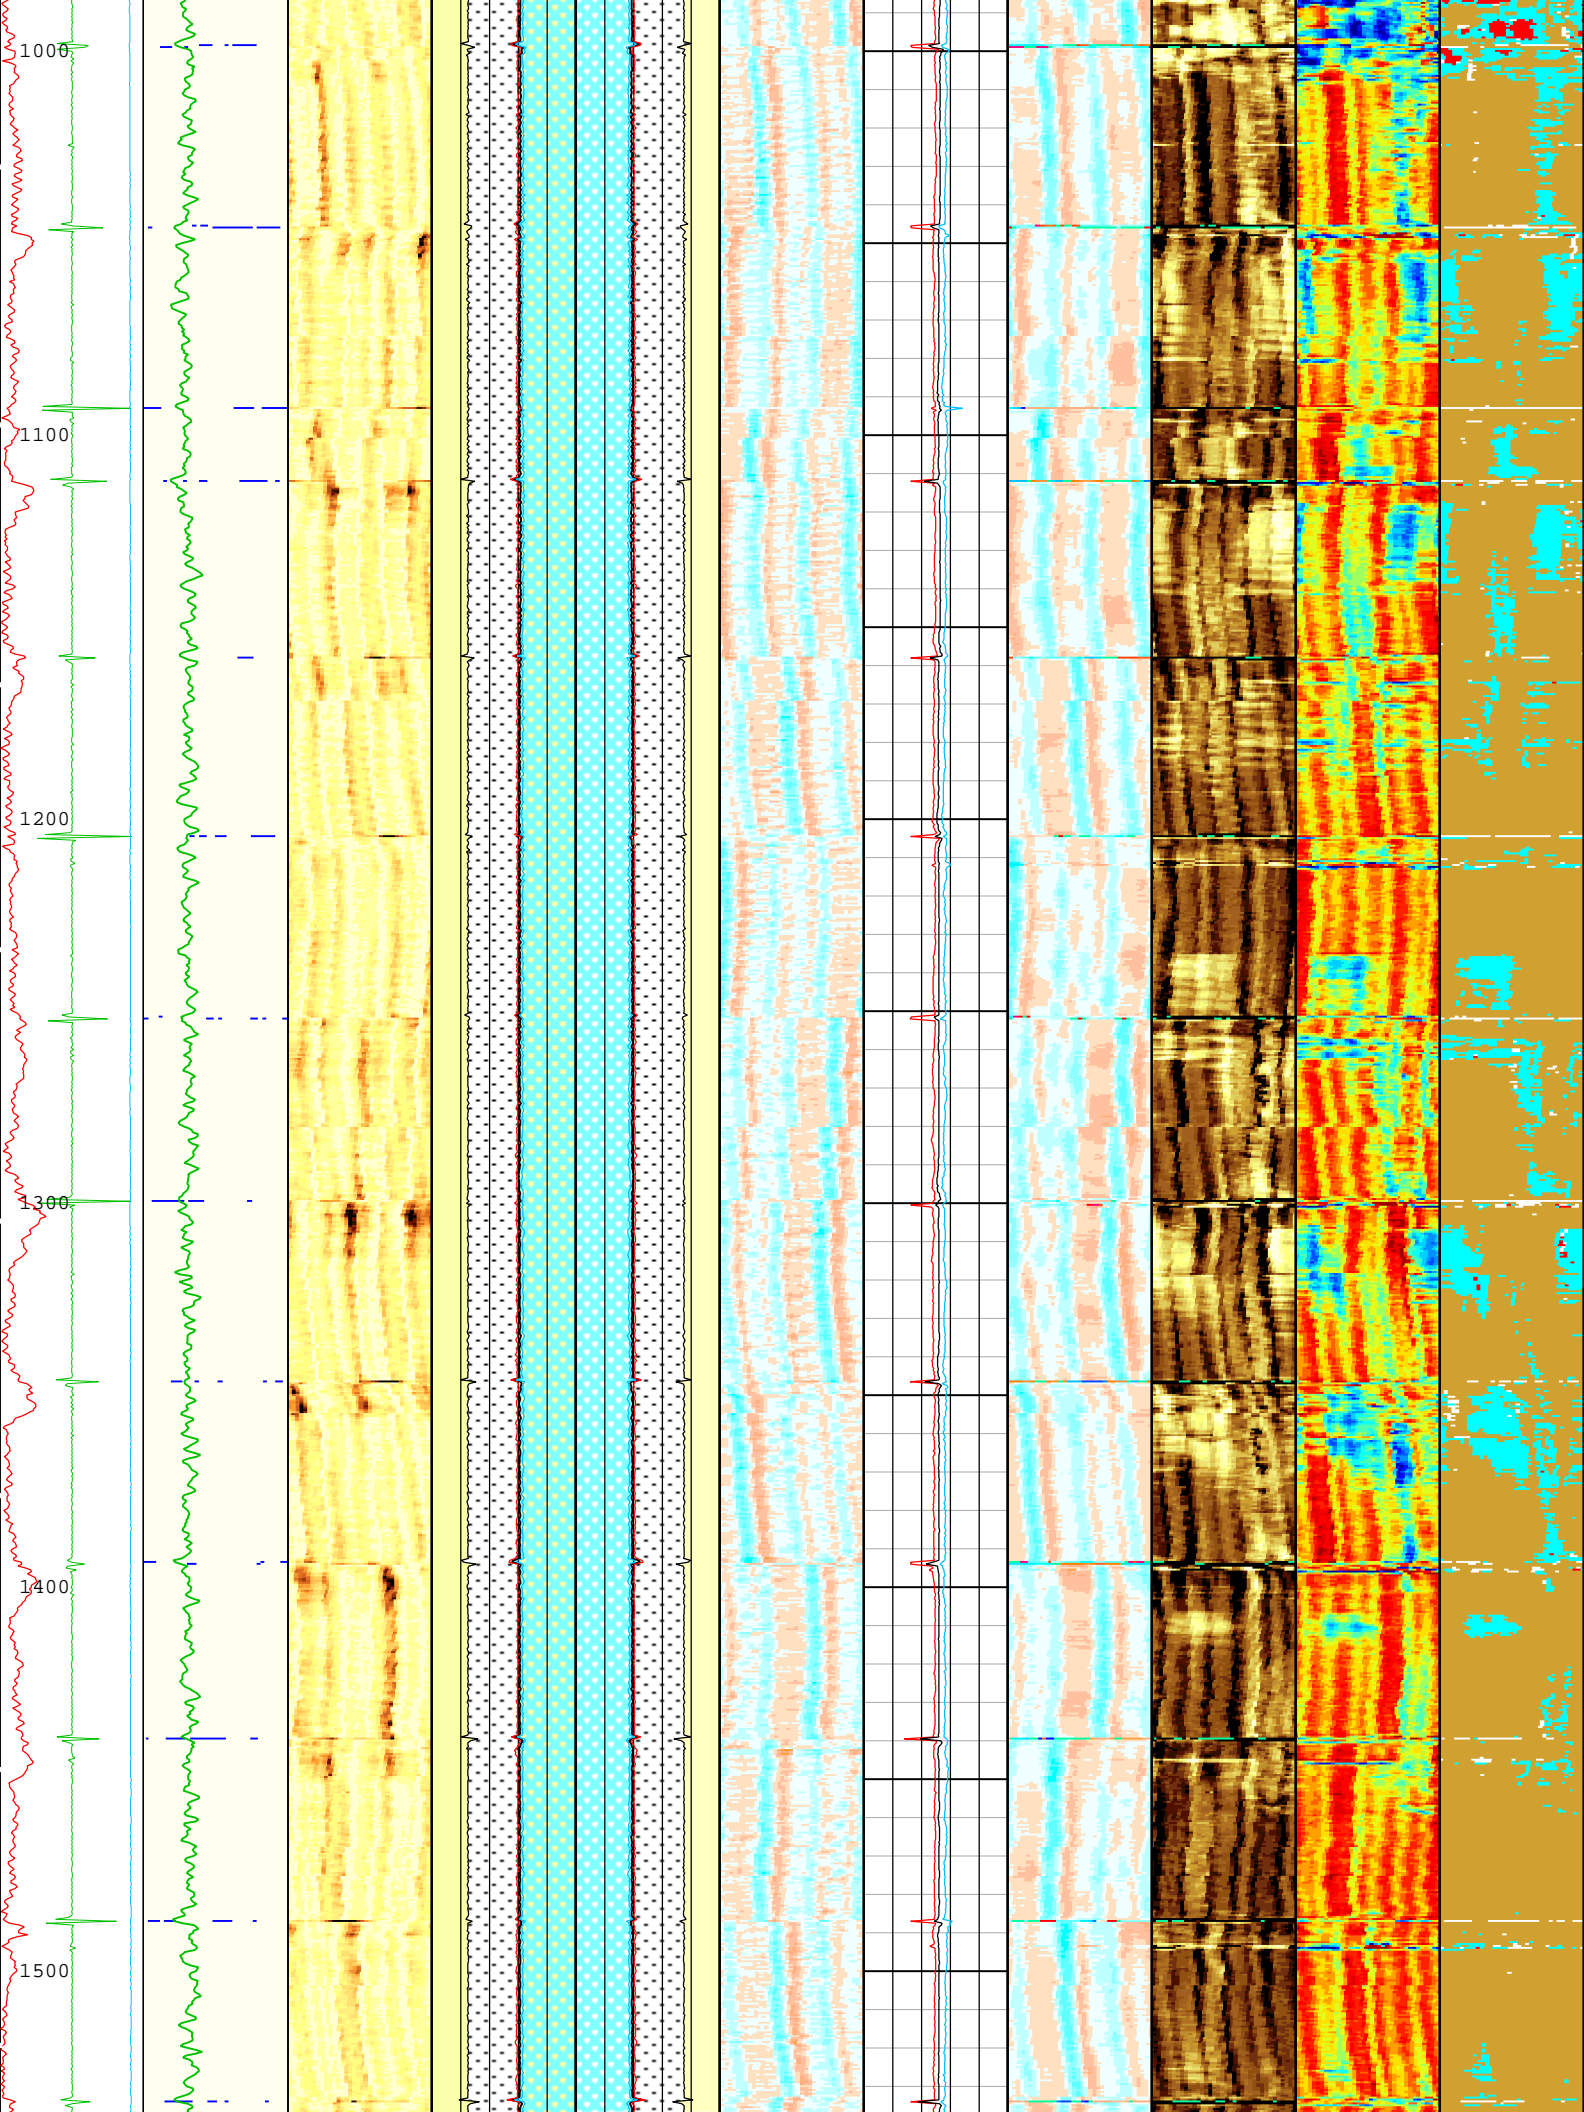


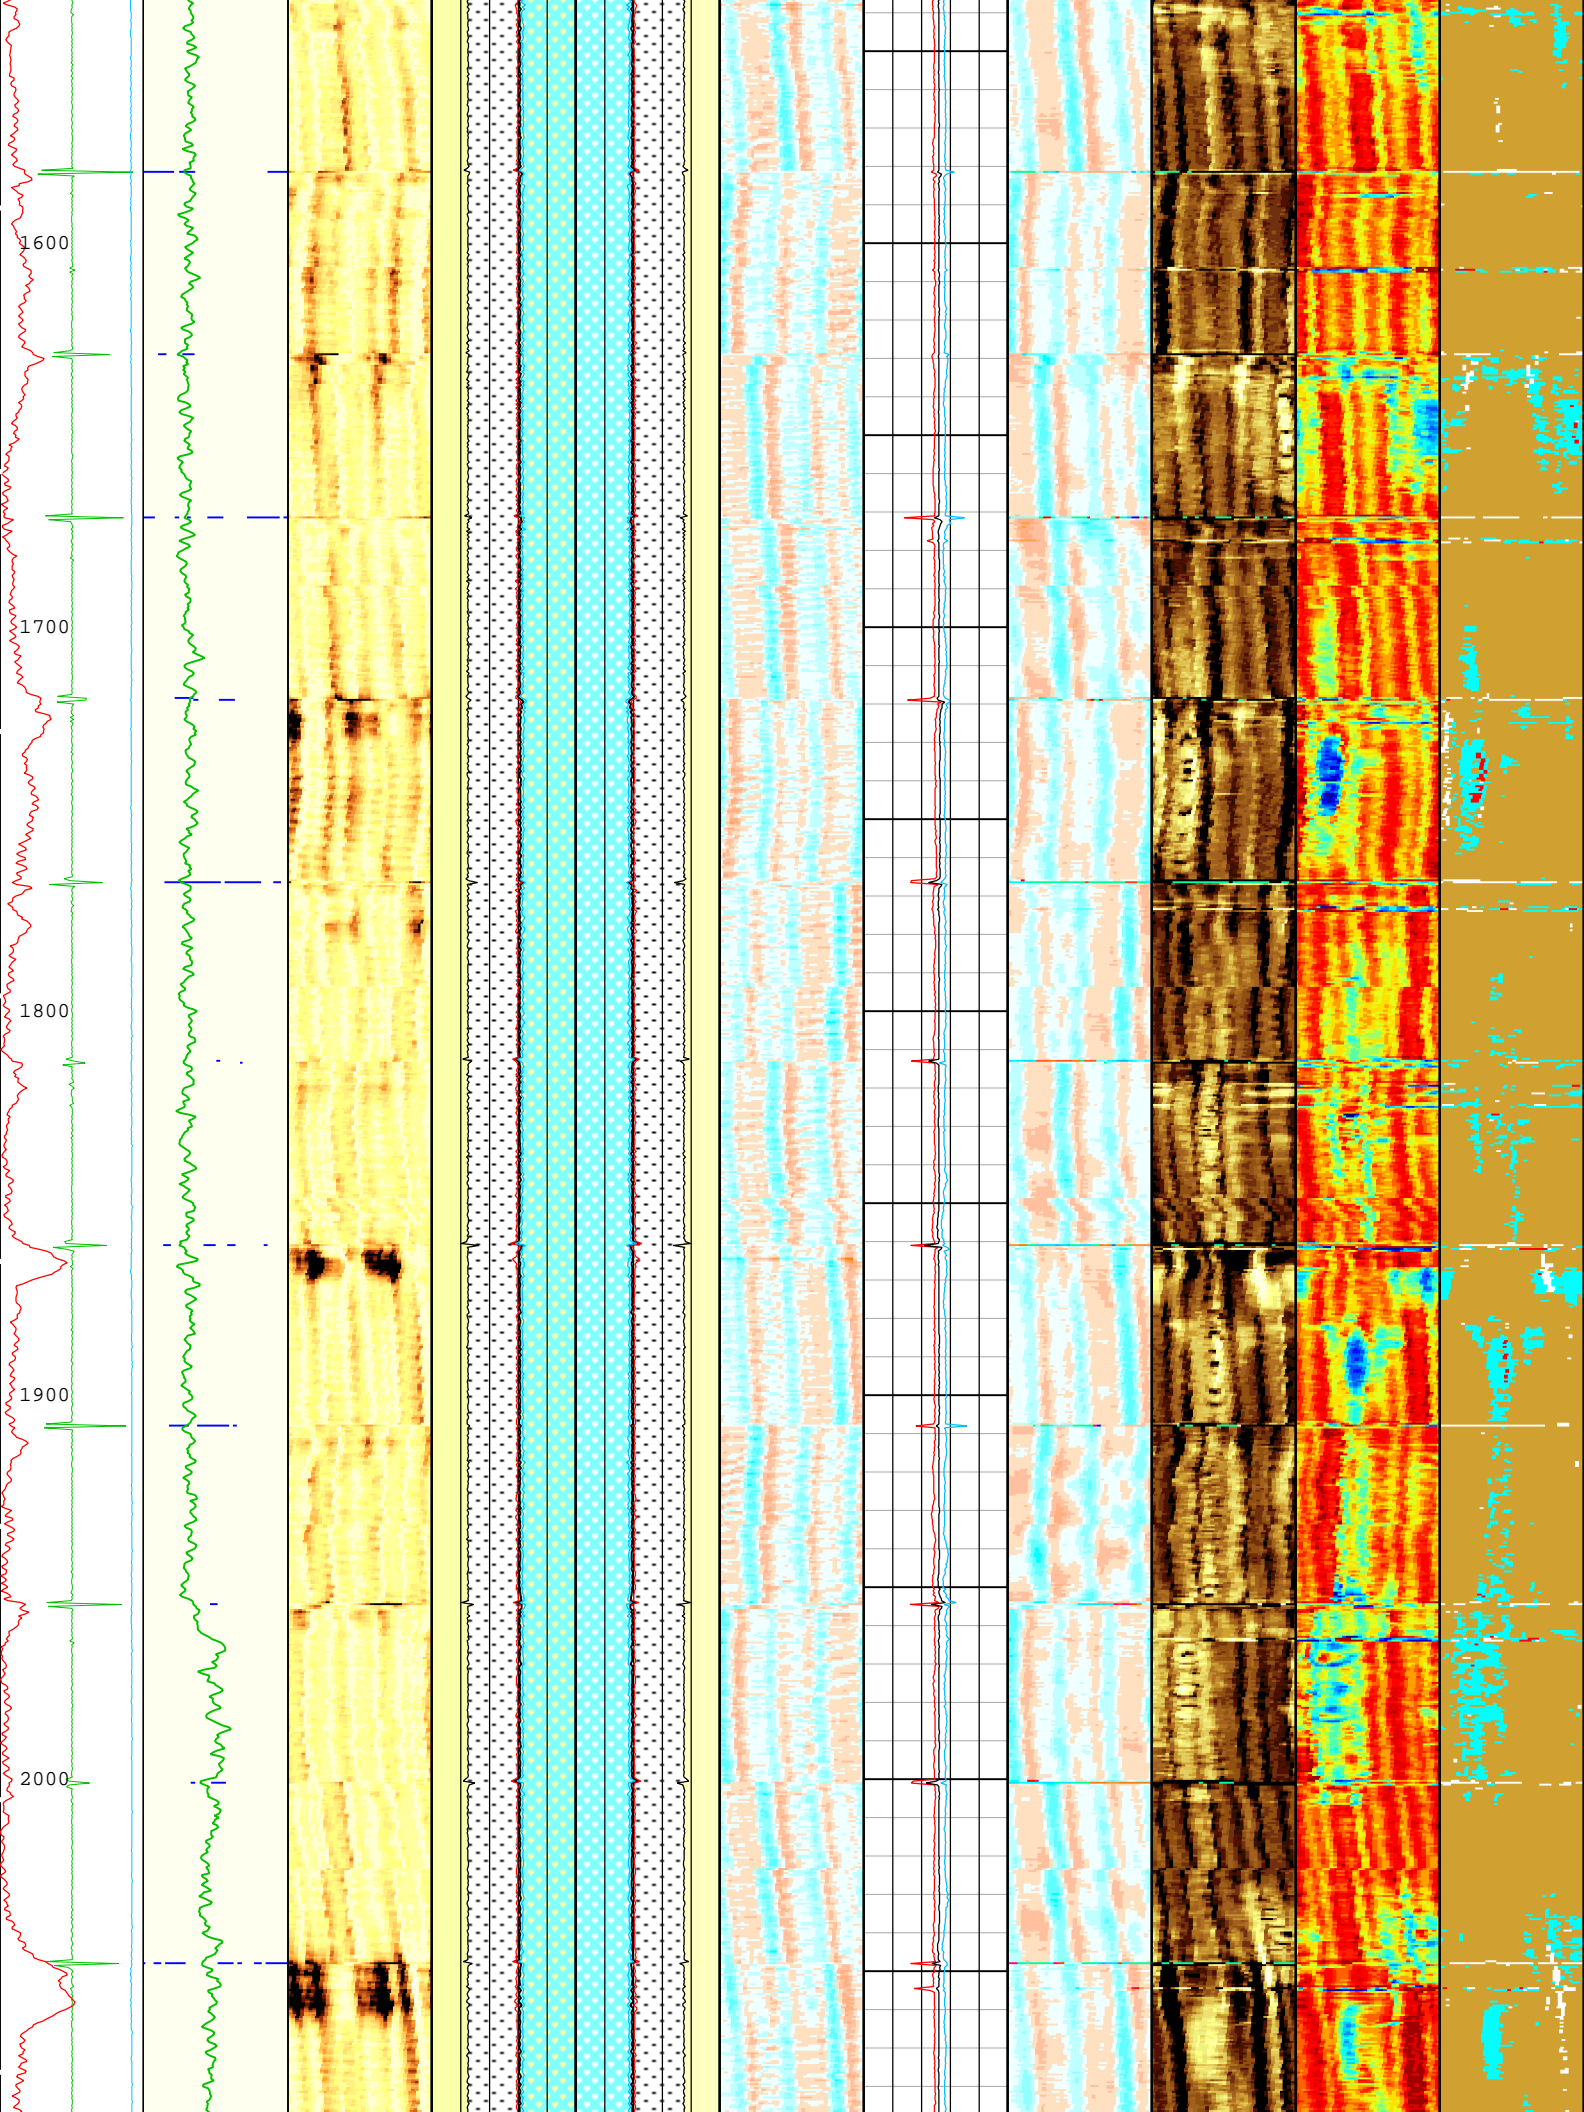


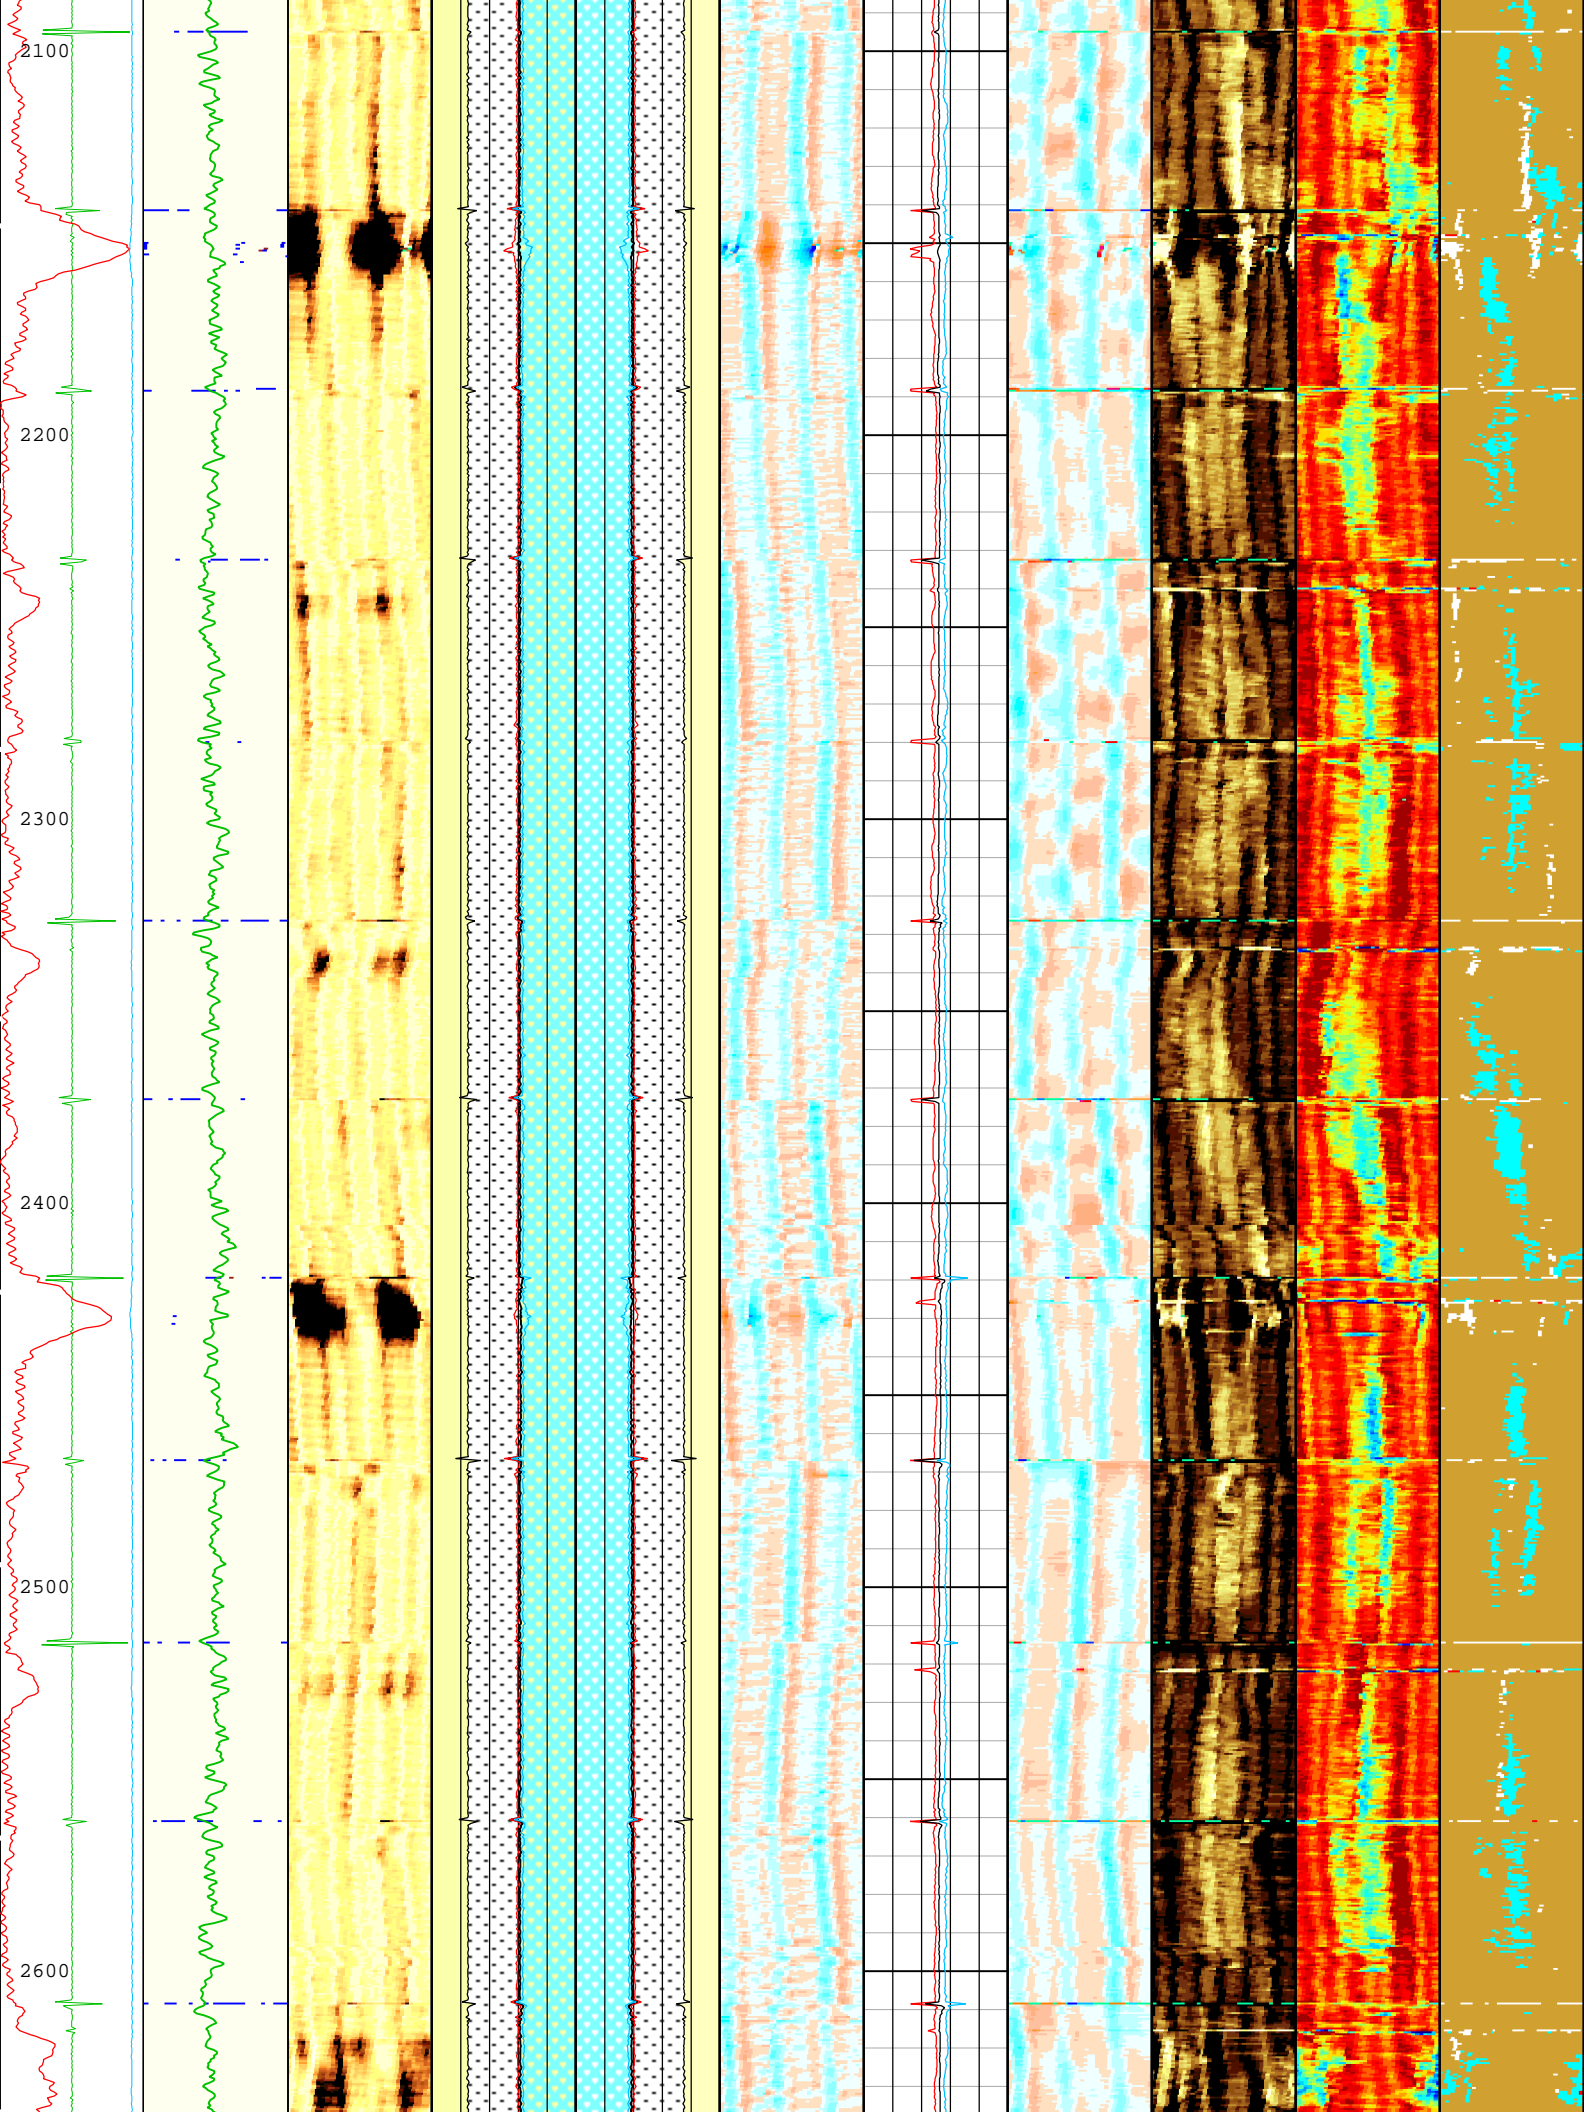


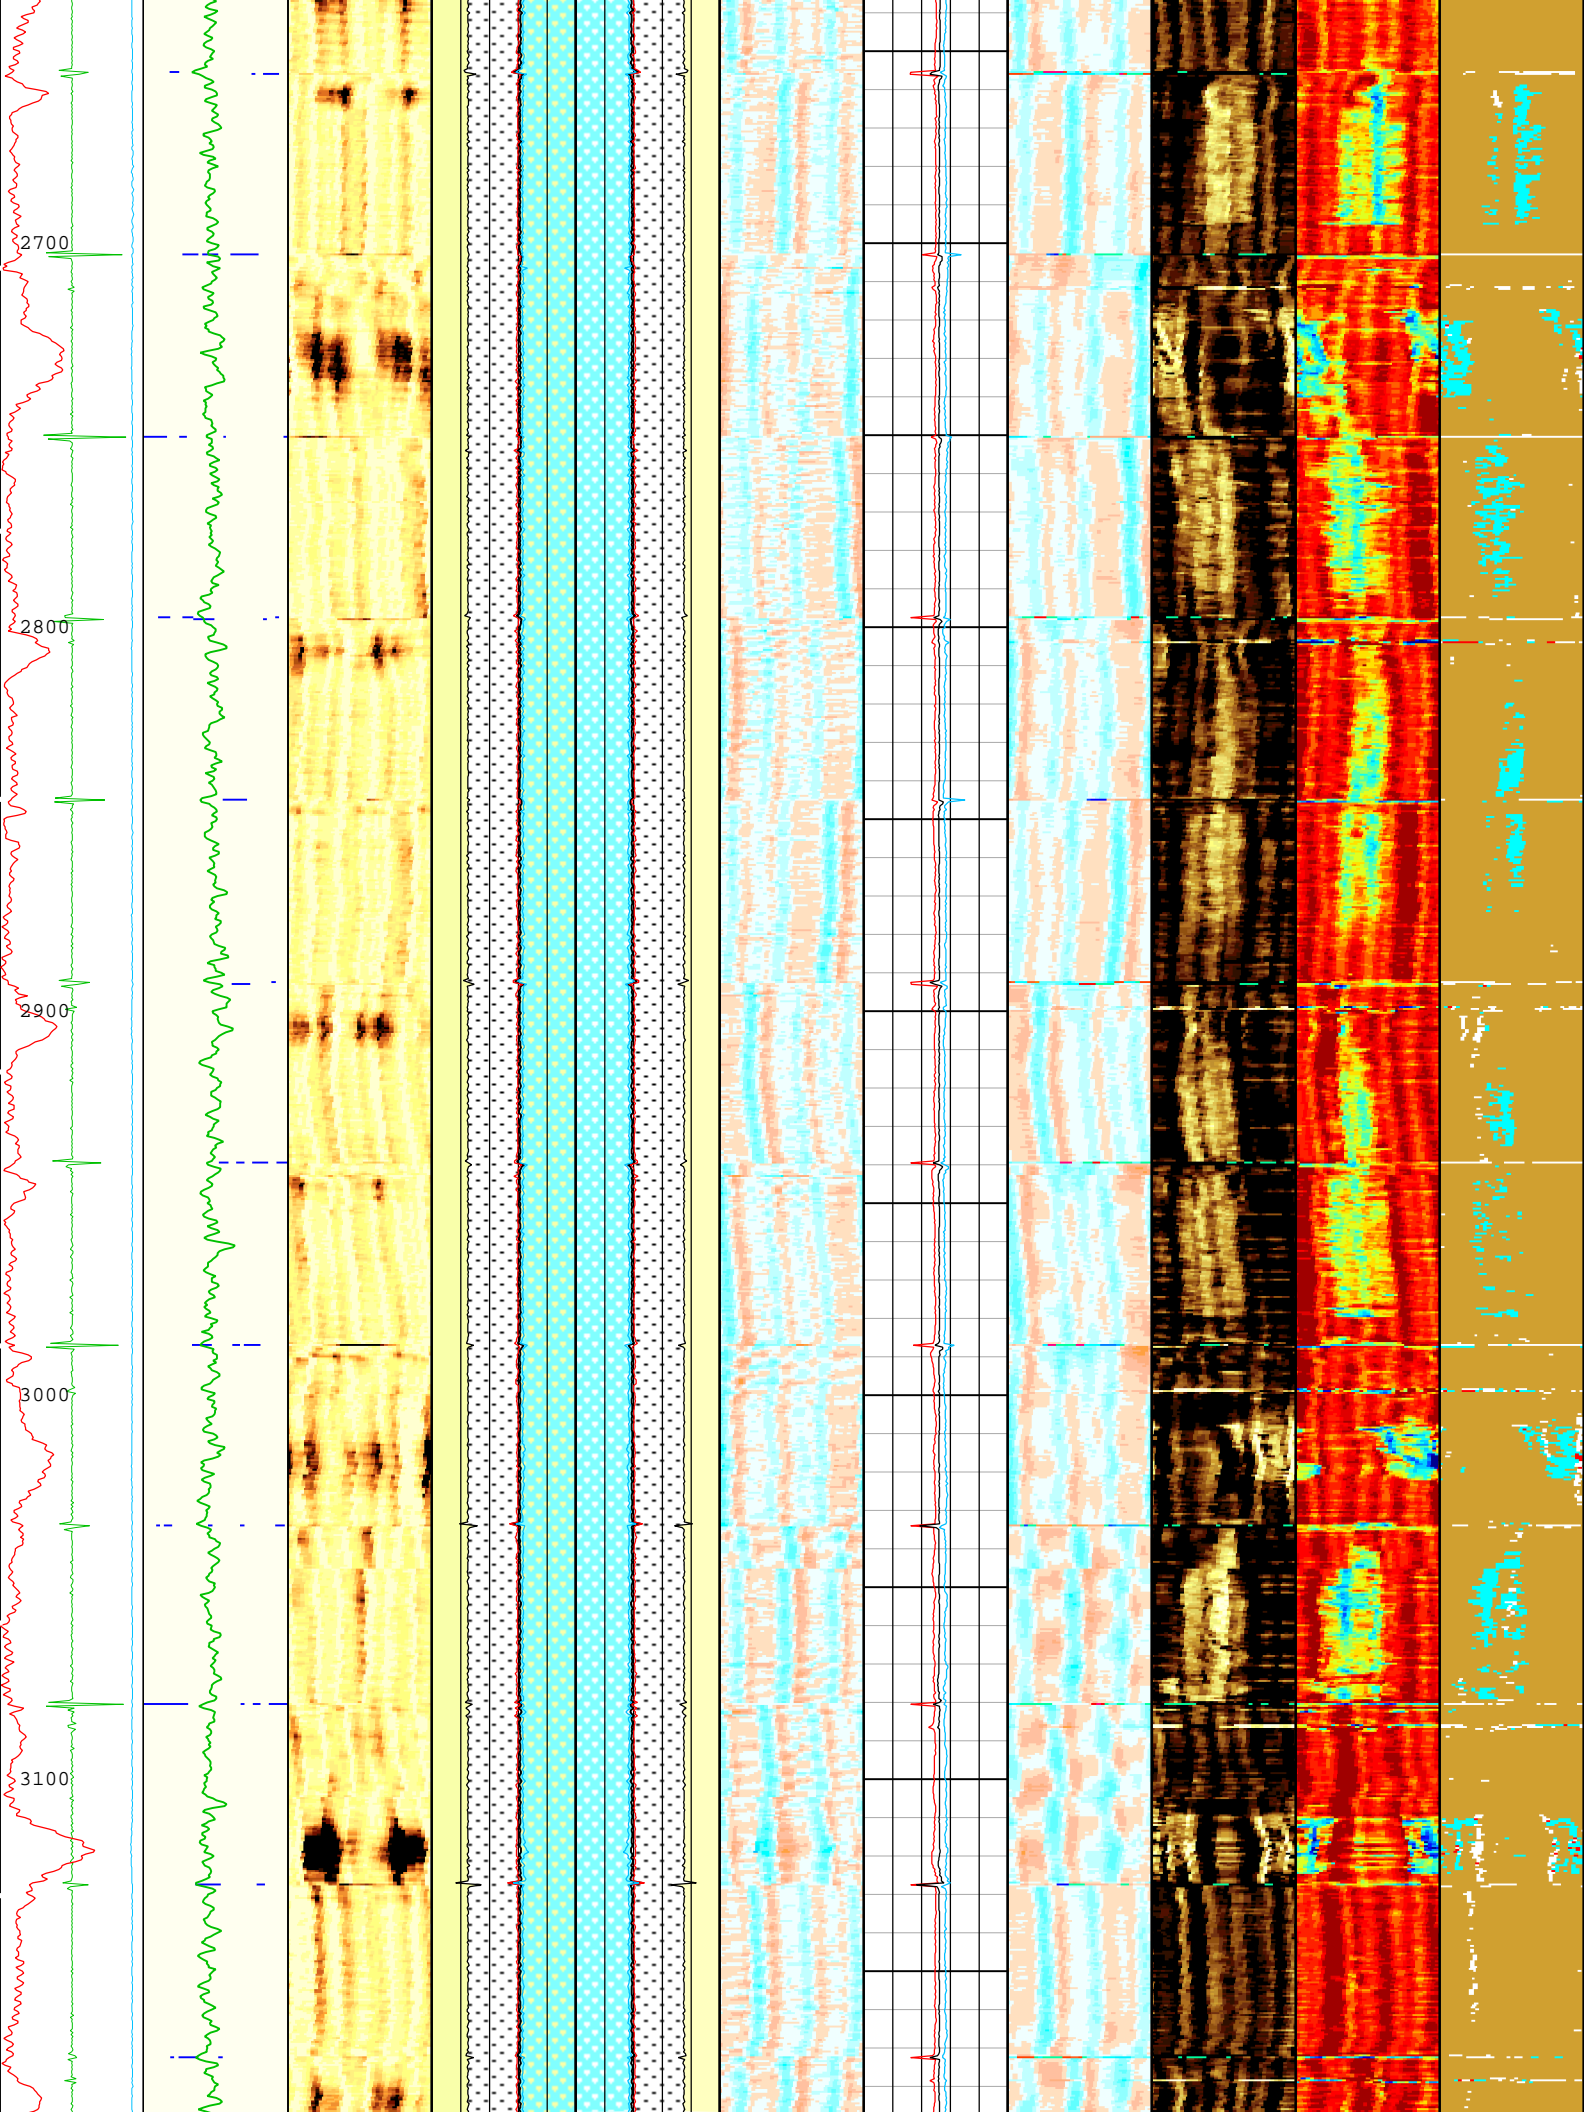


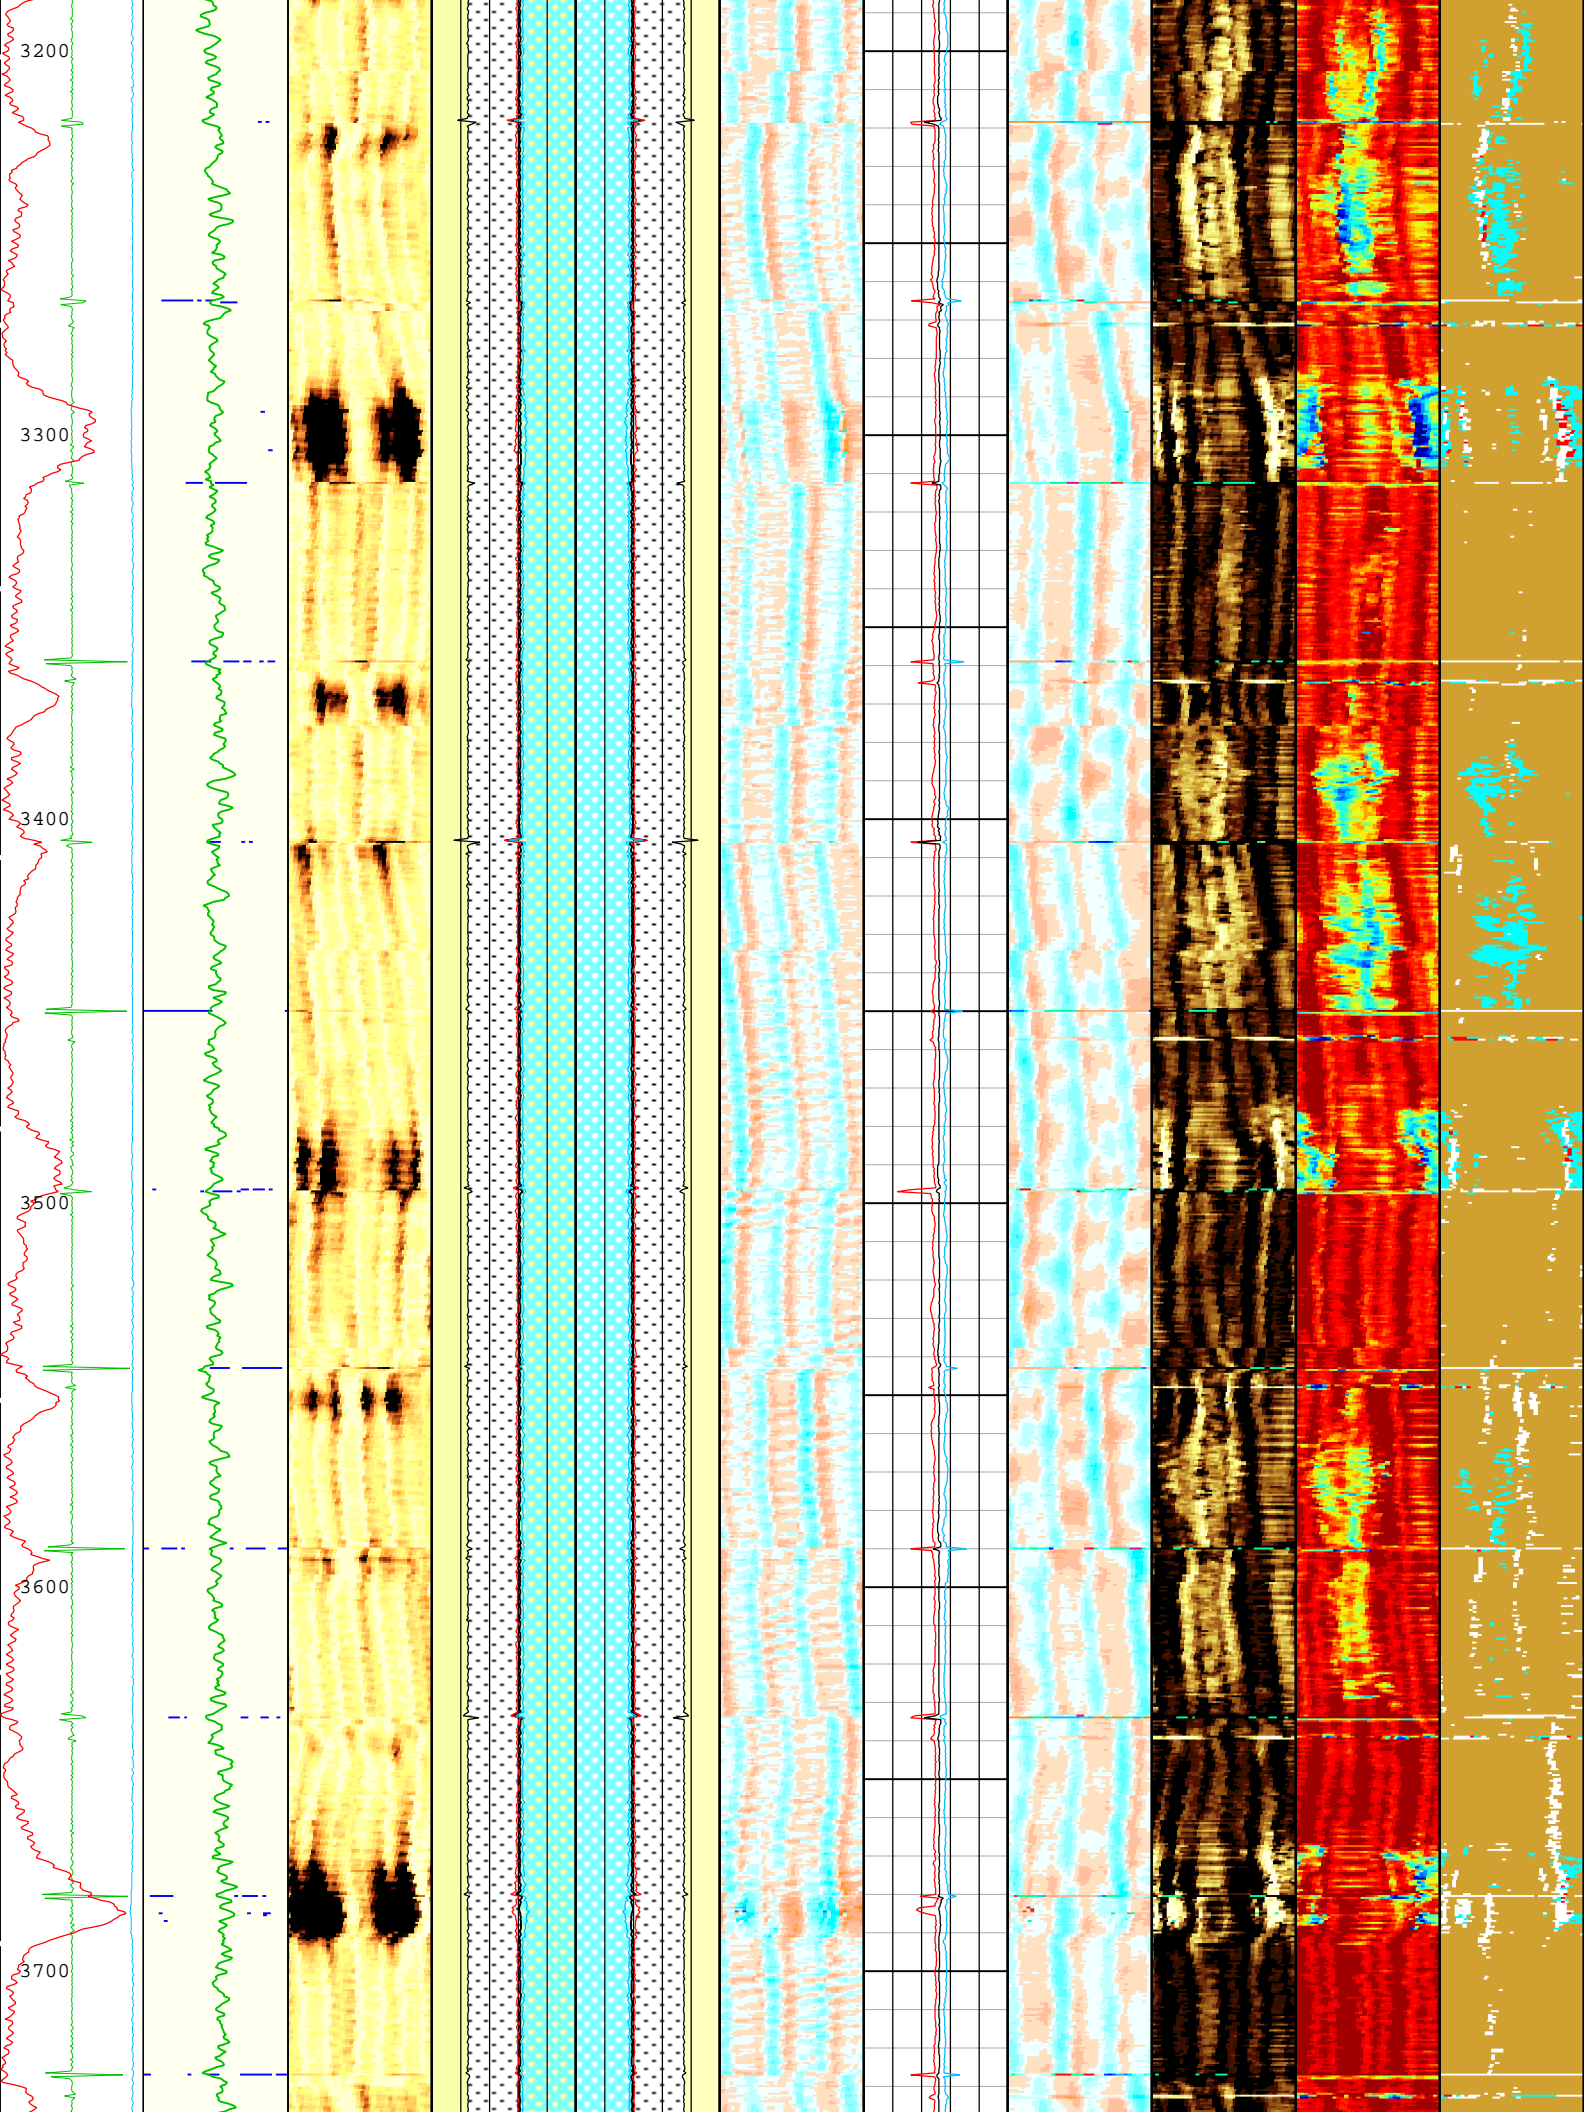


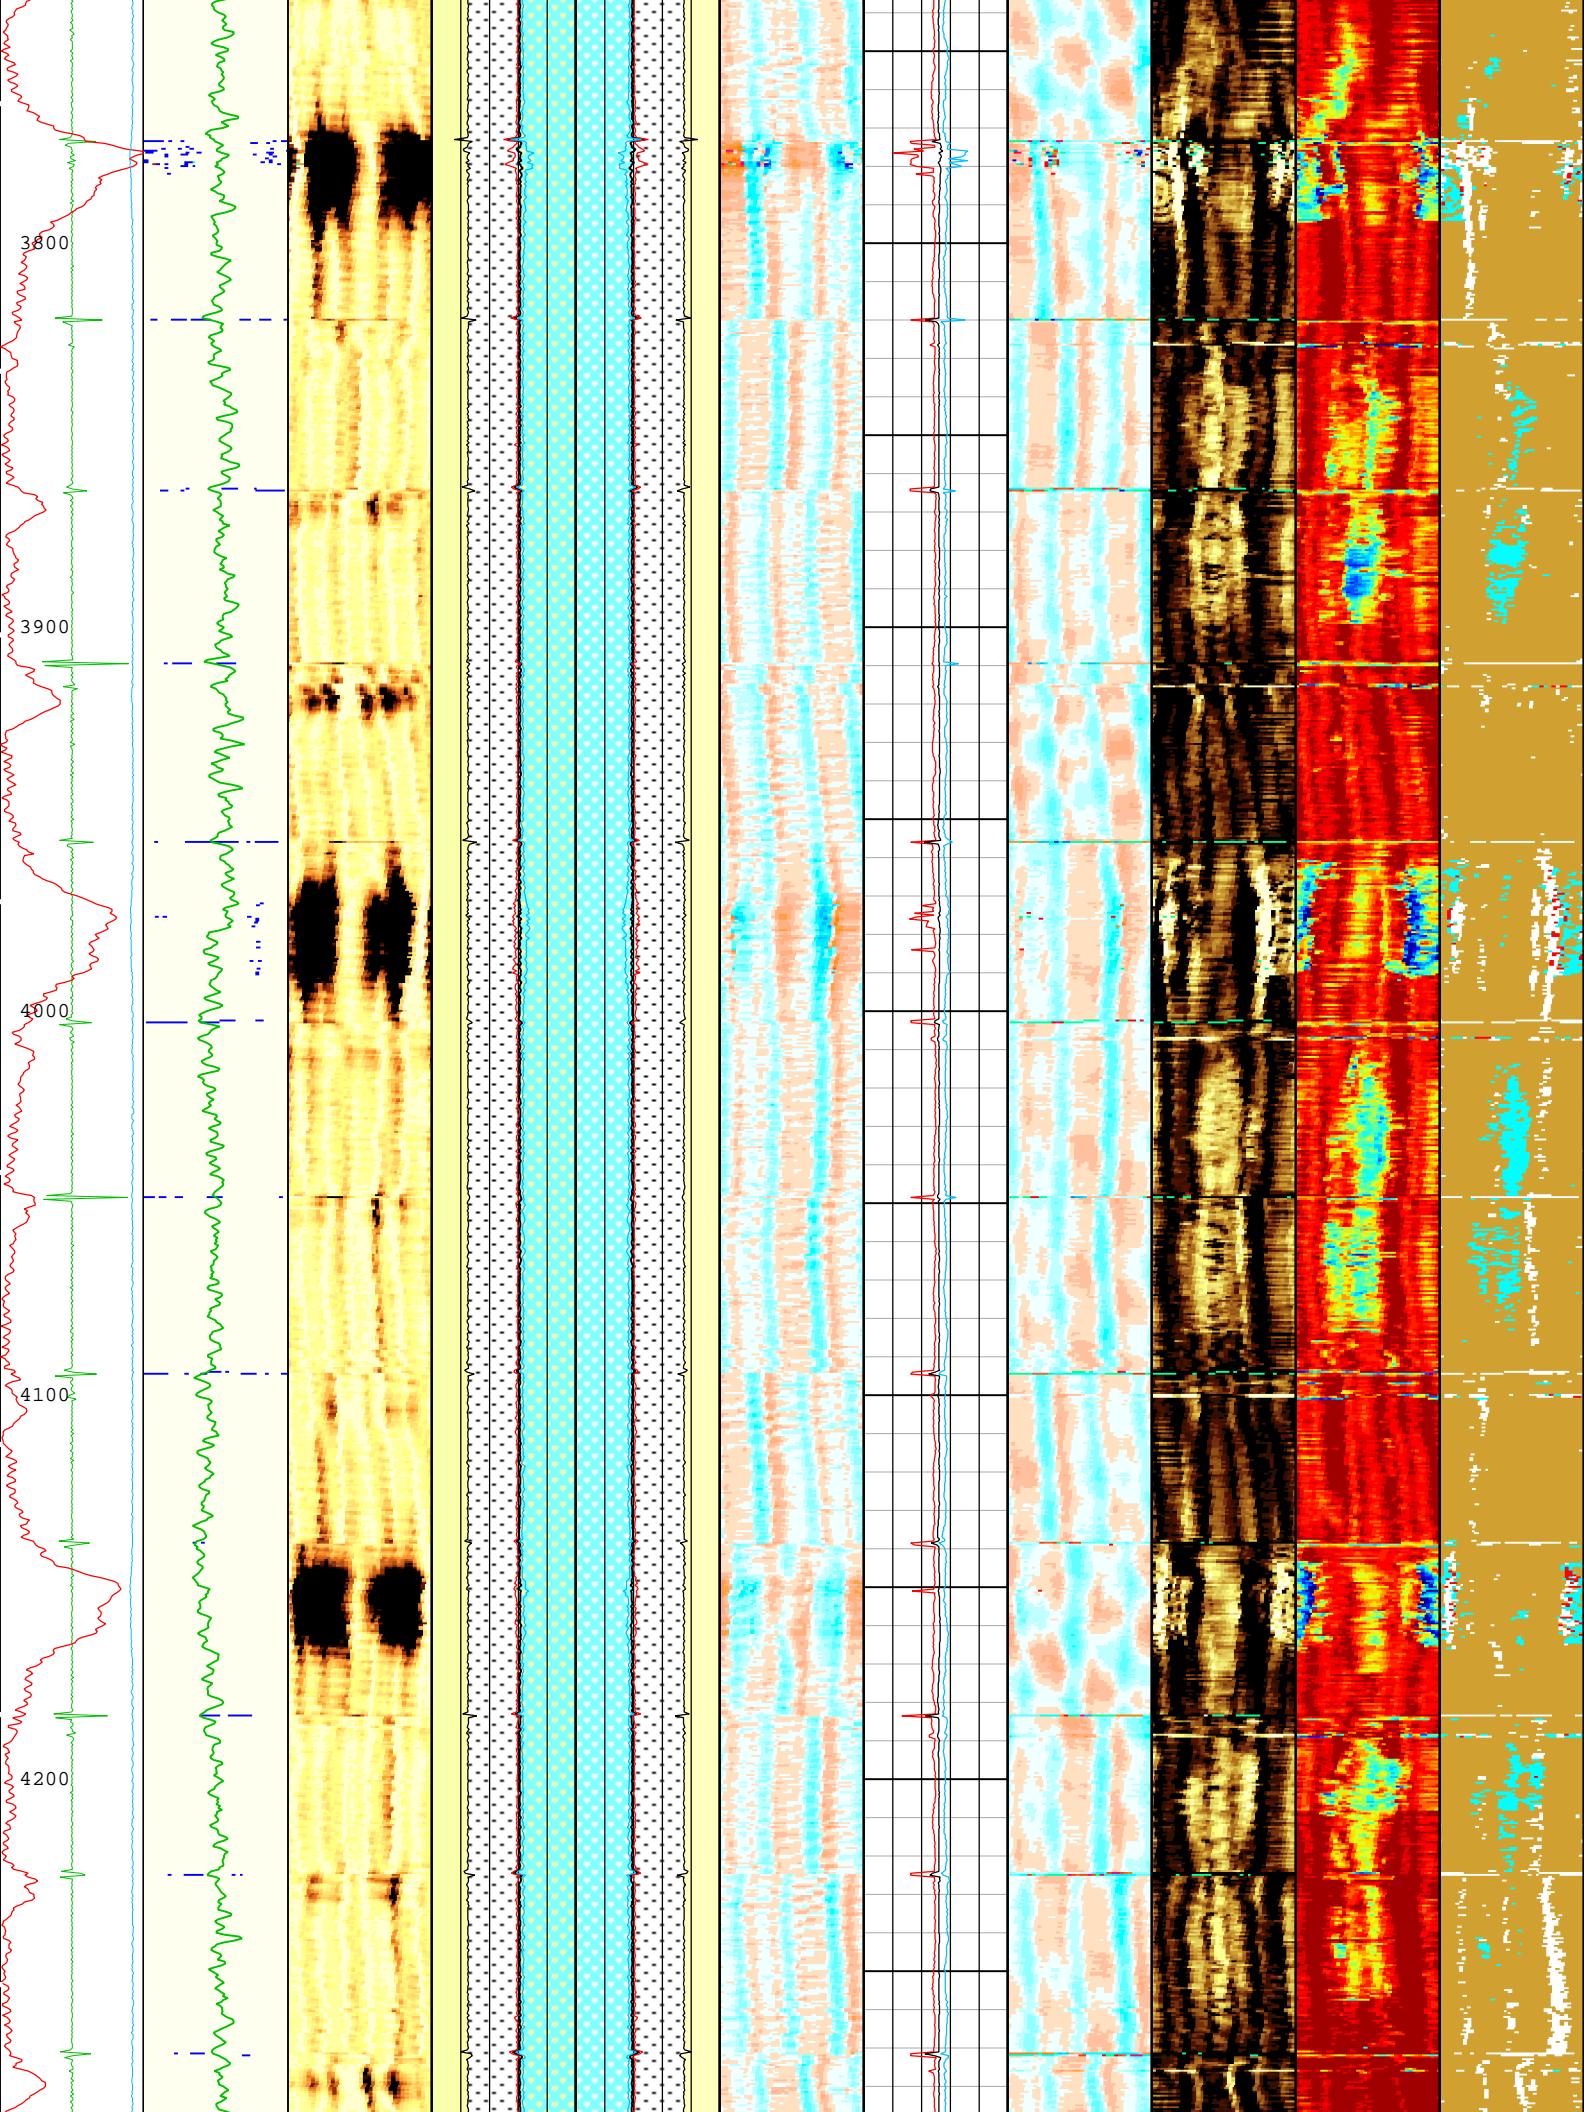


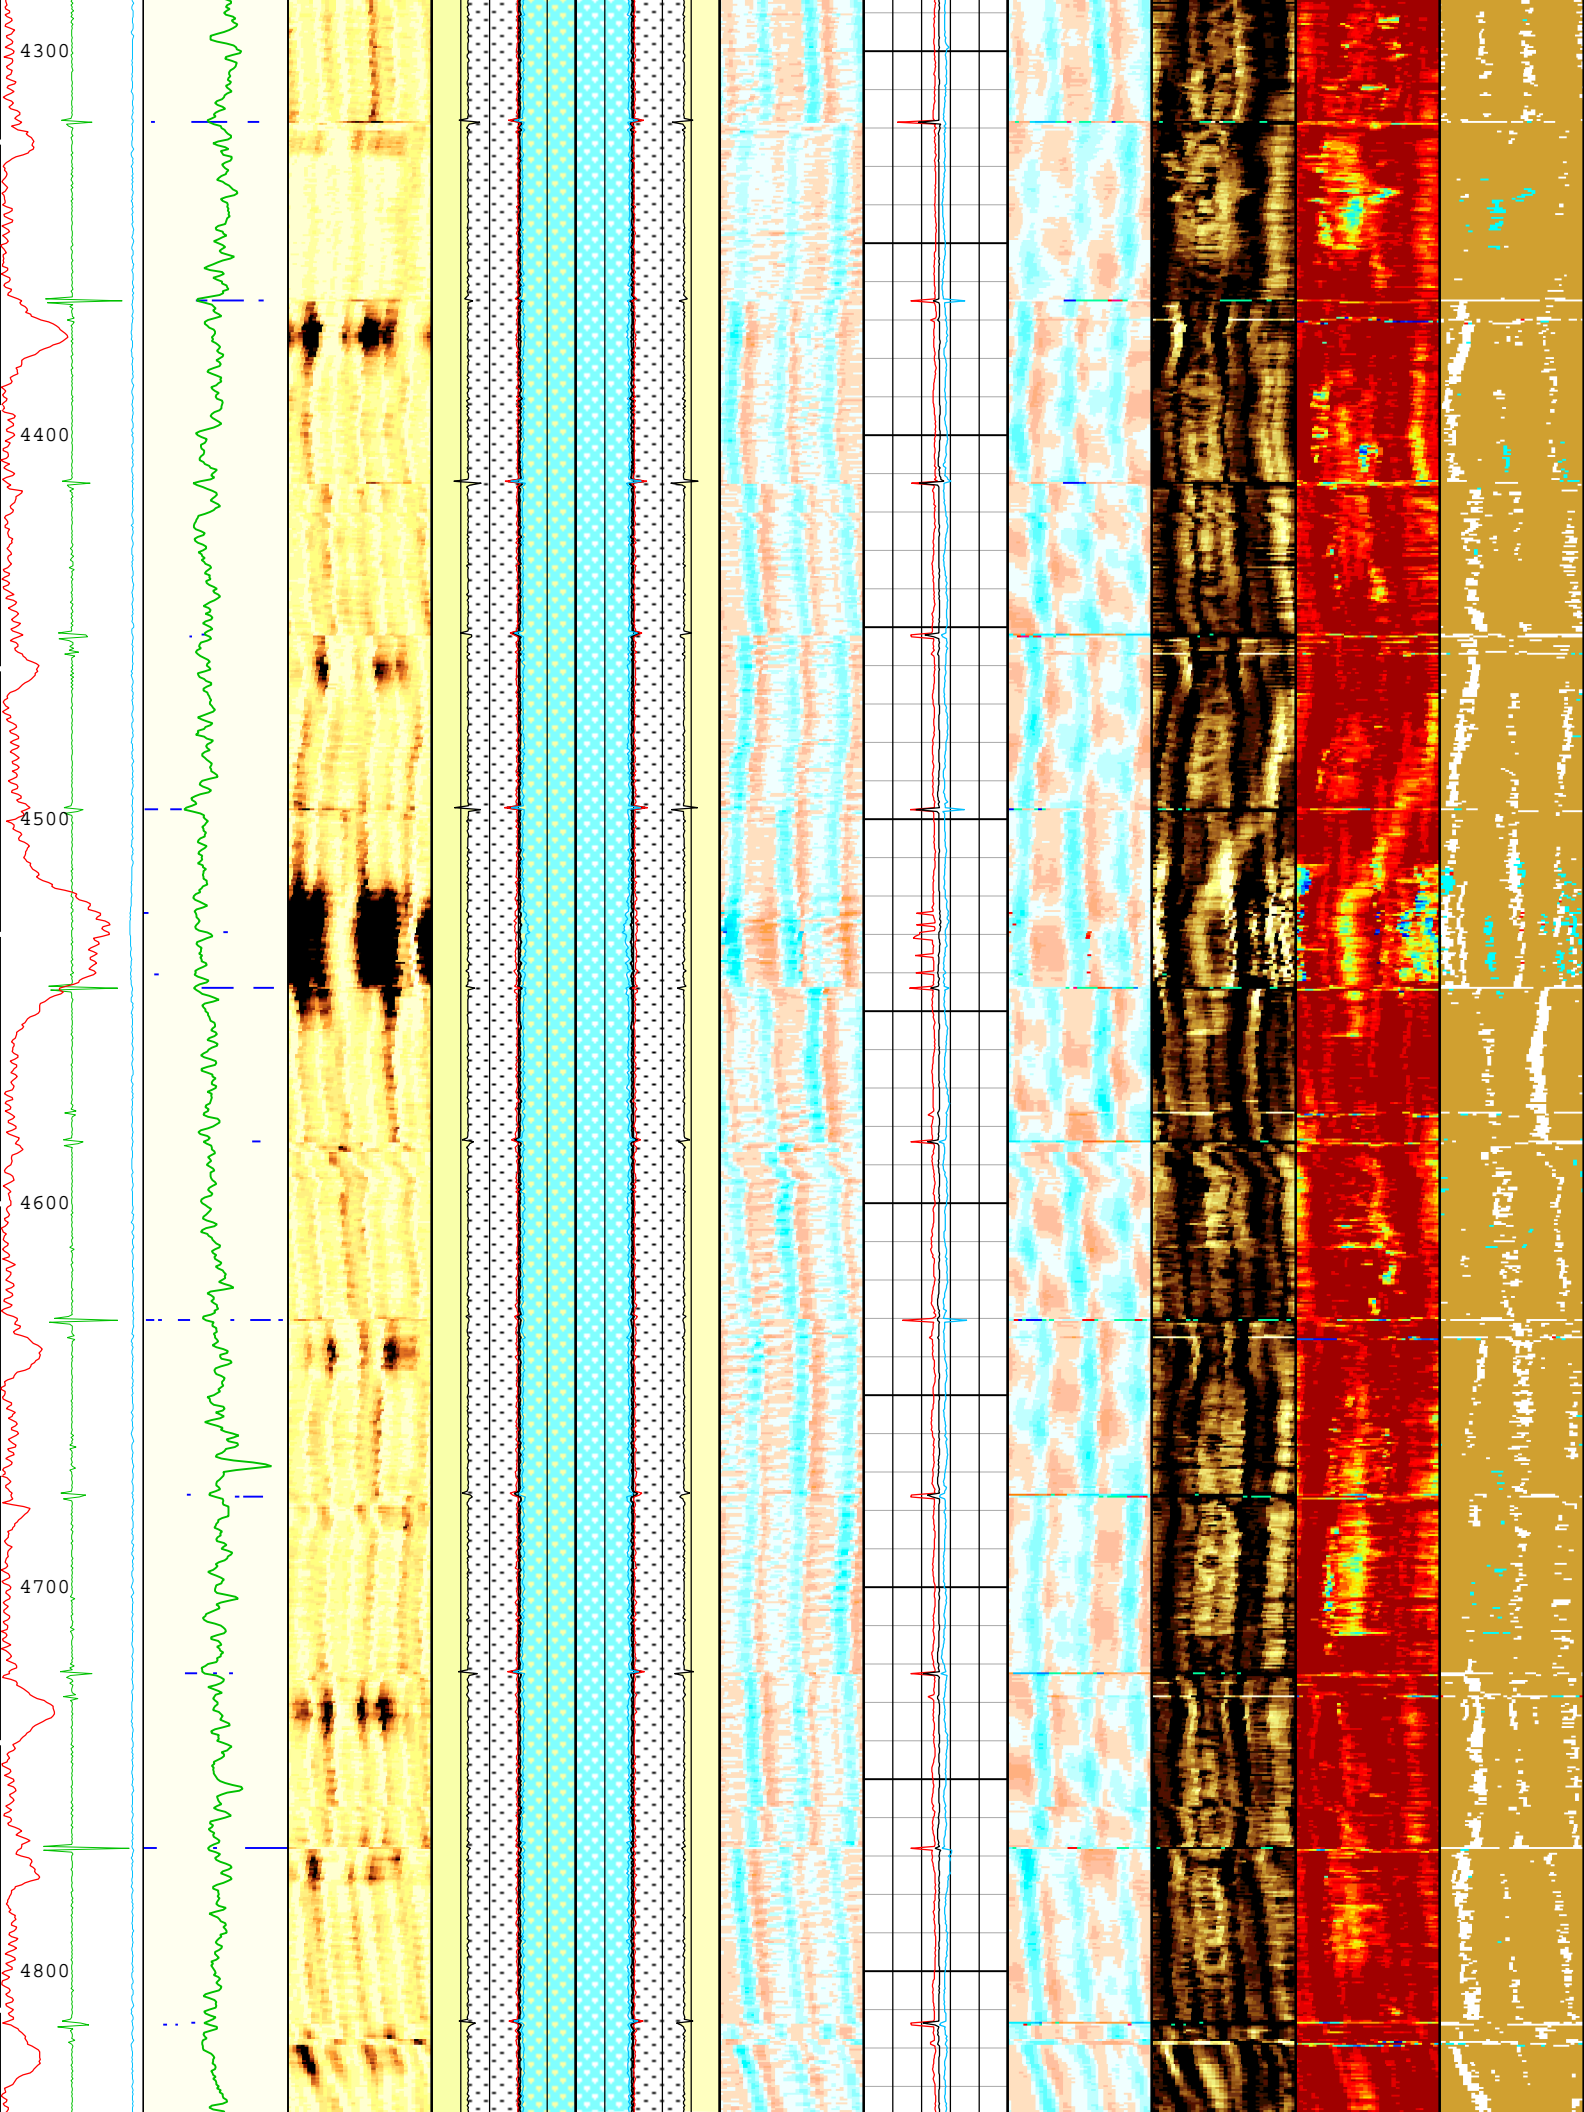

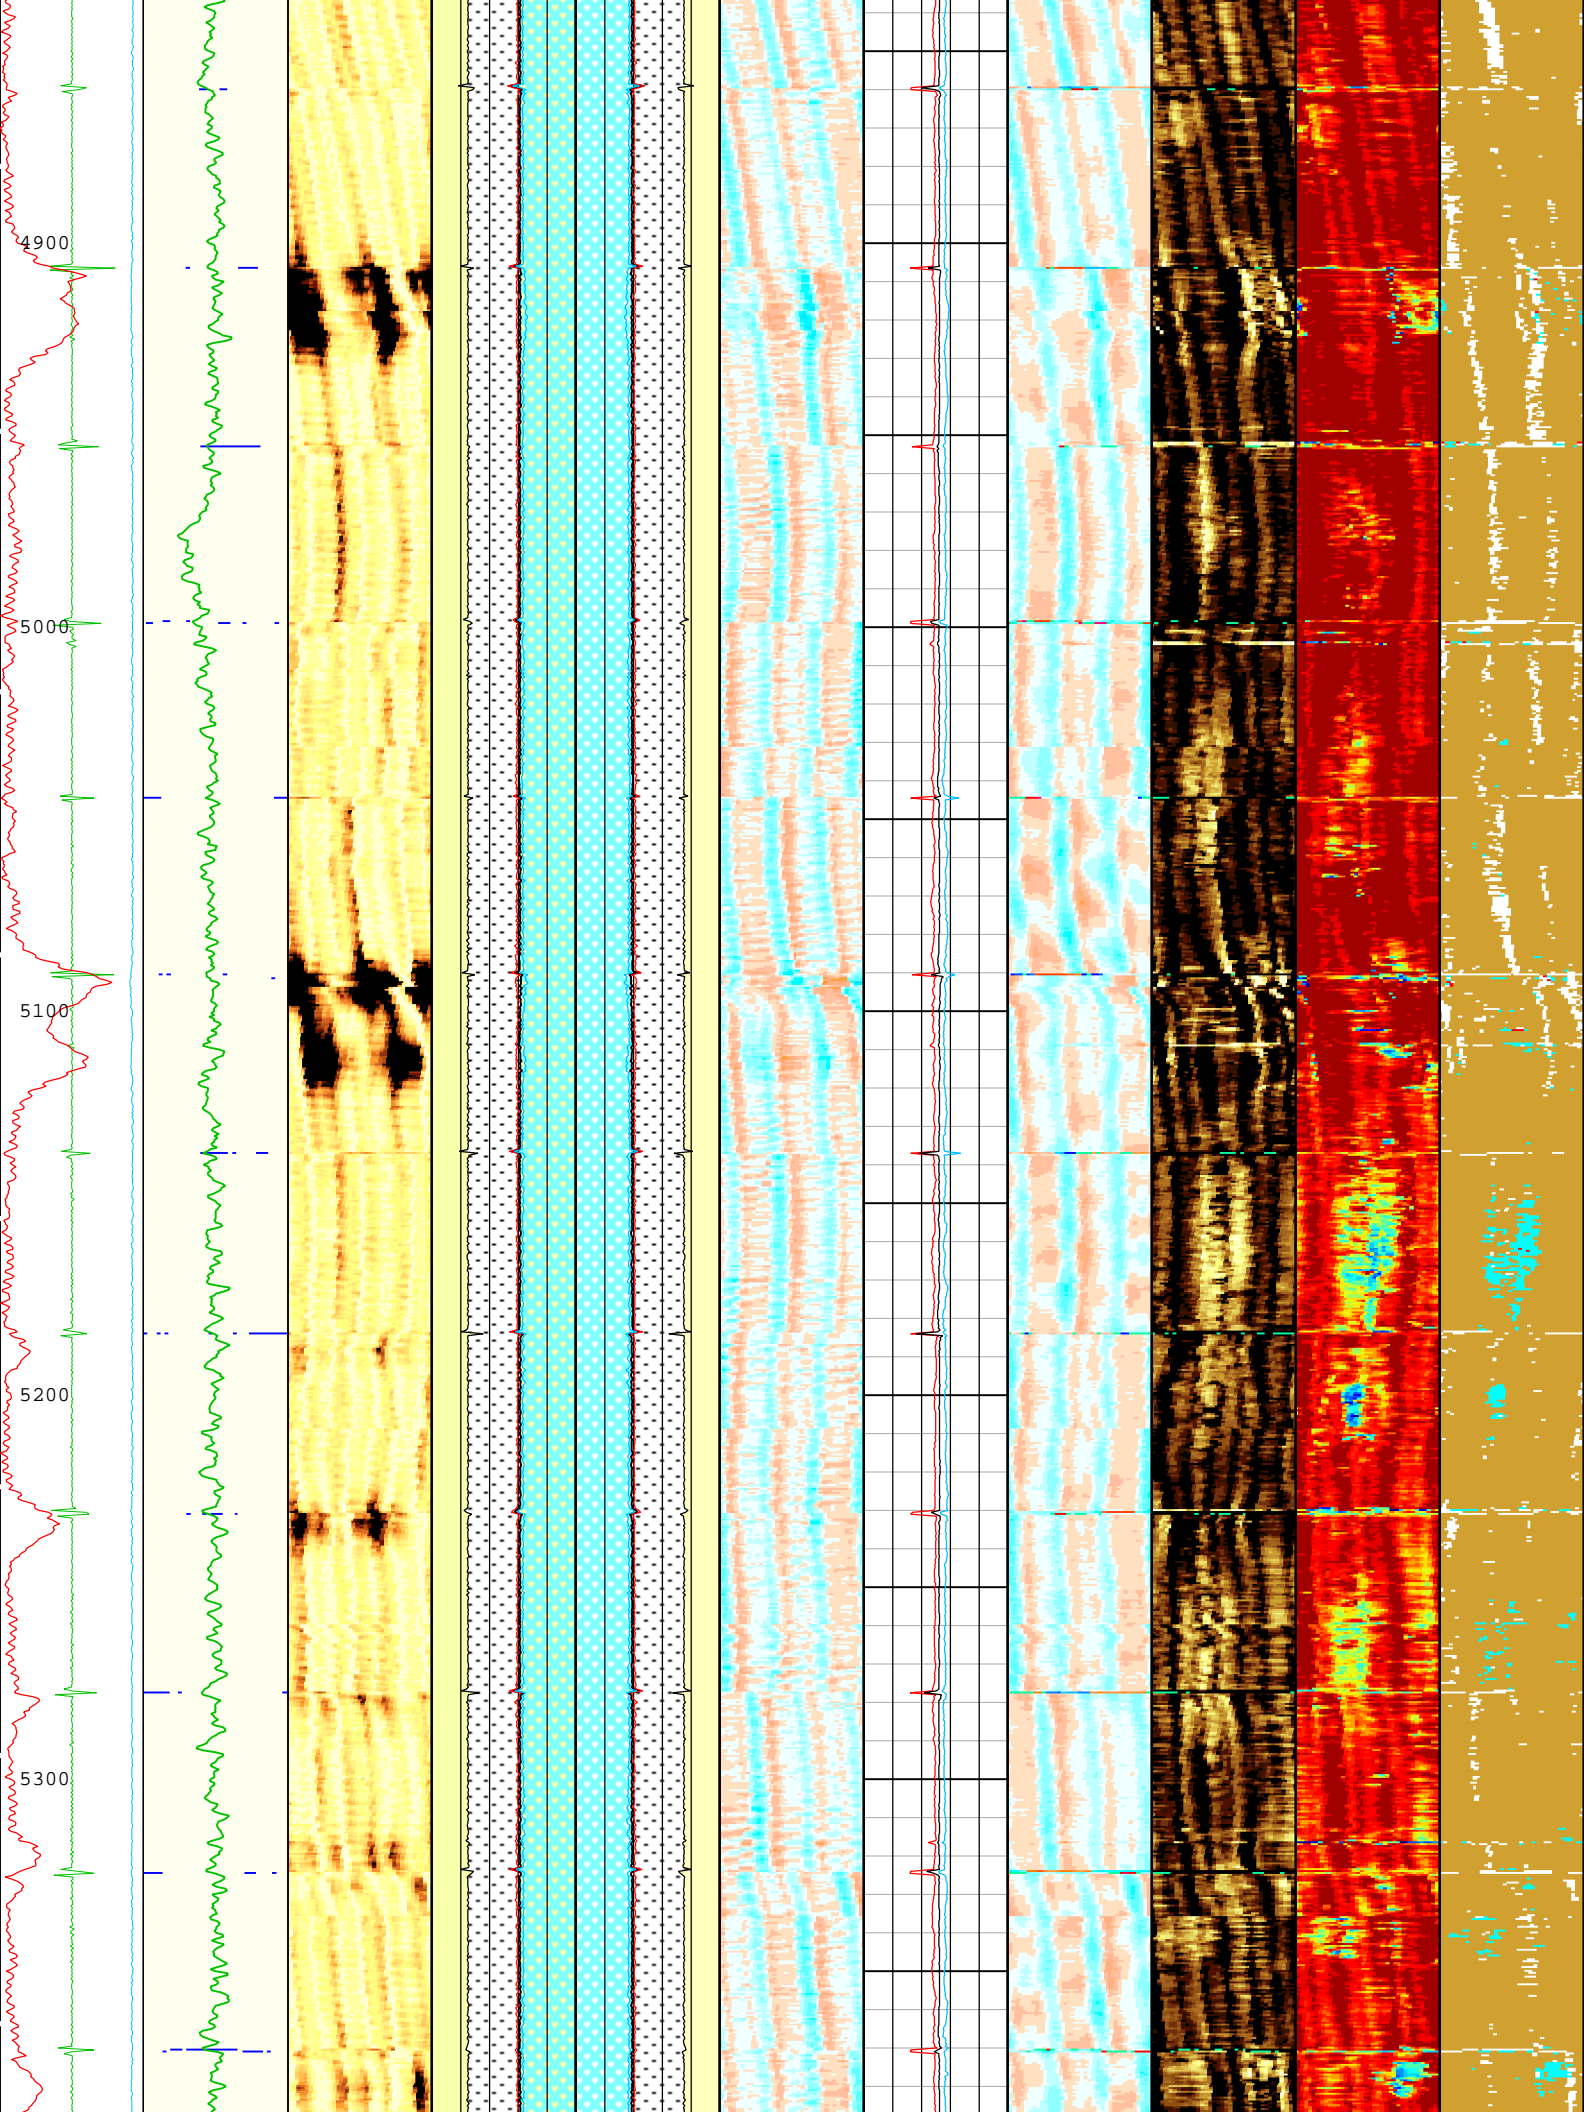

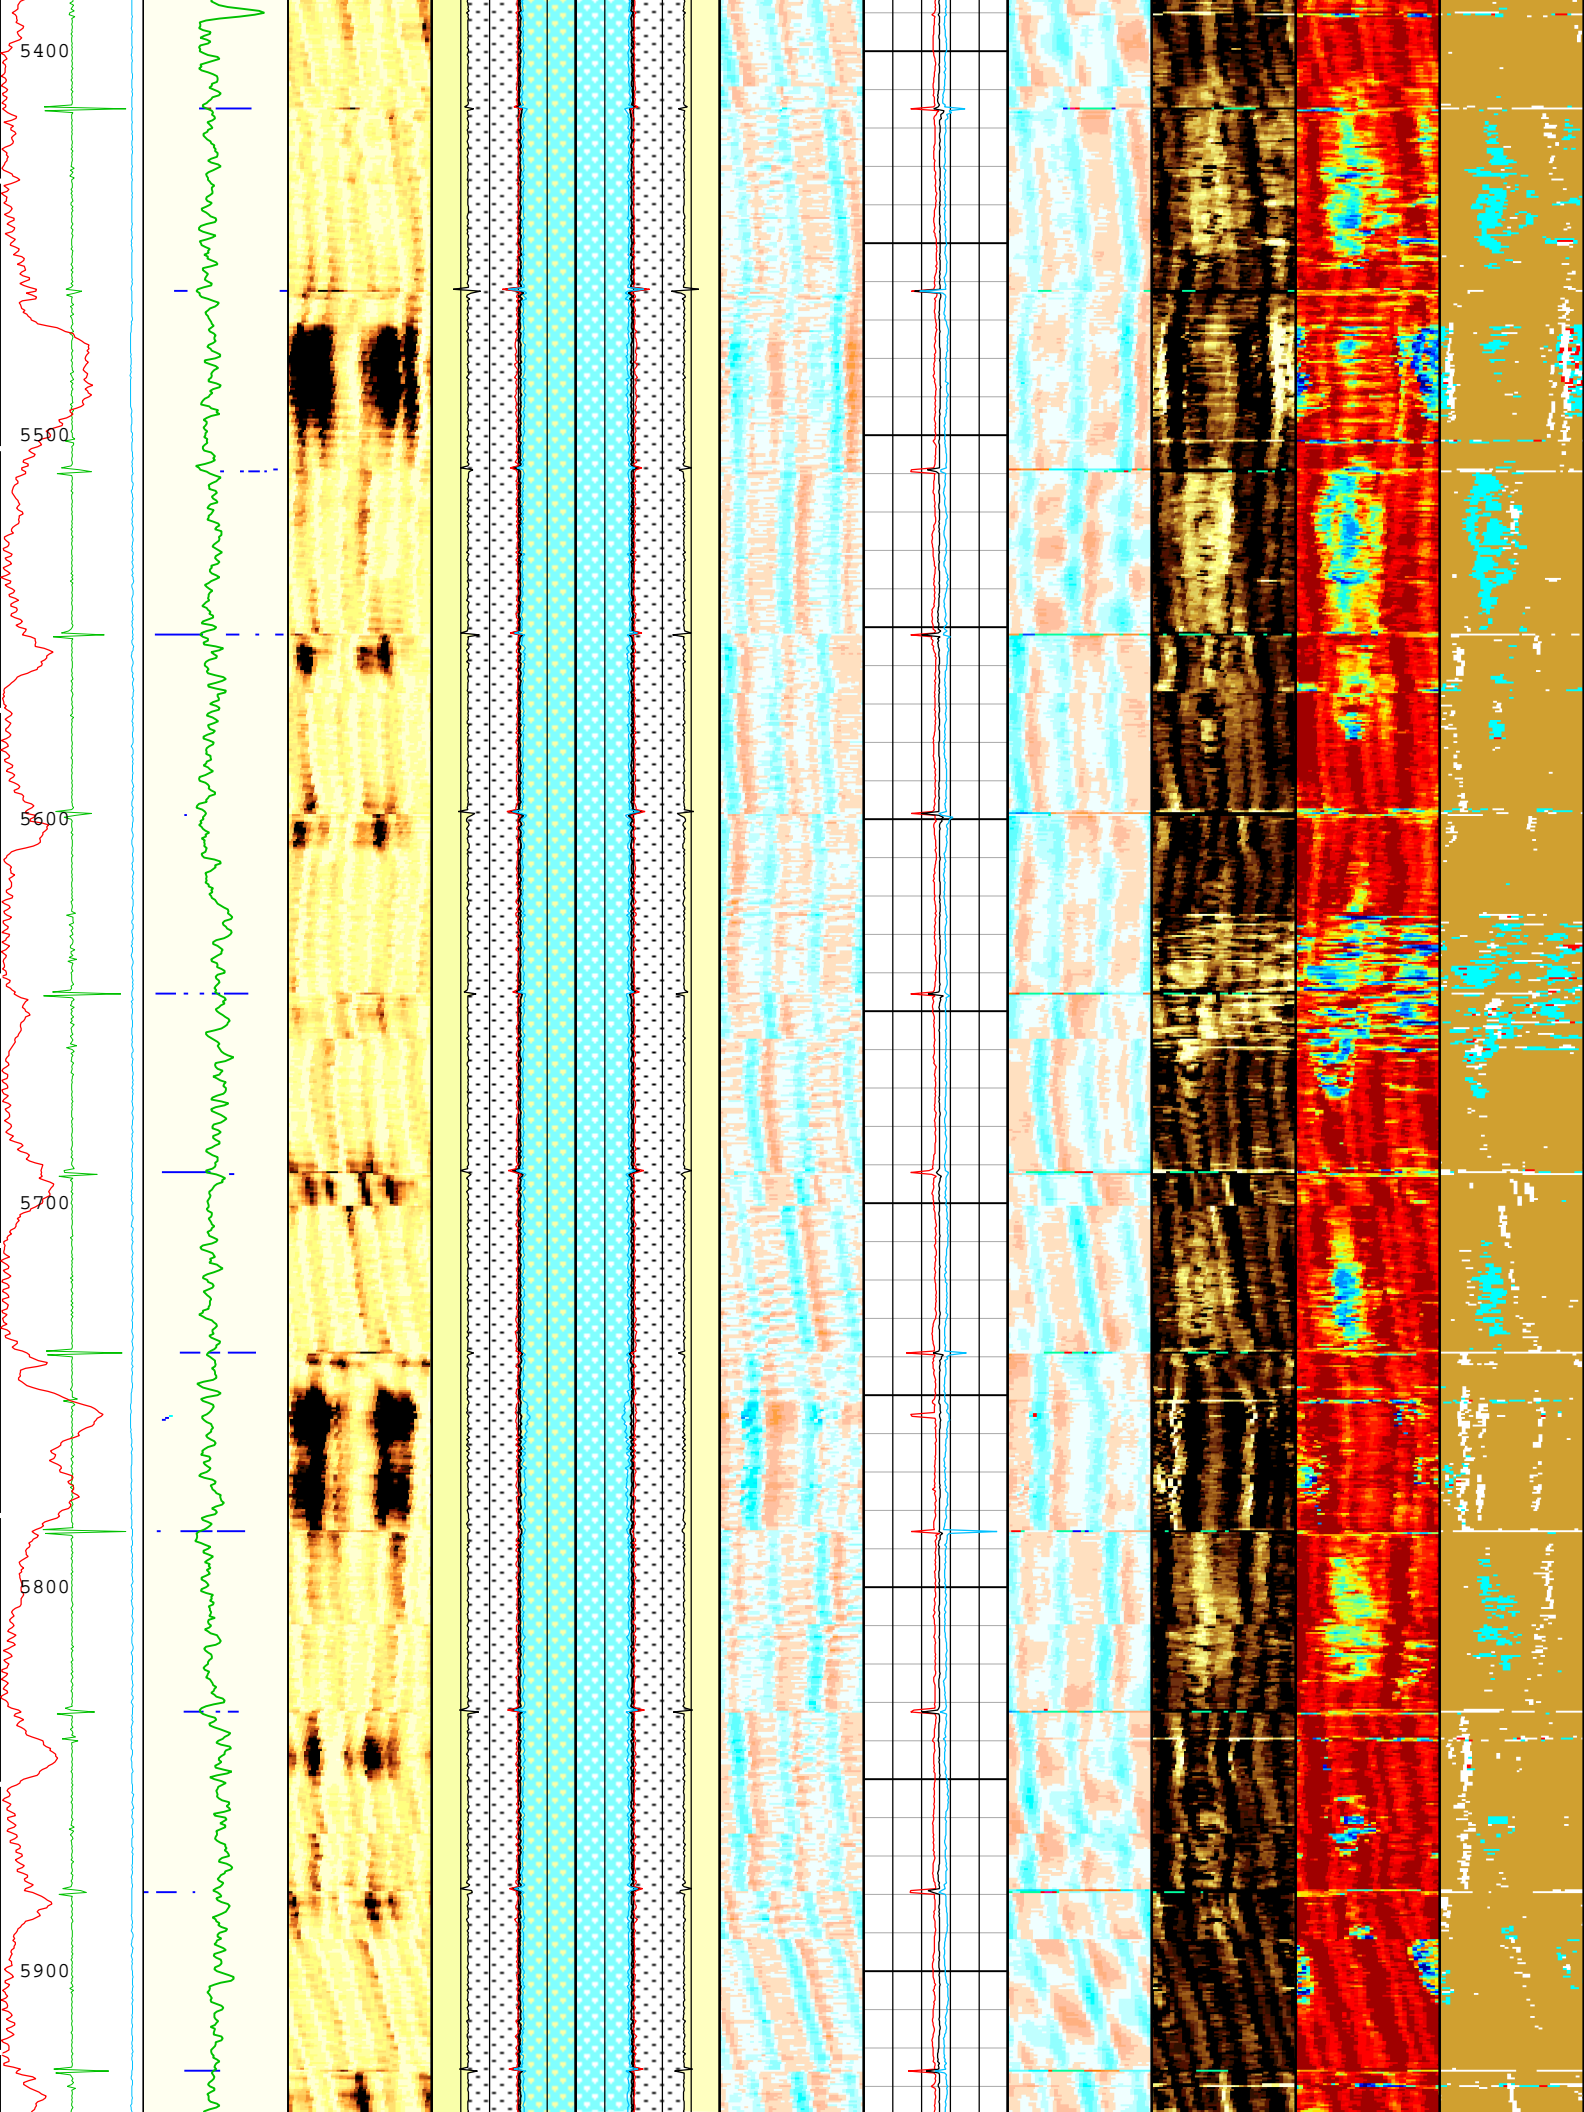

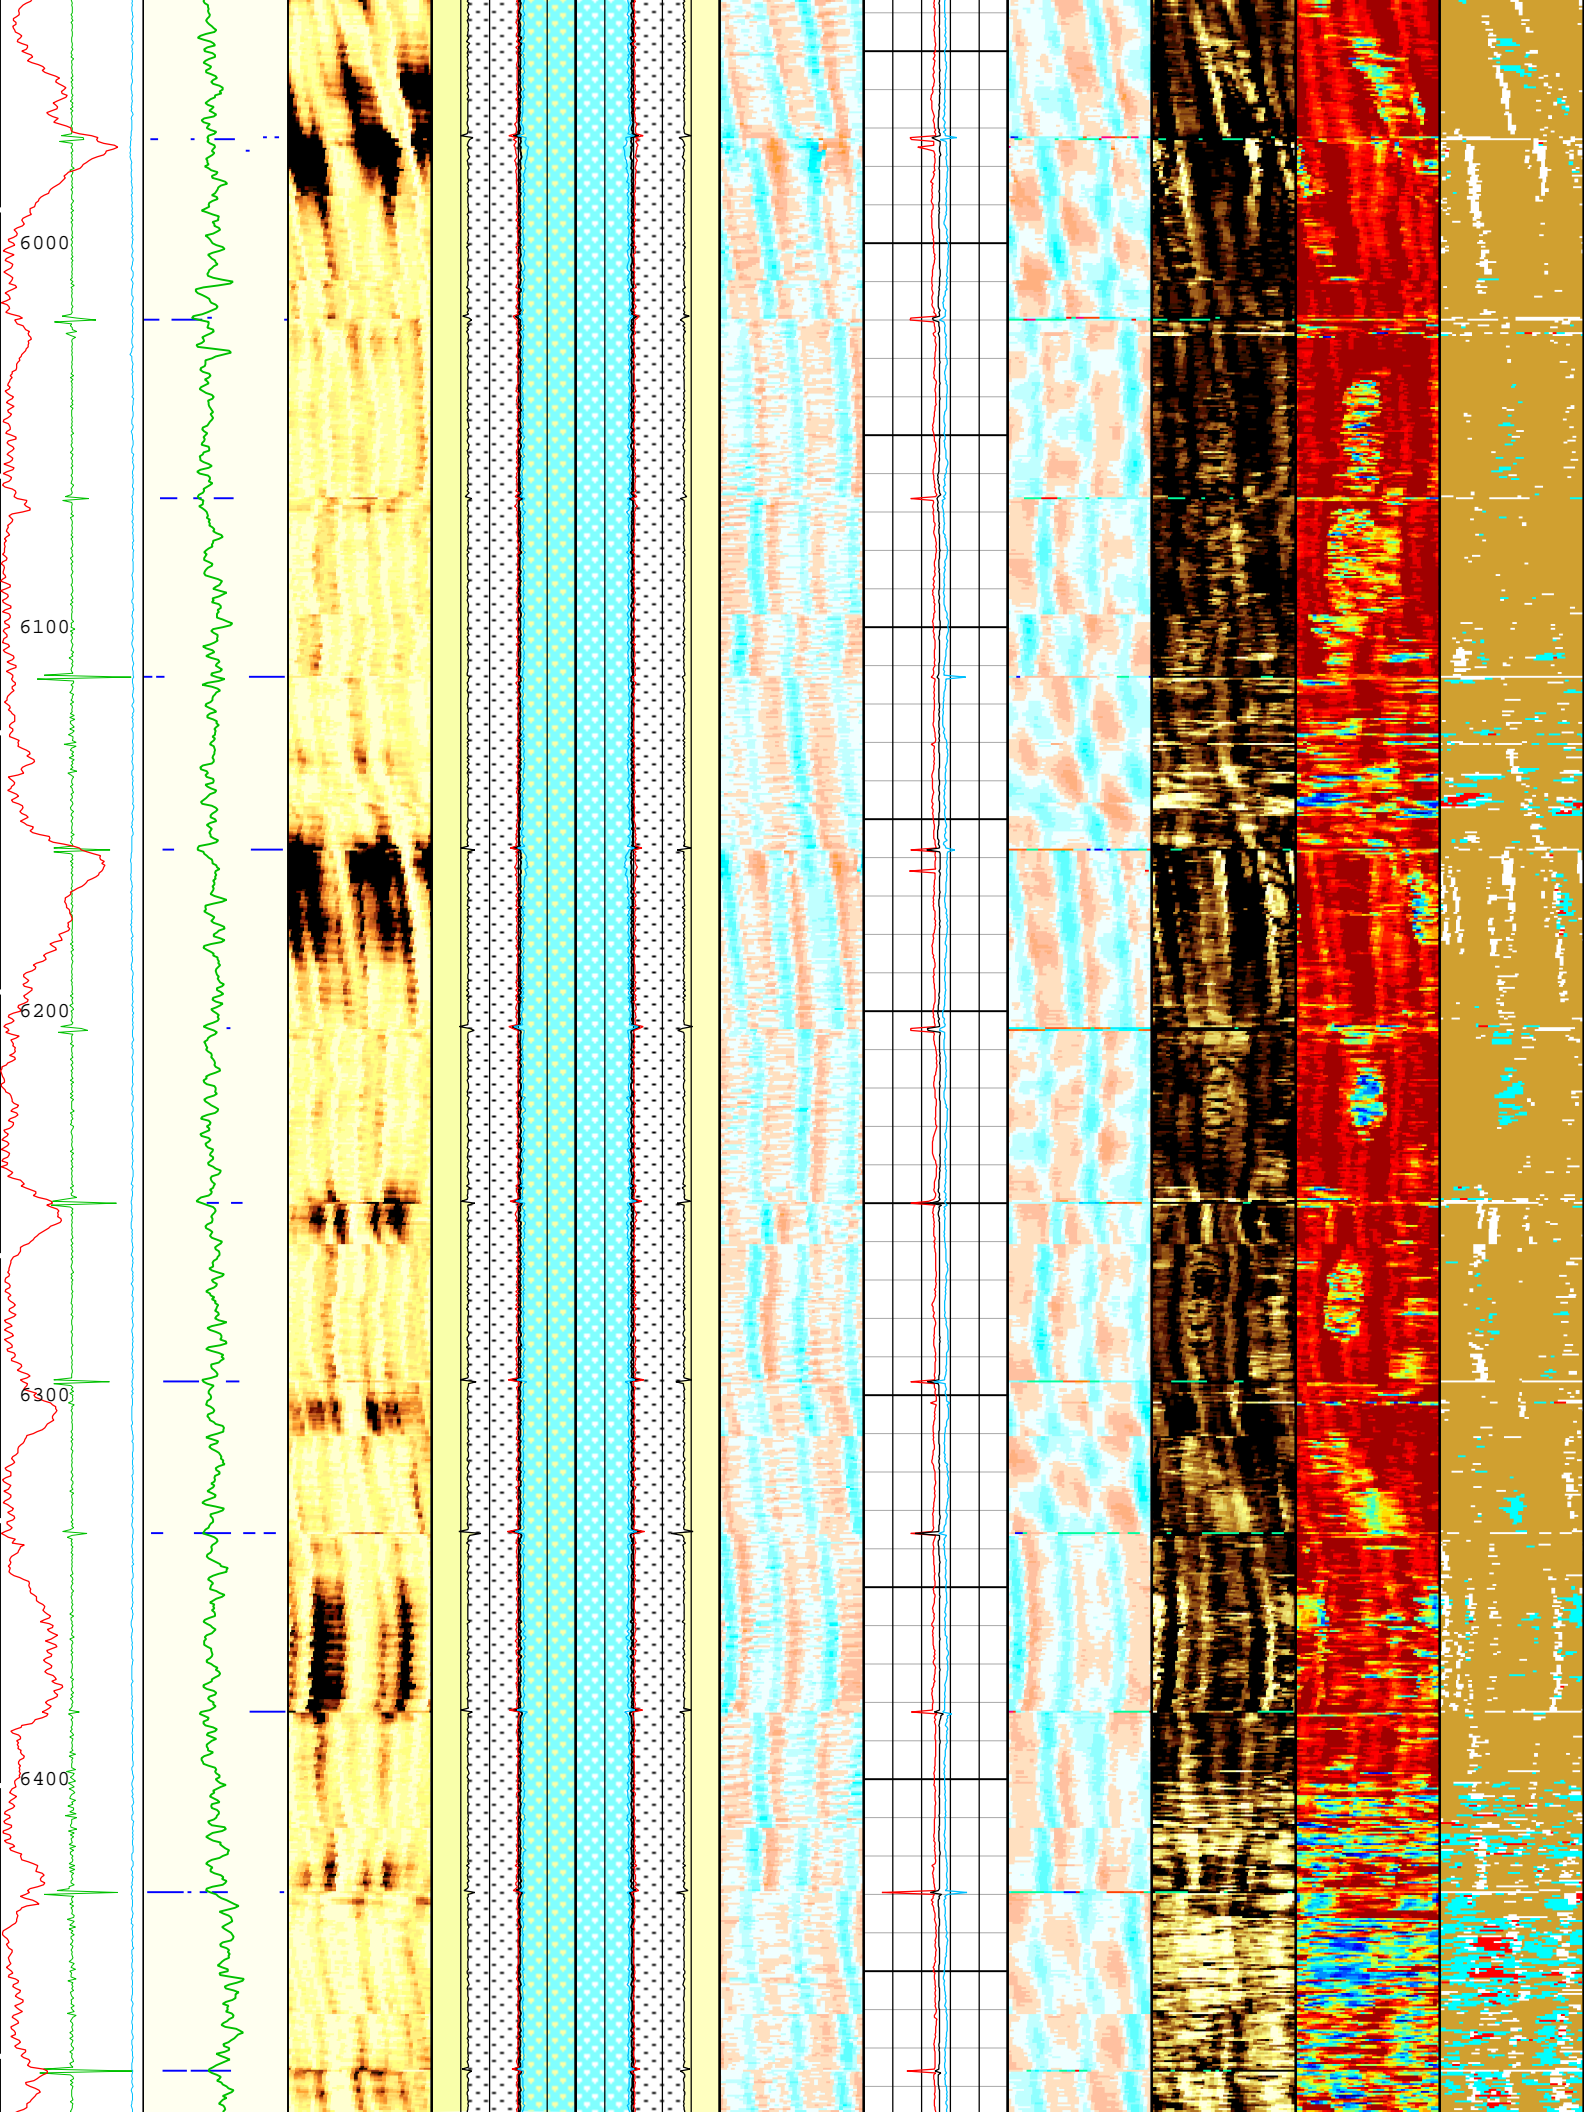

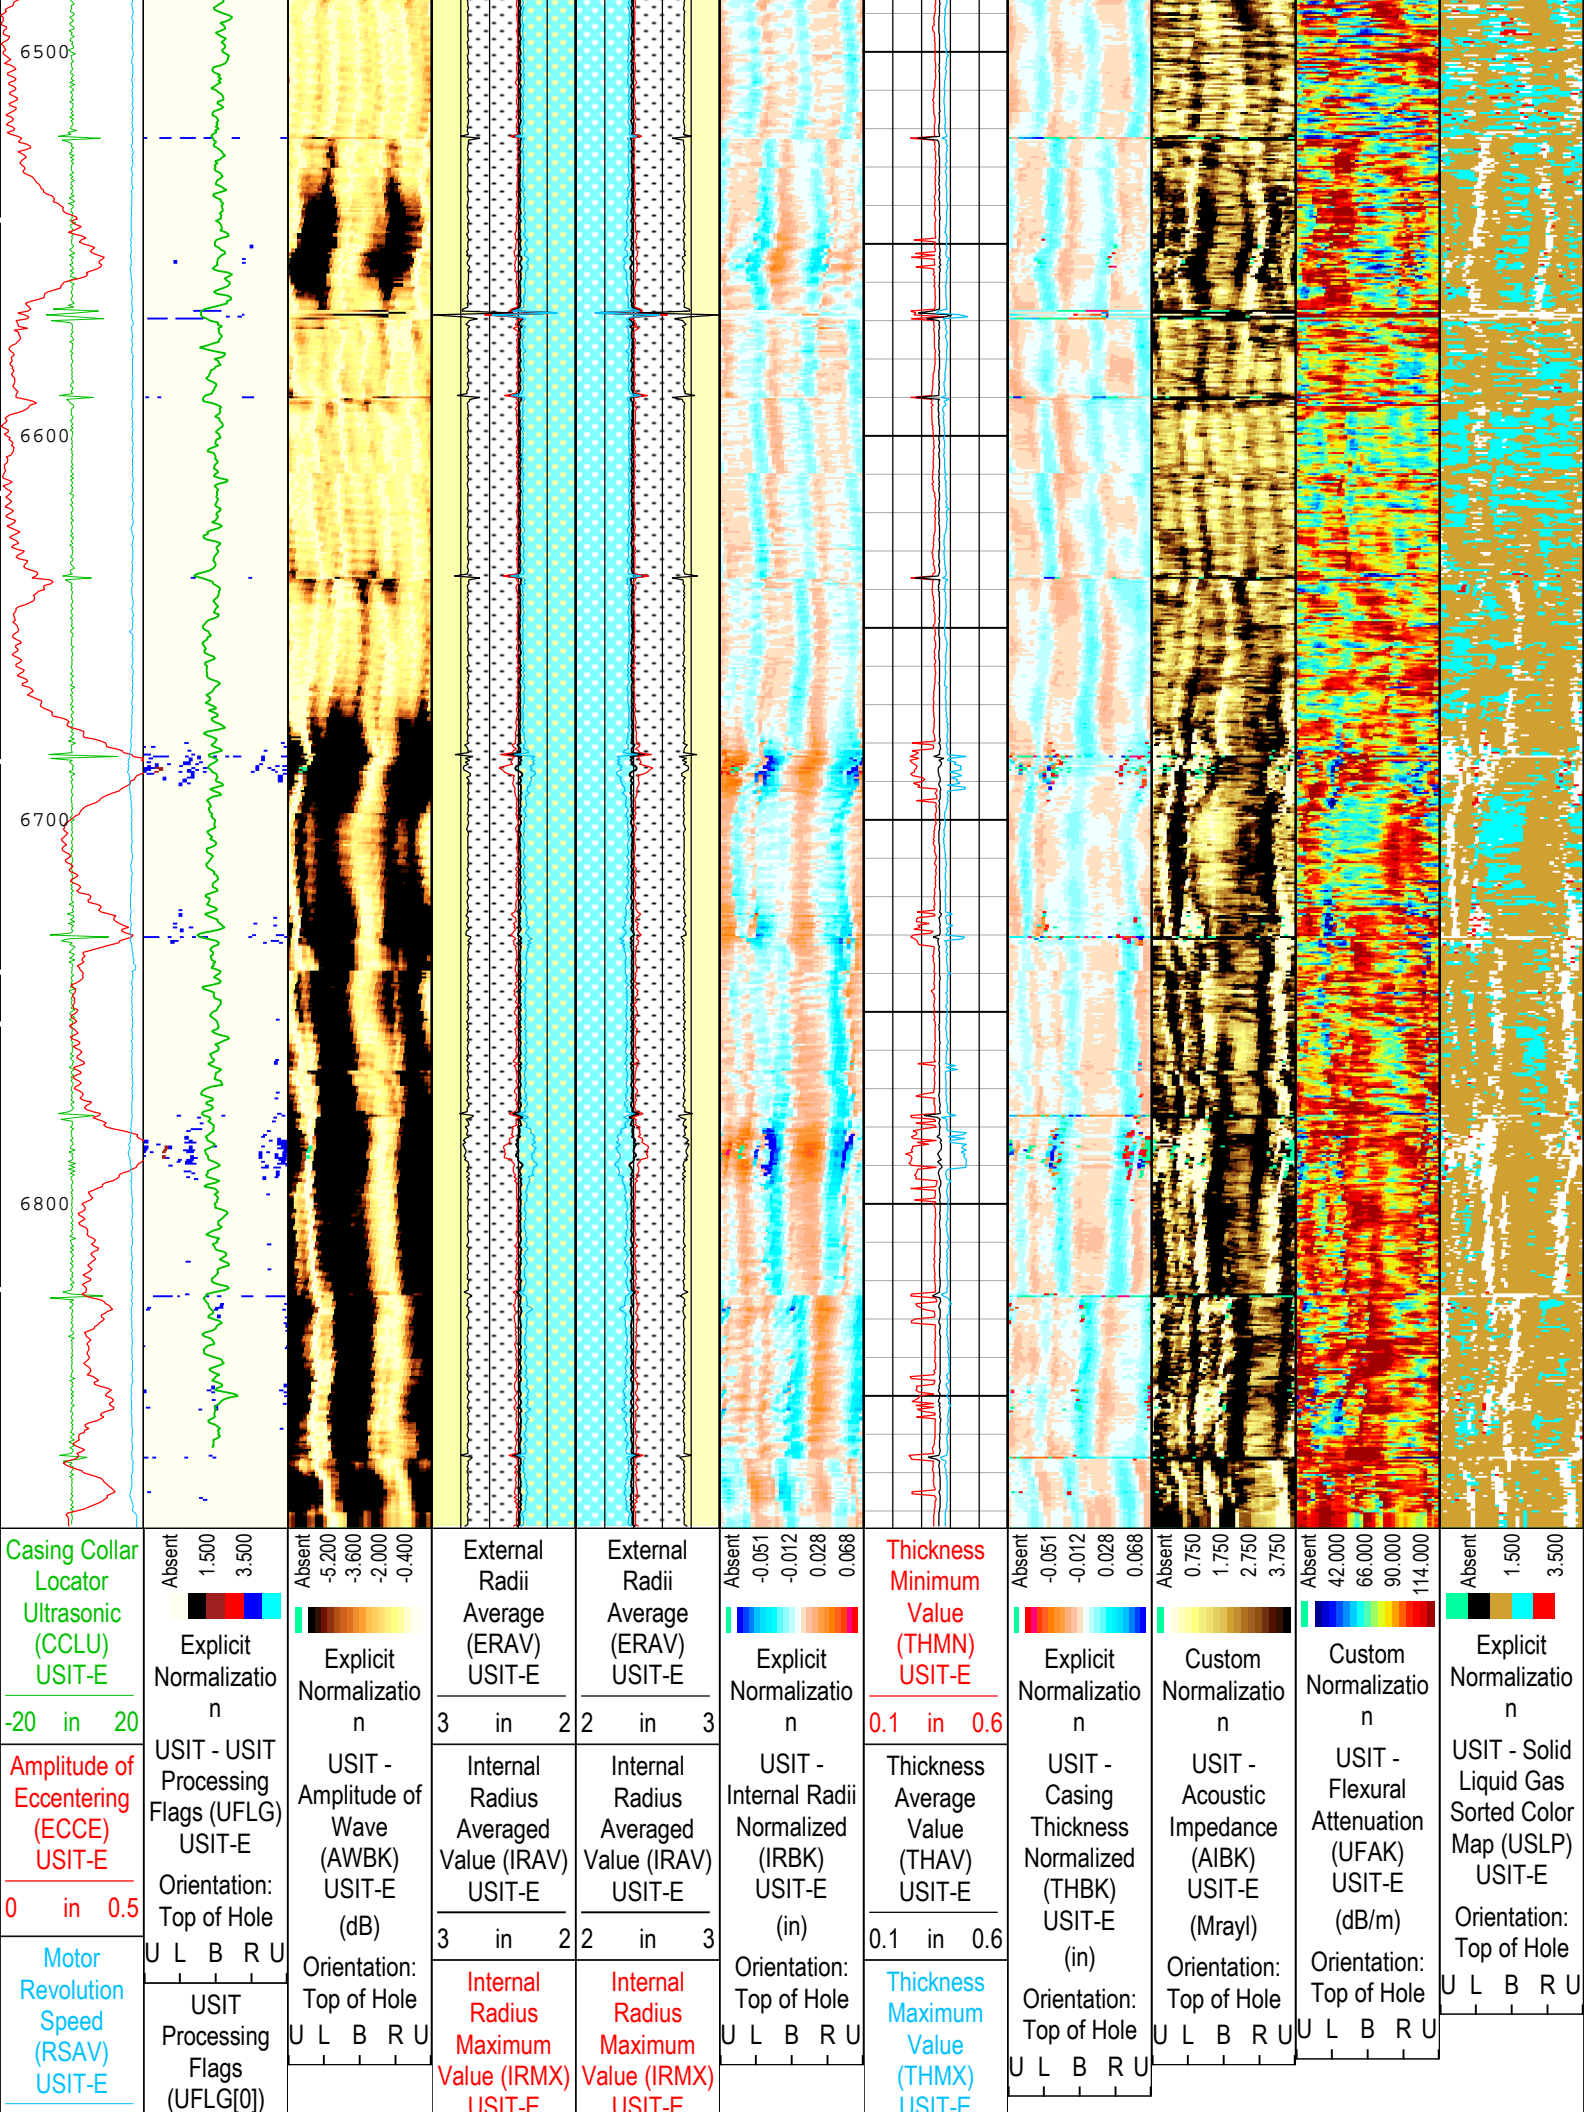

Depth Zone Parameters			
Parameter	Value	Start (ft)	Stop (ft)

All depth are actual.

1A: Parameters

Time Zone Parameters

All depth are at tool zero.

IBC Goodwin Compressed


All depths are referenced to toolstring zero

Company: Crestone Peak Resources and Operating LLC Well: File #3S-32H-K268
1A: Log[3]: Up: S003

TIME_1900 - Time Marked every 60.00 (s)

TIME_1900 - Time Marked every 60.00 (s)



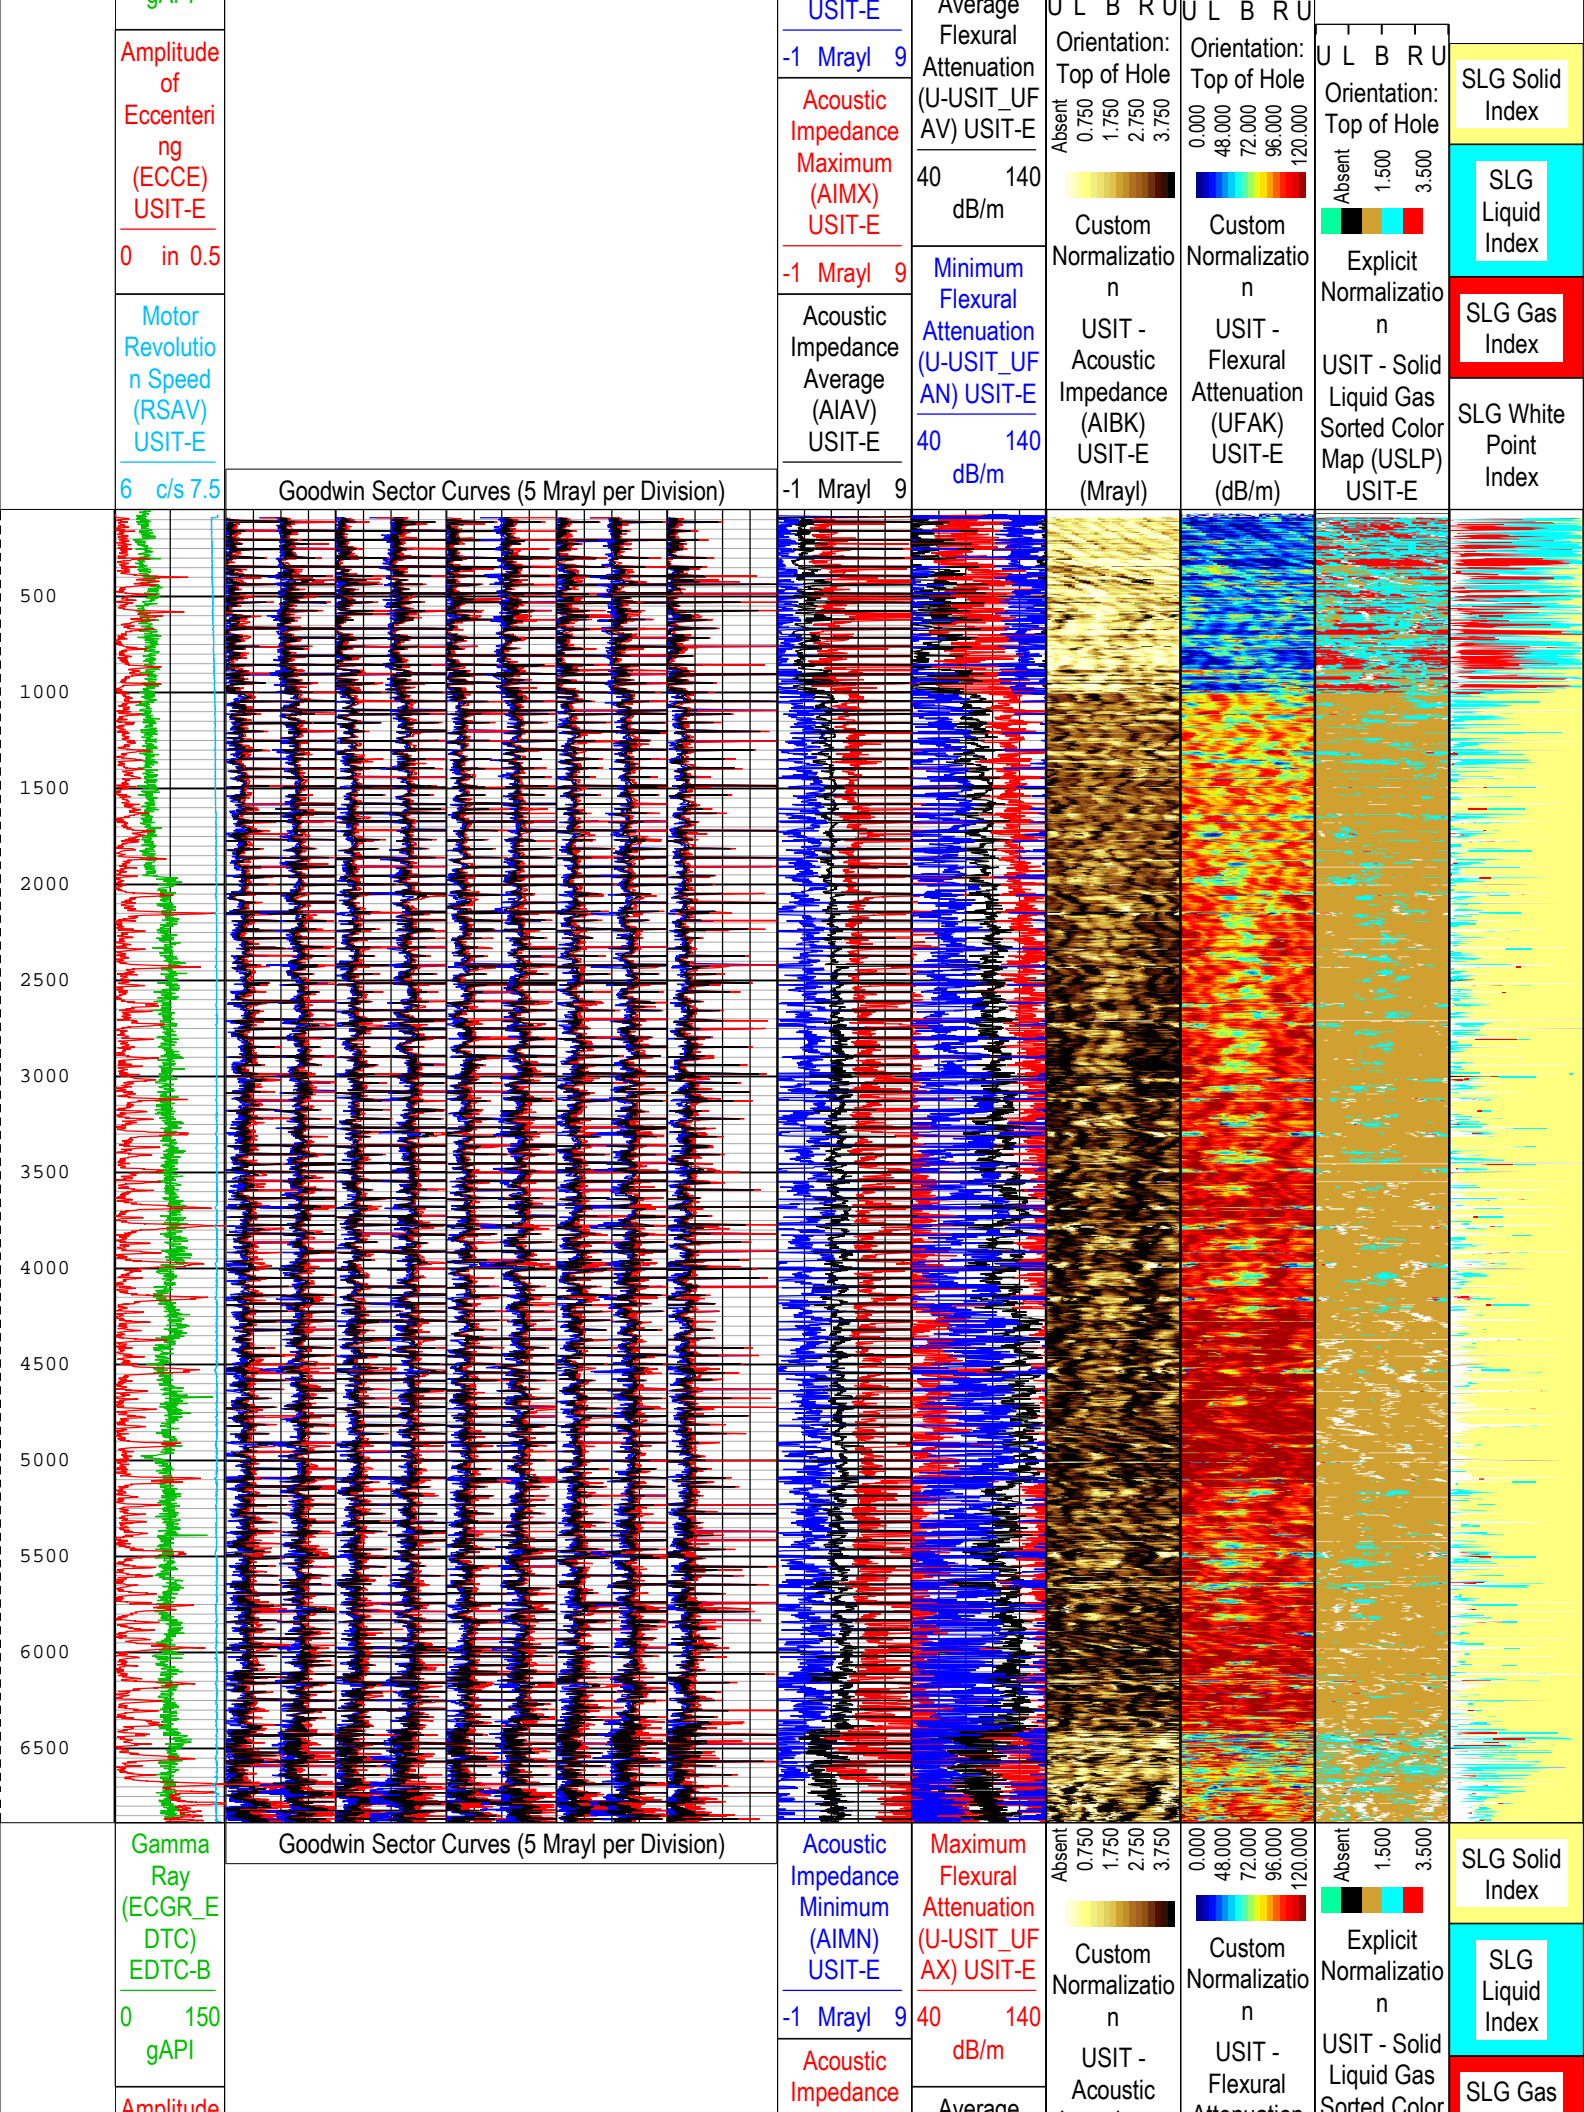

Amplitude of Eccentering (ECCE) USIT-E
0 in 0.5
Motor Revolution Speed (RSAV) USIT-E
6 c/s 7.5

Maximum (AIMX) USIT-E	Average Flexural Attenuation (U-USIT_UFAN) USIT-E	Impedance (AIBK) USIT-E (Mrayl)	Attenuation (UFAK) USIT-E (dB/m)	Corrected Collar Map (USLP) USIT-E	Index
-1 Mrayl 9	40 140 dB/m	Orientation: Top of Hole U L B R U	Orientation: Top of Hole U L B R U	Orientation: Top of Hole U L B R U	SLG White Point Index
Acoustic Impedance Average (AIAV) USIT-E	Minimum Flexural Attenuation (U-USIT_UFAN) USIT-E				
-1 Mrayl 9	40 140 dB/m				

TIME_1900 - Time Marked every 60.00 (s)

Description: USI Goodwin Format: Log (IBC Goodwin) Index Scale: 0.1 in per 100 ft Index Unit: ft Index Type: Measured Depth Creation Date: 03-Mar-2018 15:53:53


1A									
IBC SLG									
Software Version									
Acquisition System						Version			
Maxwell 2017 SP3						7.3.92069.3100			
Application Patch						Wireline_Hotfix-RTDLIS-2017SP3_7.3.92363			
						Wireline_NPD-ICE2-2017SP3_7.3.93033			
Pass Summary									
Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
1A	Log[1]:Up	Up	561.13 ft	959.50 ft	03-Mar-2018 12:31:46 PM	03-Mar-2018 12:37:48 PM	ON	2.09 ft	Yes
All depths are referenced to toolstring zero									
Log	Company:Crestone Peak Resources and Operating LLC						Well:File #3S-32H-K268		
1A: Log[1]:Up:S003									


Description: USI IBC SLG Format: Log (IBC SLG) Index Scale: 5 in per 100 ft Index Unit: ft Index Type: Measured Depth Creation Date: 03-Mar-2018 15:53:59

TIME_1900 - Time Marked every 60.00 (s)

USIT Processing Flags (UFLG[0]) USIT-E	
1 - UFLG 1 Value within [0.0 - 1.5] - :	■ UTIM Error
2 - UFLG 2 Value within [1.5 - 2.5] - :	■ Pulse Origin Not Detected
3 - UFLG 3 Value within [2.5 - 3.5] - :	■ WINLEN Error
4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :	■ Casing Thickness Error
5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :	■ Loop Processing Error

Casing Collar Locator Ultrasonic (CCLU) USIT-E	U L B R U	Orientation: Top of Hole	Acoustic Impedance Minimum (AIMN) USIT-E	Minimum Flexural Attenuation (U-USIT_UFAN) USIT-E	U L B R U	Orientation: Top of Hole	U L B R U	Orientation: Top of Hole	SLG Solid Index
-20 in 20	Absent 1.500 3.500	Explicit Normalization	-1 Mrayl 9	0 dB/m 150	ant 50 50 50 50	ant 50 50 50 50	ant 50 50 50 50	ant 50 50 50 50	
Amplitude of Eccentering (ECCE) USIT-E	USIT - USIT	Processing Flags (UFLG) USIT-E	Acoustic Impedance Average (AIAV)	Average Flexural Attenuation (U-USIT_UFAN)	USIT - USIT	Orientation: Top of Hole	Orientation: Top of Hole	Orientation: Top of Hole	
	USIT Processing	ant 00 00 00 00							

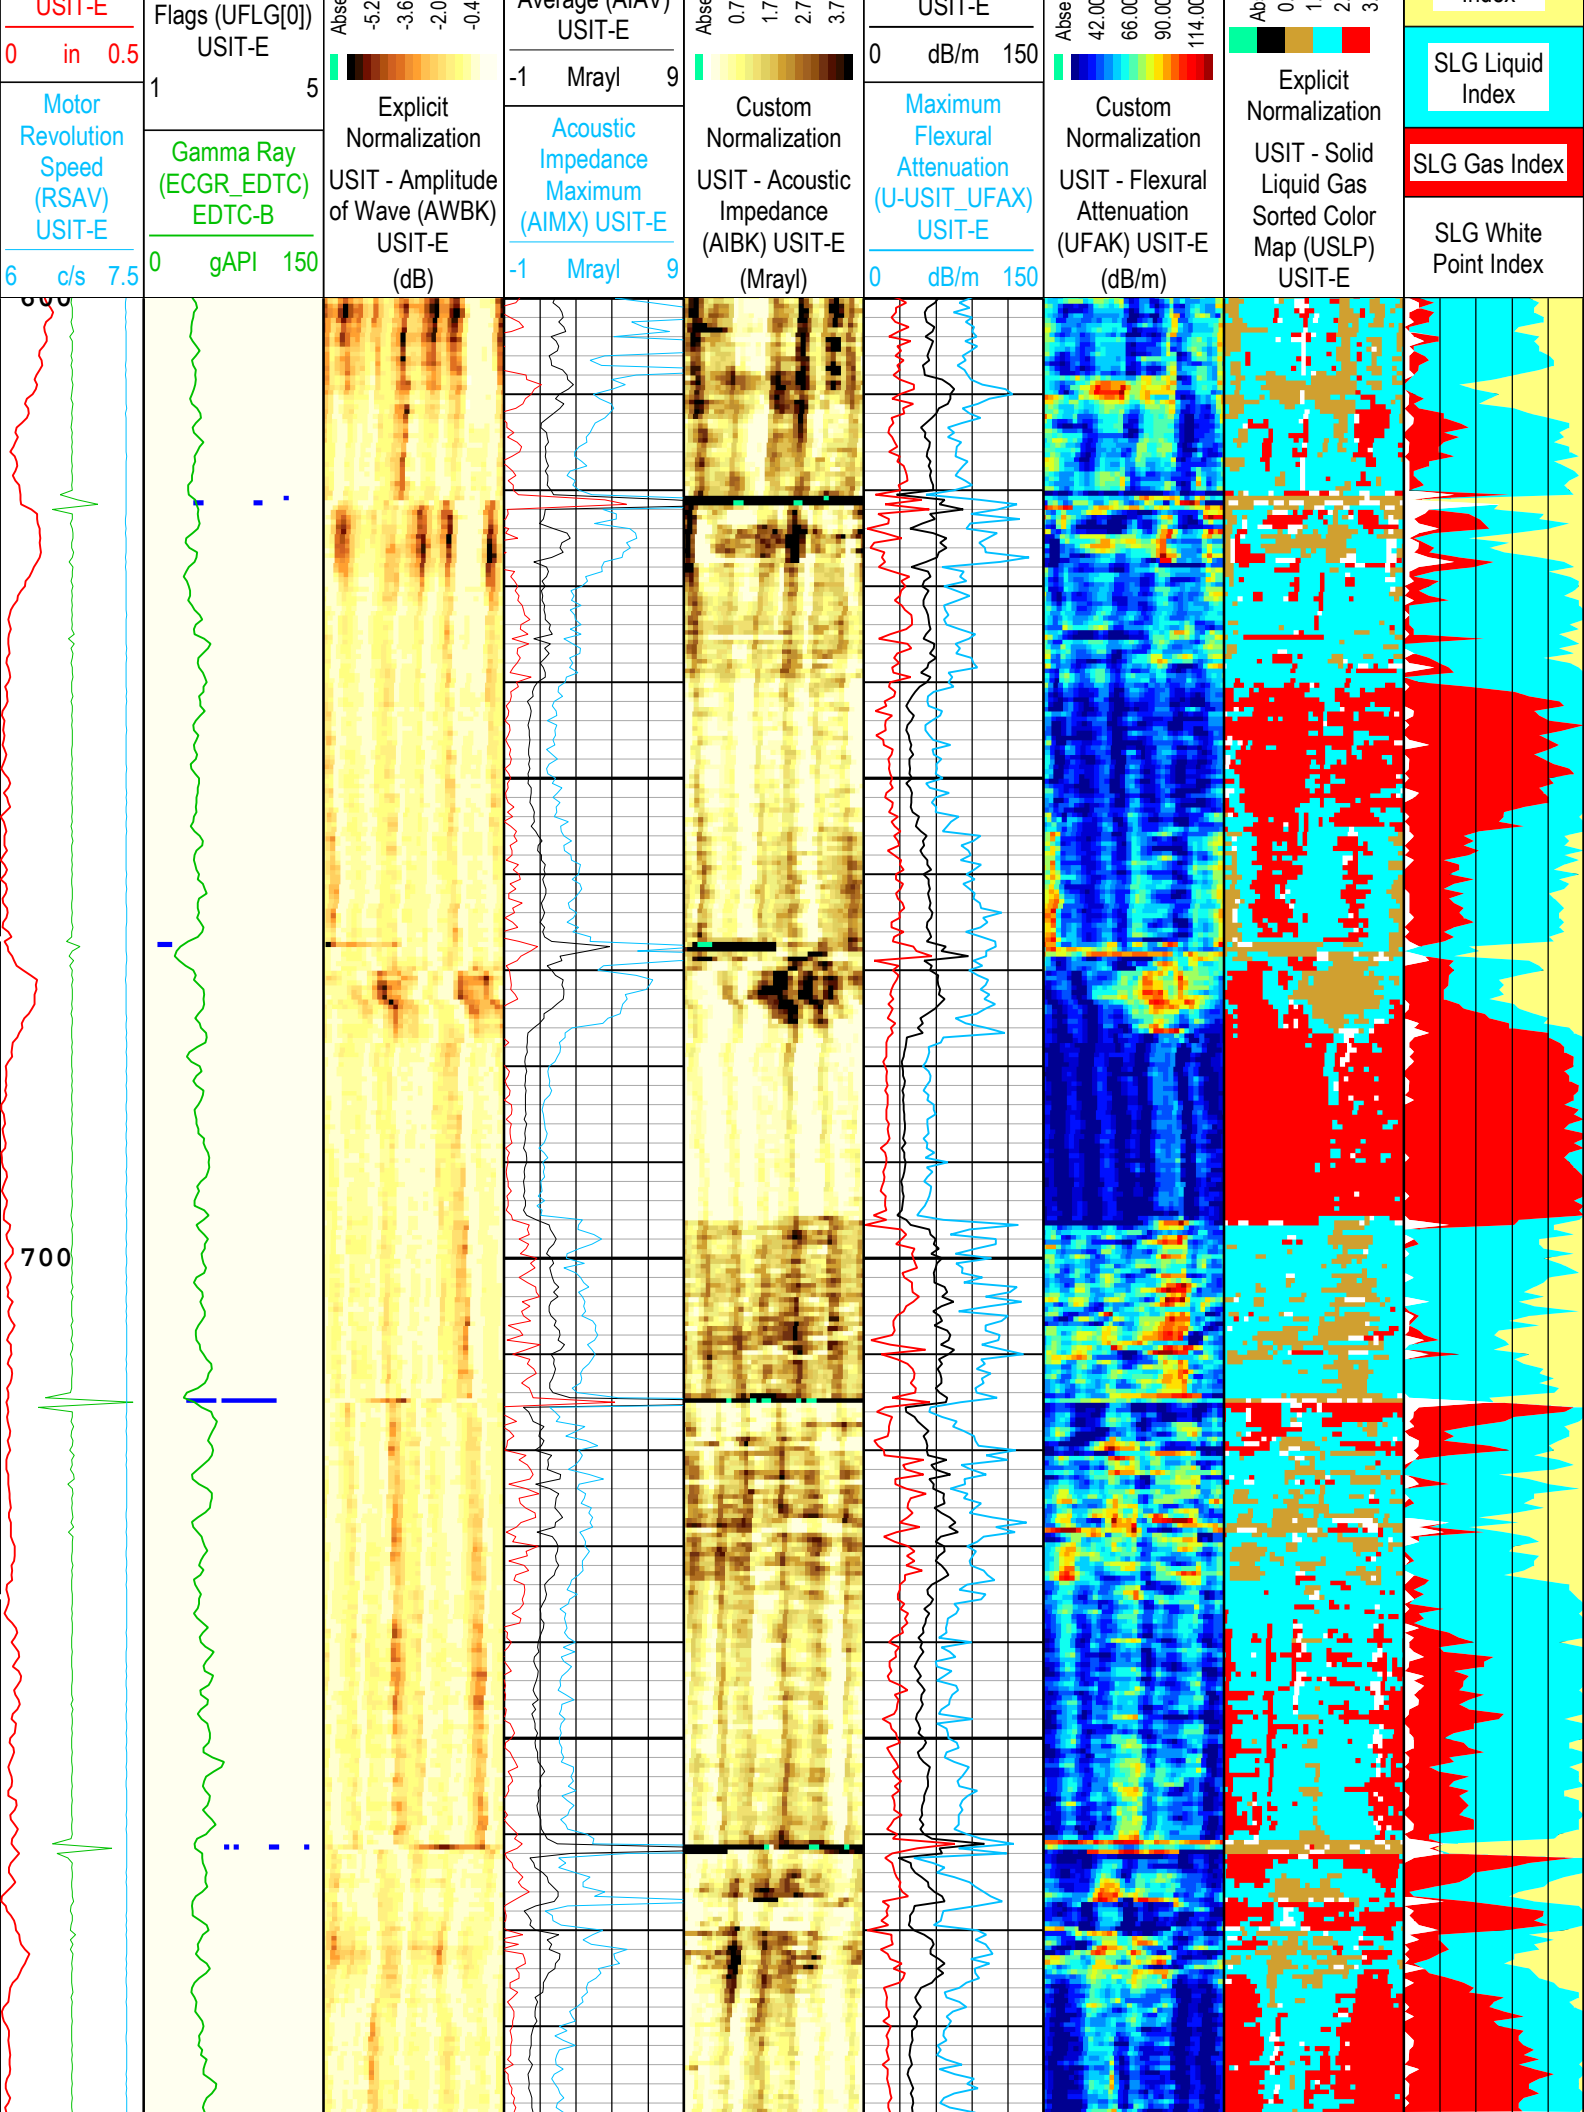

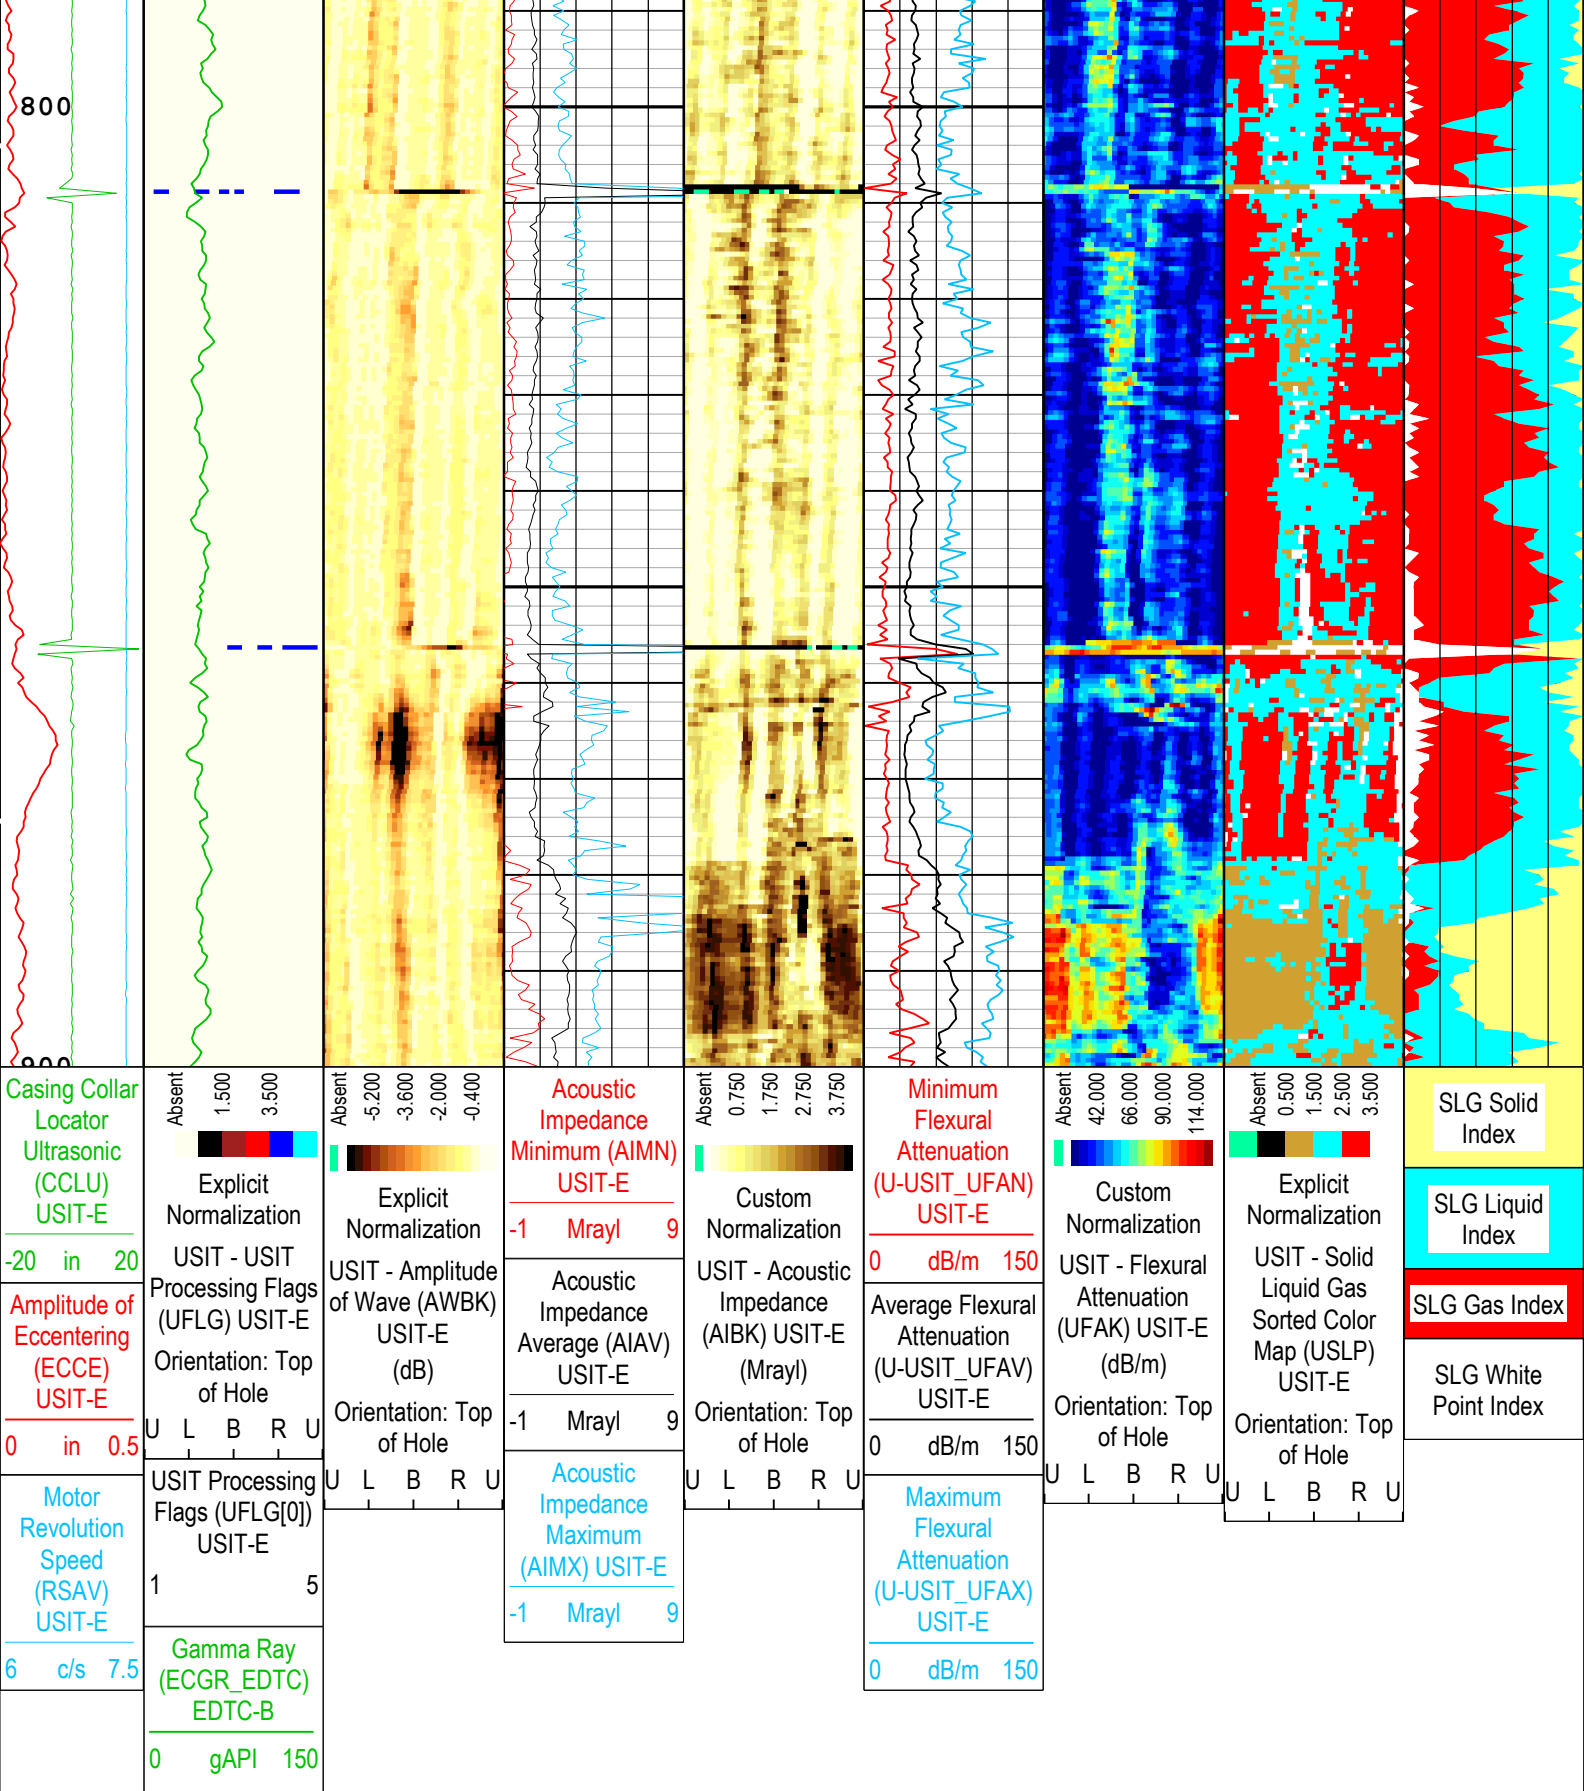

USIT Processing Flags (UFLG[0]) USIT-E	
1 - UFLG 1 Value within [0.0 - 1.5] - :	UTIM Error
2 - UFLG 2 Value within [1.5 - 2.5] - :	Pulse Origin Not Detected
3 - UFLG 3 Value within [2.5 - 3.5] - :	WINLEN Error
4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :	Casing Thickness Error
5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :	Loop Processing Error
TIME_1900 - Time Marked every 60.00 (s)	

Channel Processing Parameters				
1A: Parameters				
Parameter	Description	Tool	Value	Unit
ISSBAR	Barite Mud Presence Flag	Borehole	No	
BERJ	Bad Echo Rejection	USIT-E	On	
BHS	Borehole Status (Open or Cased Hole)	Borehole	Cased	
BS	Bit Size	WLSESSION	13.5	in
CASING_PRATIO	Casing Poisson Ratio	USIT-E	Standard Poisson Ratio	
CBLO	Casing Bottom (Logger)	WLSESSION	18900	ft
CDEN	Cement Density	USIT-E	11	lbm/gal
CDEN	Cement Density	EDTC-B	16.69	lbm/gal
CMTY(U-USIT_CEMT)	Cement Type	USIT-E	Light Cement	
DFD	Drilling Fluid Density	Borehole	8.4	lbm/gal
DFT_CATEGORY	Drilling Fluid Type	Borehole	Water	
DTMD	Borehole Fluid Slowness	Borehole	206	us/ft
FD	Fluid Density	USIT-E	10.4	lbm/gal
FDII	FPM Data Interpolation Interval	USIT-E	0	ft
GCSE_DOWN_PASS	Generalized Caliper Selection for WL Log Down Passes	Borehole	BS(RT)	
GCSE_UP_PASS	Generalized Caliper Selection for WL Log Up Passes	Borehole	BS(RT)	
GR_MULTIPLIER	Gamma Ray Multiplier	EDTC-B	1	
HEMA	Hematite Presence Flag	Borehole	No	
IBC_FRP_OFFSET	IBC Flexural Offset from Free Pipe	USIT-E	0	dB/m
IBC_FVEL_SEL	IBC Fluid Velocity Selection	USIT-E	Automatic	
IBC_OFFSET_SEL	IBC Flexural Offset Selector	USIT-E	UFAO	
IBC_ZMUD_SEL	IBC Mud Impedance Selection	USIT-E	Inversion Norm.	
ICE_PROCESS	ICE Processing	USIT-E	Yes	
IMAR	Image Rotation	USIT-E	RB	
MEAS_WLEN	Tcube Processing Window Length in Measurement Mode	USIT-E	22.44	us
MUD_N_INV	IBC Inversion Mud Normalization Factor	USIT-E	1.22	
MUD_N_THE	Theoretical Mud Normalization Factor	USIT-E	1.15	
RCOD	Reference Calibrator Outer Diameter	USIT-E	4.5	in
RCSO	Reference Calibrator Standoff	USIT-E	0.842	in
RCTH	Reference Calibrator Thickness	USIT-E	0.216	in
RPLUS_PROCESS	Ultrasonic R+ Processing	USIT-E	No	
SOCN	Standoff Distance	EDTC-B	0.125	in
SOCO	Standoff Correction Option	EDTC-B	No	
THDH	Maximum Search Thickness (percentage of nominal)	USIT-E	130	%
THDL	Minimum Search Thickness (percentage of nominal)	USIT-E	70	%
TPOS_EDTC	Tool Position: Centered or Eccentered	EDTC-B	Eccentered	
U-USIT_DFSZ	Drilling Fluid Specific Acoustic Impedance	USIT-E	1.67	Mrayl
U-USIT_UFAO	SIT Flexural Attenuation Offset	USIT-E	-10.05	dB/m
U-USIT_UIAP	IBC Answer Product Enabled	USIT-E	SolidLiquidGasMap	
THDP	Thickness Detection Policy	USIT-E	Fundamental	
VCAS	Ultrasonic Transversal Velocity in Casing	USIT-E	51.4	us/ft
ZCAS	Acoustic Impedance of Casing	USIT-E	46.25	Mrayl
ZINI	Initial Estimate of Cement Impedance	USIT-E	-1	Mrayl
ZMUD	Acoustic Impedance of Mud	Borehole	1.75	Mrayl
ZTCM	Acoustic Impedance Threshold for Cement	USIT-E	2.6	Mrayl

ZTGS	Acoustic Impedance Threshold for Gas	USIT-E	0.3	Mrayl
------	--------------------------------------	--------	-----	-------

Tool Control Parameters

1A: Parameters

Parameter	Description	Tool	Value	Unit
AGMN	Minimum Gain of Cartridge	USIT-E	-12	dB
AGMX	Maximum Gain of Cartridge	USIT-E	48	dB
U-USIT_DDT5	USIC Downhole Decimation for T5 only	USIT-E	0_NONE	
DOT(DOS)	Distance between Opposite Transducer Faces	USIT-E	1.756	in
EMXV	EMEX Voltage	USIT-E	50	V
HRES	Horizontal Resolution	USIT-E	10 deg	
IBC_ACQTYPE	IBC Acquisition type	USIT-E	1 MHz	
IBC_FLEXDBP	IBC Flex Duration Before Peak	USIT-E	30	us
MOTOR_PROTECT	Motor Protection	USIT-E	On	
UACLV_PERM	Ultrasonic ACLV Permanent	USIT-E	Yes	
U-USIT_UFWB	Far Receiver Window Begin Time	USIT-E	136	us
U-USIT_UFWE	Far Receiver Window End Time	USIT-E	176	us
U-USIT_UNWB	Near Receiver Window Begin Time	USIT-E	105	us
U-USIT_UNWE	Near Receiver Window End Time	USIT-E	145	us
USFR	Ultrasonic Sampling Frequency	USIT-E	666667	Hz
UPAT	USIT Emission Pattern	USIT-E	Pattern 375 KHz	
UWKM	USIT Working Mode	USIT-E	10 deg at 6.0 in	
USSP	Ultrasonic Service	USIT-E	IBC	
U-USIT_UTAN	Transducer Angles	USIT-E	33_DEG	
VRES	Vertical Resolution	USIT-E	6.0 in	
WINB	Window Begin Time	USIT-E	31.17	us
WINE	Window End Time	USIT-E	71.17	us

1A

IBC SLG Composite

Pass Summary

Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	DSC Mode	Depth Shift	Include Parallel Data
1A	Log[1]:Up	Up	561.13 ft	959.50 ft	03-Mar-2018 12:31:46 PM	03-Mar-2018 12:37:48 PM	ON	2.09 ft	Yes

All depths are referenced to toolstring zero

Log

Company:Crestone Peak Resources and Operating LLC

Well:File #3S-32H-K268

1A: Log[1]:Up:S003

Description: USI IBC SLG Composite Format: Log (IBC SLG Composite) Index Scale: 2 in per 100 ft Index Unit: ft Index Type: Measured Depth
Creation Date: 03-Mar-2018 15:54:03

TIME_1900 - Time Marked every 60.00 (s)

USIT Processing Flags (UFLG[0]) USIT-E

1 - UFLG 1 Value within [0.0 - 1.5] - :
2 - UFLG 2 Value within [1.5 - 2.5] - :
3 - UFLG 3 Value within [2.5 - 3.5] - :
4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :
5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :

■

 UTIM Error

■

 Pulse Origin Not Detected

■

 WINLEN Error

■

 Casing Thickness Error

■


 Loop Processing Error

U L B R U

Orientation:
Top of Hole

External Radii
Average (ERAV)

External Radii
Average (ERAV)

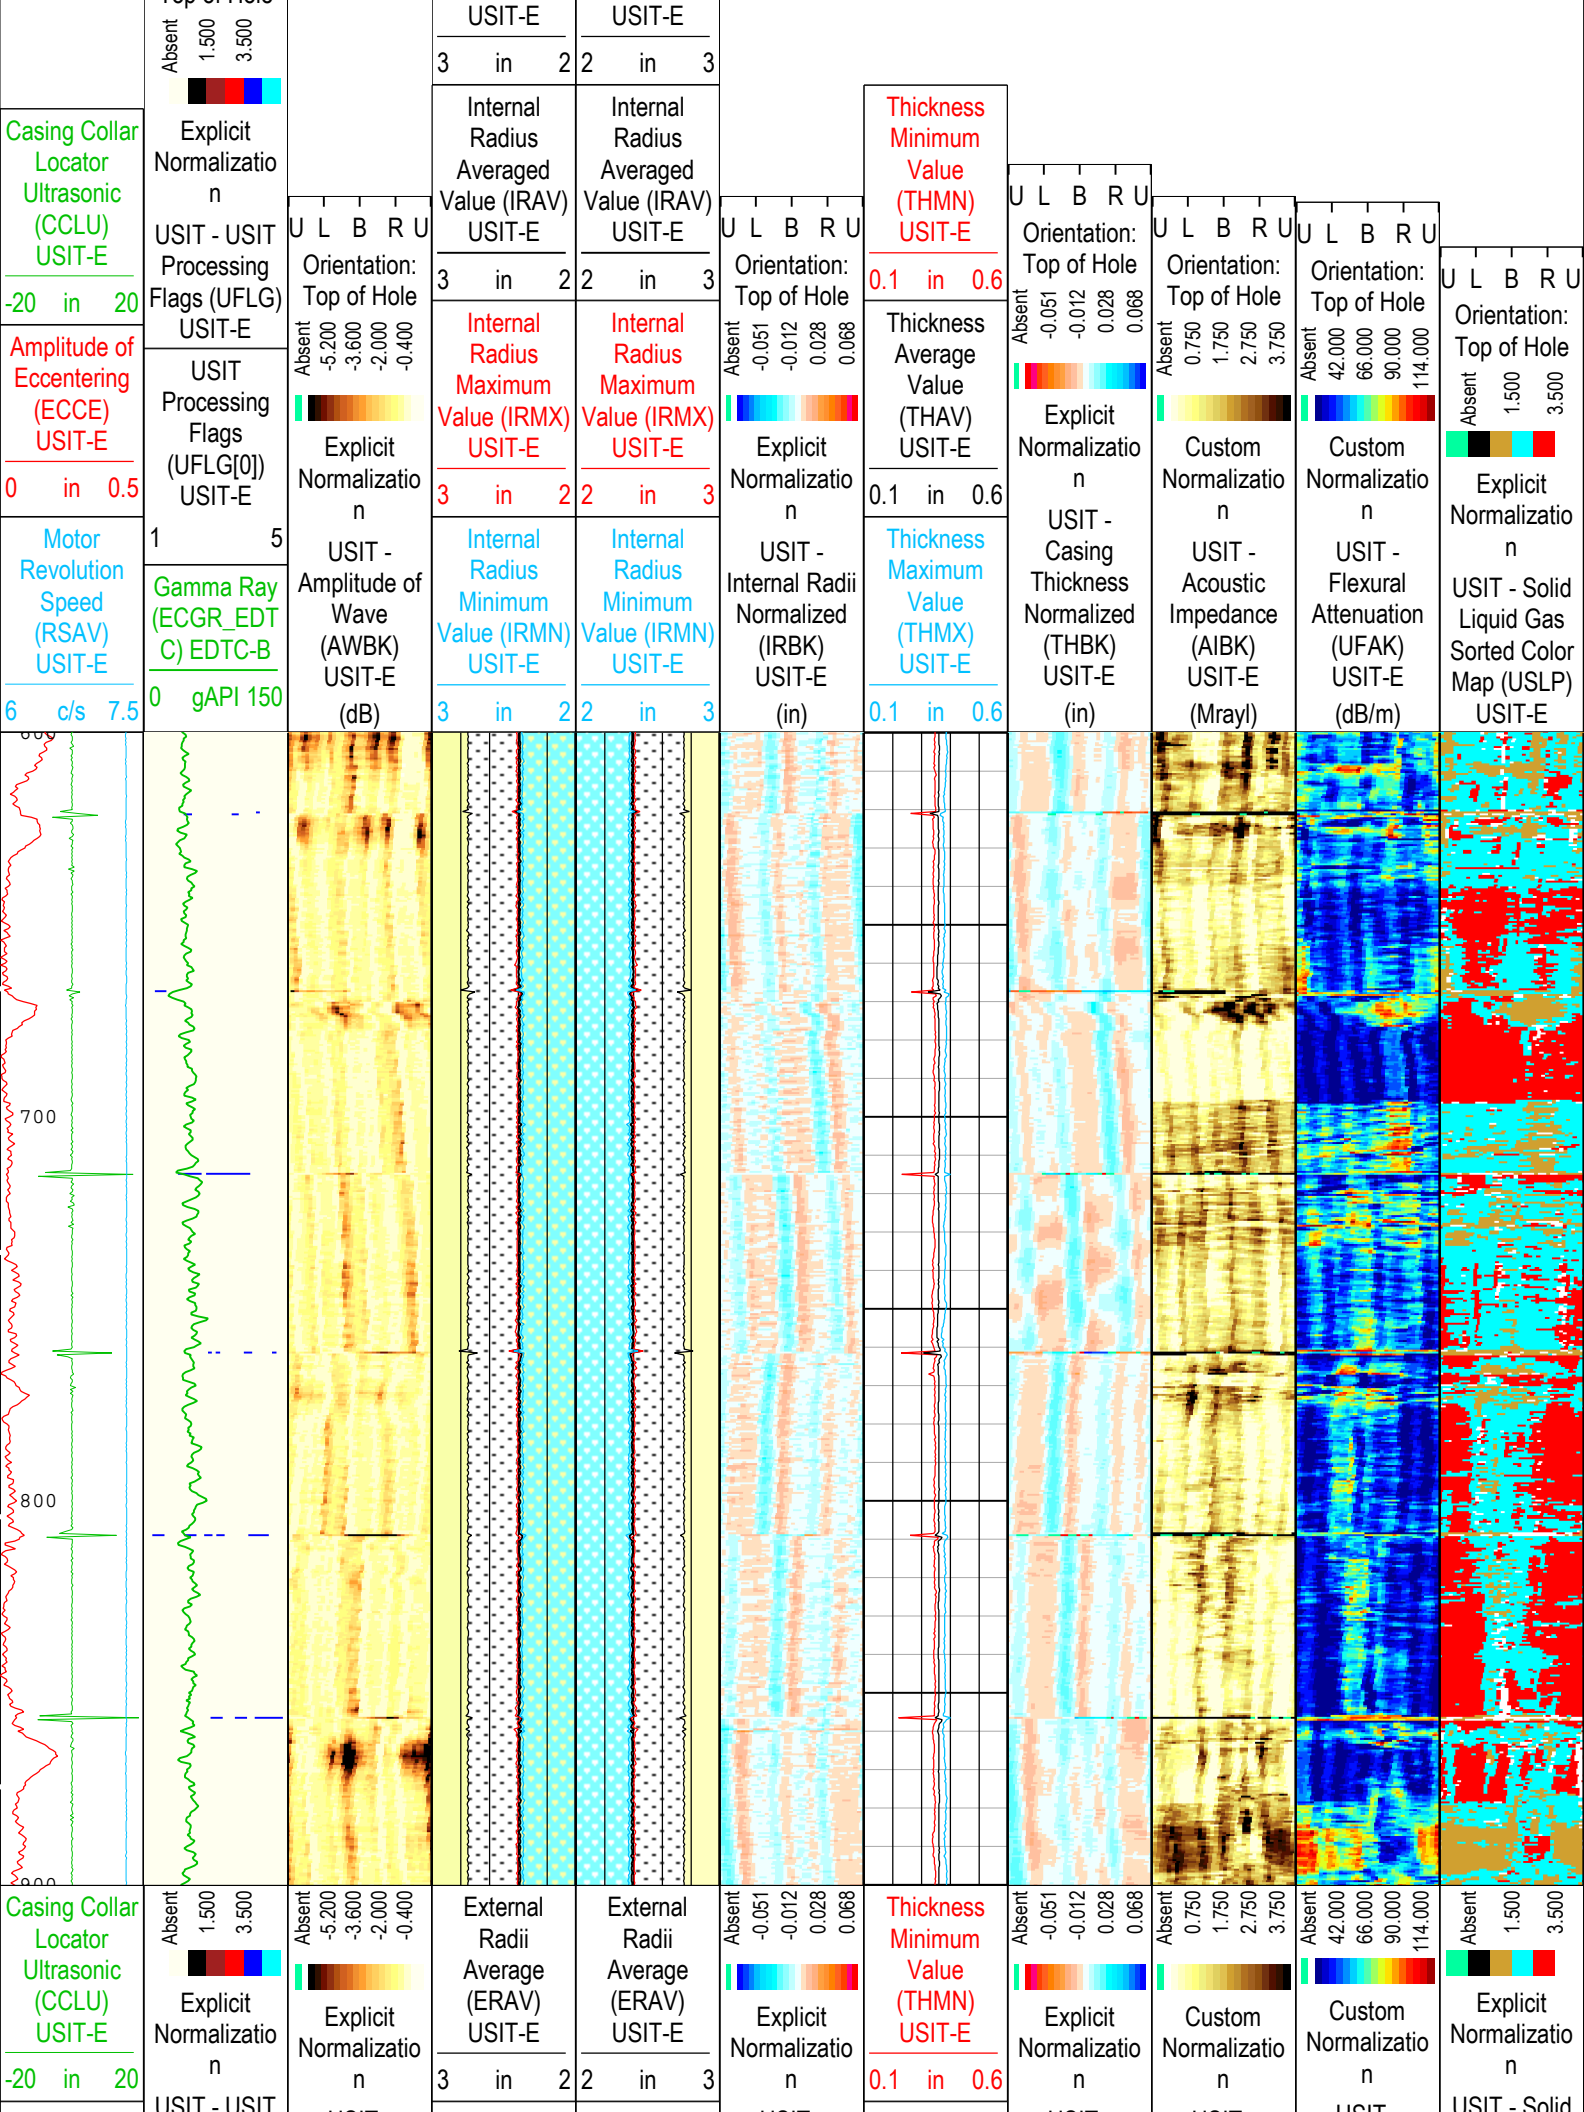

Amplitude of Eccentering (ECCE) USIT-E 0 in 0.5 Motor Revolution Speed (RSAV) USIT-E 6 c/s 7.5 Gamma Ray (ECGR_EDT C) EDTC-B 0 gAPI 150	USIT - Processing Flags (UFLG) USIT-E Orientation: Top of Hole U L B R U USIT Processing Flags (UFLG[0]) USIT-E 1 5 Gamma Ray (ECGR_EDT C) EDTC-B 0 gAPI 150	USIT - Amplitude of Wave (AWBK) USIT-E (dB) Orientation: Top of Hole U L B R U Internal Radius Averaged Value (IRAV) USIT-E 3 in 2 Internal Radius Maximum Value (IRMX) USIT-E 3 in 2 Internal Radius Minimum Value (IRMN) USIT-E 3 in 2	Internal Radius Averaged Value (IRAV) USIT-E 2 in 3 Internal Radius Maximum Value (IRMX) USIT-E 2 in 3 Internal Radius Minimum Value (IRMN) USIT-E 2 in 3	USIT - Internal Radii Normalized (IRBK) USIT-E (in) Orientation: Top of Hole U L B R U Thickness Average Value (THAV) USIT-E 0.1 in 0.6 Thickness Maximum Value (THMX) USIT-E 0.1 in 0.6	USIT - Casing Thickness Normalized (THBK) USIT-E (in) Orientation: Top of Hole U L B R U USIT - Acoustic Impedance (AIBK) USIT-E (Mrayl) Orientation: Top of Hole U L B R U USIT - Flexural Attenuation (UFAK) USIT-E (dB/m) Orientation: Top of Hole U L B R U Liquid Gas Sorted Color Map (USLP) USIT-E Orientation: Top of Hole U L B R U
---	---	--	---	---	---

USIT Processing Flags (UFLG[0]) USIT-E				
1 - UFLG 1 Value within [0.0 - 1.5] - :		UTIM Error		
2 - UFLG 2 Value within [1.5 - 2.5] - :		Pulse Origin Not Detected		
3 - UFLG 3 Value within [2.5 - 3.5] - :		WINLEN Error		
4 - UFLG 4 UFLG 5 UFLG 6 Value within [3.5 - 6.5] - :		Casing Thickness Error		
5 - UFLG 7 UFLG 8 UFLG 9 Value within [6.5 - 10] - :		Loop Processing Error		
TIME_1900 - Time Marked every 60.00 (s)				
Description: USI IBC SLG Composite Format: Log (IBC SLG Composite) Index Scale: 2 in per 100 ft Index Unit: ft Index Type: Measured Depth				
Creation Date: 03-Mar-2018 15:54:03				

Channel Processing Parameters				
1A: Parameters				
Parameter	Description	Tool	Value	Unit
ISSBAR	Barite Mud Presence Flag	Borehole	No	
BHS	Borehole Status (Open or Cased Hole)	Borehole	Cased	
BS	Bit Size	WLSESSION	13.5	in
CBLO	Casing Bottom (Logger)	WLSESSION	18900	ft
CDEN	Cement Density	USIT-E	11	lbm/gal
CDEN	Cement Density	EDTC-B	16.69	lbm/gal
CMTY(U-USIT_CEMT)	Cement Type	USIT-E	Light Cement	
DFD	Drilling Fluid Density	Borehole	8.4	lbm/gal
DFT_CATEGORY	Drilling Fluid Type	Borehole	Water	
DTMD	Borehole Fluid Slowness	Borehole	206	us/ft
FD	Fluid Density	USIT-E	10.4	lbm/gal
FDII	FPM Data Interpolation Interval	USIT-E	0	ft
GCSE_DOWN_PASS	Generalized Caliper Selection for WL Log Down Passes	Borehole	BS(RT)	
GCSE_UP_PASS	Generalized Caliper Selection for WL Log Up Passes	Borehole	BS(RT)	
HEMA	Hematite Presence Flag	Borehole	No	
IBC_FVEL_SEL	IBC Fluid Velocity Selection	USIT-E	Automatic	
IBC_OFFSET_SEL	IBC Flexural Offset Selector	USIT-E	UFAO	
IBC_ZMUD_SEL	IBC Mud Impedance Selection	USIT-E	Inversion Norm.	
IMAR	Image Rotation	USIT-E	RB	
MEAS_WLEN	Tcube Processing Window Length in Measurement Mode	USIT-E	22.44	us
MUD_N_INV	IBC Inversion Mud Normalization Factor	USIT-E	1.22	
MUD_N_THE	Theoretical Mud Normalization Factor	USIT-E	1.15	

U-USIT_DFSZ	Drilling Fluid Specific Acoustic Impedance	USIT-E	1.67	Mrayl
U-USIT_UFAO	SIT Flexural Attenuation Offset	USIT-E	-10.05	dB/m
U-USIT_UIAP	IBC Answer Product Enabled	USIT-E	SolidLiquidGasMap	
ZMUD	Acoustic Impedance of Mud	Borehole	1.75	Mrayl
ZTCM	Acoustic Impedance Threshold for Cement	USIT-E	2.6	Mrayl
ZTGS	Acoustic Impedance Threshold for Gas	USIT-E	0.3	Mrayl

Tool Control Parameters

1A: Parameters

Parameter	Description	Tool	Value	Unit
AGMN	Minimum Gain of Cartridge	USIT-E	-12	dB
AGMX	Maximum Gain of Cartridge	USIT-E	48	dB
EMXV	EMEX Voltage	USIT-E	50	V
IBC_ACQTYPE	IBC Acquisition type	USIT-E	1 MHz	
IBC_FLEXDBP	IBC Flex Duration Before Peak	USIT-E	30	us
U-USIT_UFWB	Far Receiver Window Begin Time	USIT-E	136	us
U-USIT_UFWE	Far Receiver Window End Time	USIT-E	176	us
U-USIT_UNWB	Near Receiver Window Begin Time	USIT-E	105	us
U-USIT_UNWE	Near Receiver Window End Time	USIT-E	145	us
UPAT	USIT Emission Pattern	USIT-E	Pattern 375 KHz	
UWKM	USIT Working Mode	USIT-E	10 deg at 6.0 in	
U-USIT_UTAN	Transducer Angles	USIT-E	33_DEG	
VRES	Vertical Resolution	USIT-E	6.0 in	
WINB	Window Begin Time	USIT-E	31.17	us
WINE	Window End Time	USIT-E	71.17	us


XYZ


Company:Crestone Peak Resources and Operating LLC Well:File #3S-32H-K268
1A: Log[3]:Up:S003

Fluid Acoustic Slowness vs Depth

2D Cross Plot

Index Range: From 6884.50 to 69.50 ft

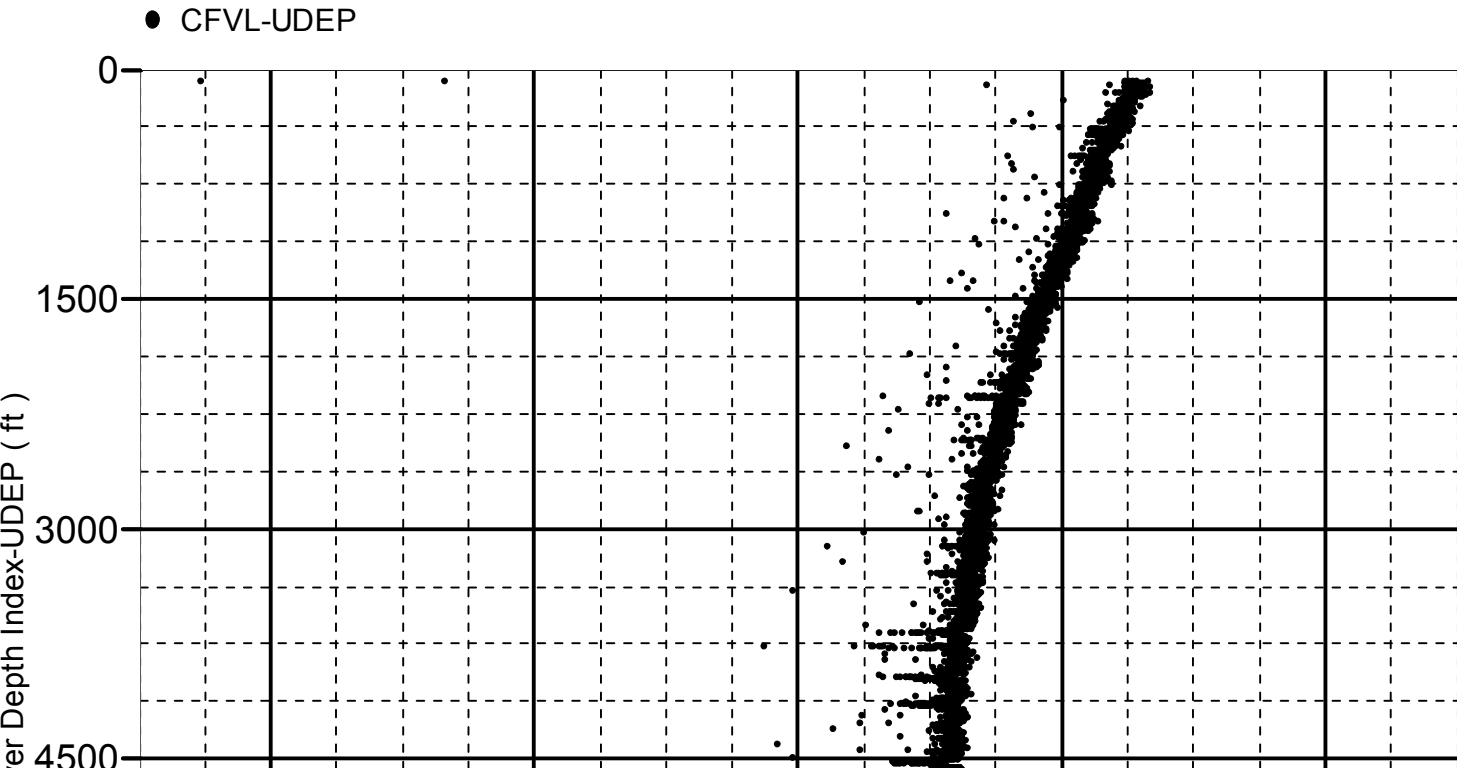

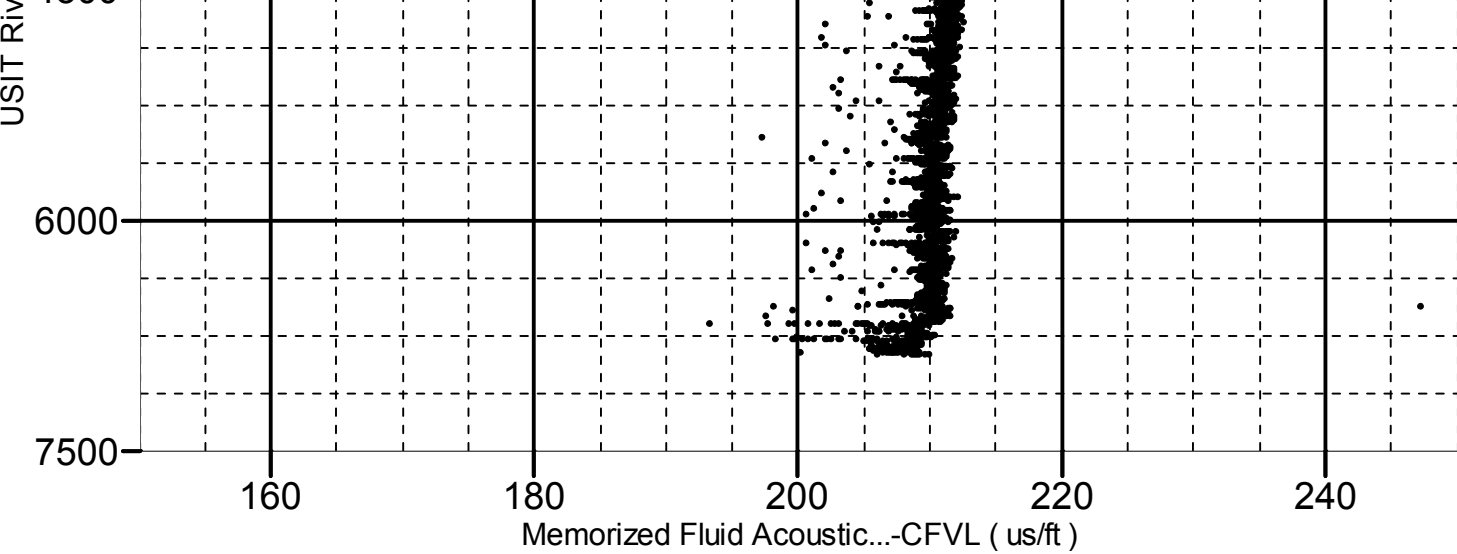

XYZ


Company: Crestone Peak Resources and Operating LLC Well: File #3S-32H-K268
1A: Log[3]:Up:S003

Acoustic Impedance of Mud vs Depth

2D Cross Plot

Index Range: From 6884.50 to 69.50 ft



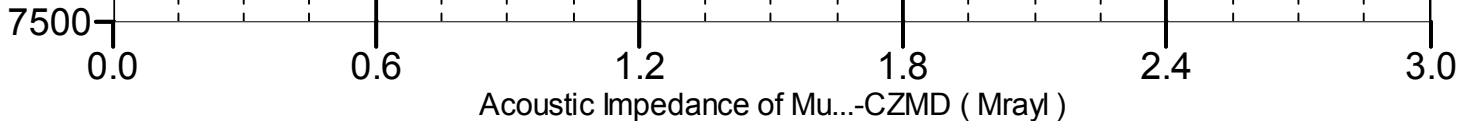

Company:	Crestone Peak Resources and Operating LLC	Schlumberger
Well:	File #3S-32H-K268	
Field:	Wattenberg	
County:	Weld	
State:	Colorado	
Isolation Scanner		
Cement Evaluation		
Gamma Ray - CCL Log		