



Company

Well

Interval

Created

Bayswater E&P LLC

G&D Hanks W-27-28HC

Date From: 2018-05-08 10:57:43

Date To: 2018-05-12 11:09:20

2018-05-14 00:10:11

Top: 1563.00

Bottom: 18024.00

Gamma Ray - Apparent 1 ft Average GRAX

0 300

API

True Vertical Depth TVD

7500 1500

ft

MID 1:600 feet

Depth Averaged ROP 3 ft Average ROPA

1000 0

ft/h

Weight On Bit, Average 1 ft Average WOBA

0 50

klb

Downhole Temperature TCDX

0 300

degF

1500

1550

1600

1650

1700


1750



1800


1850

R1 <


>R2


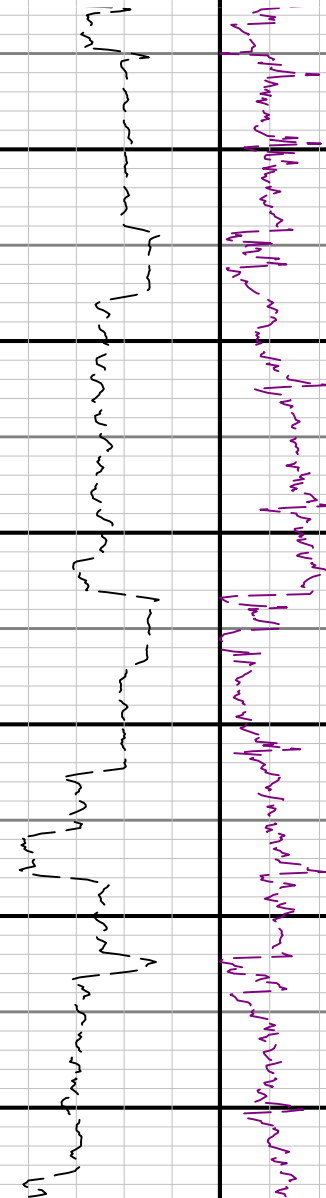


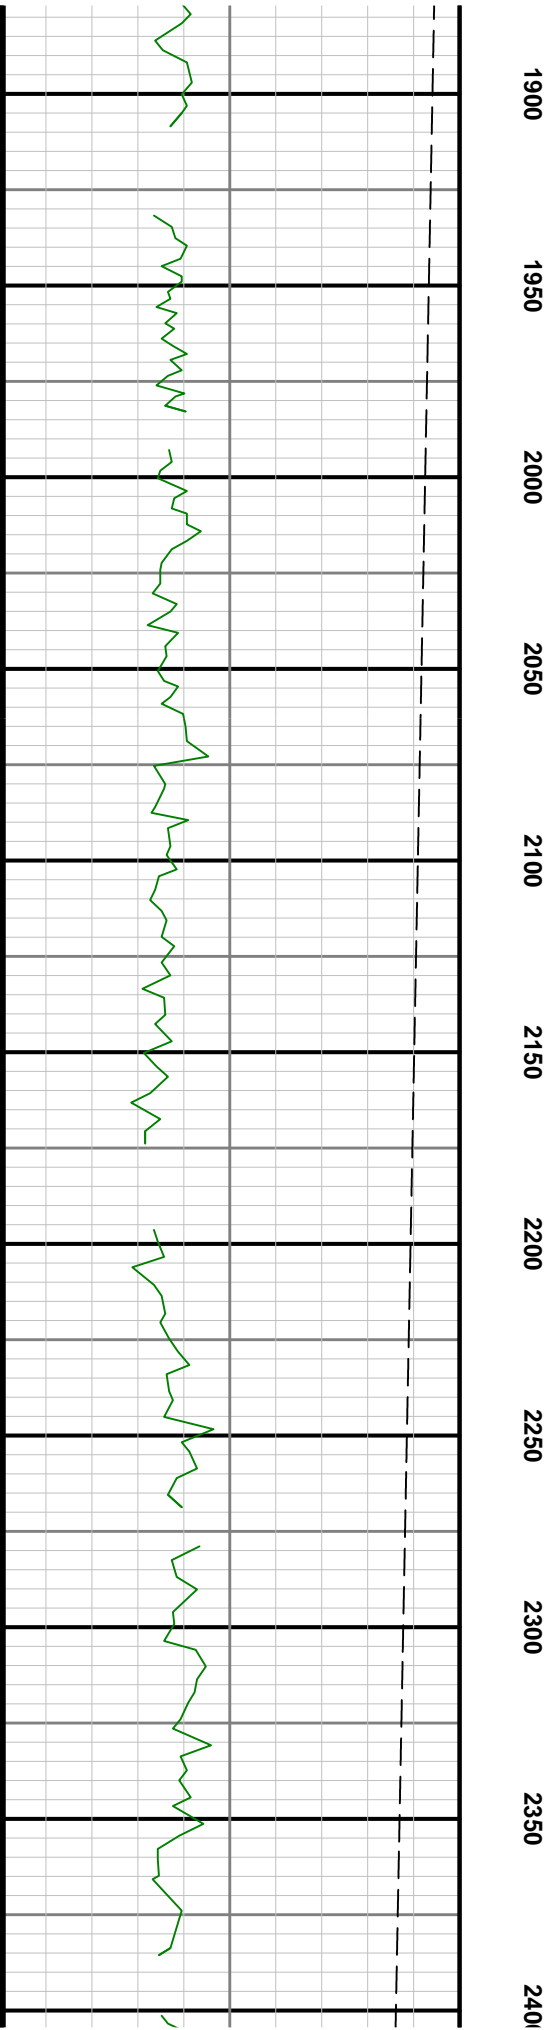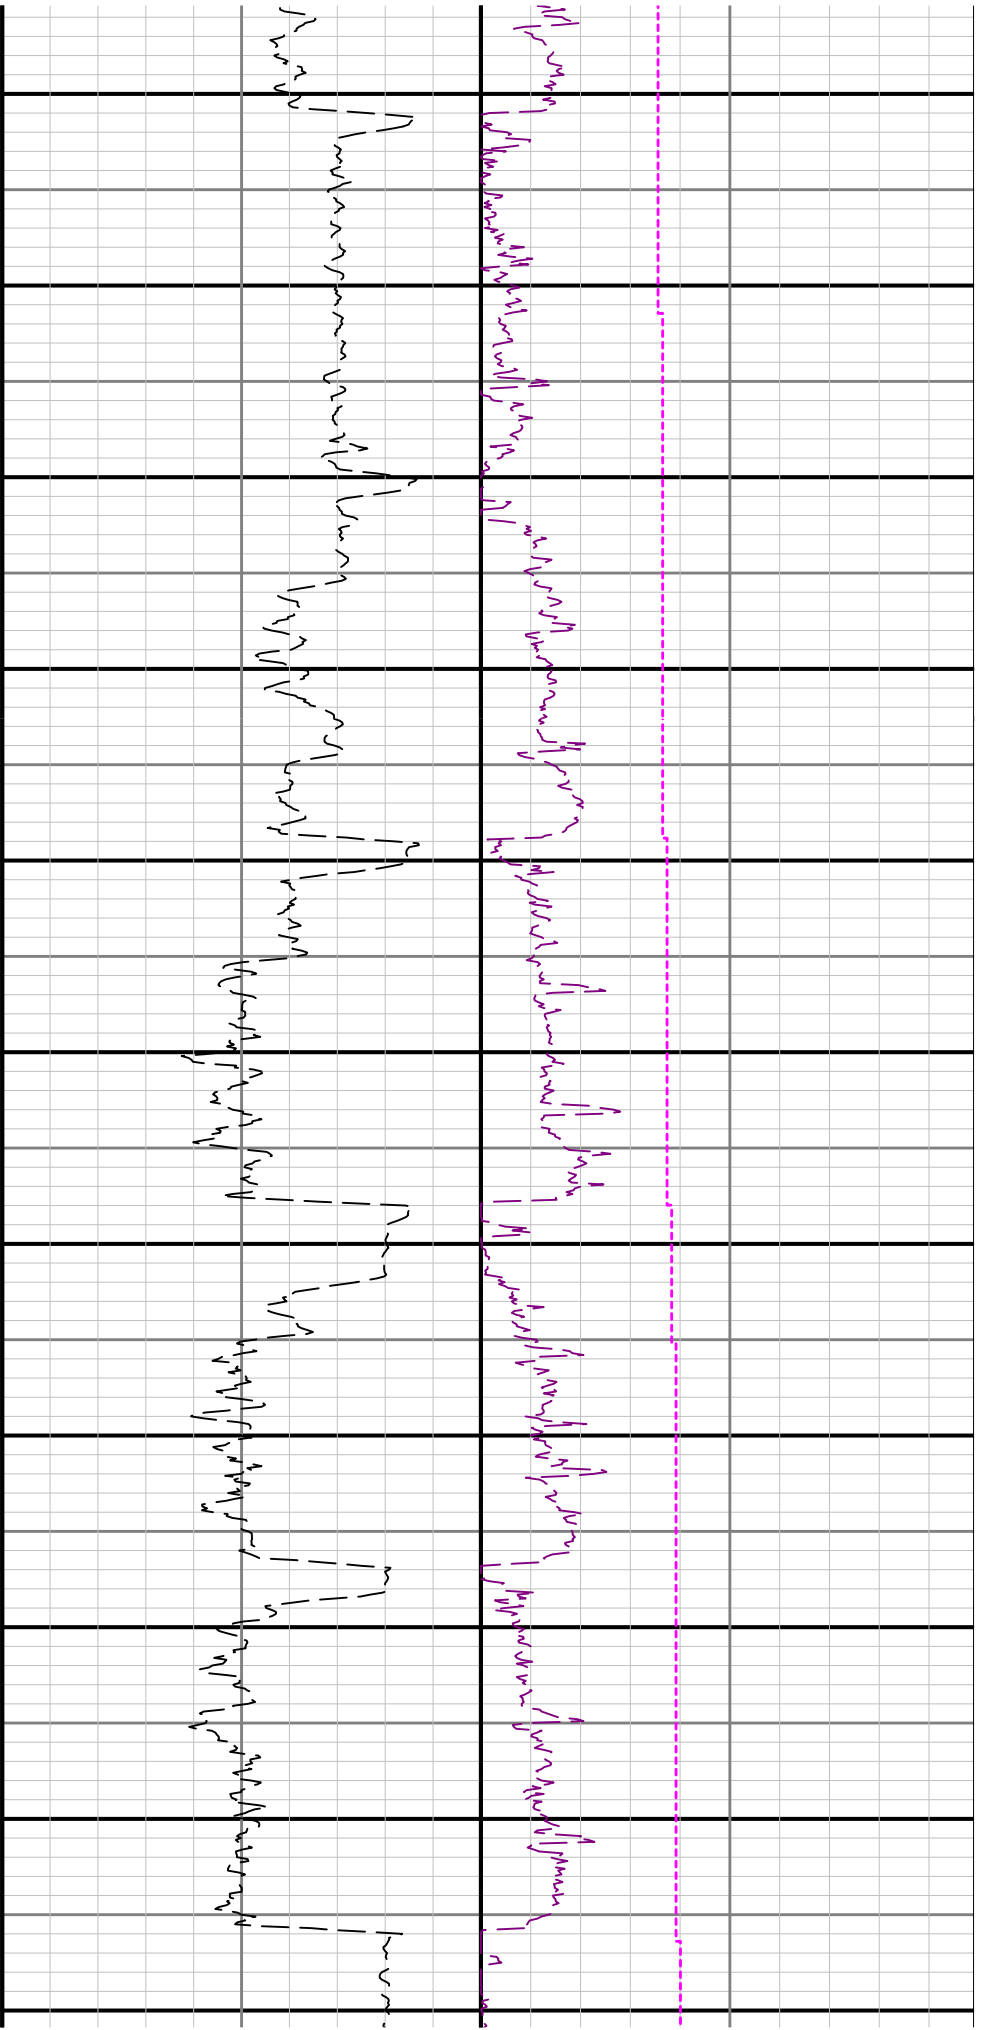


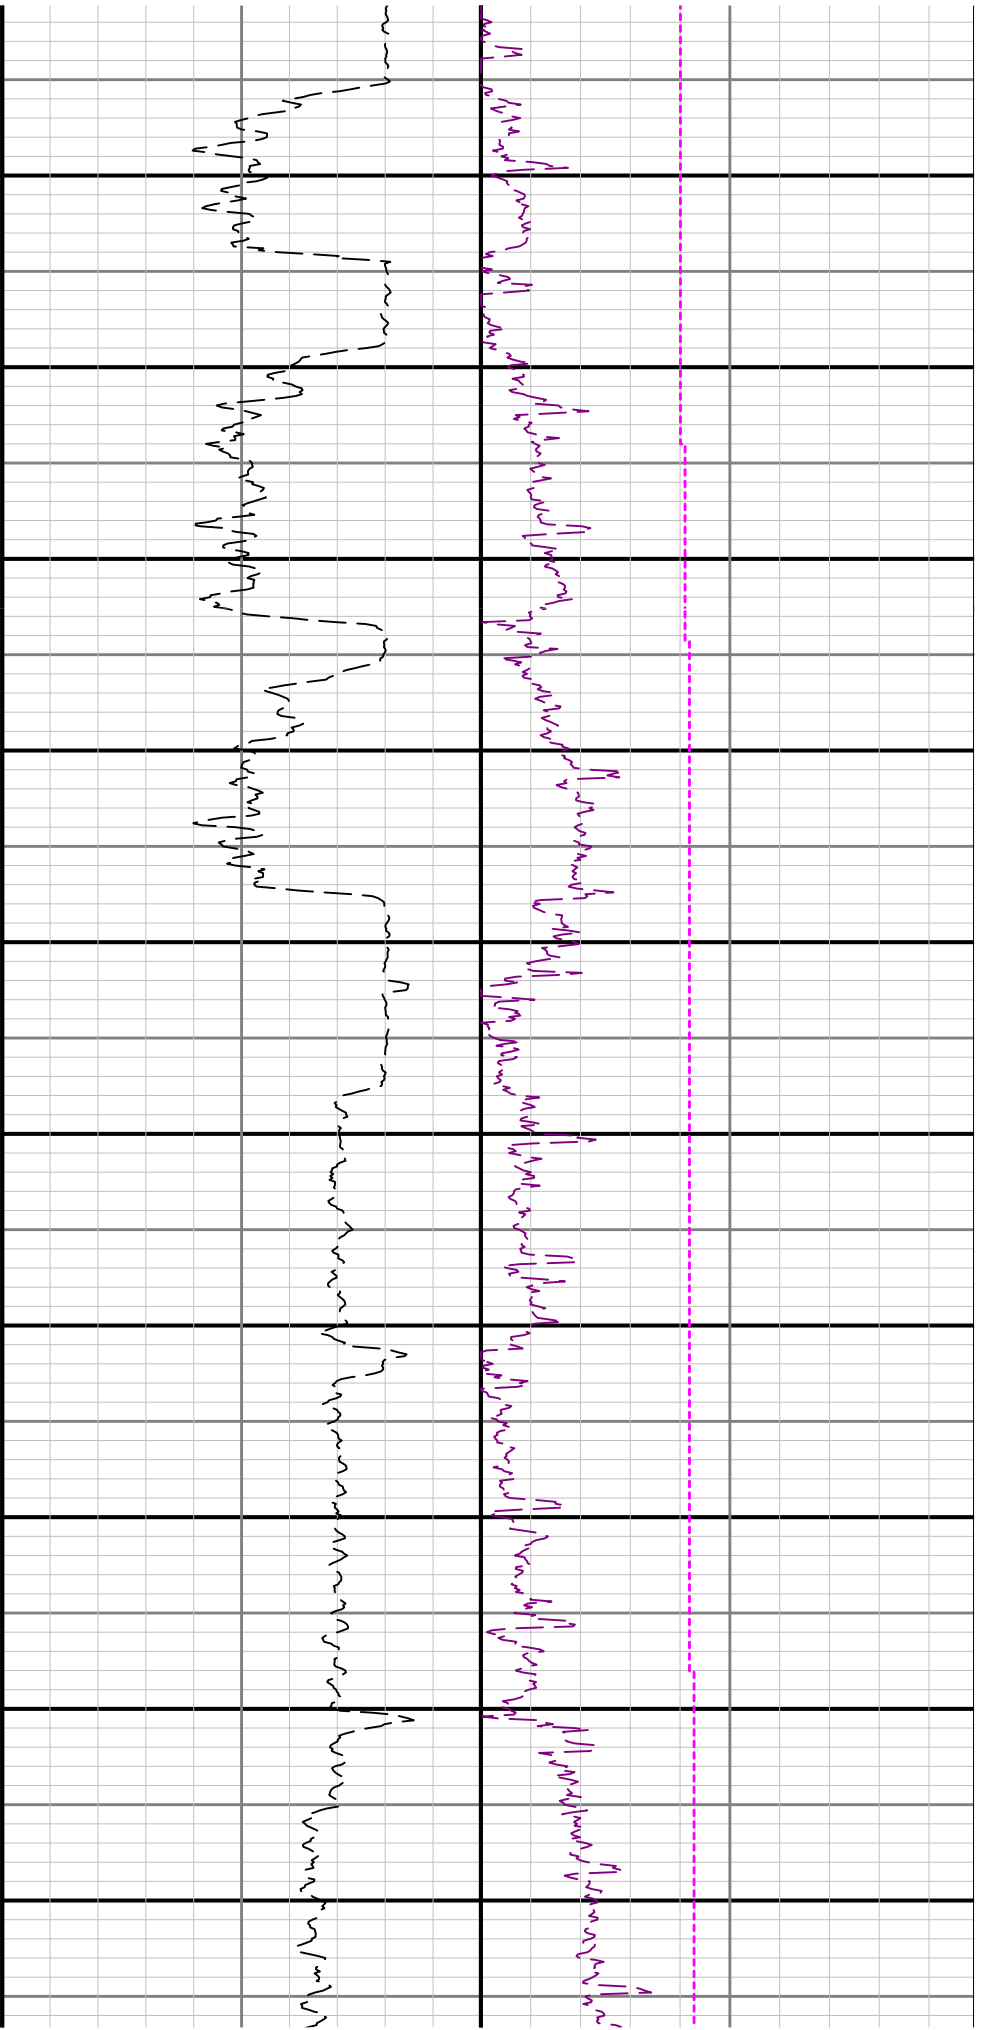



2450 2500 2550 2600 2650 2700 2750 2800 2850 2900

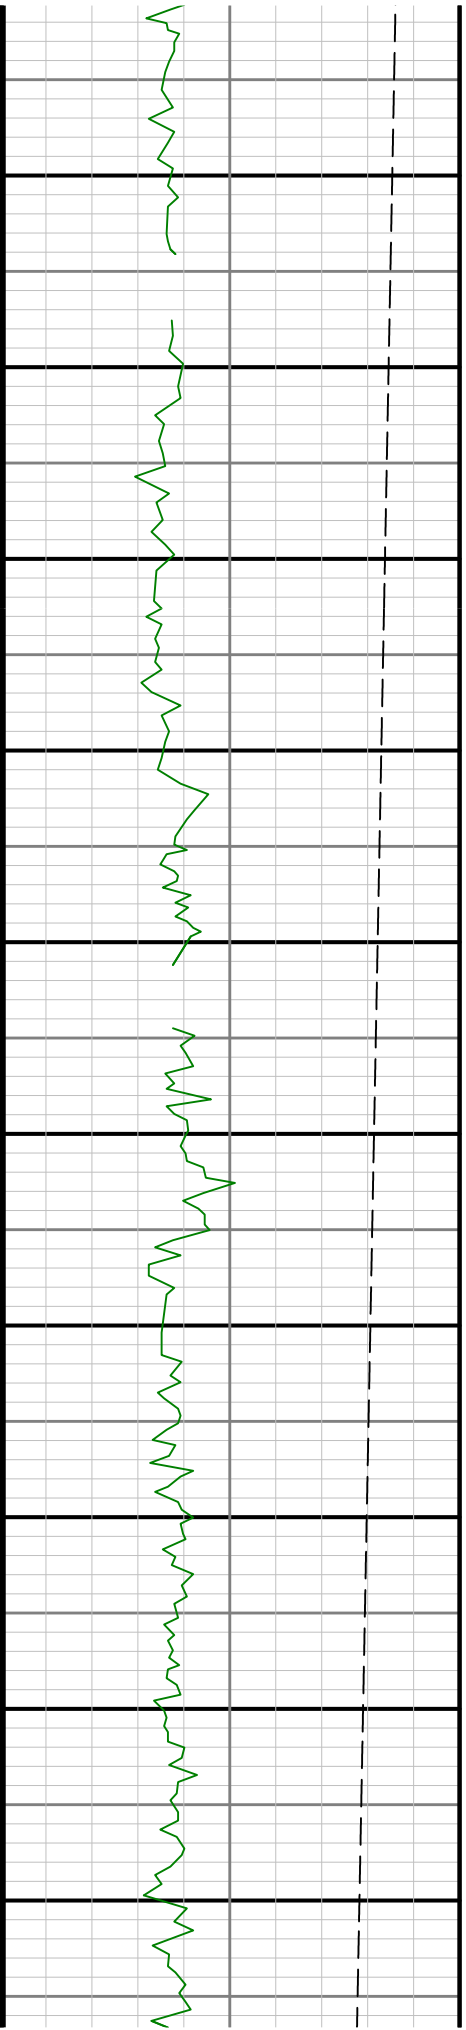

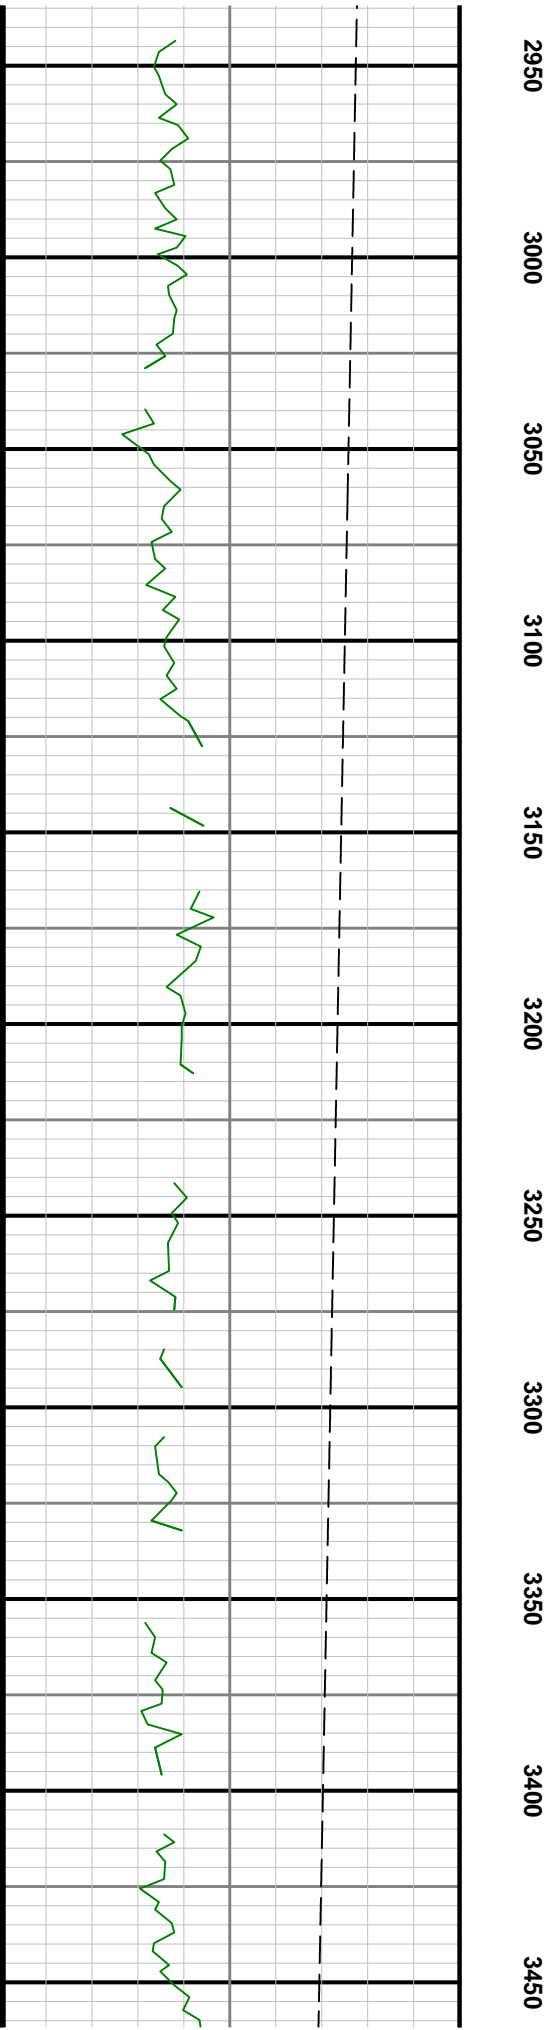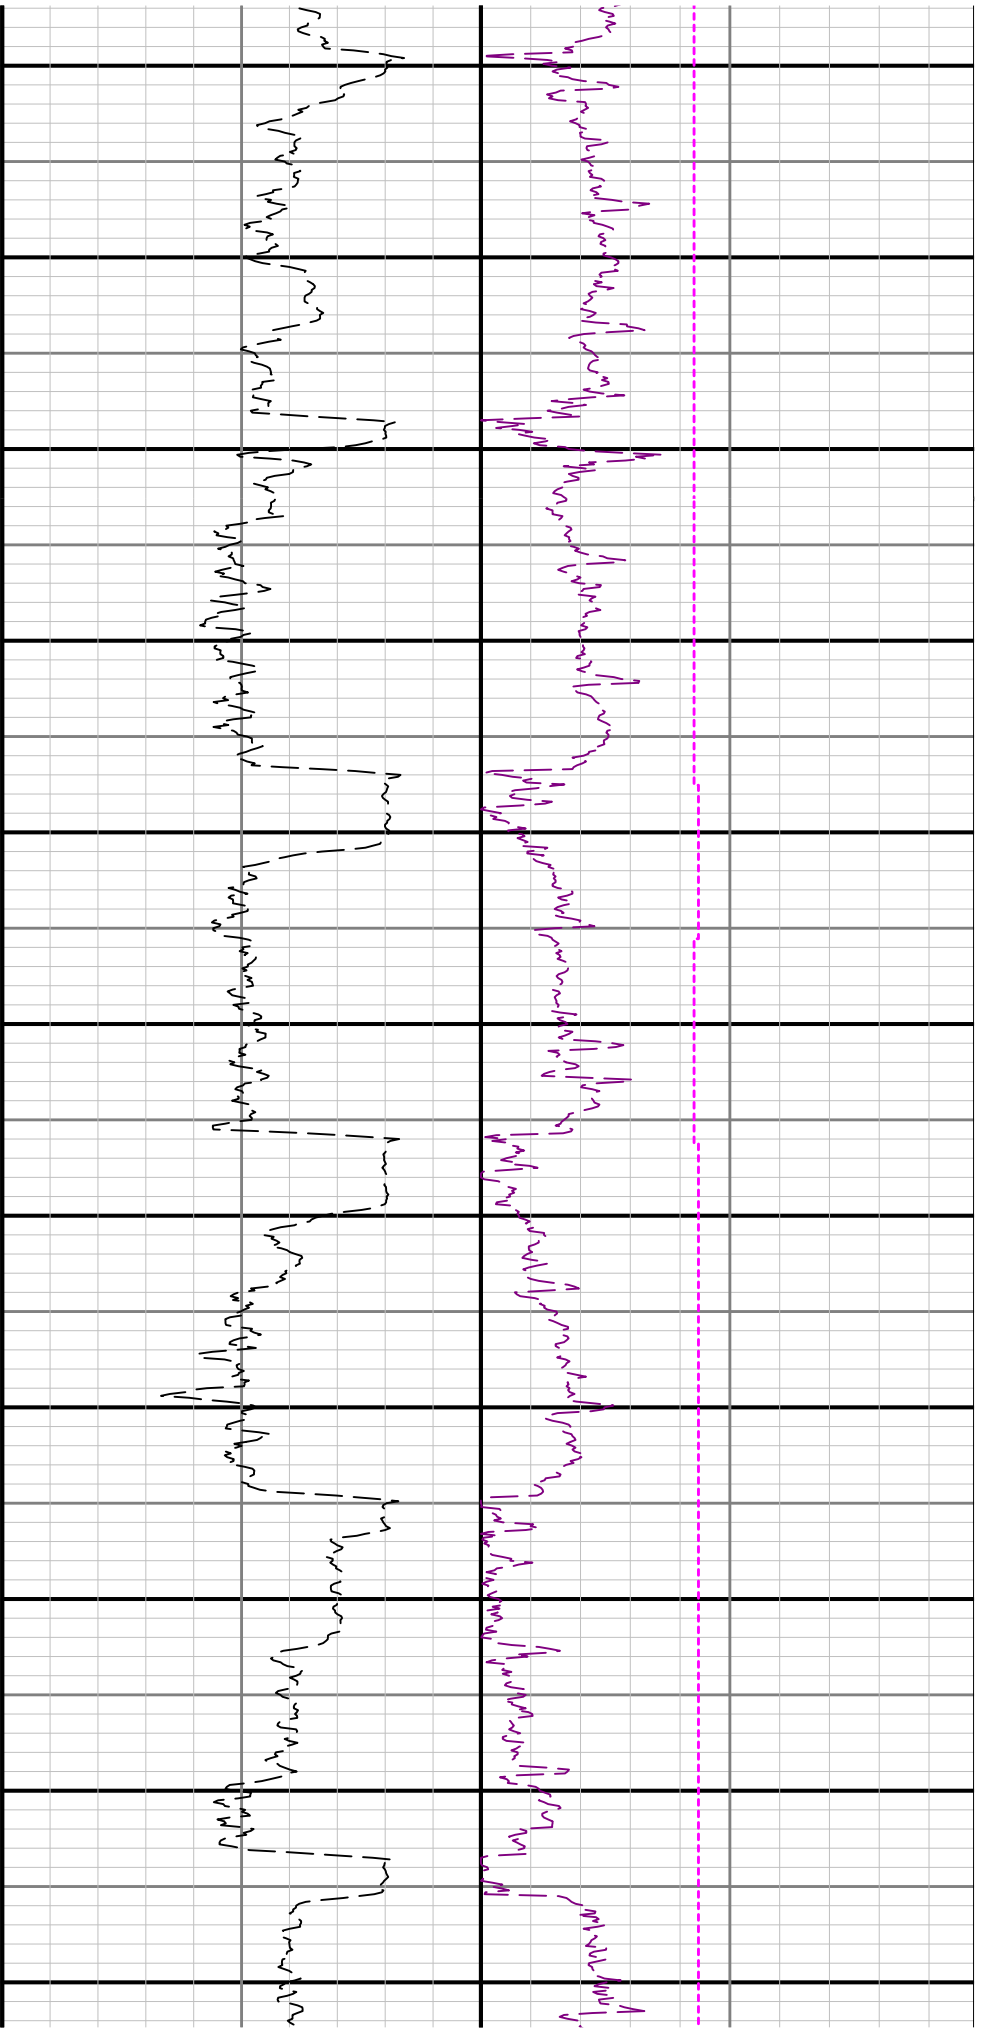






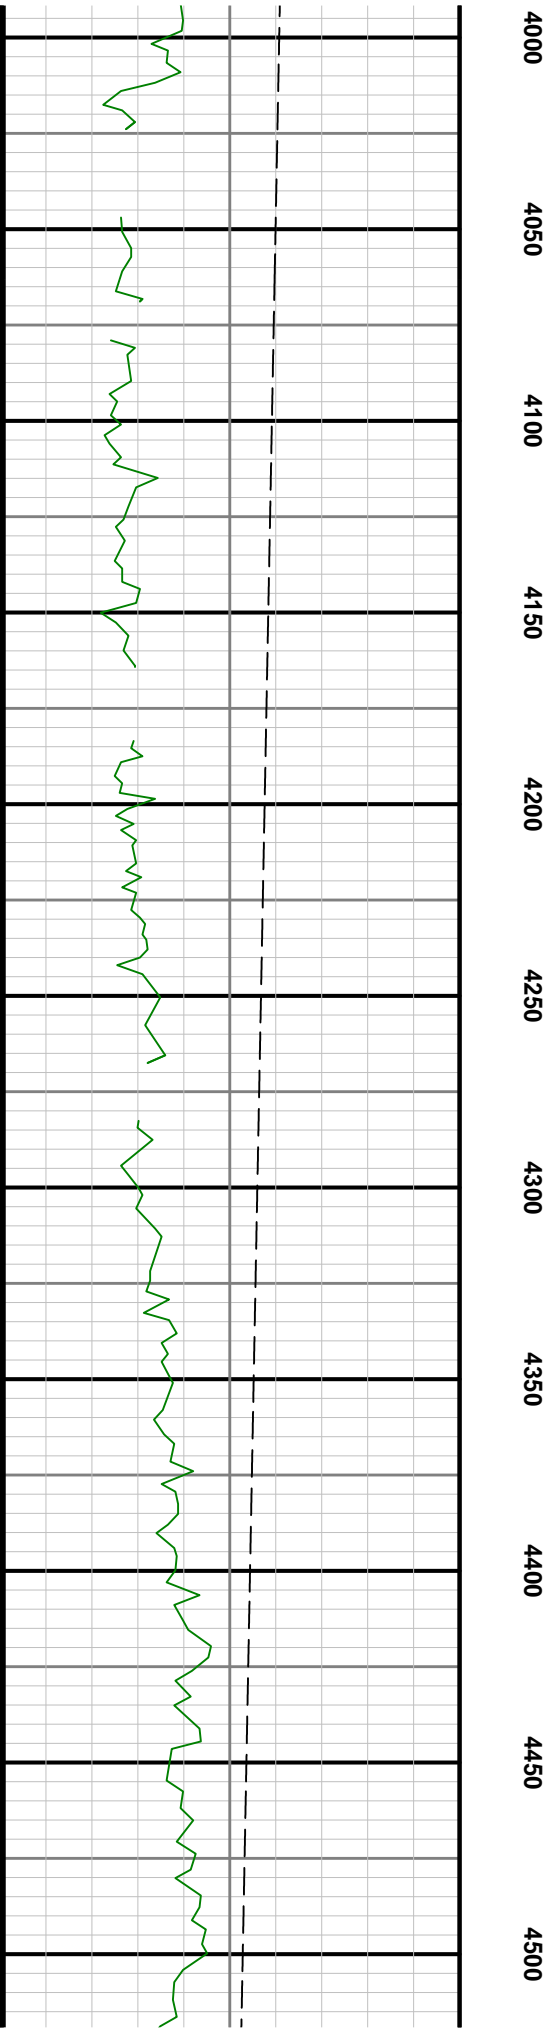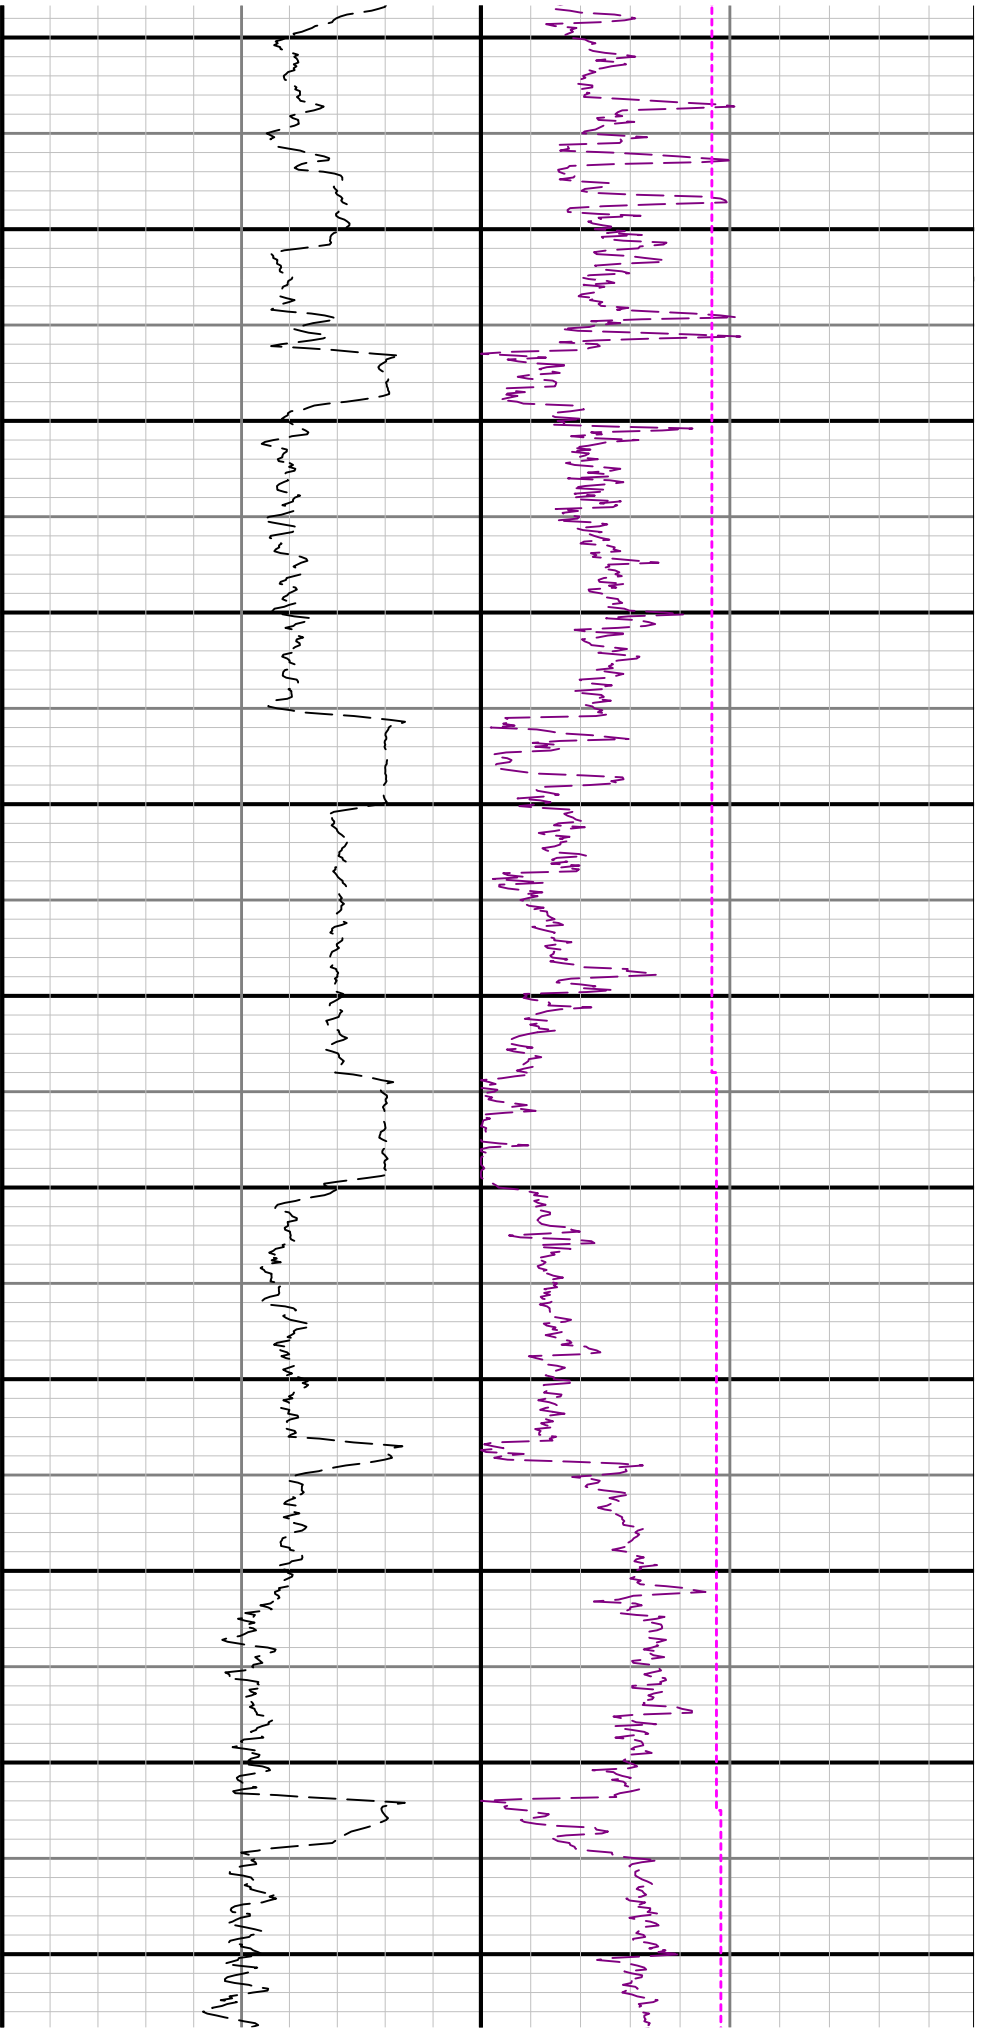


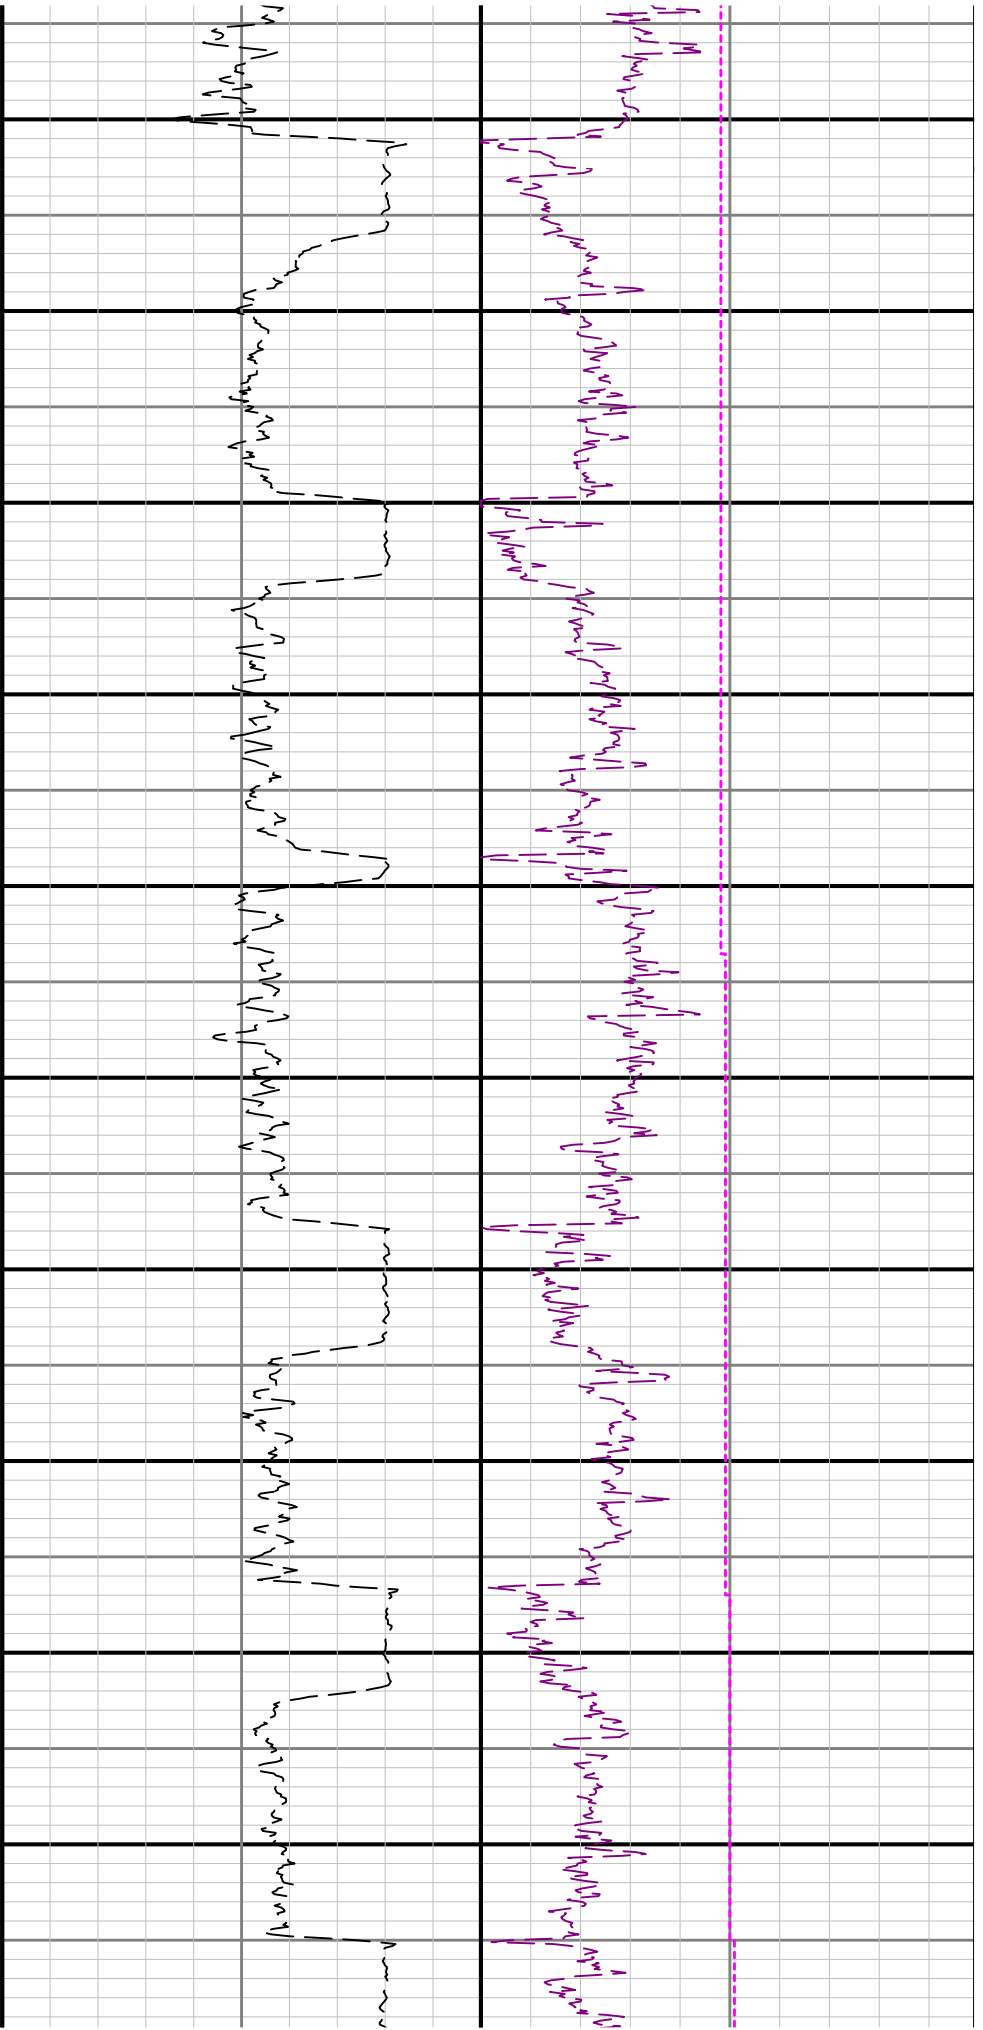




4550 4600 4650 4700 4750 4800 4850 4900 4950 5000 5050


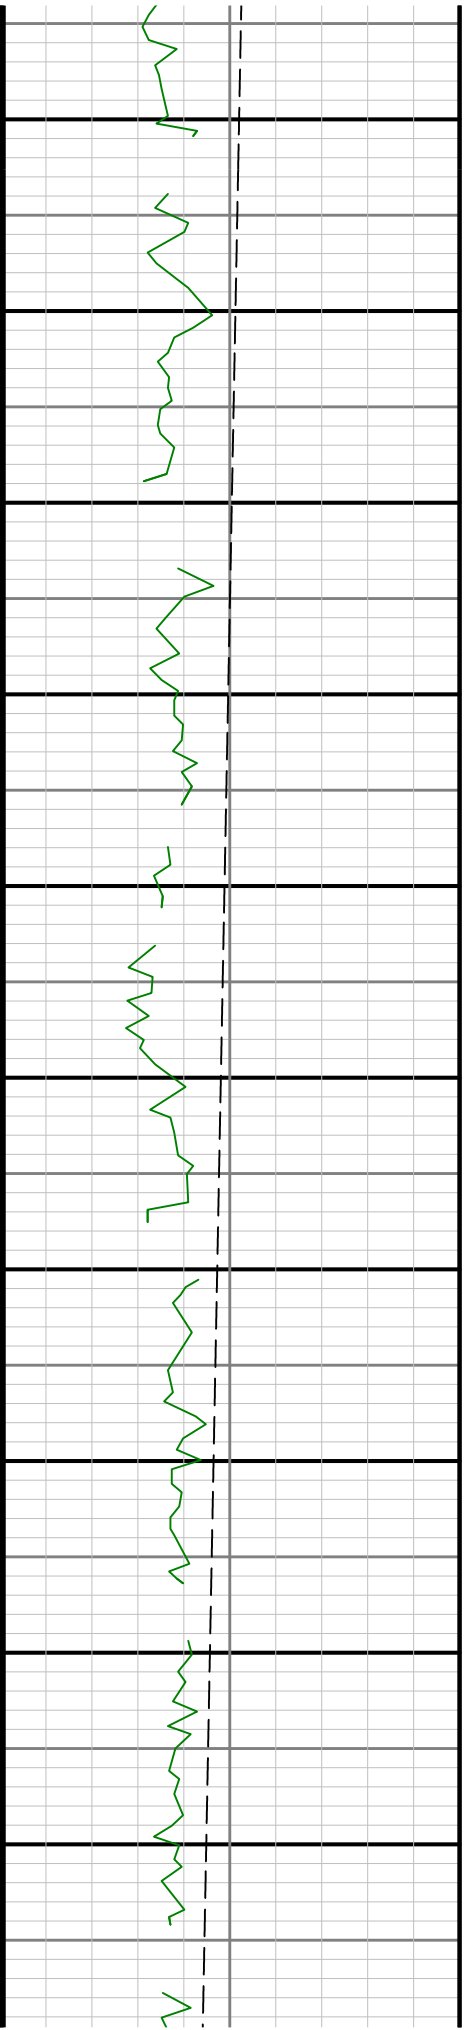


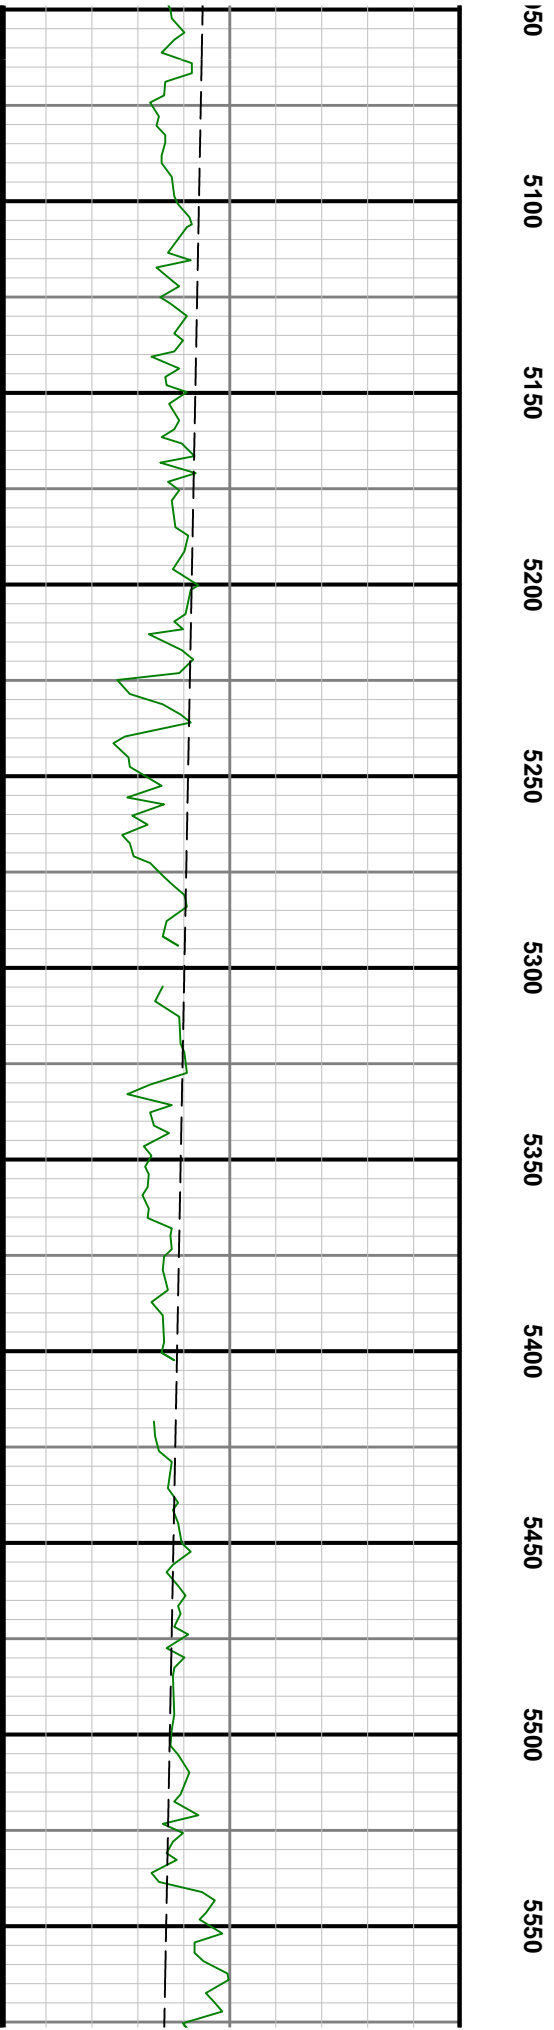
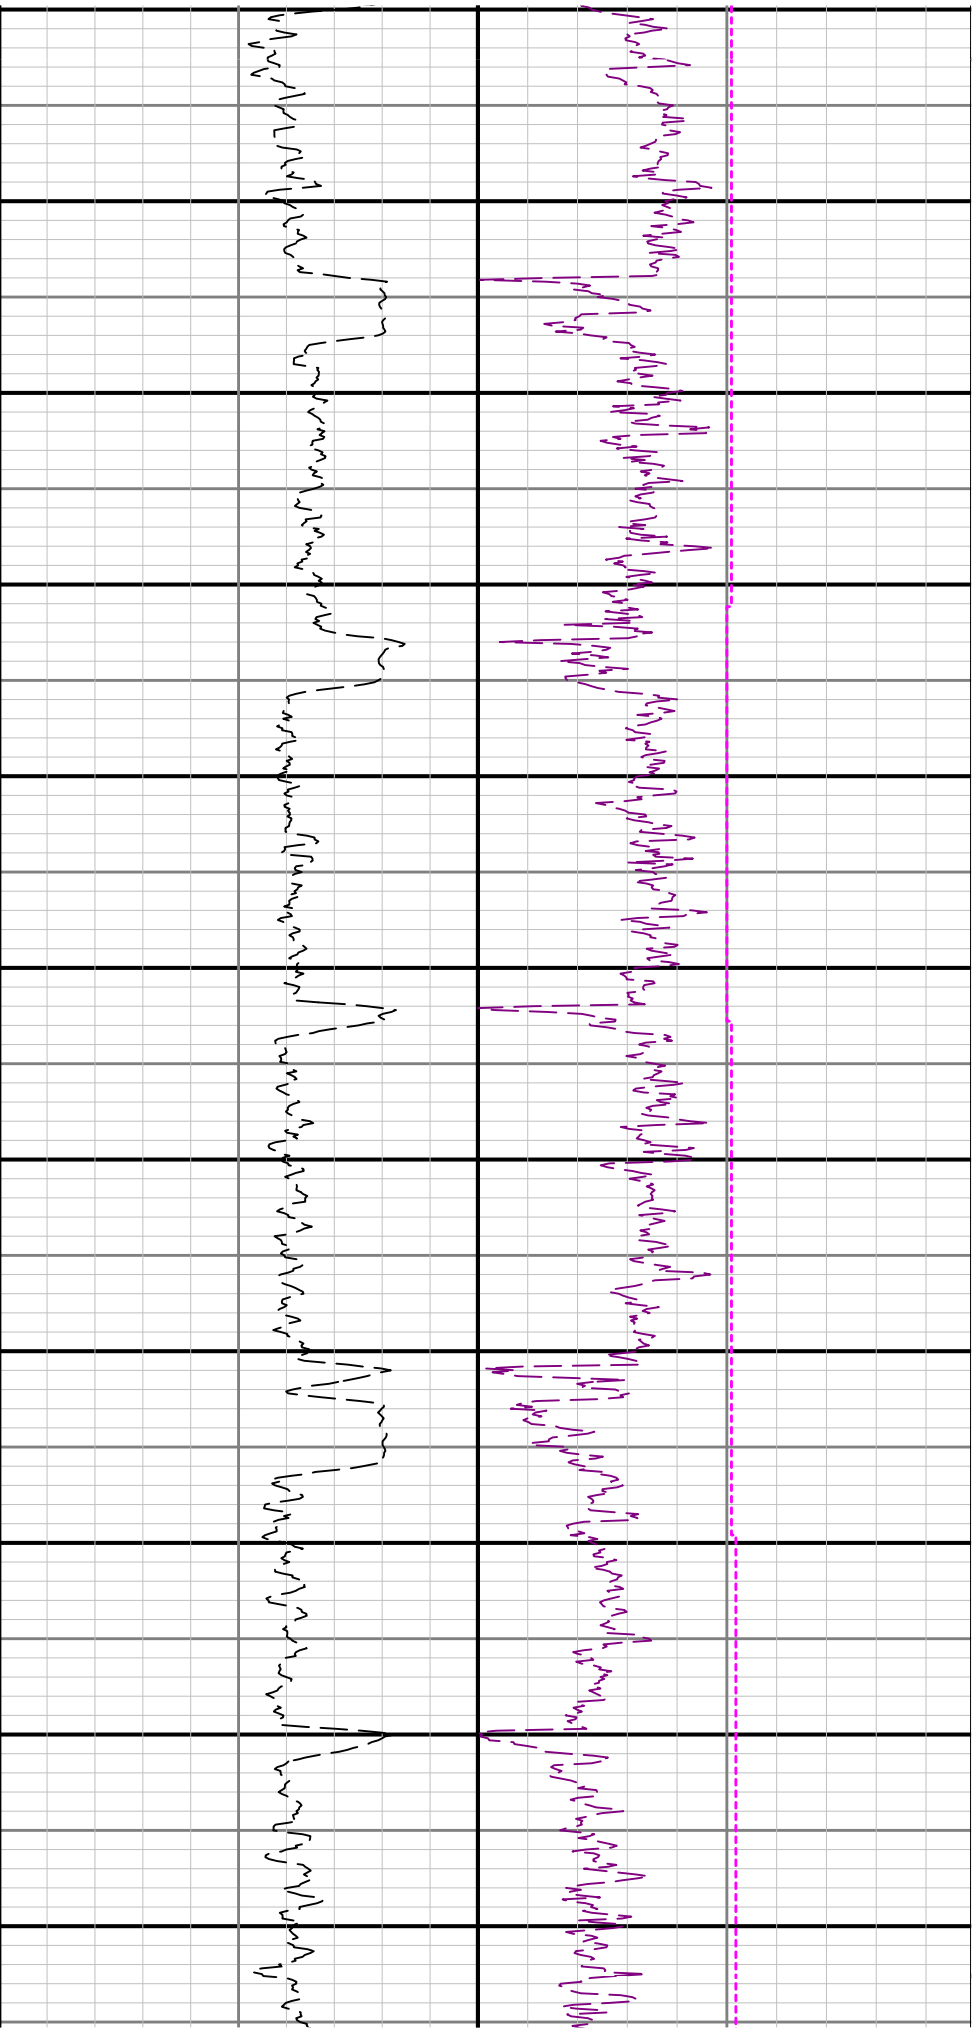






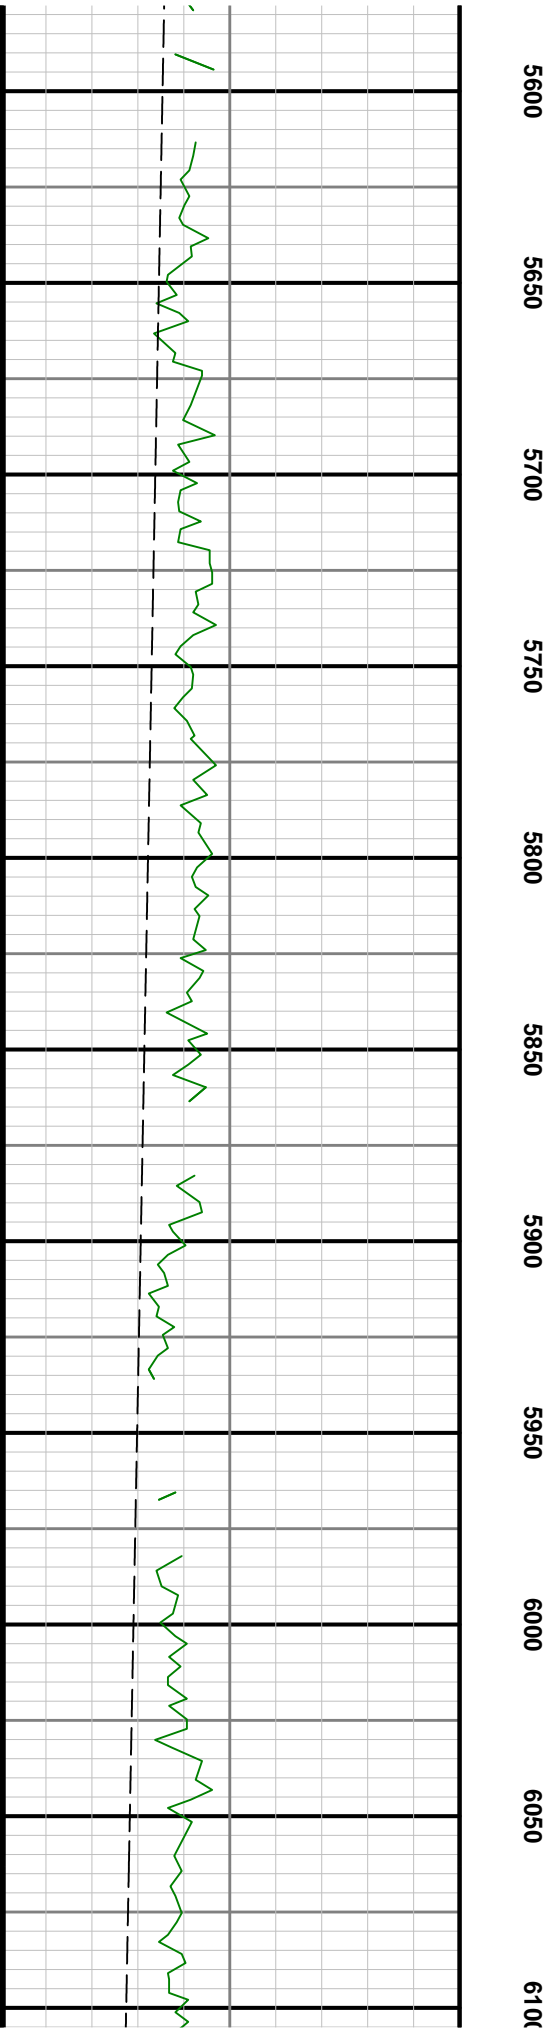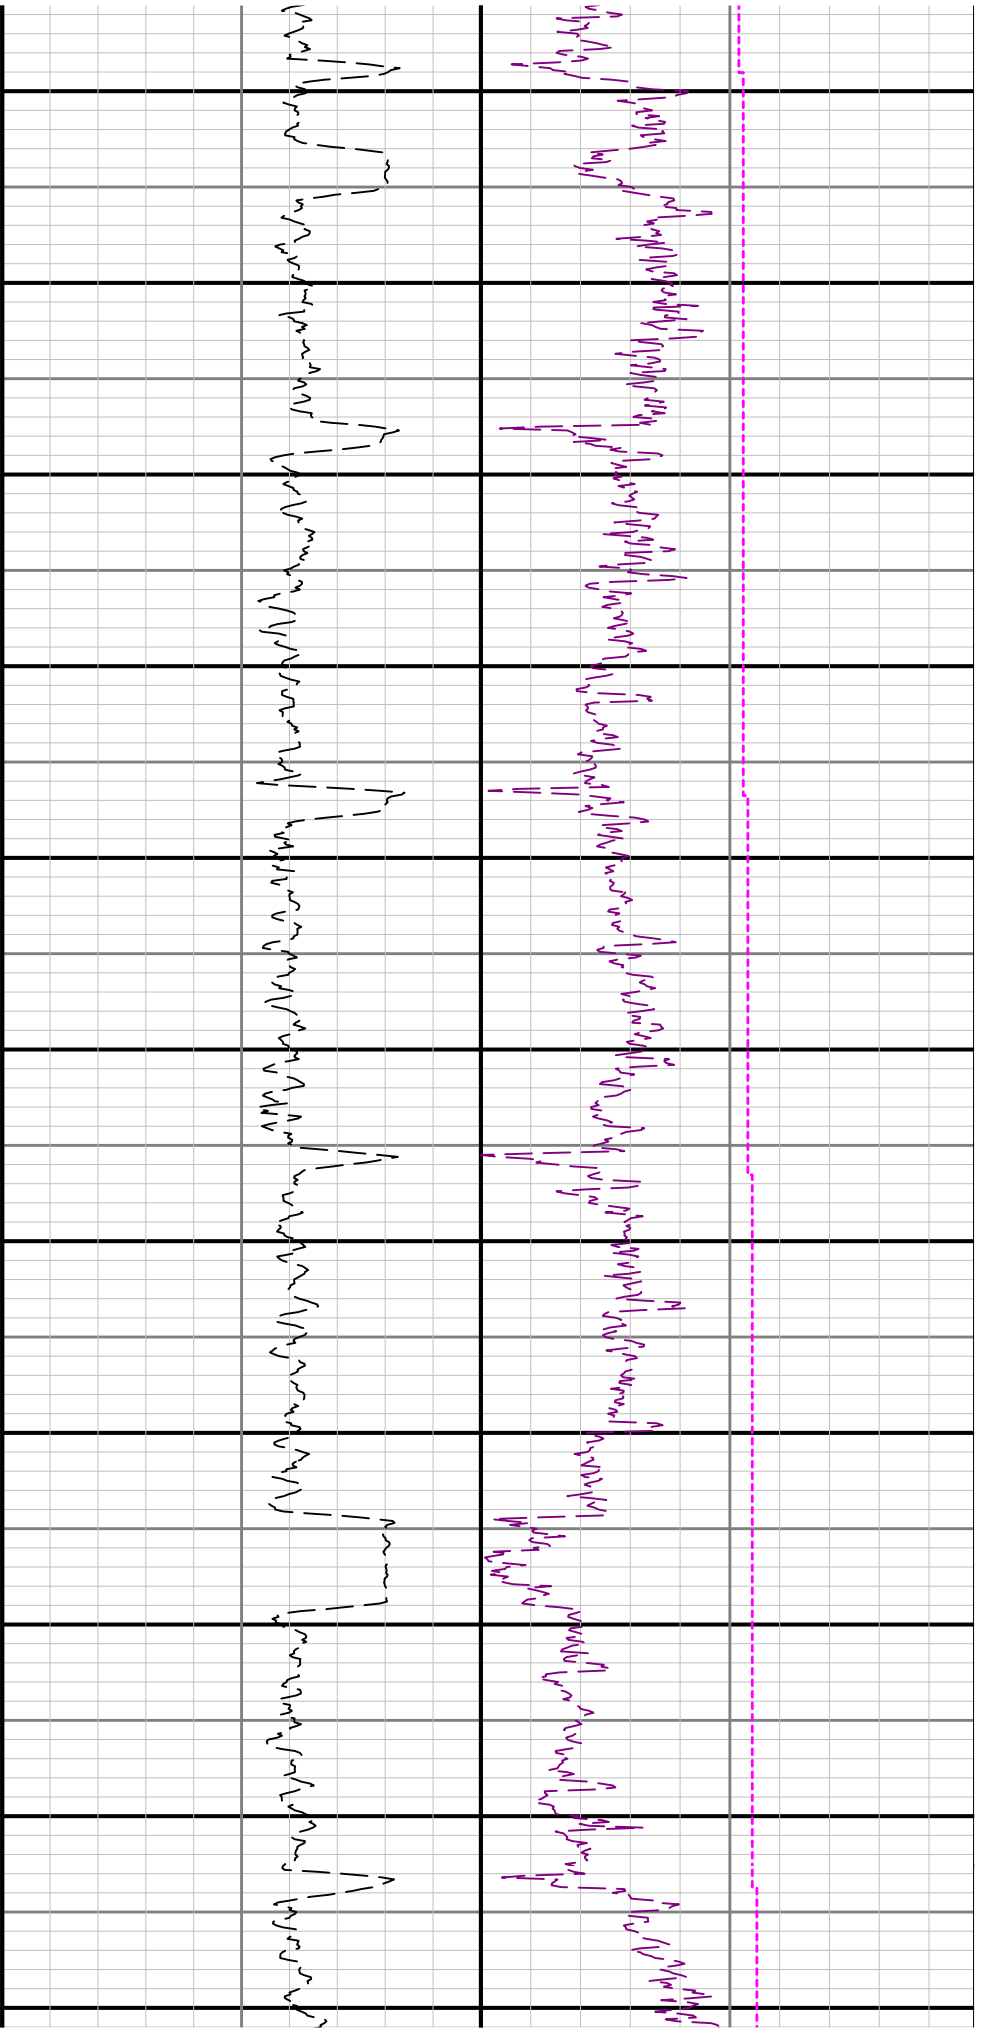


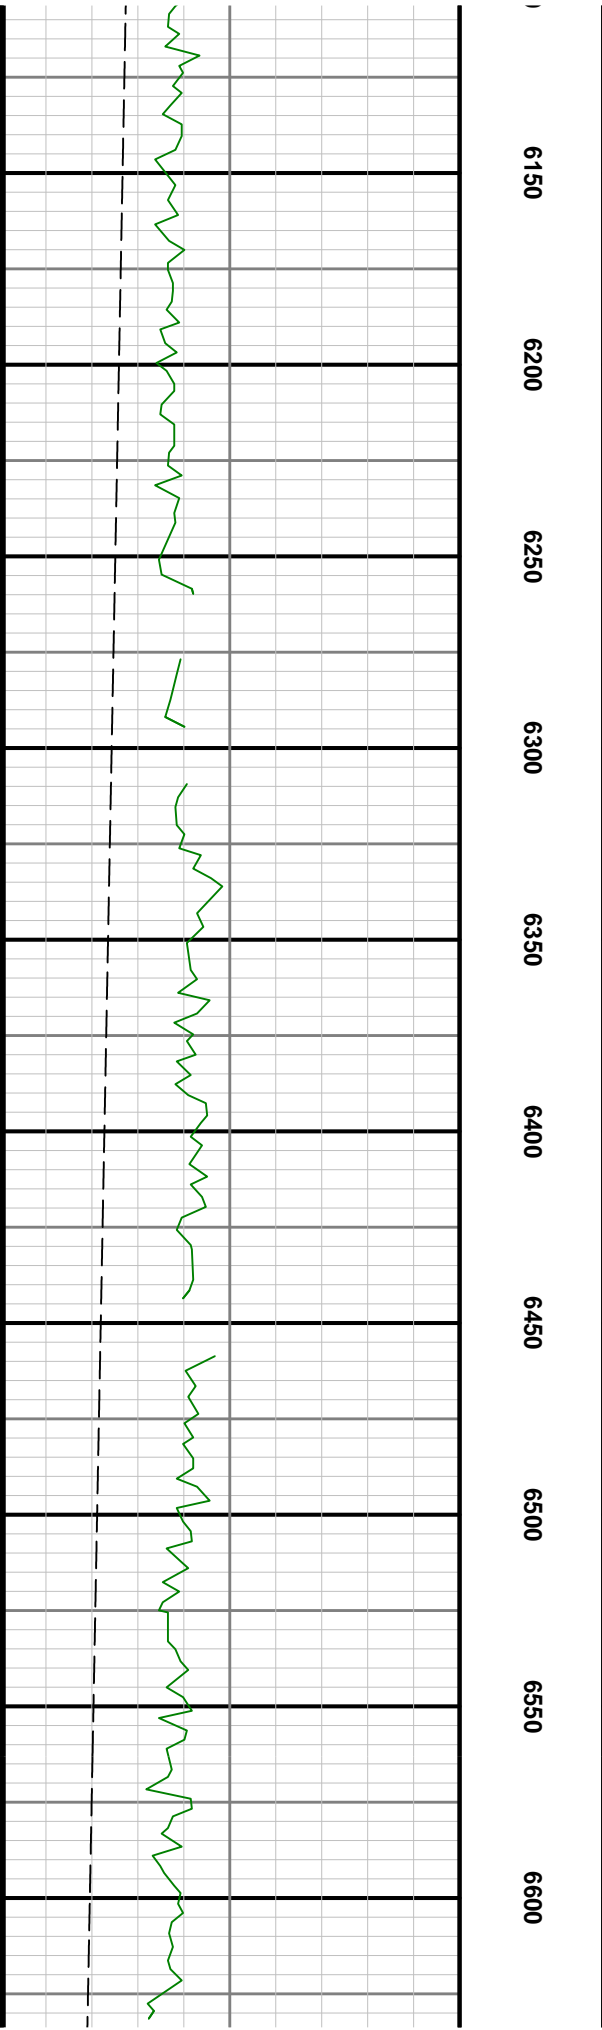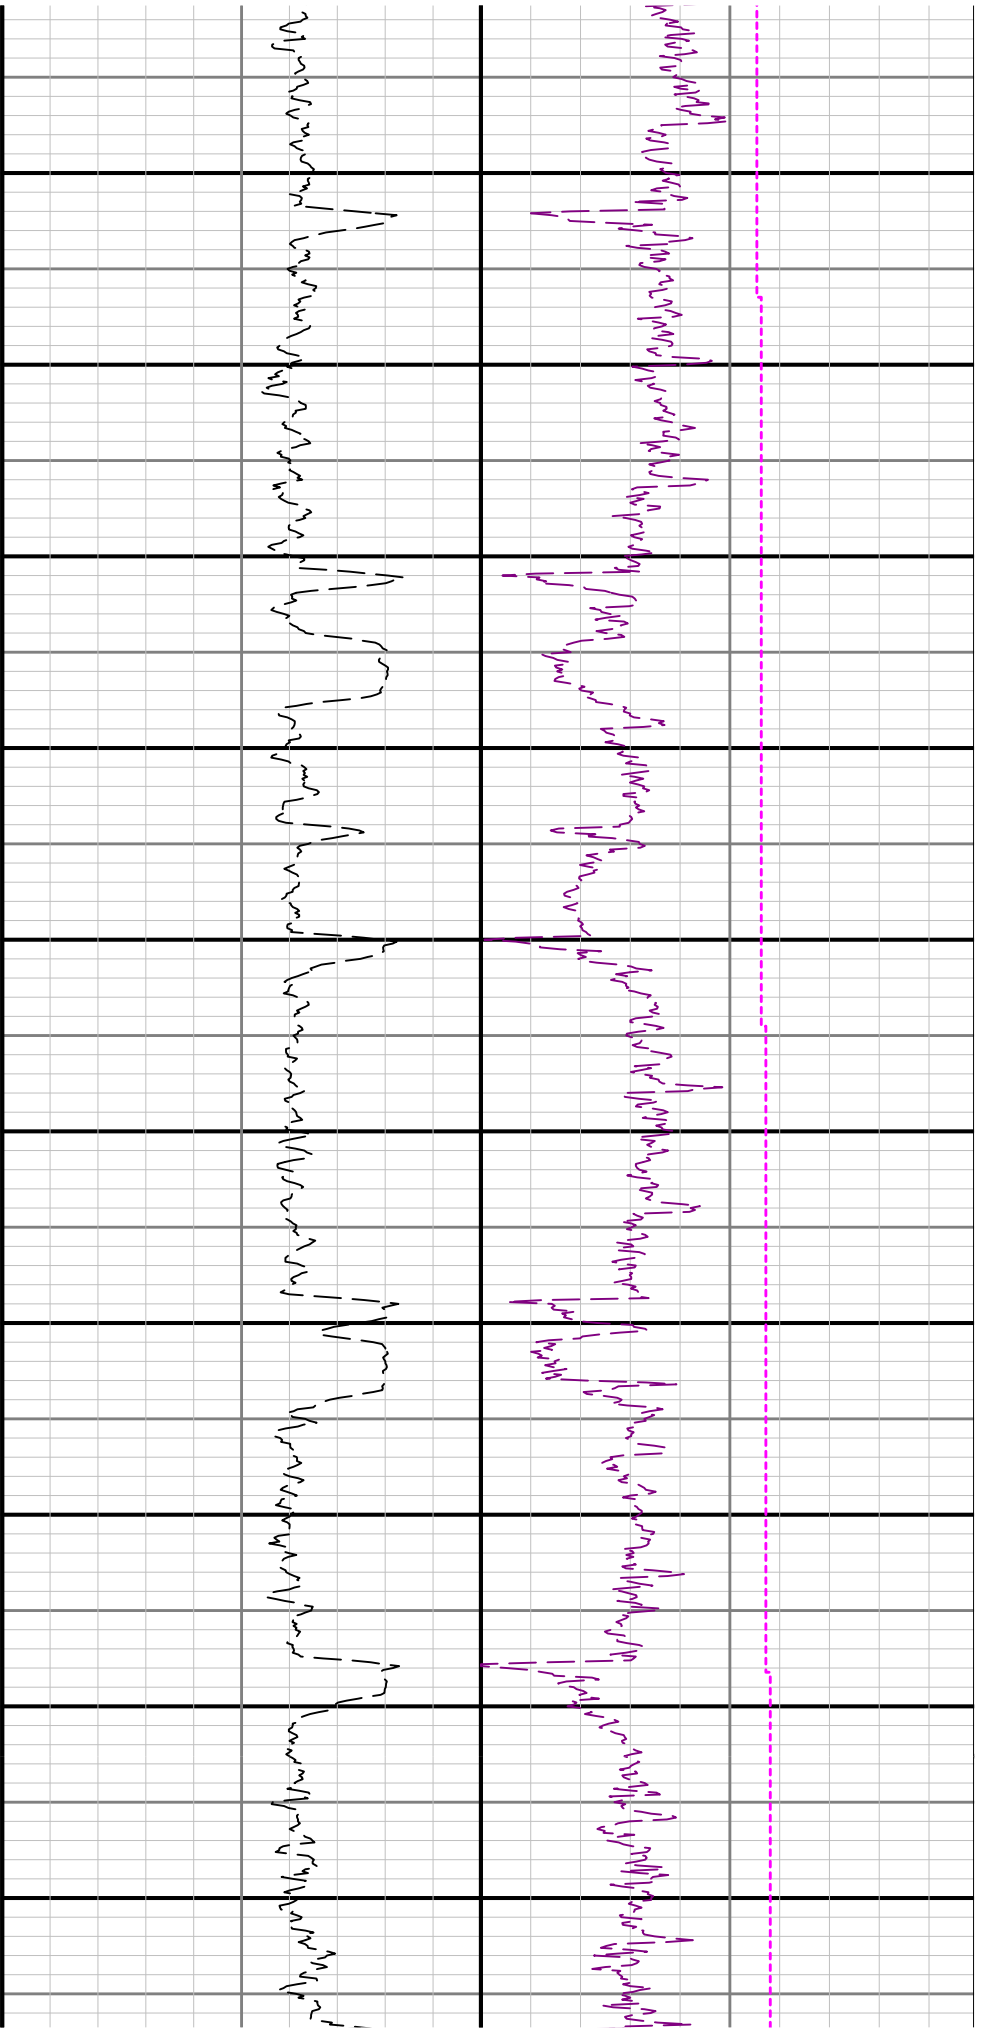

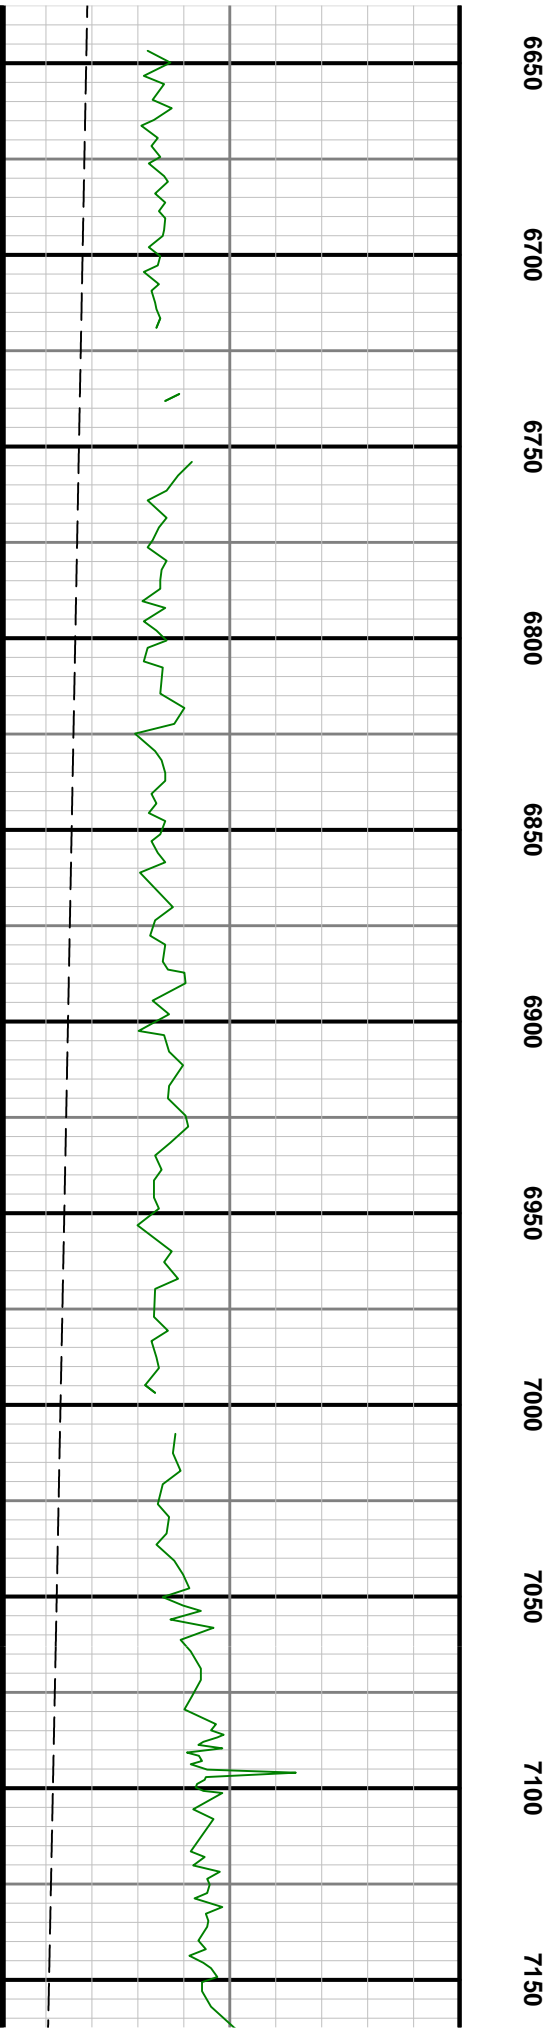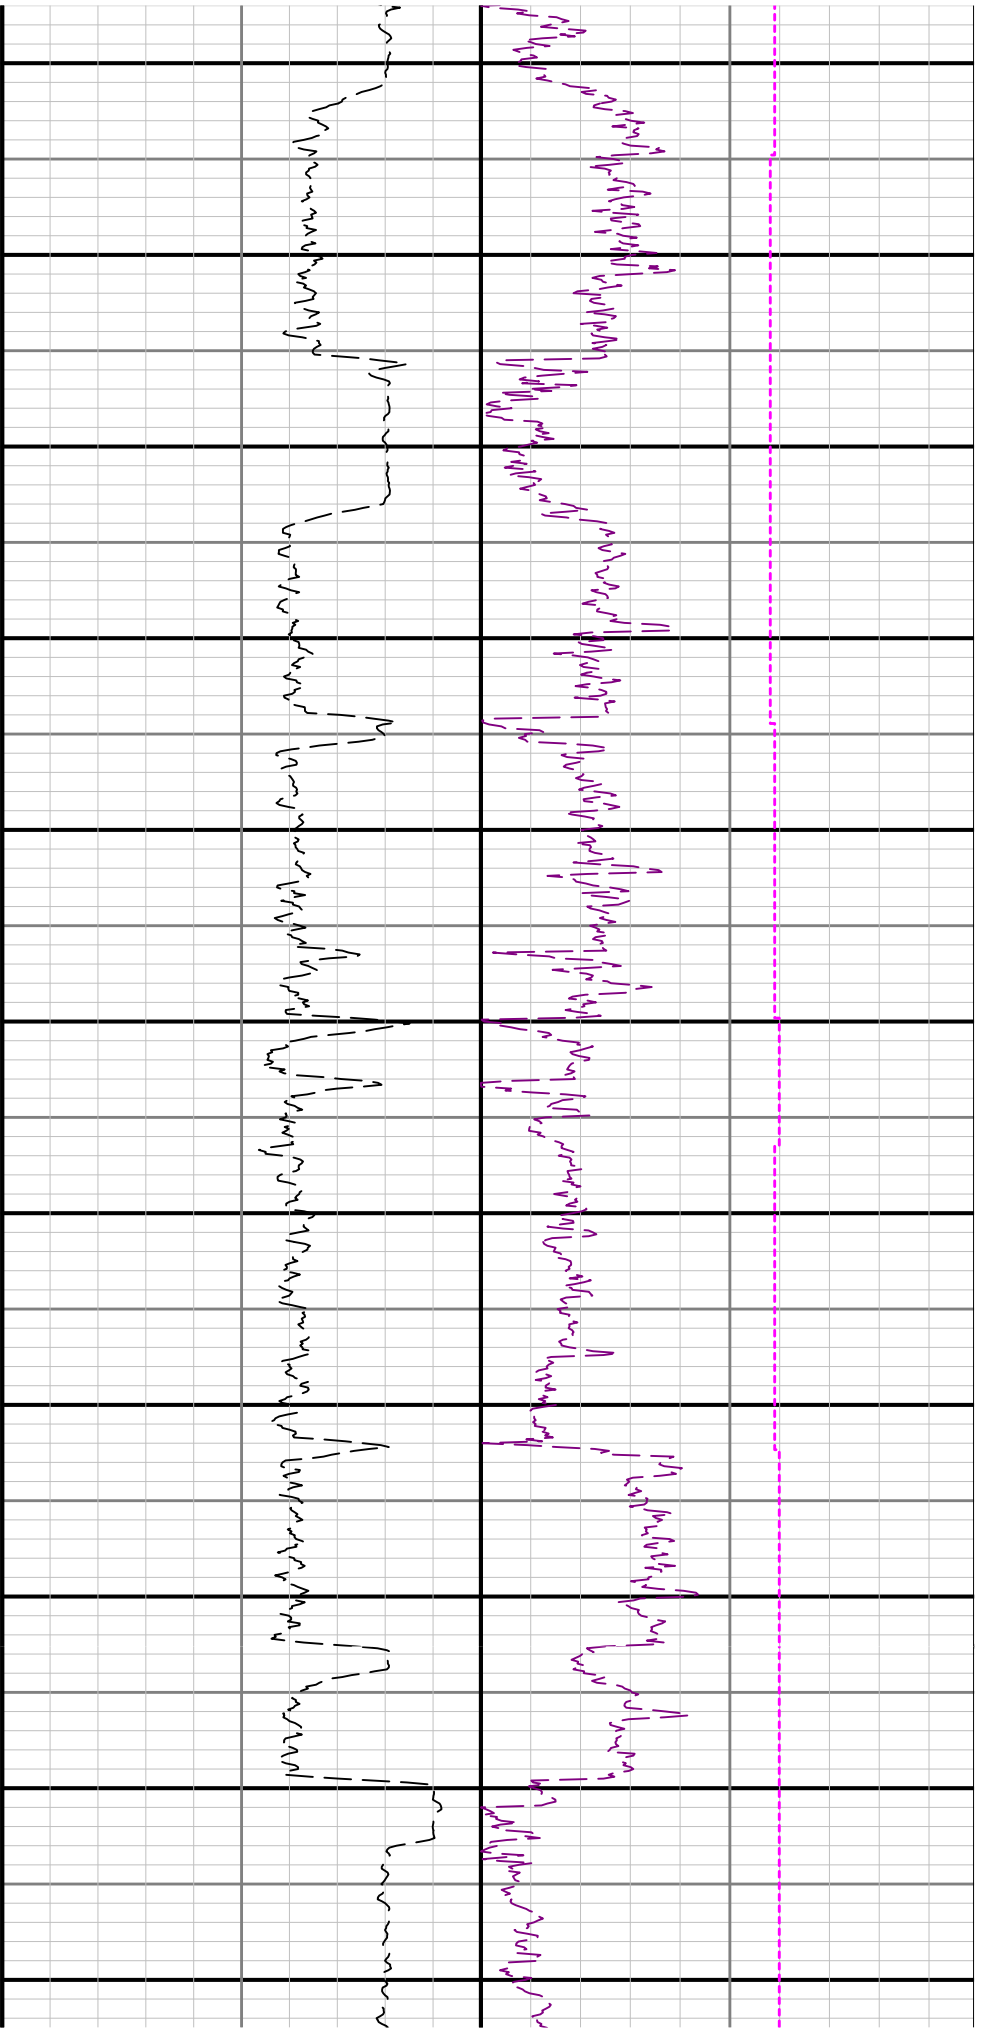


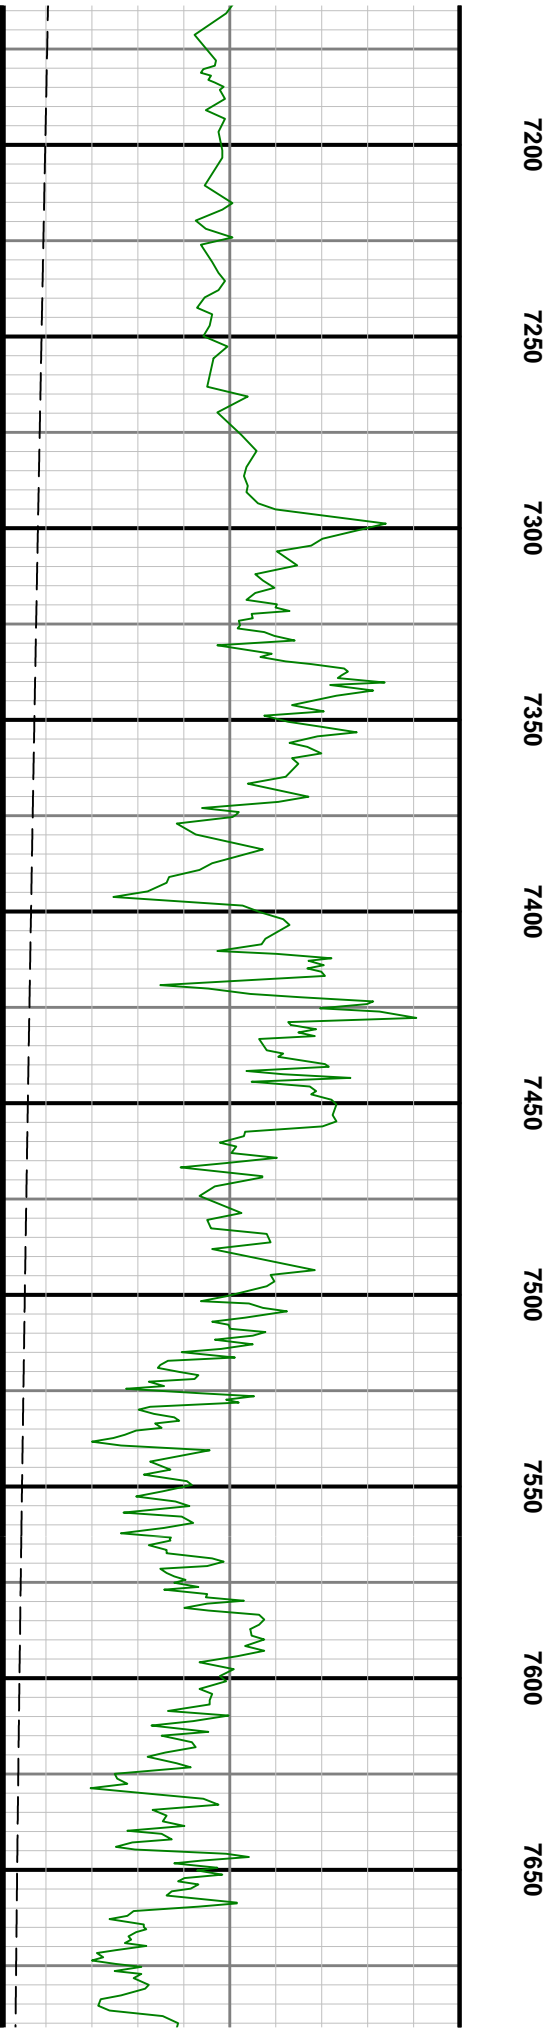
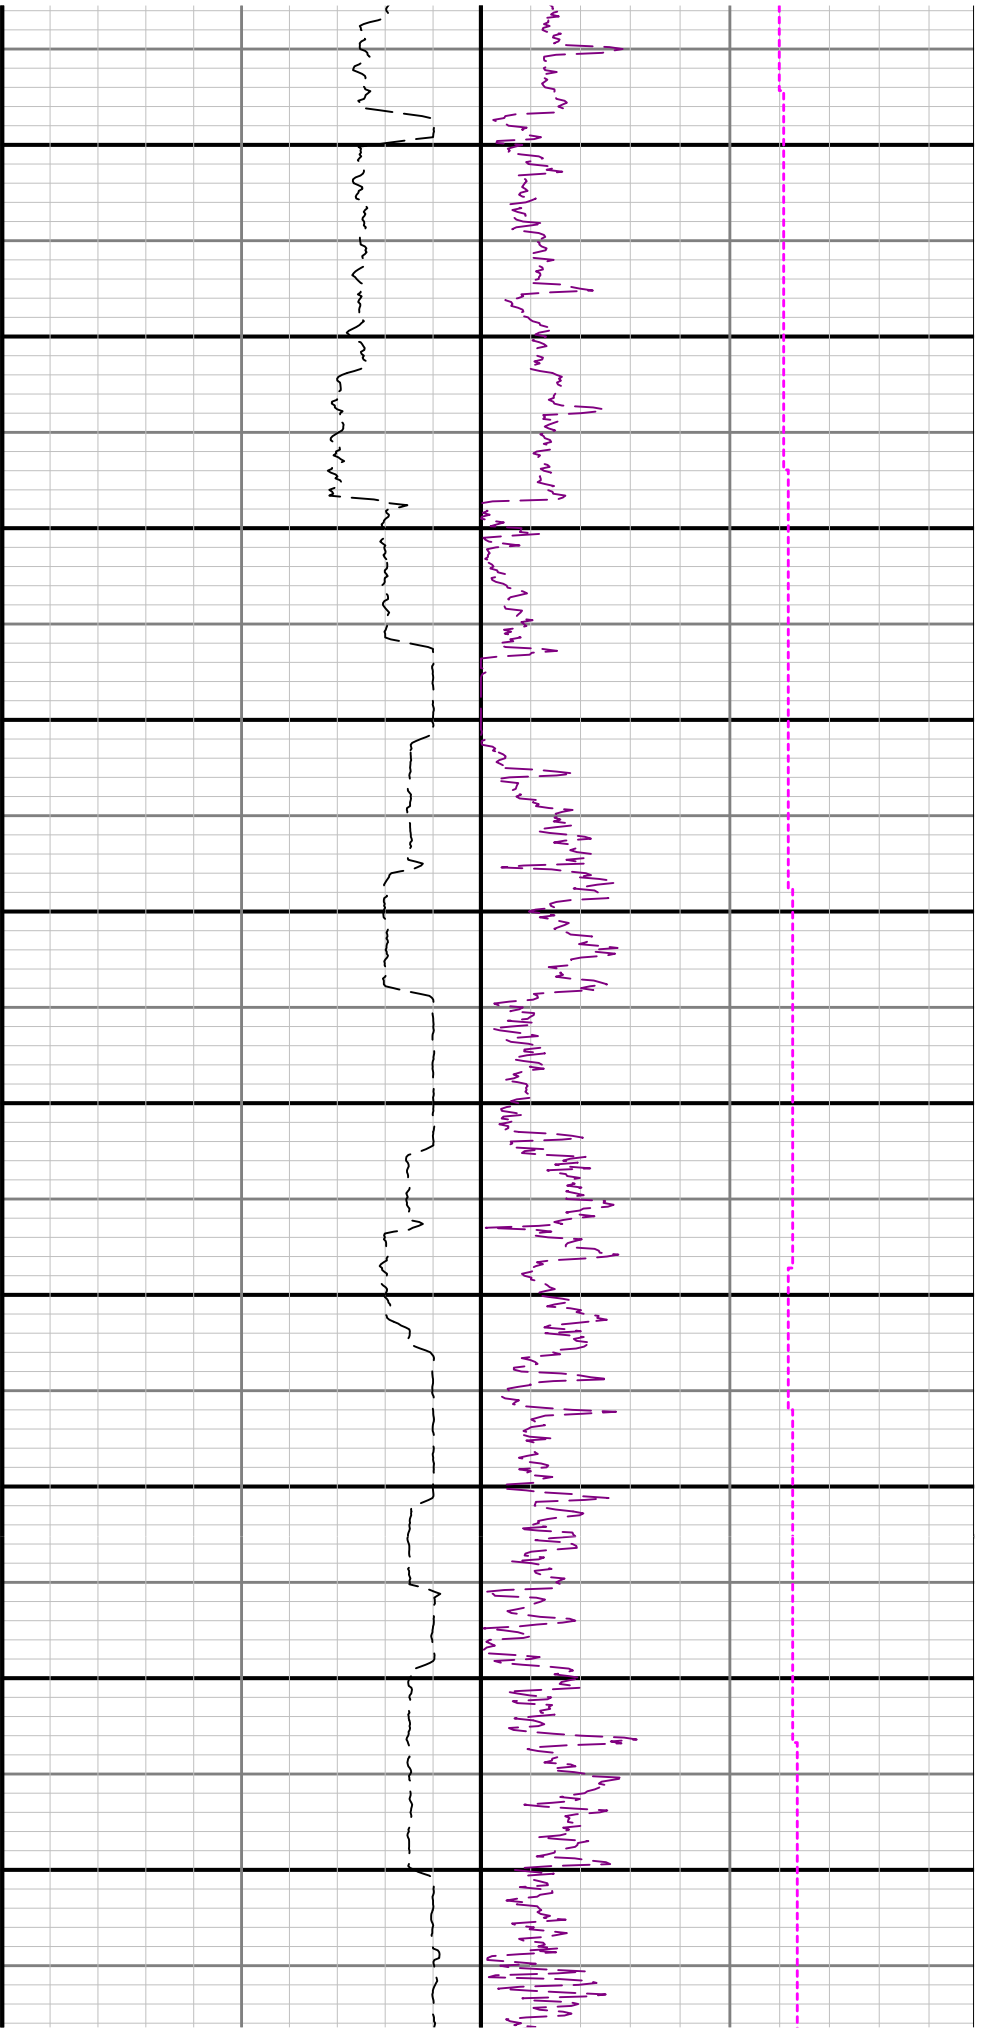


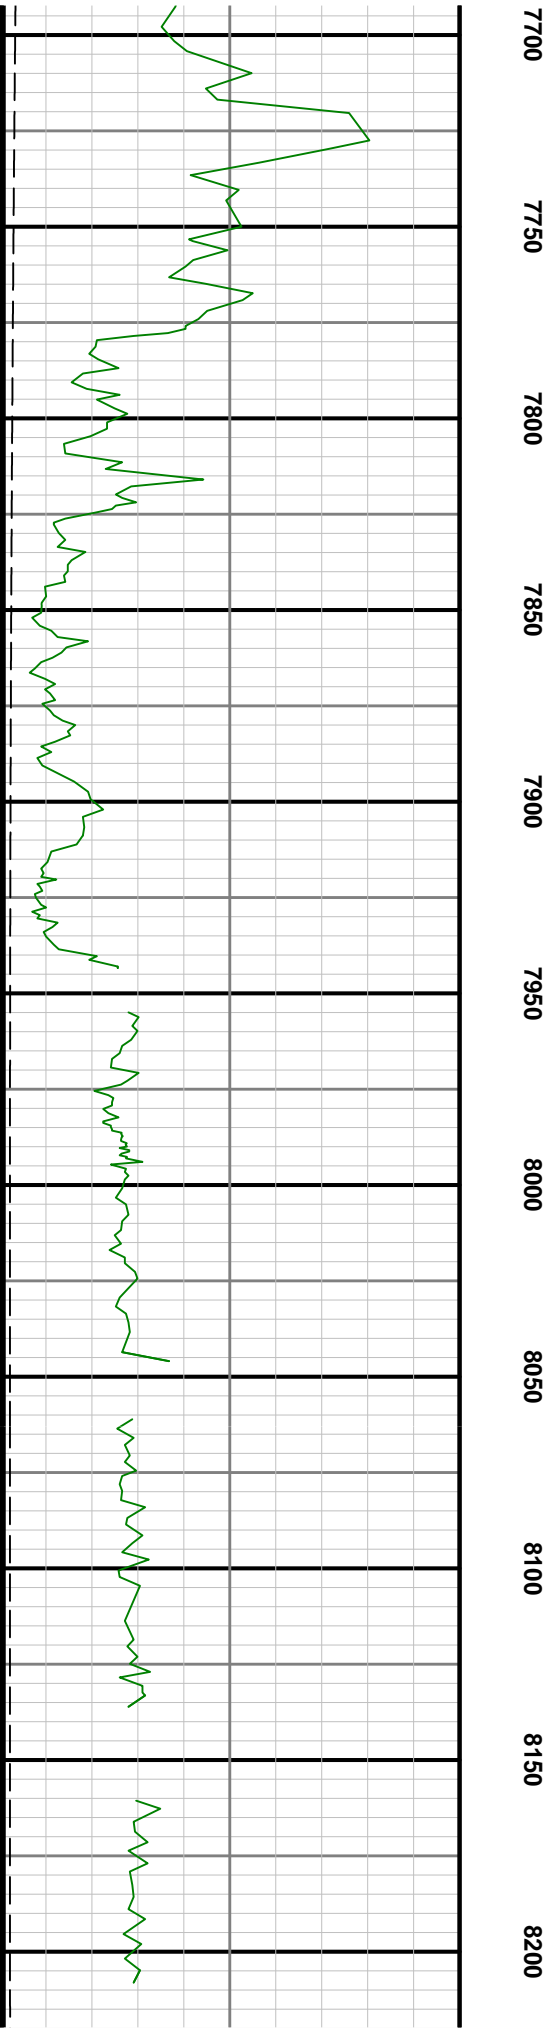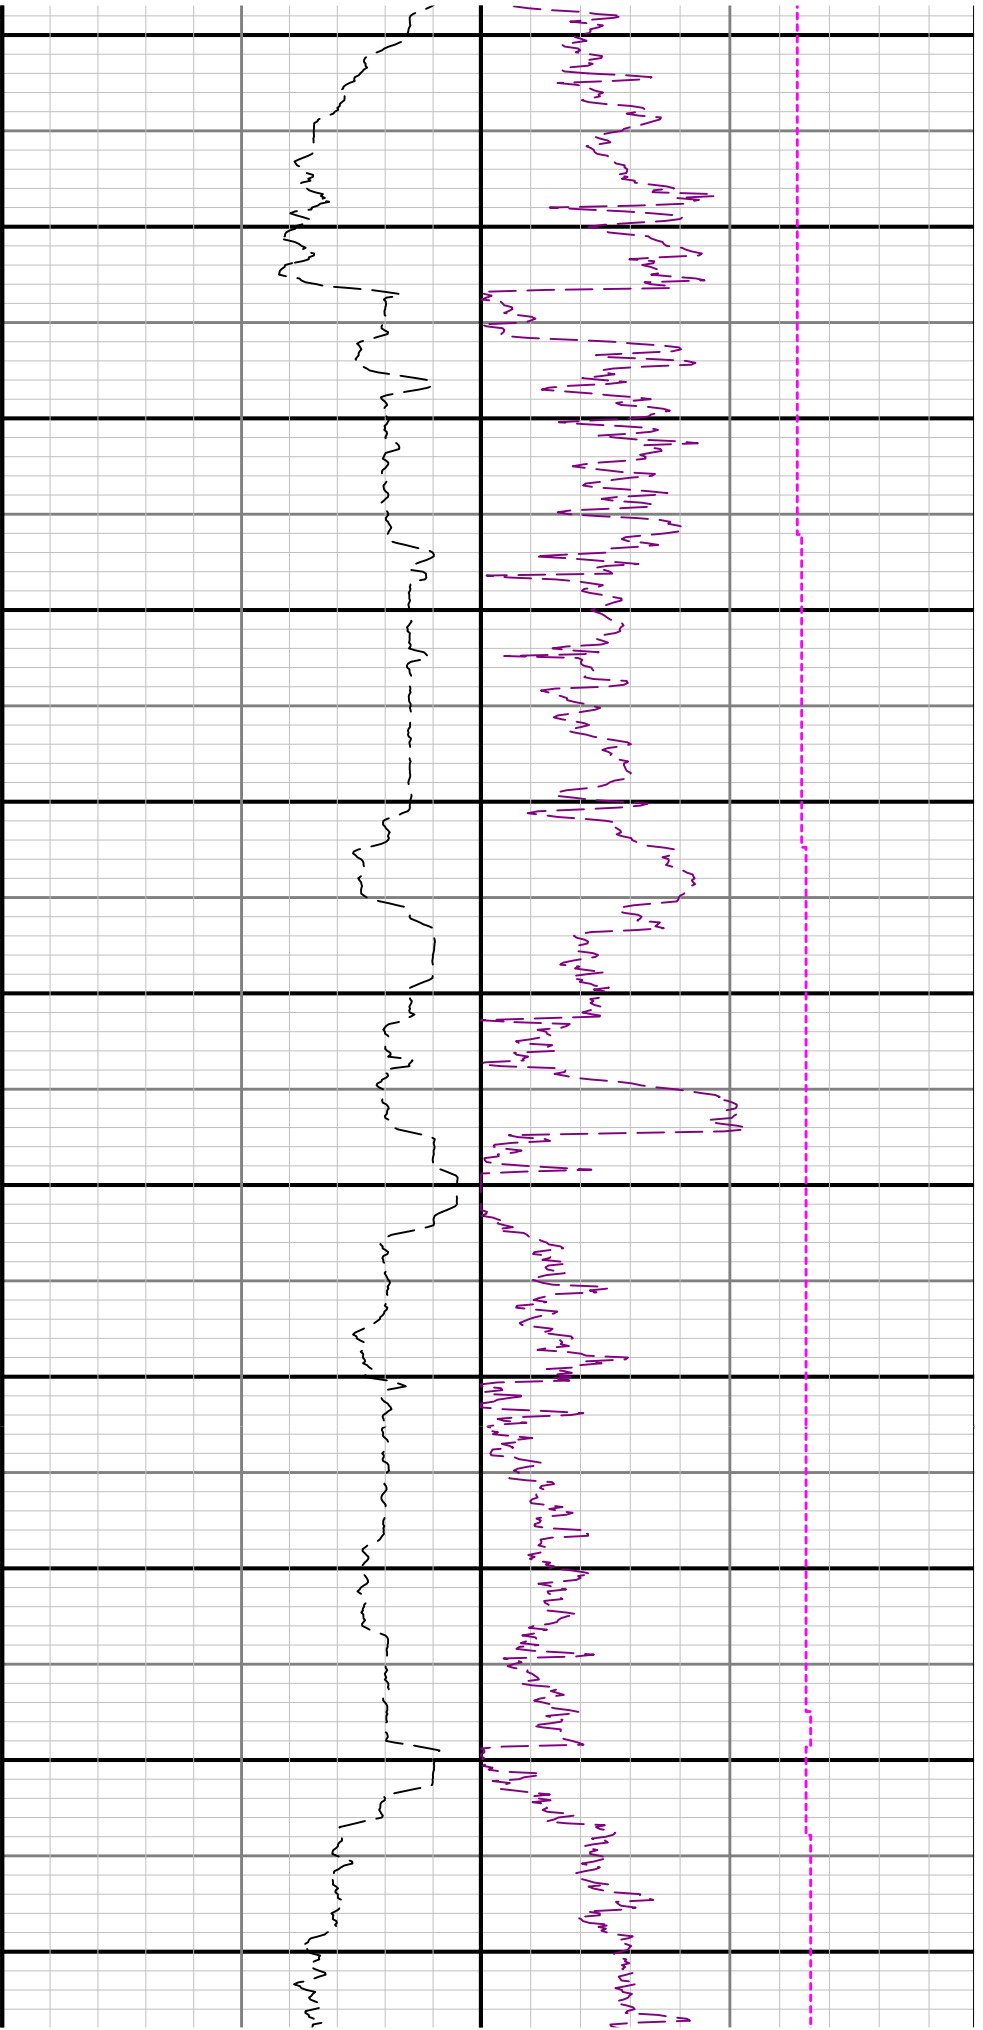


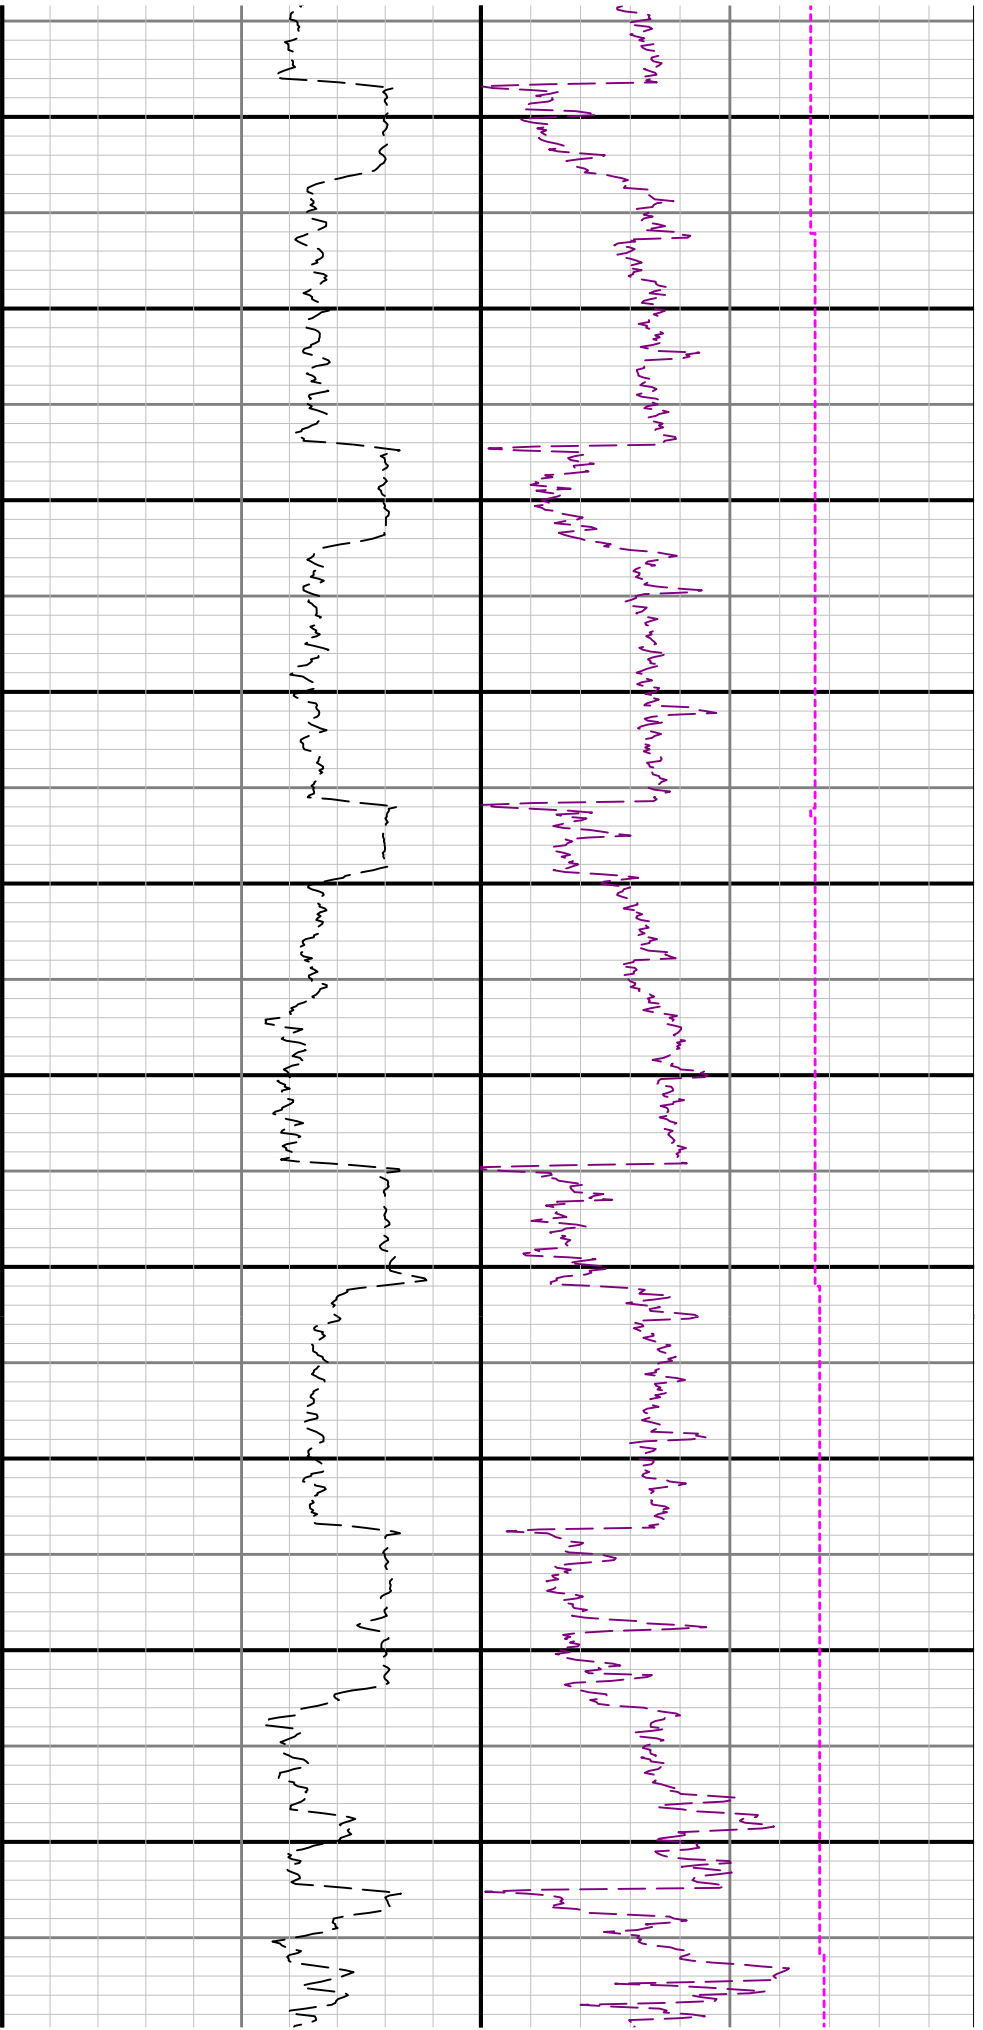


8250 8300 8350 8400 8450 8500 8550 8600 8650 8700 87

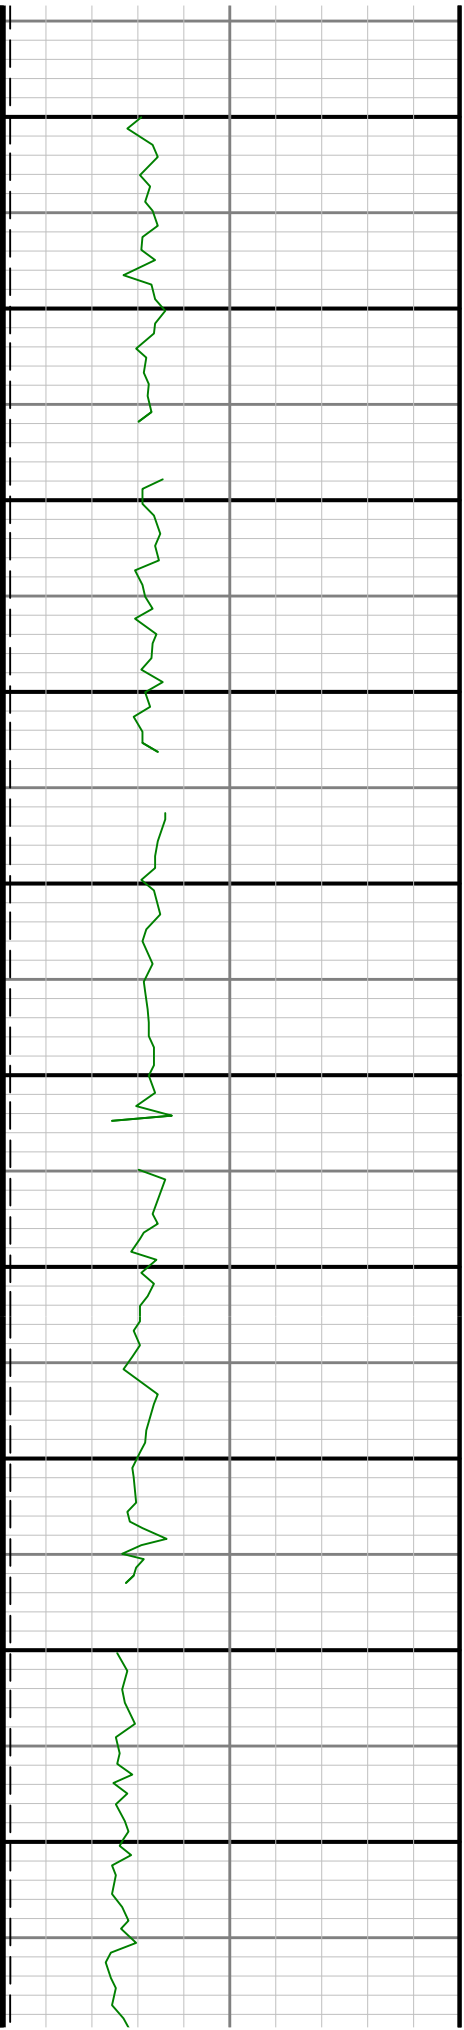

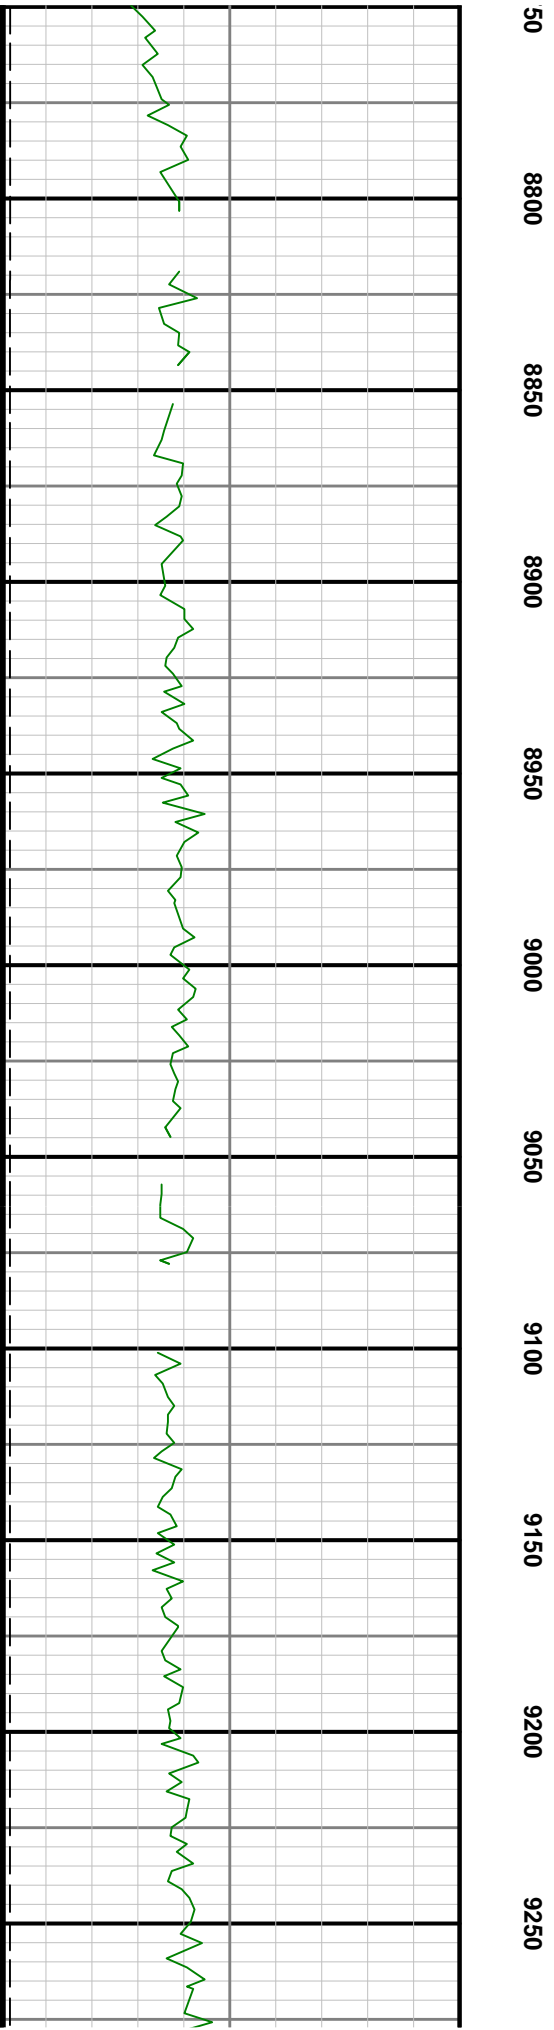
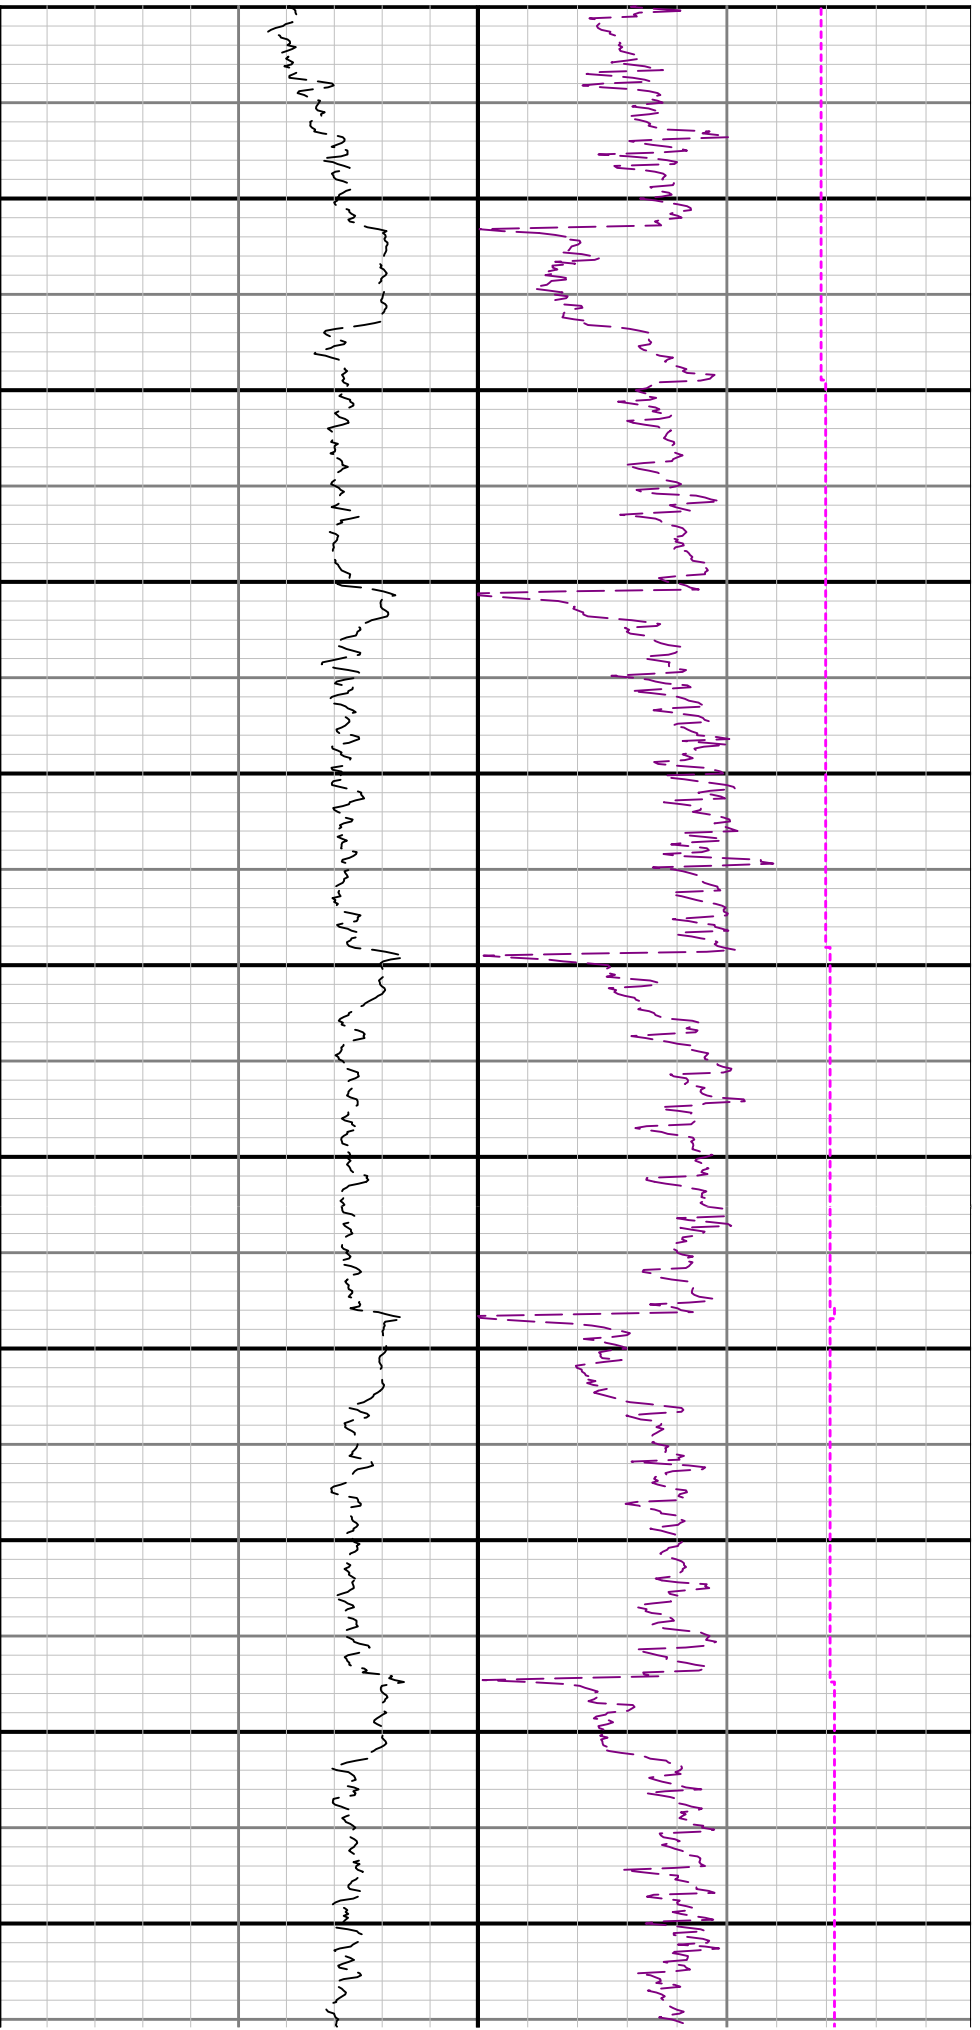


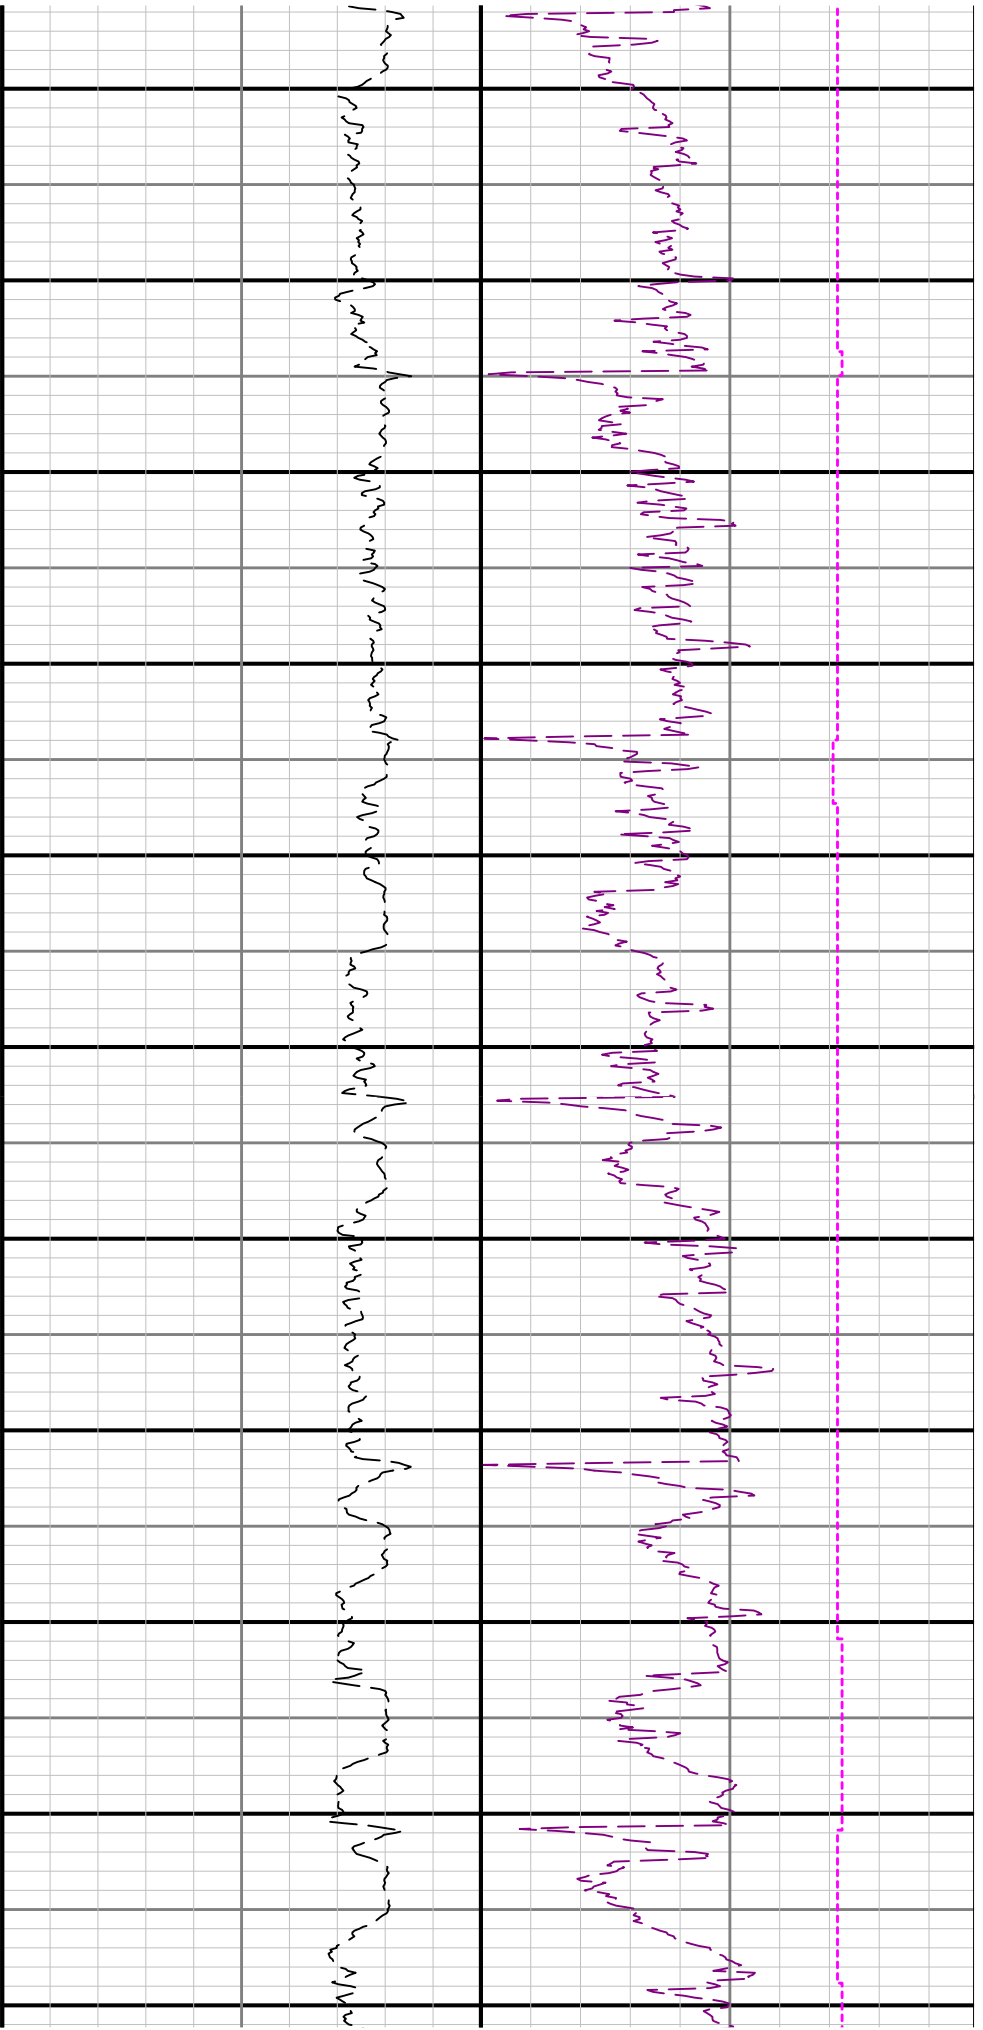


9300 9350 9400 9450 9500 9550 9600 9650 9700 9750 9800

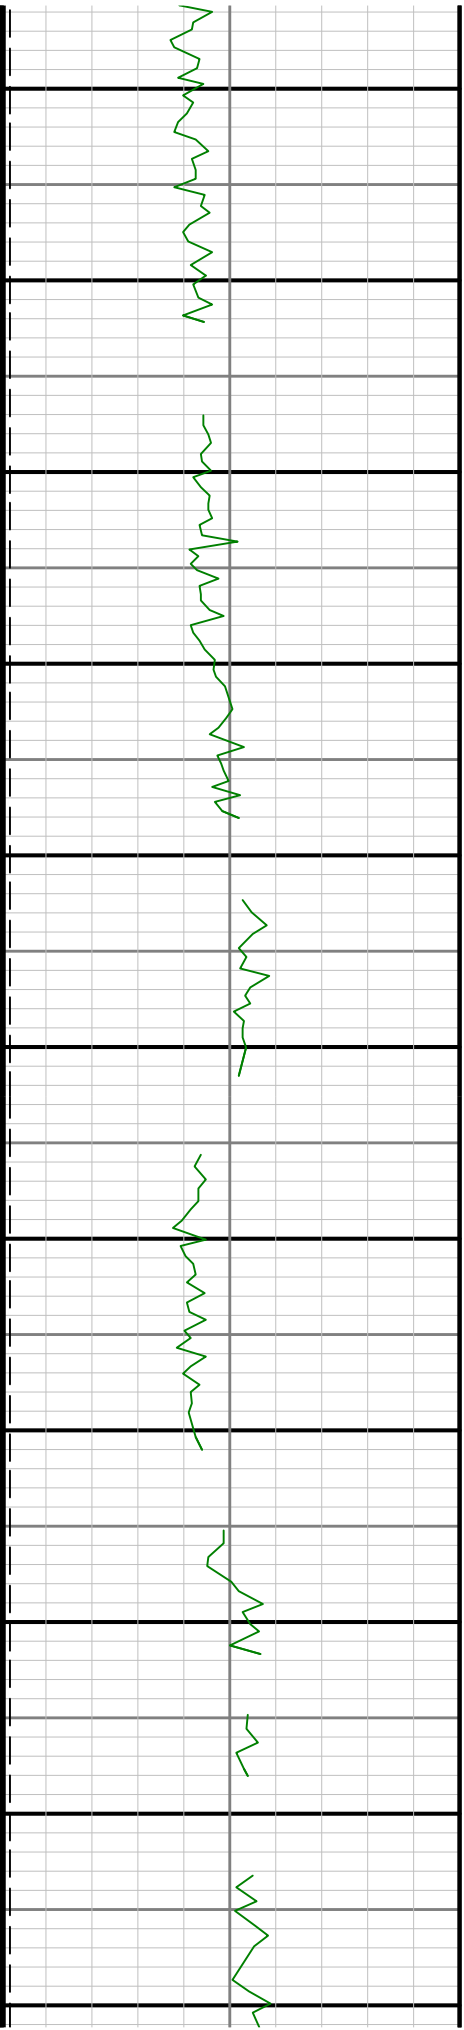






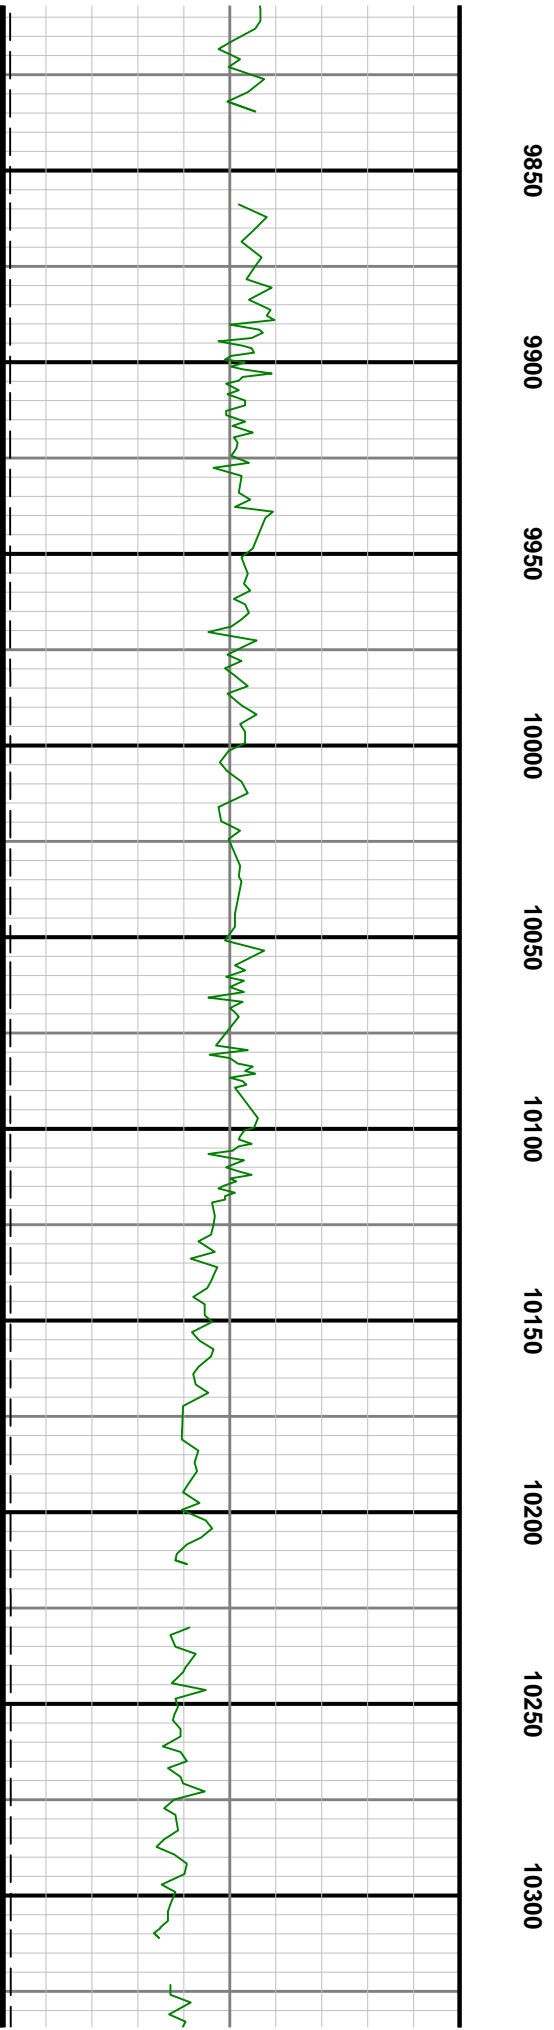
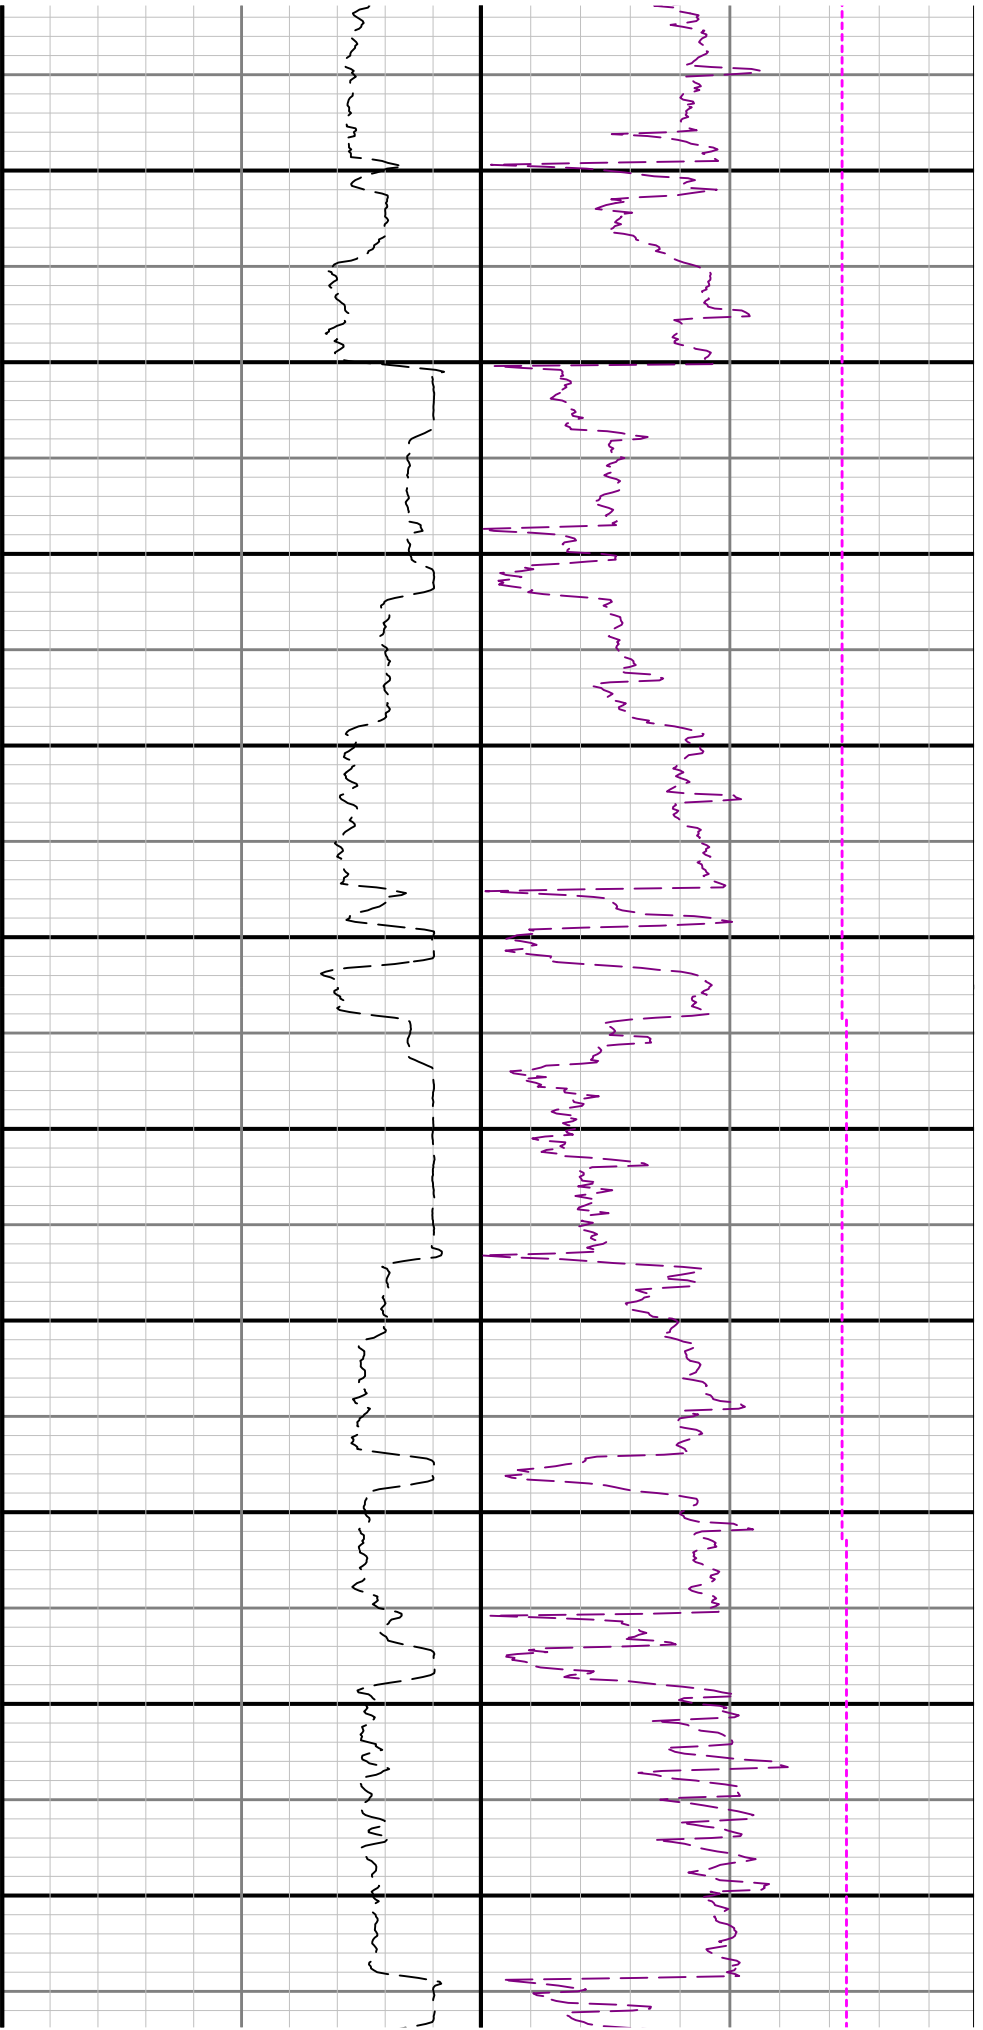



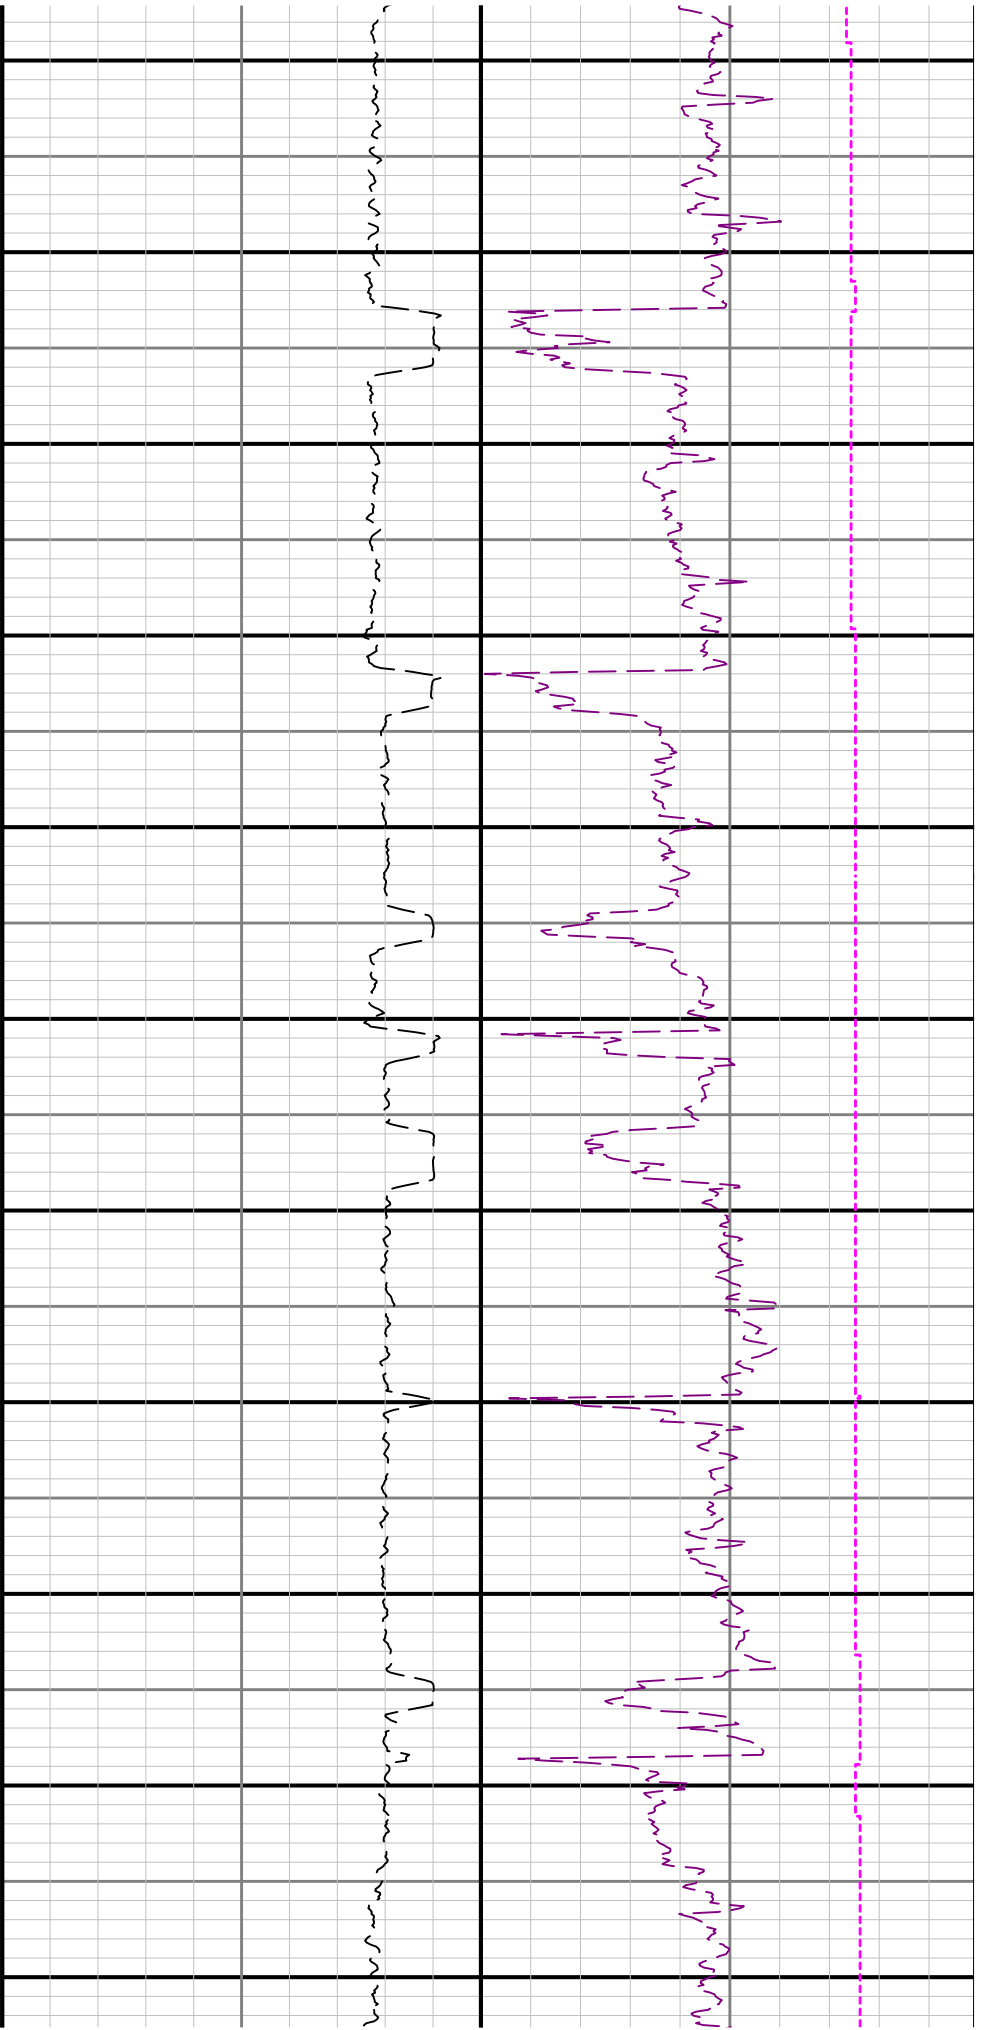




10350      10400      10450      10500      10550      10600      10650      10700      10750      10800      10850


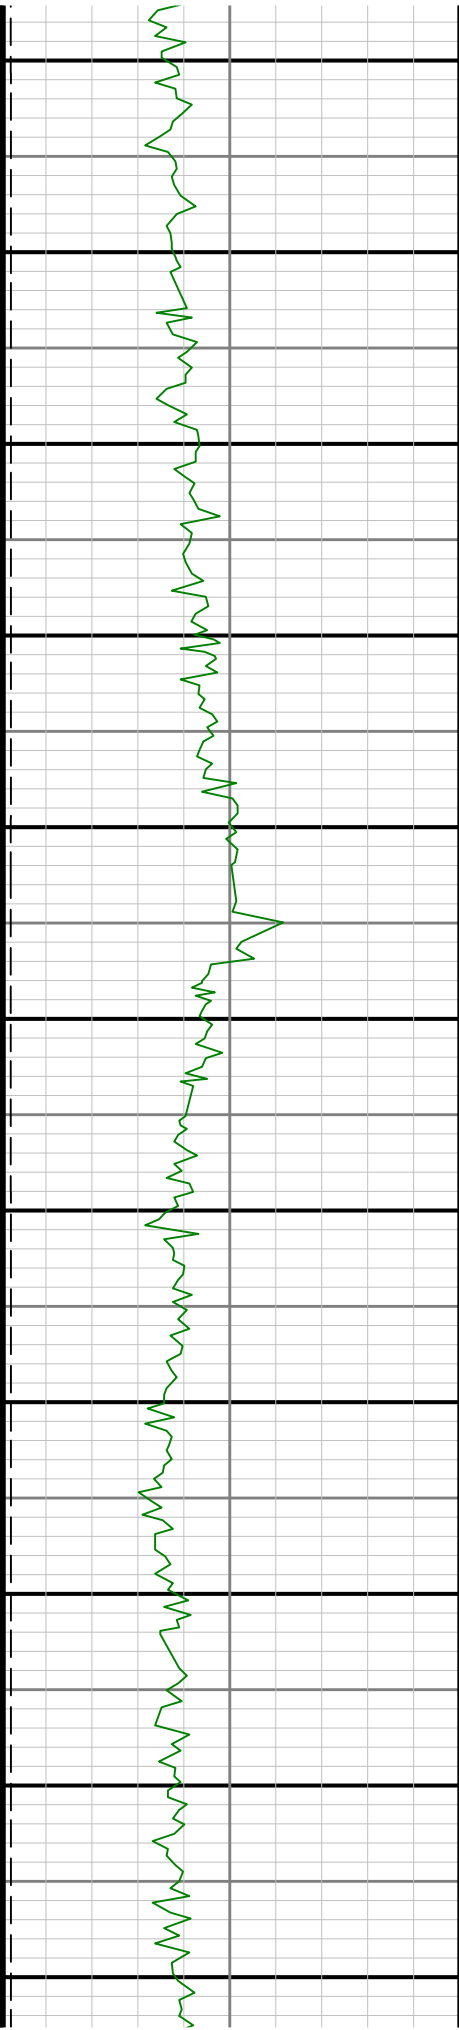


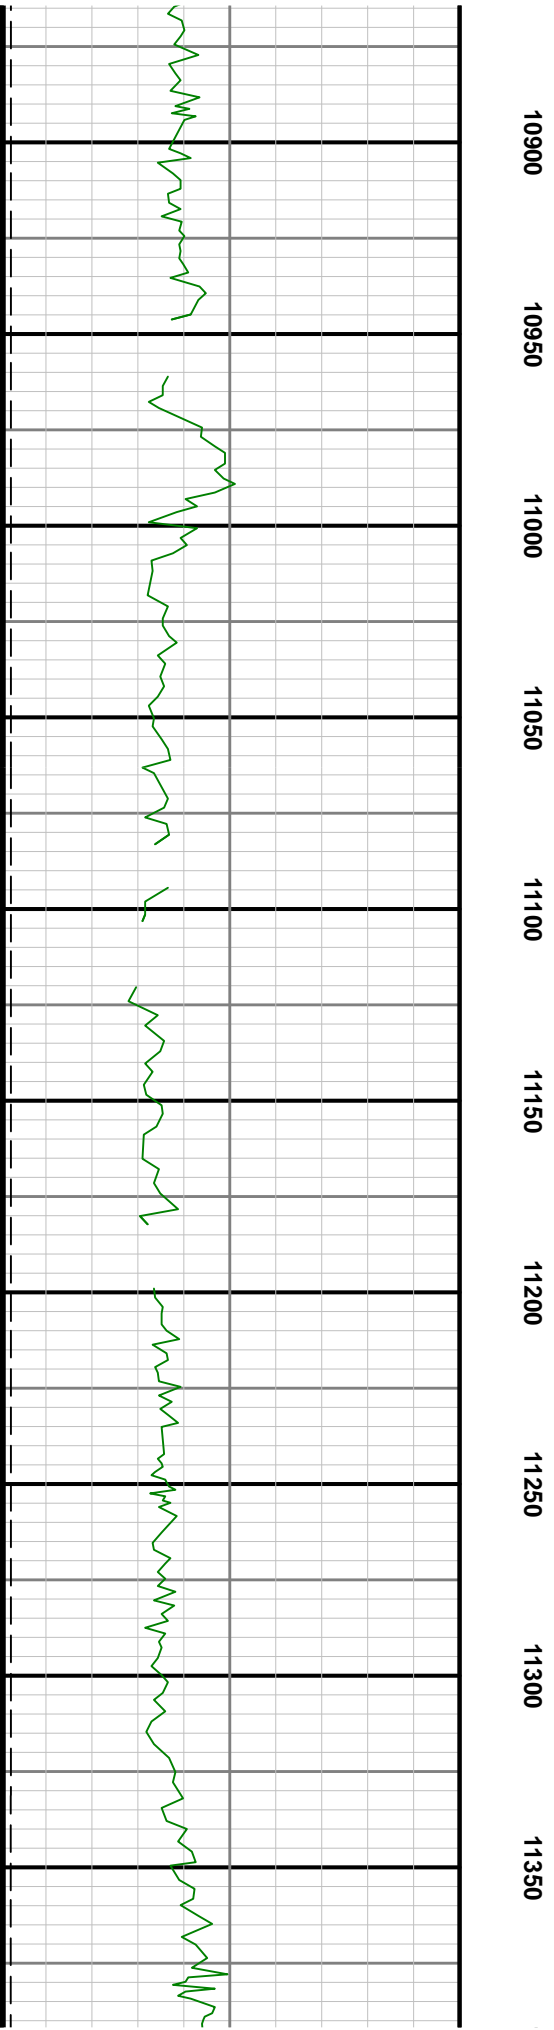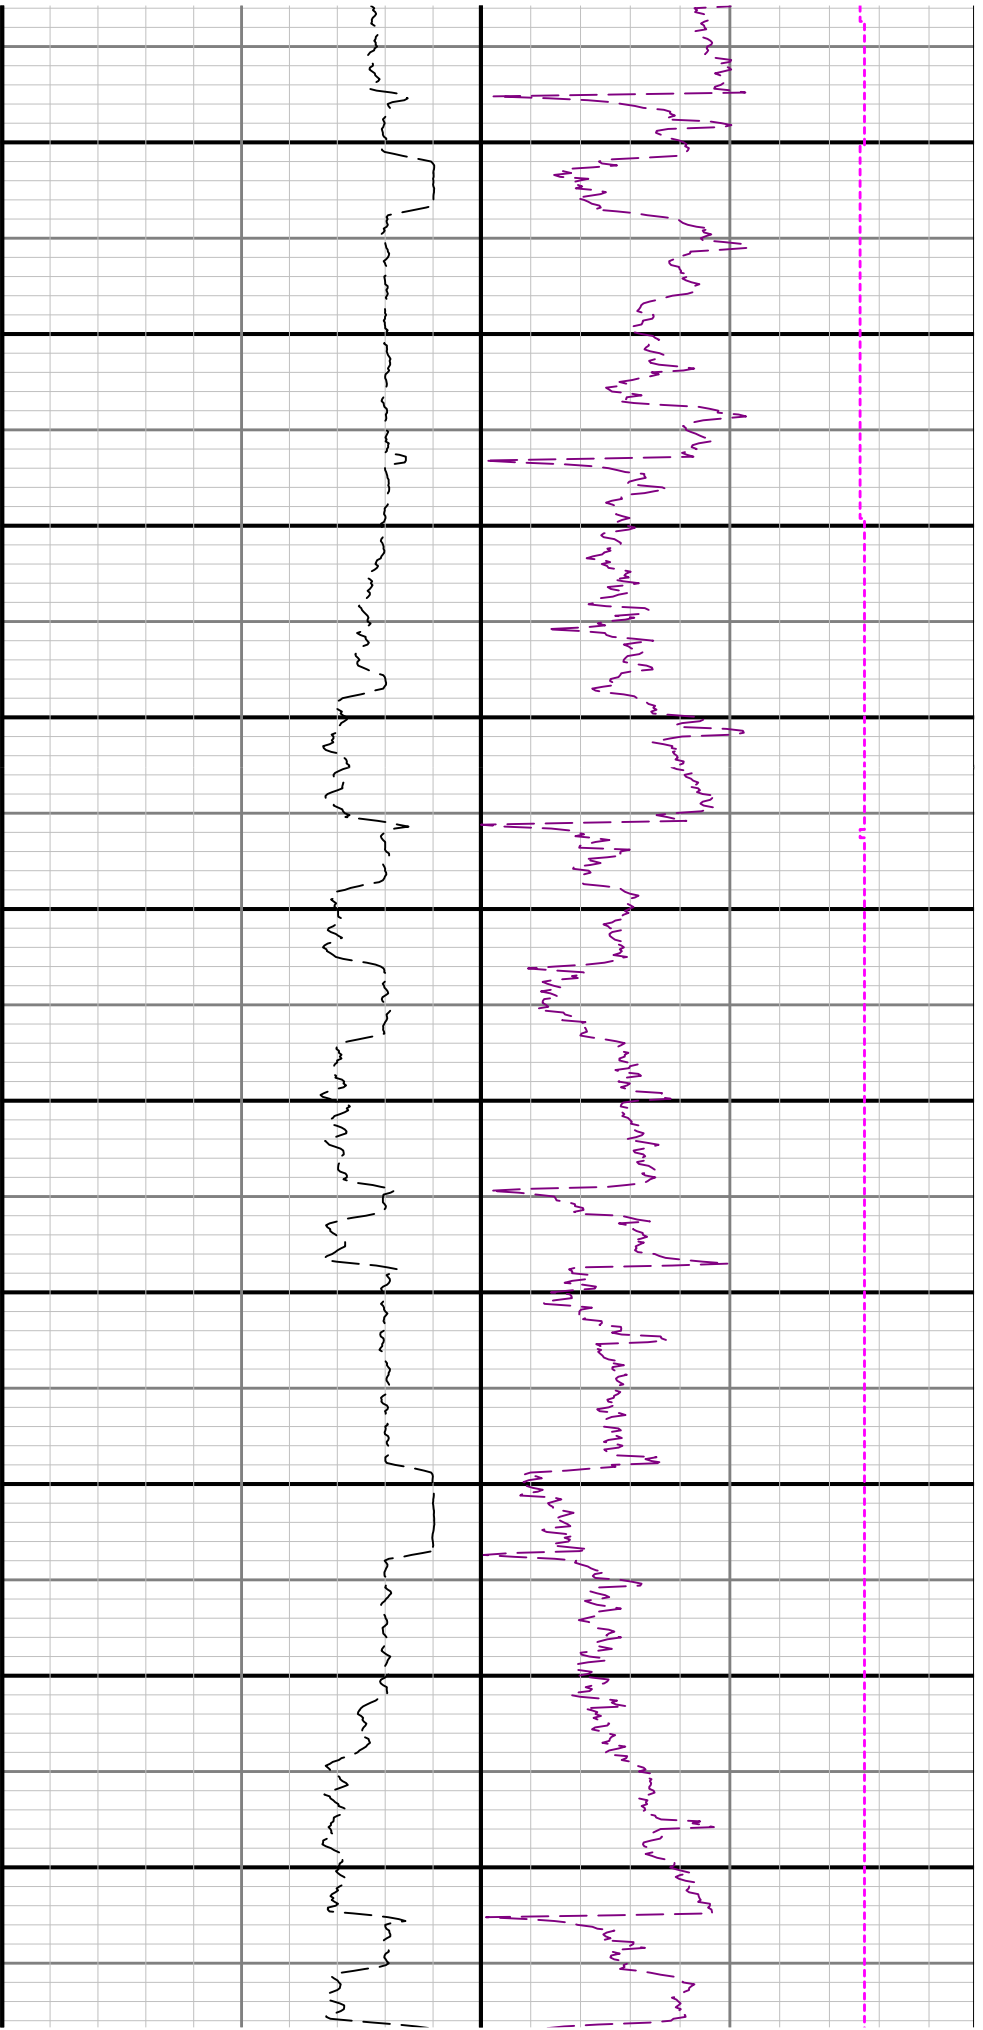

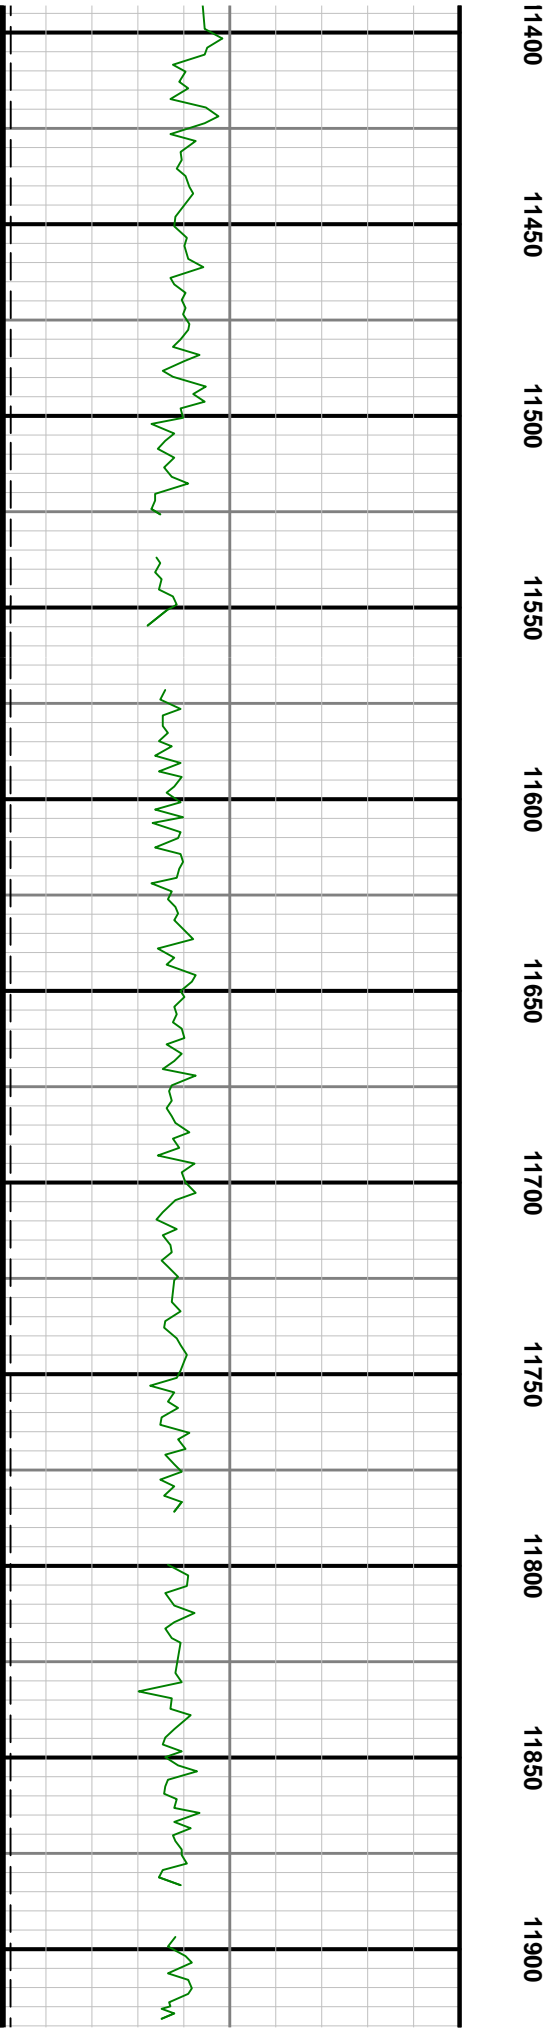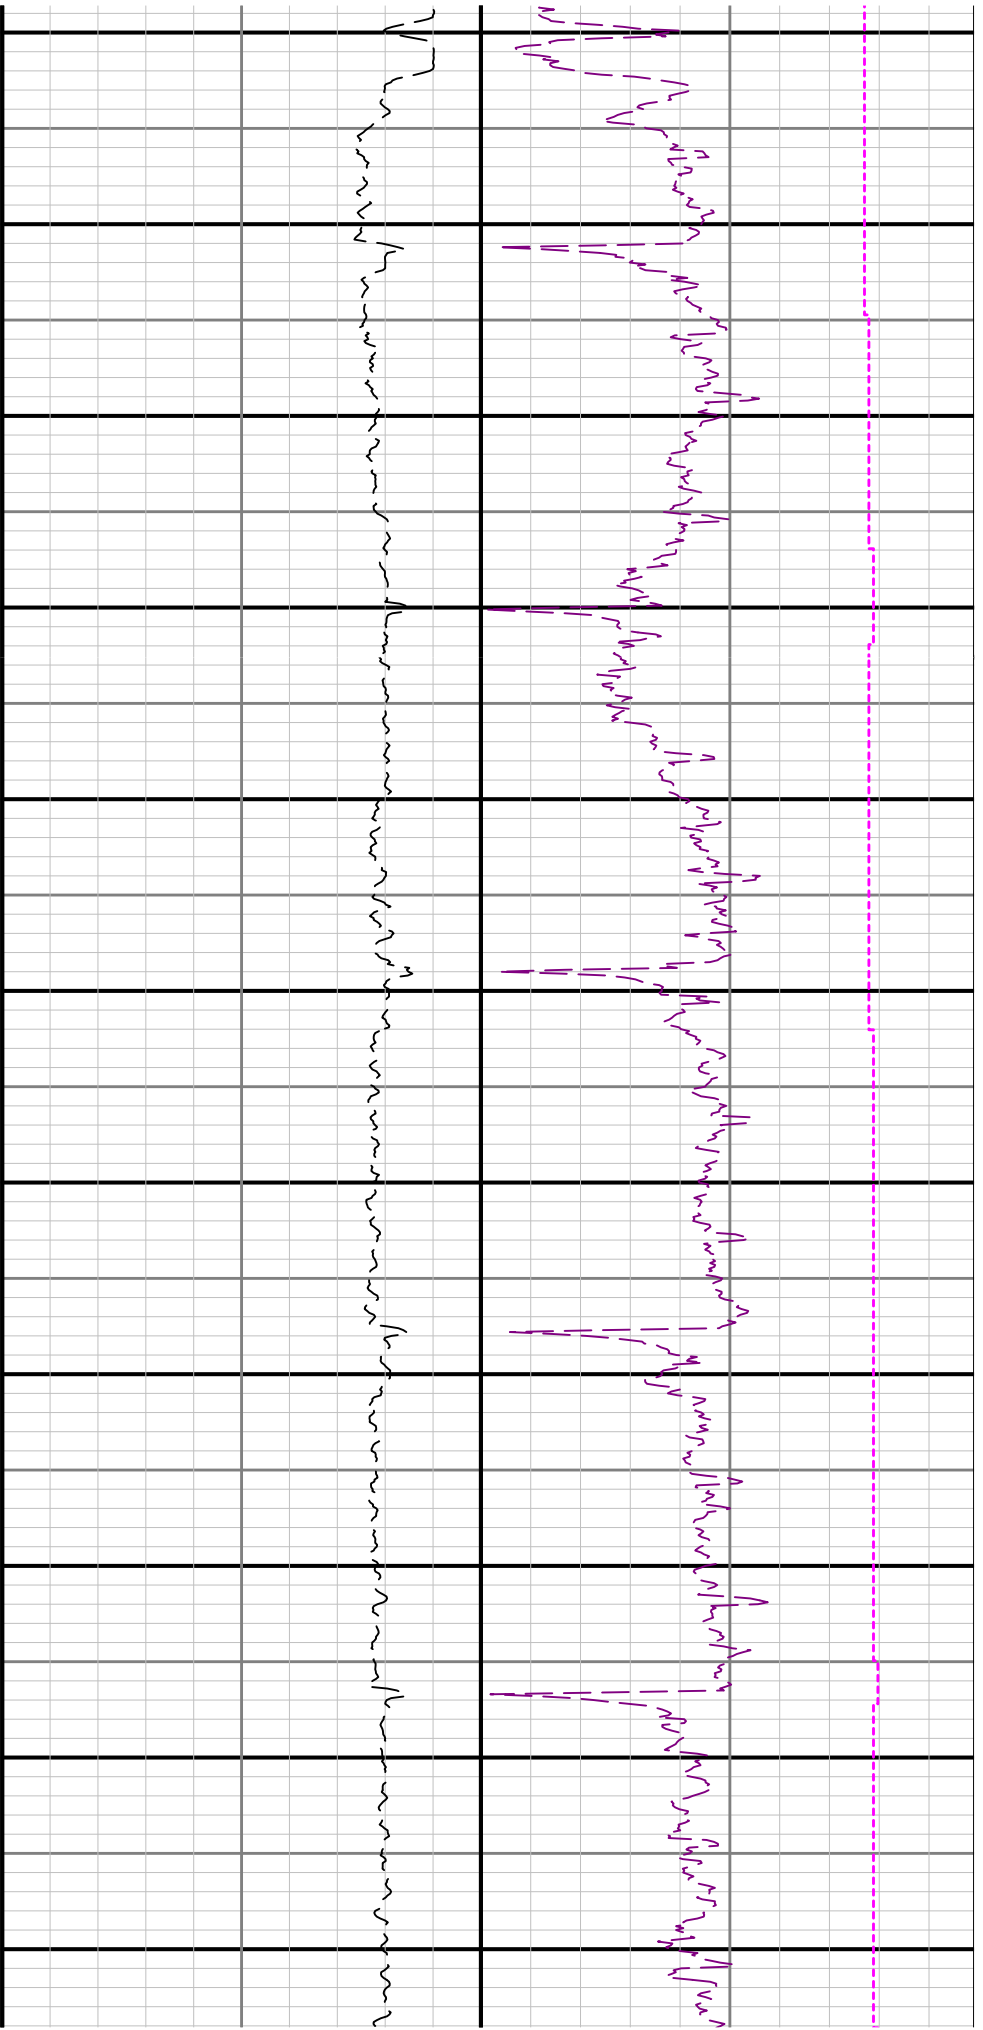

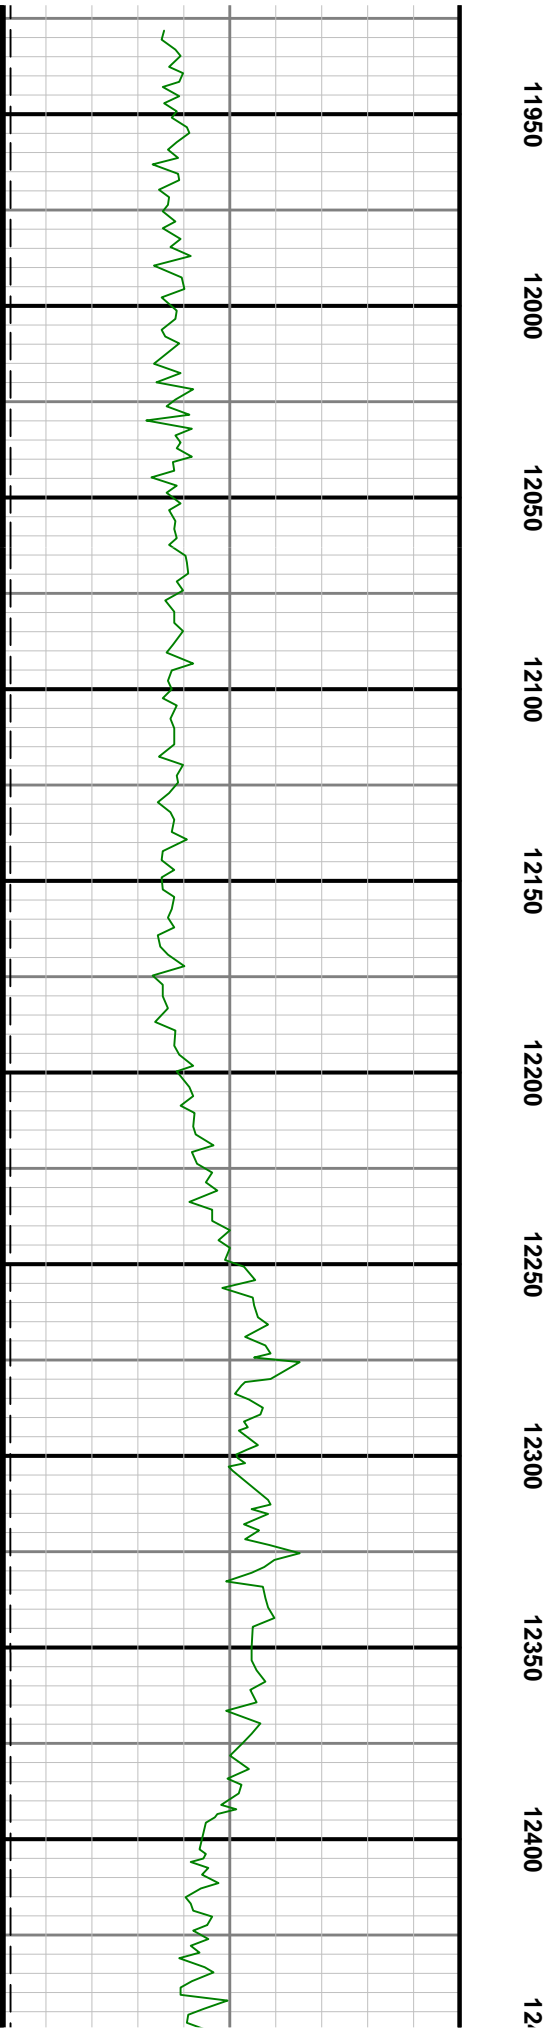
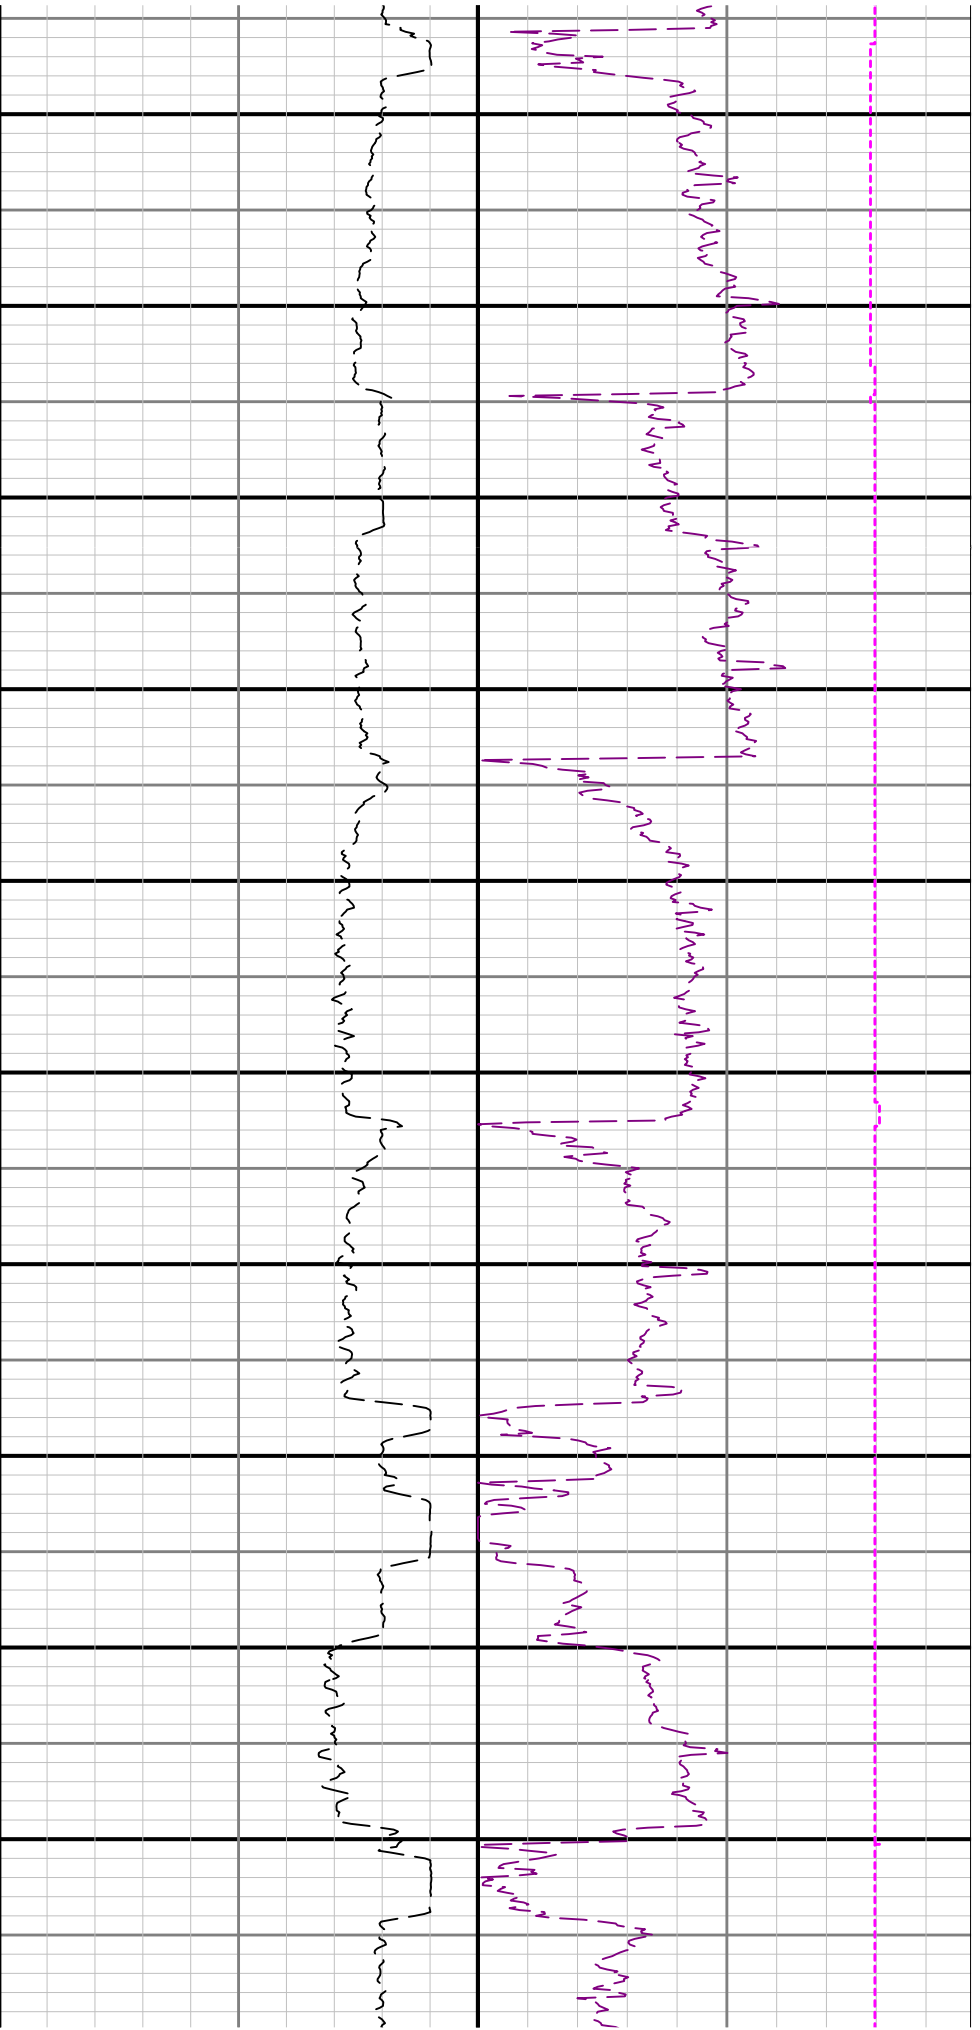


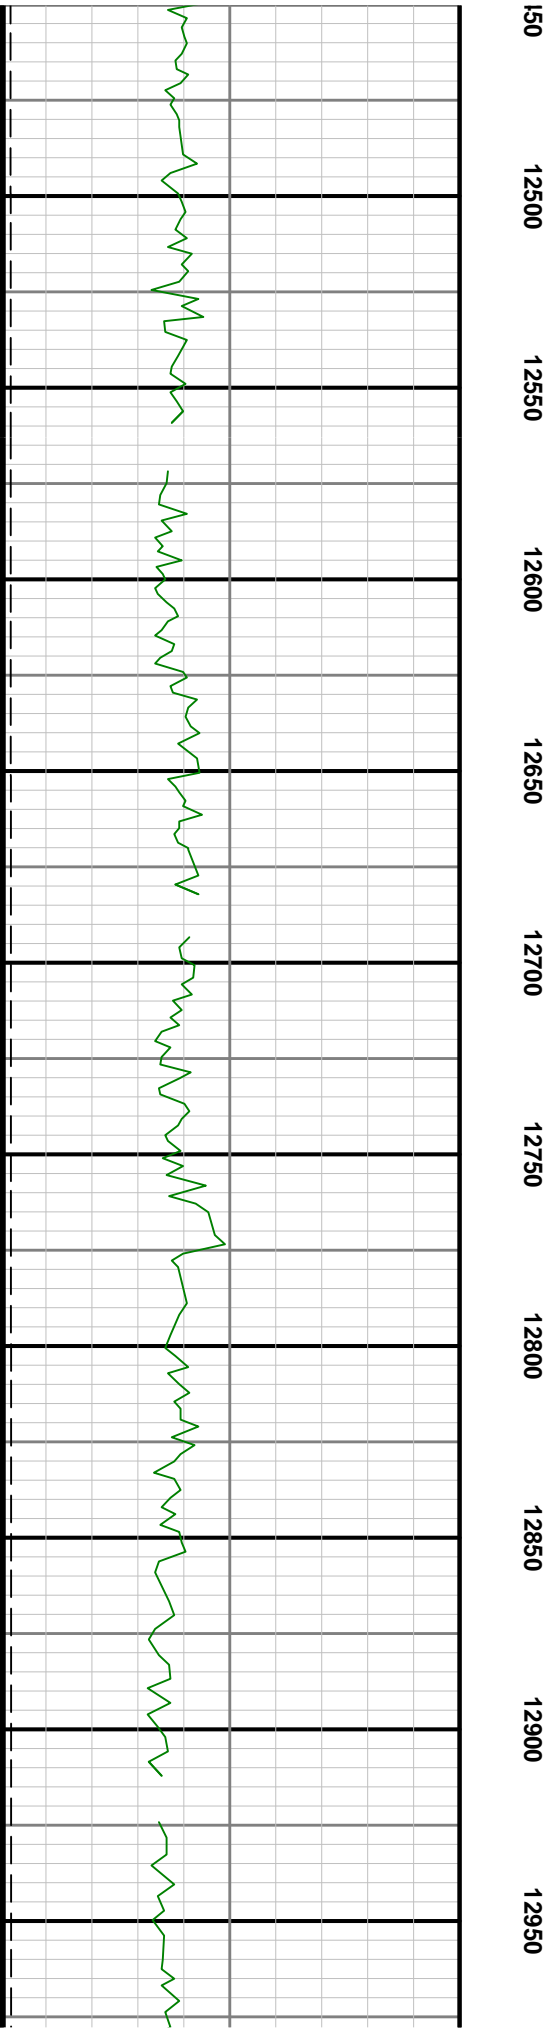
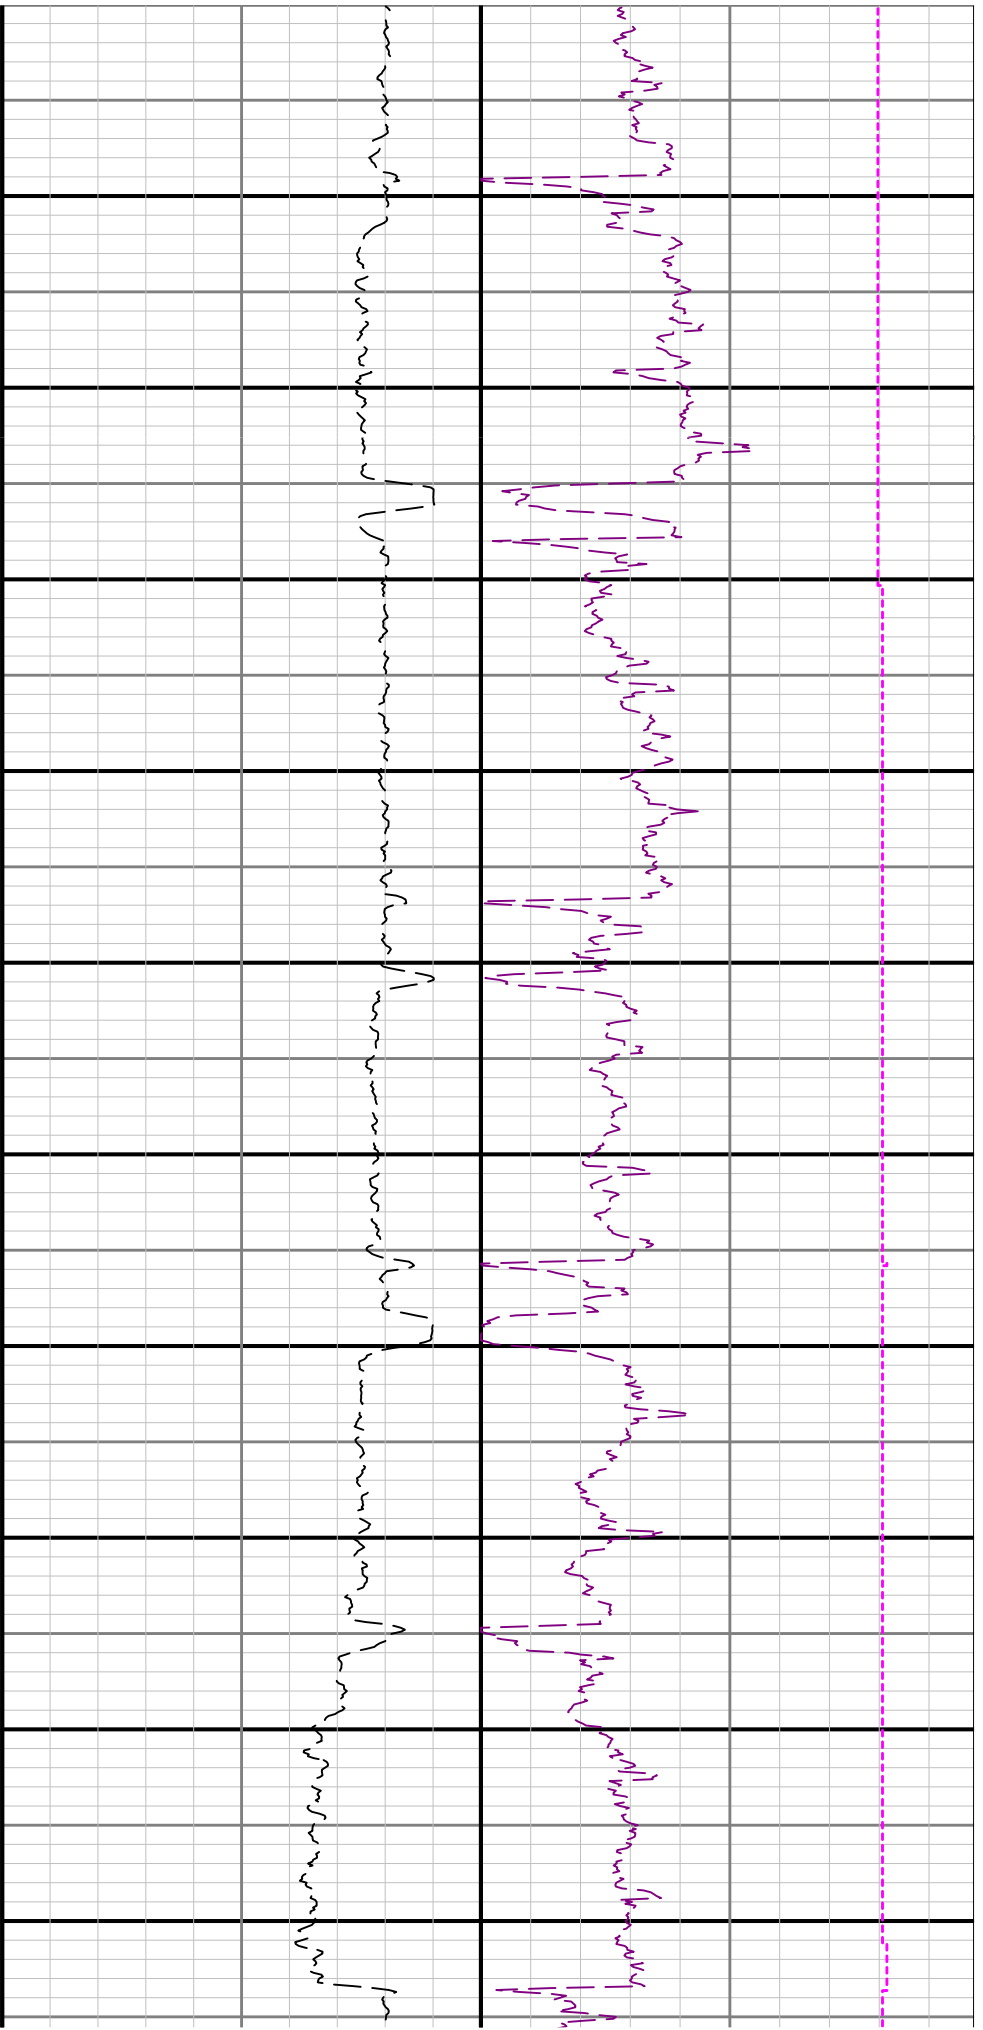


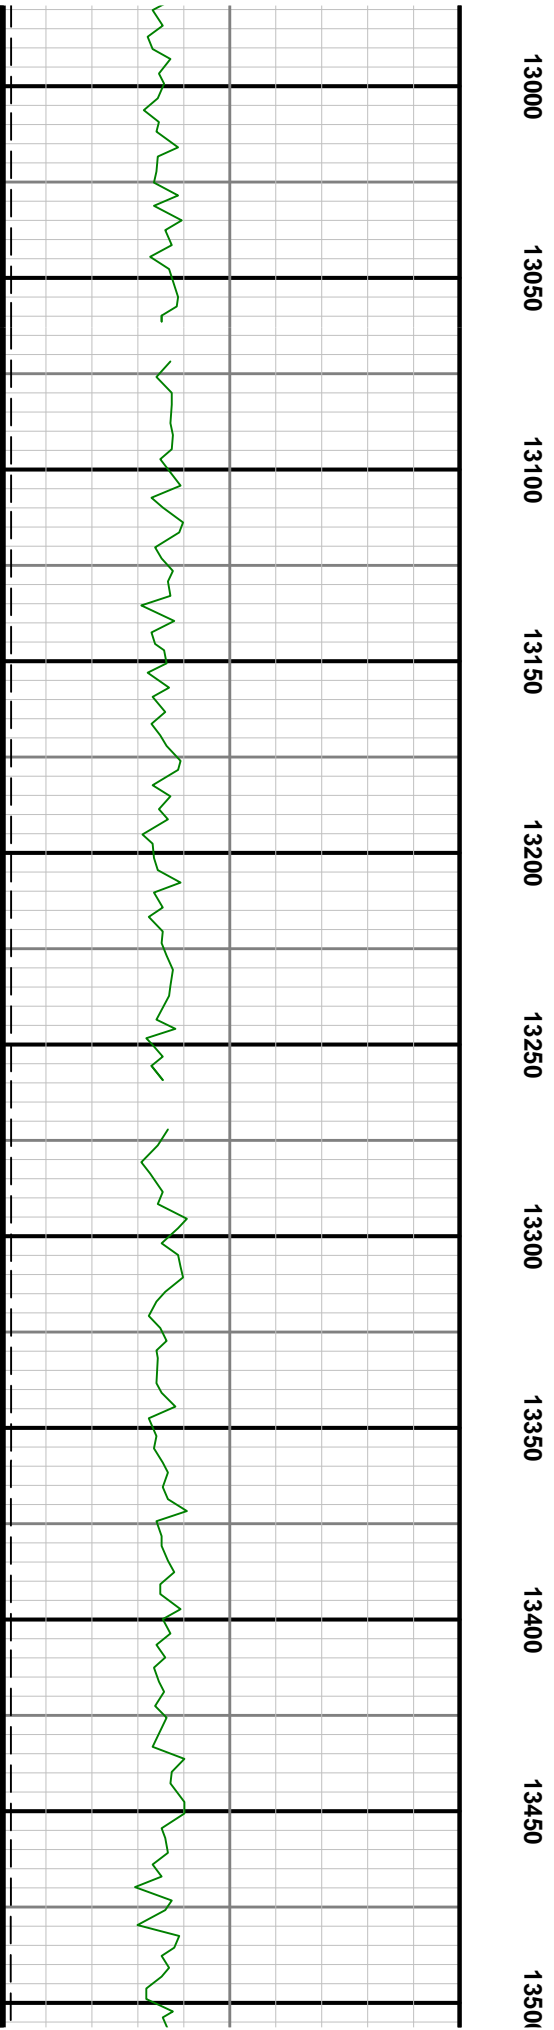
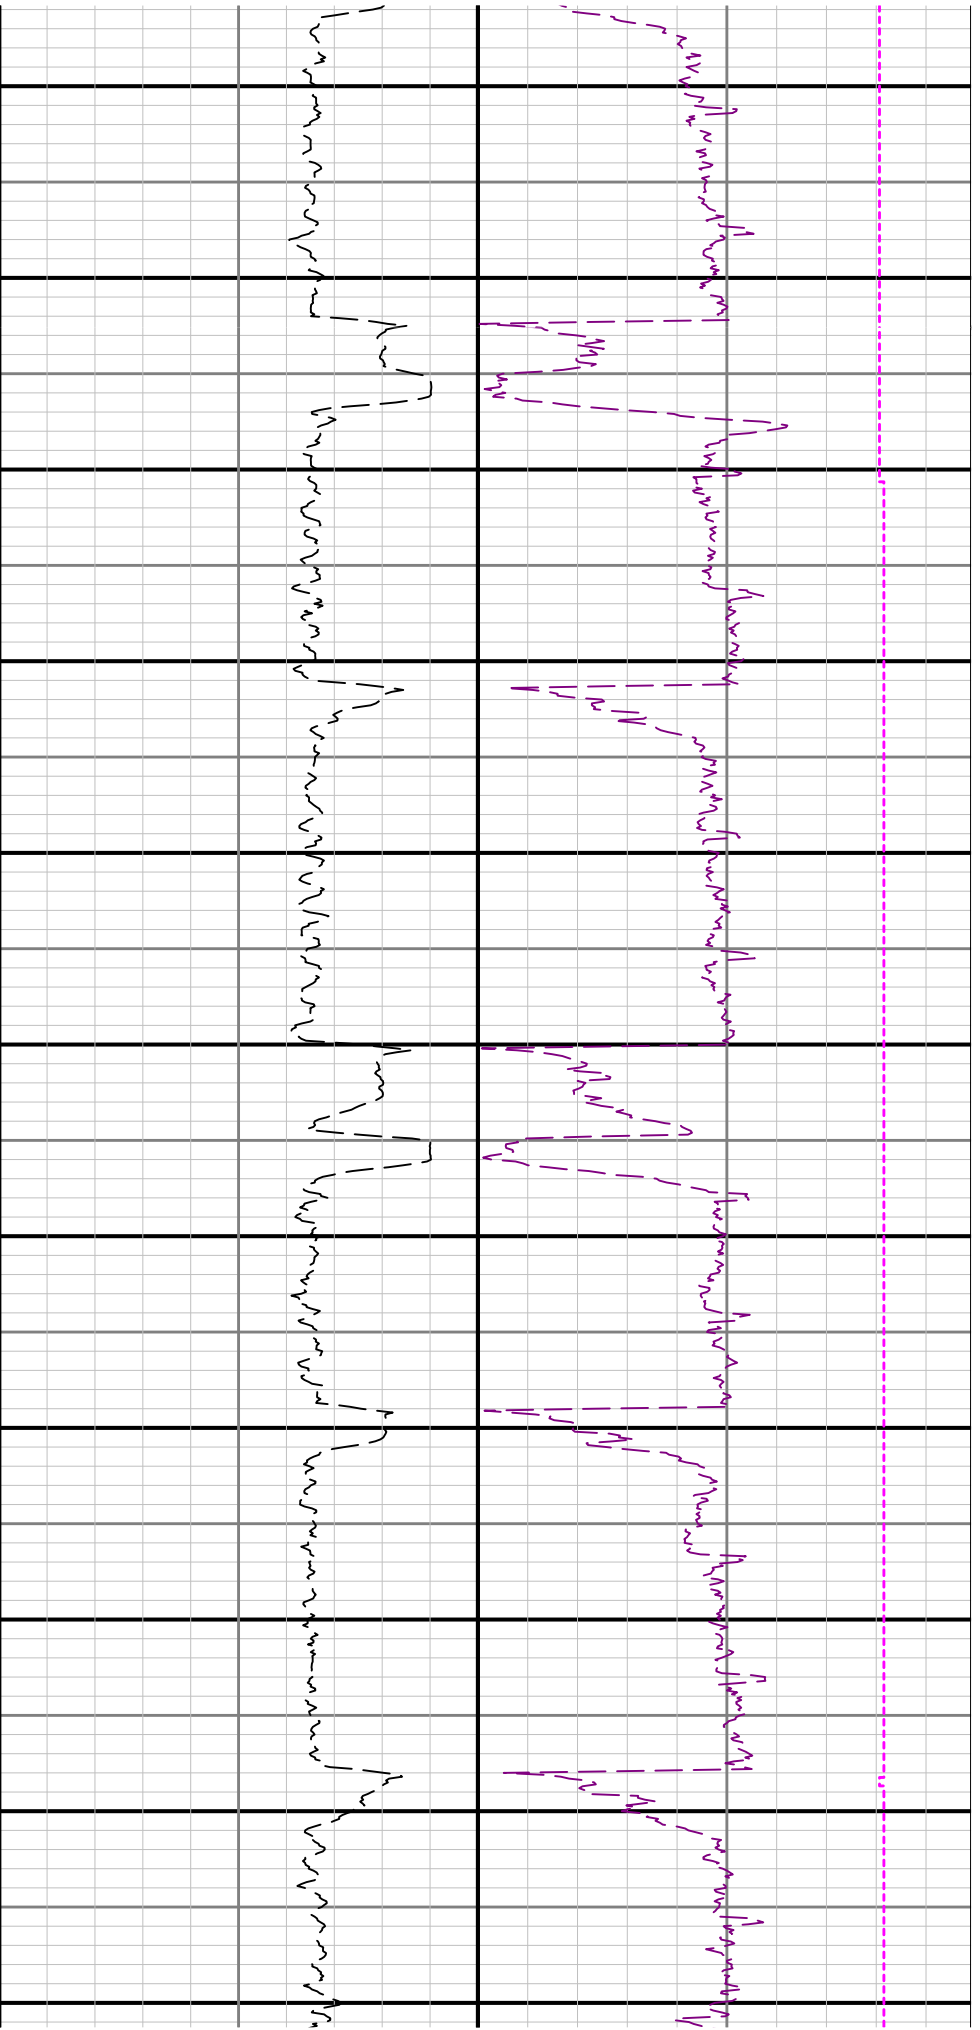










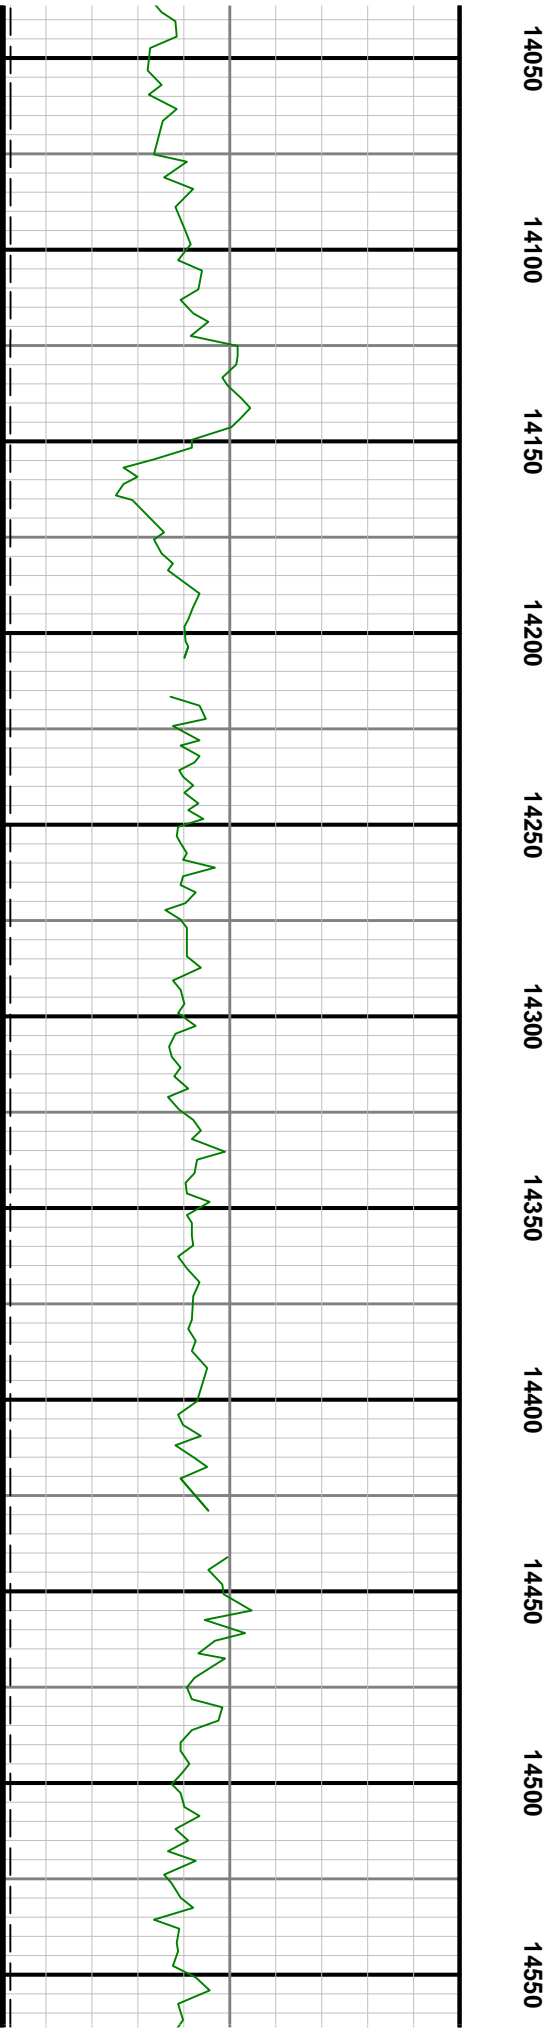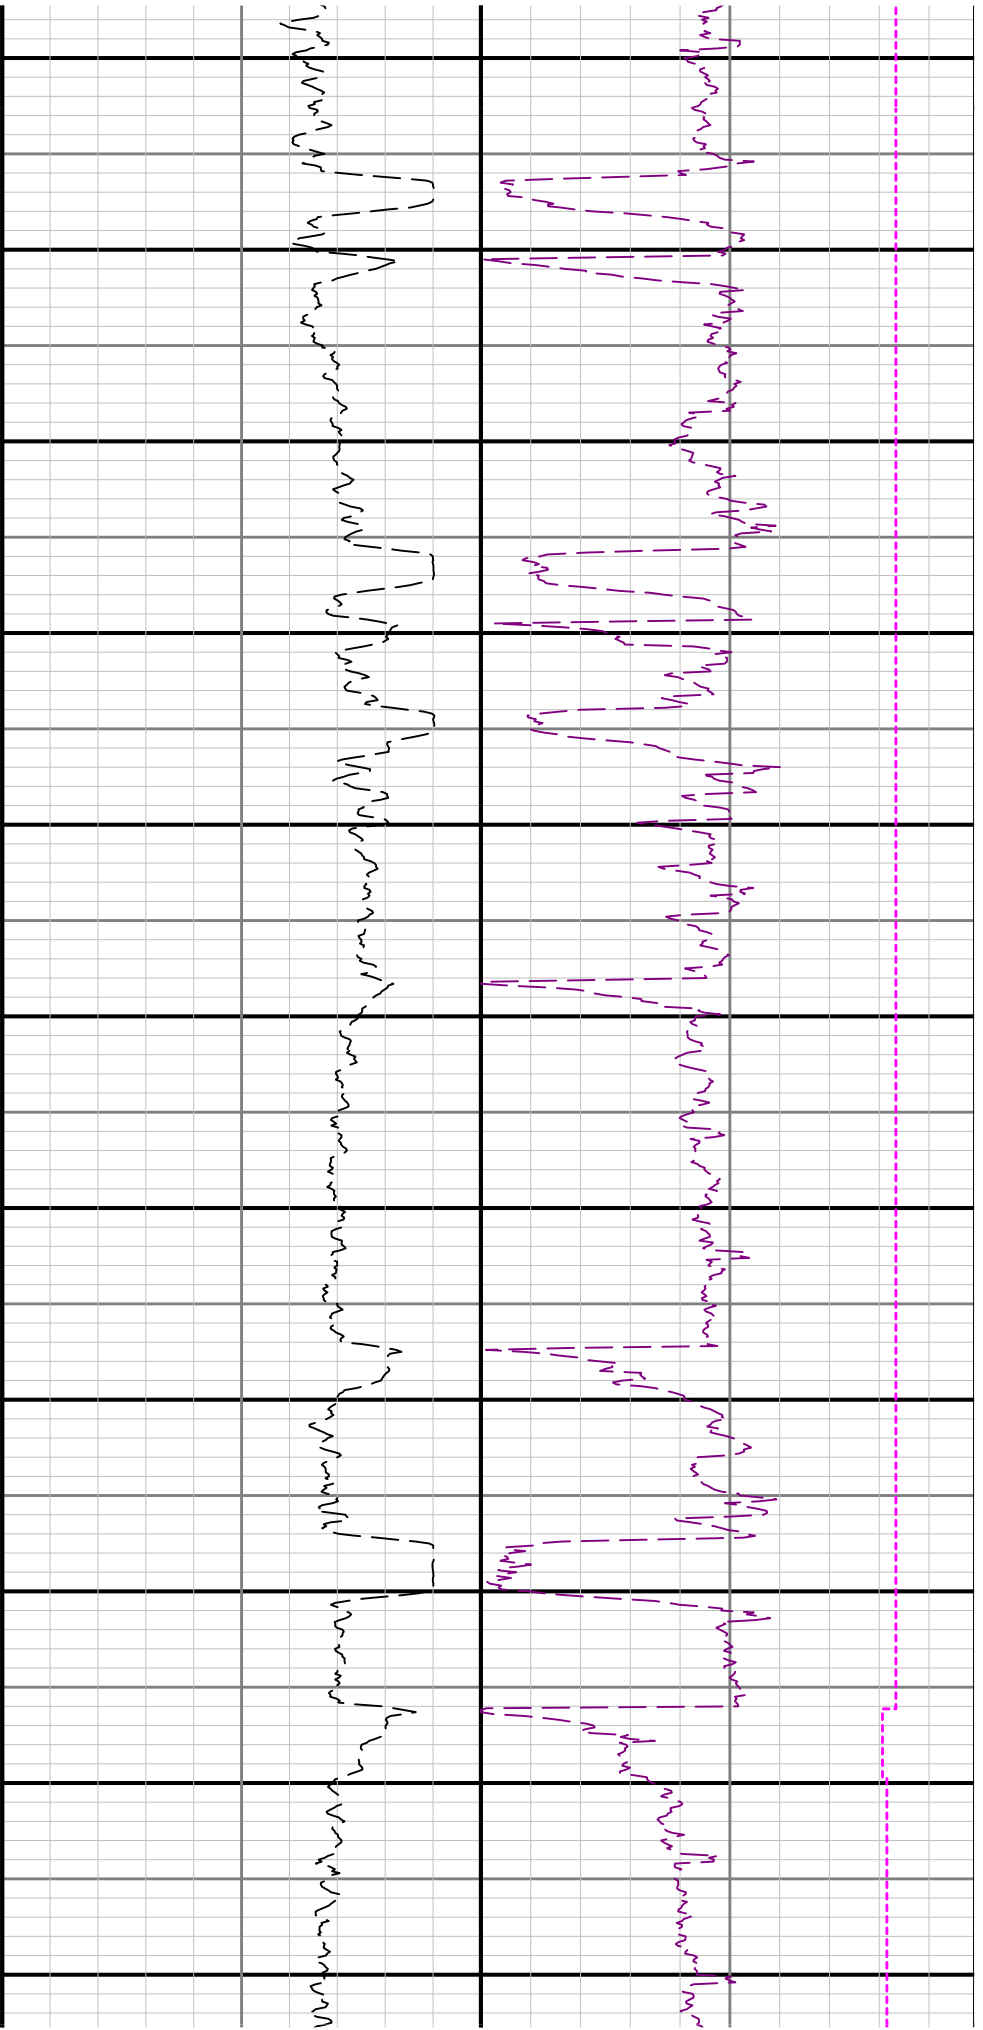


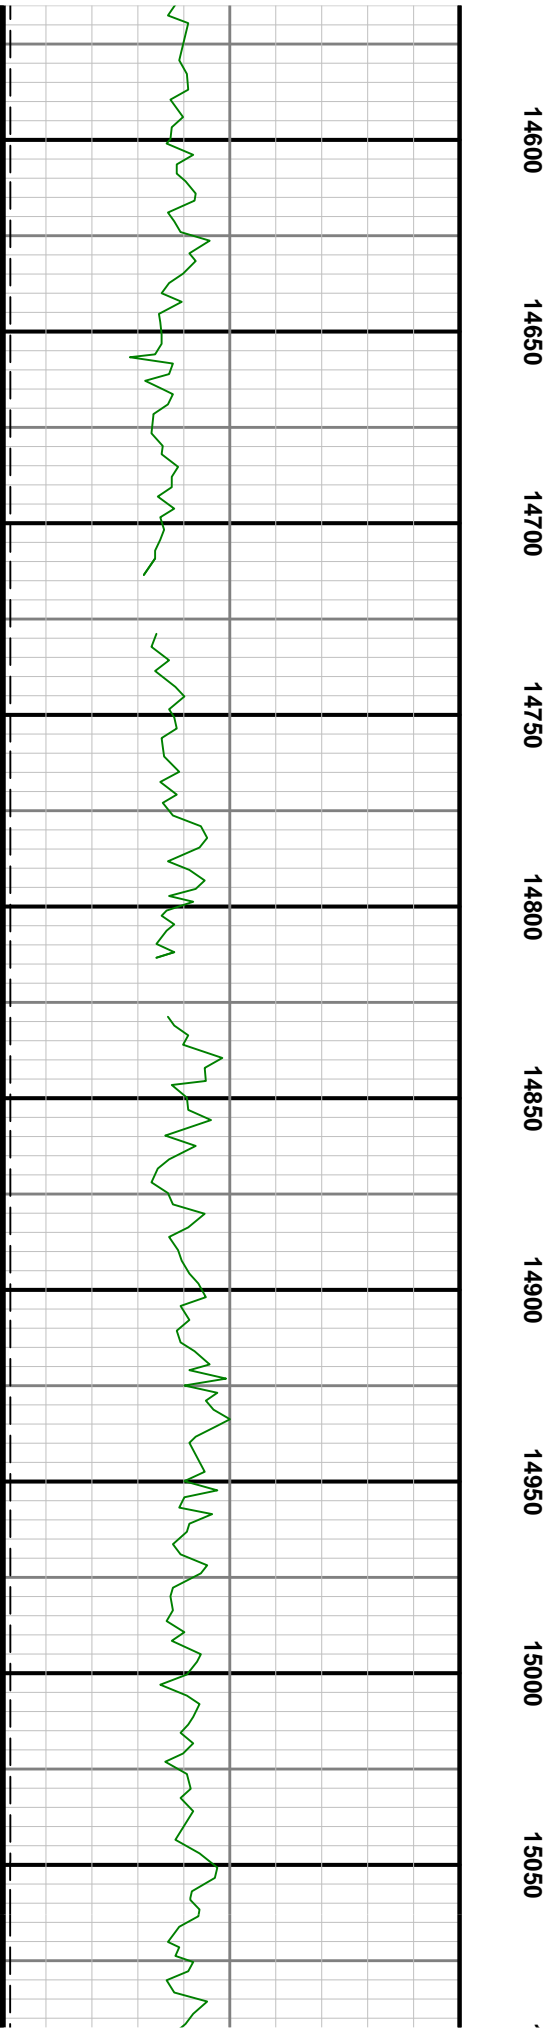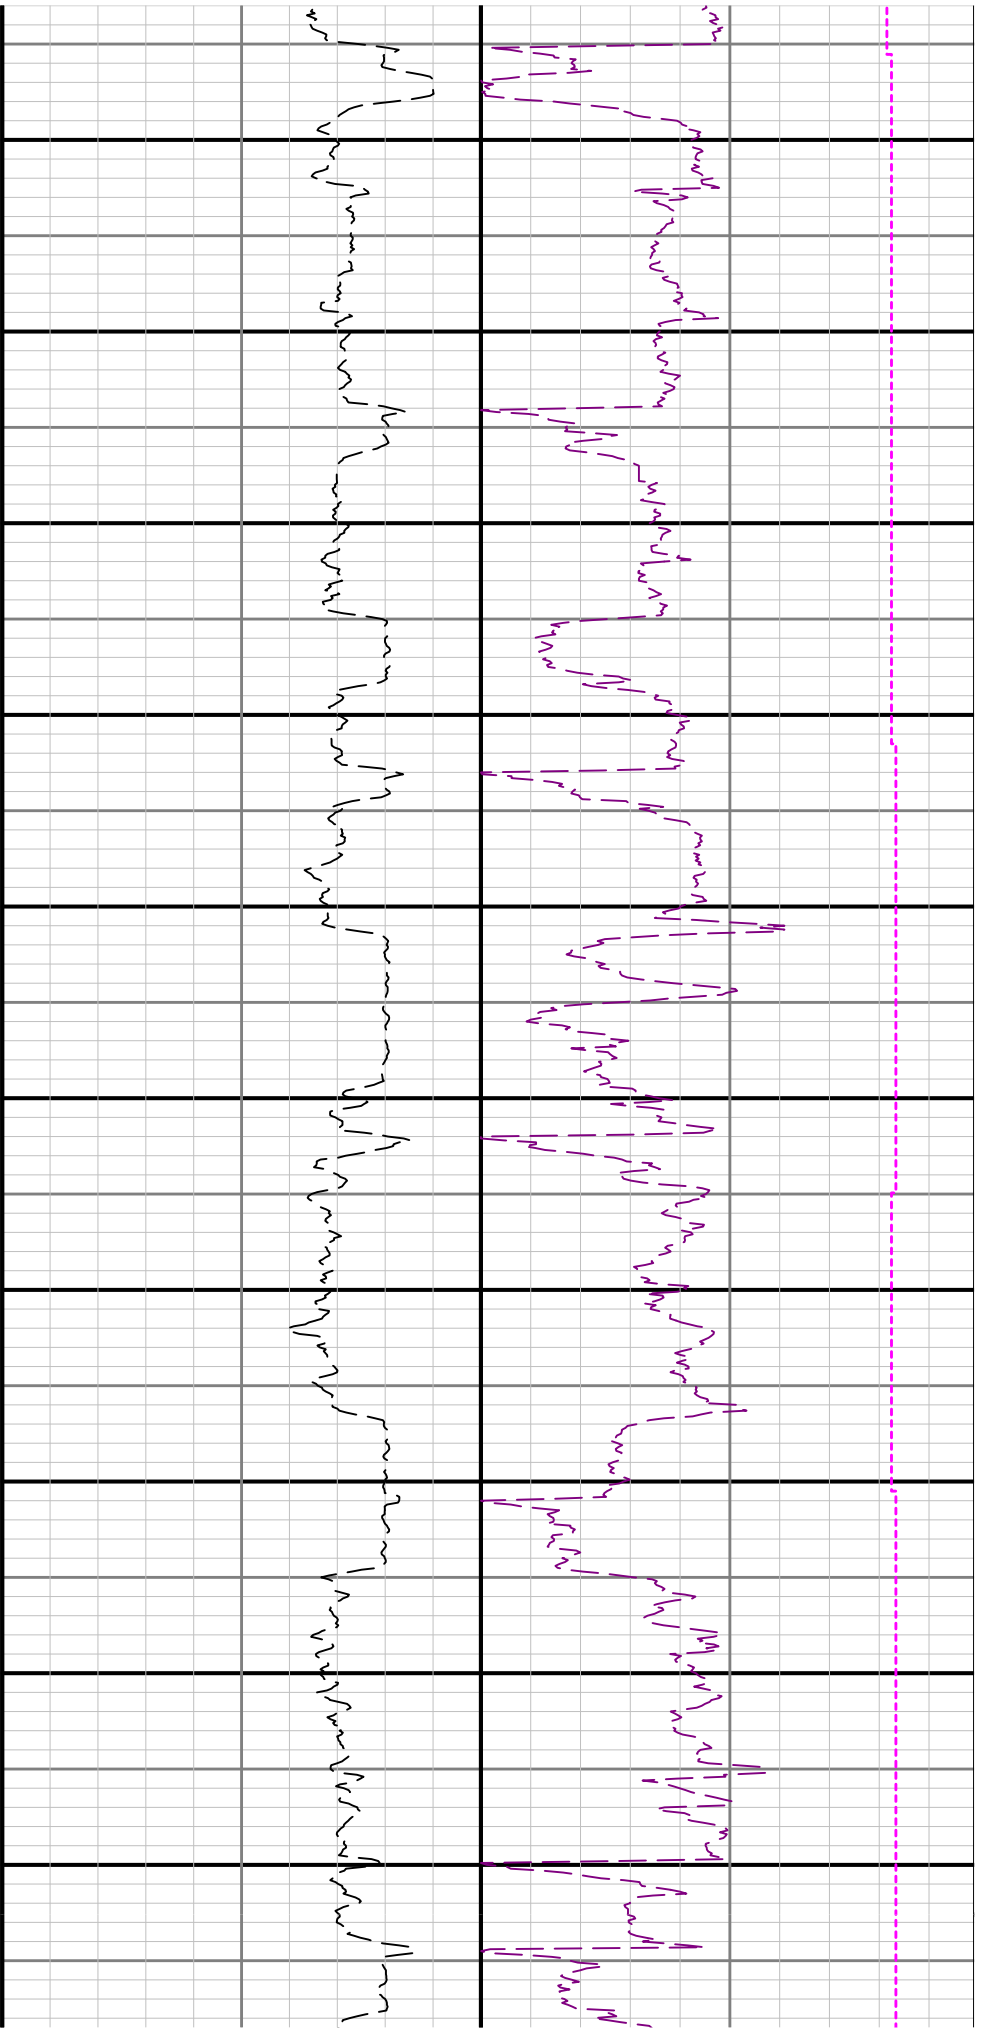

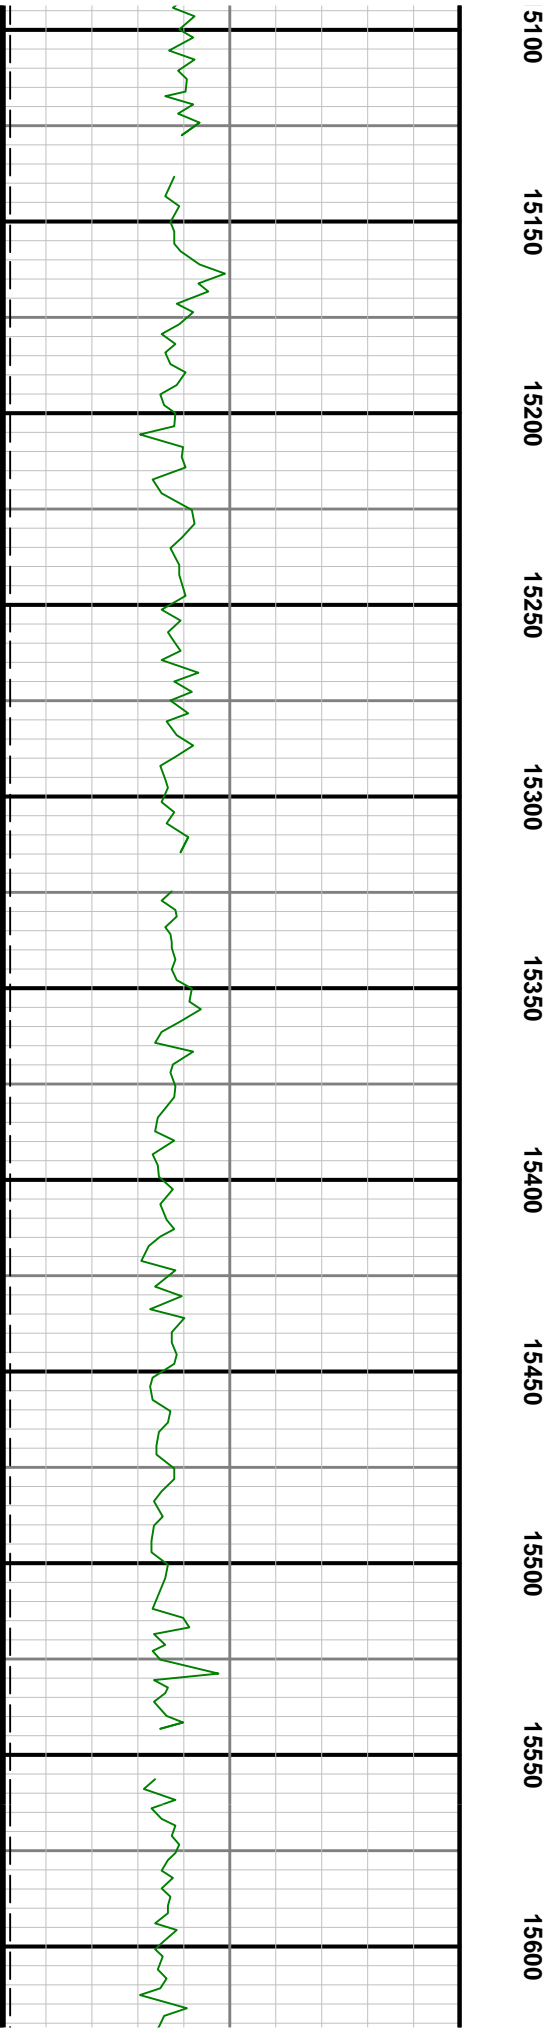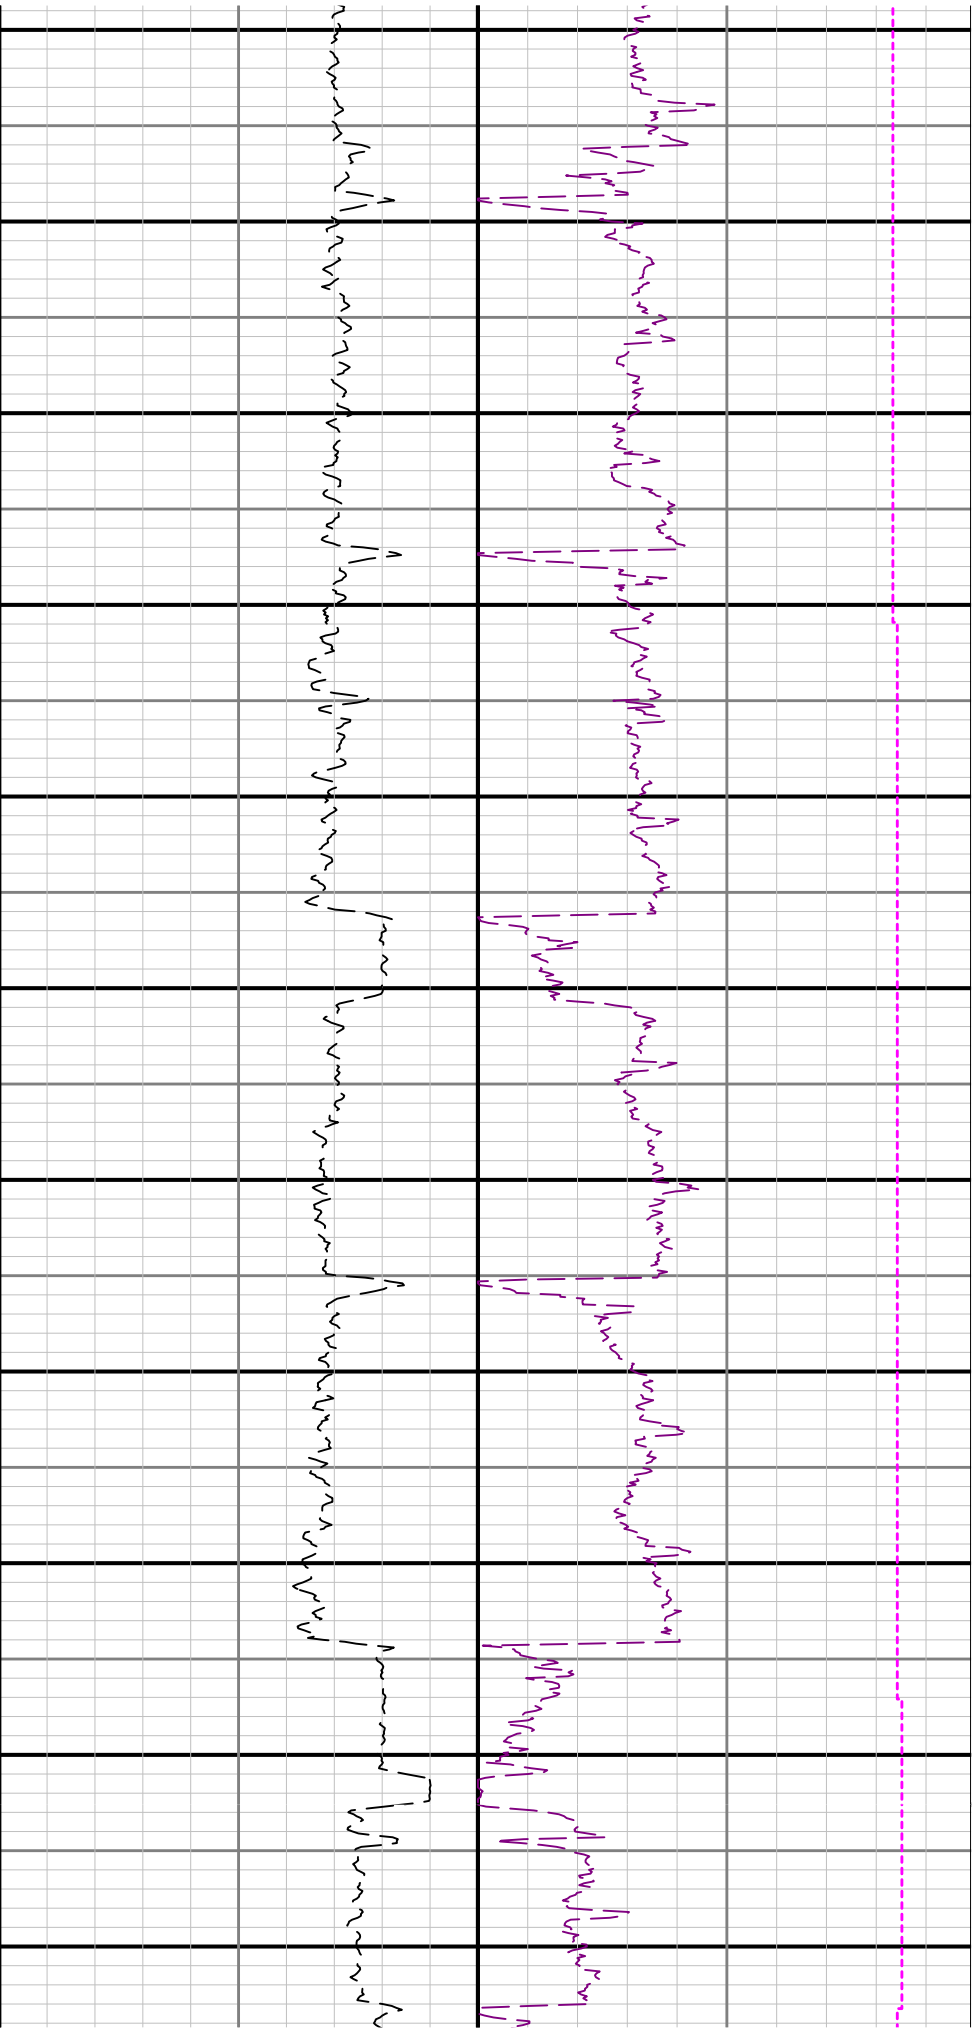

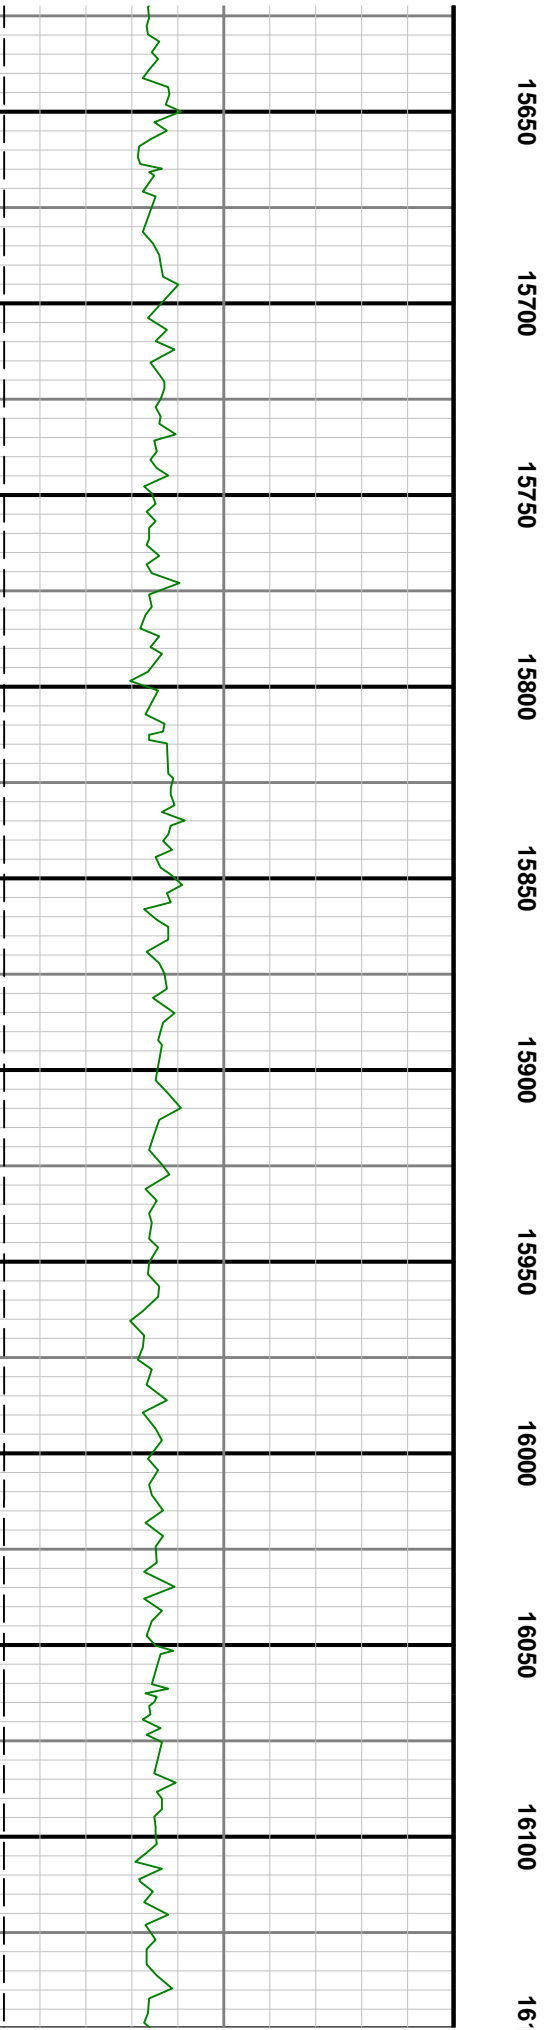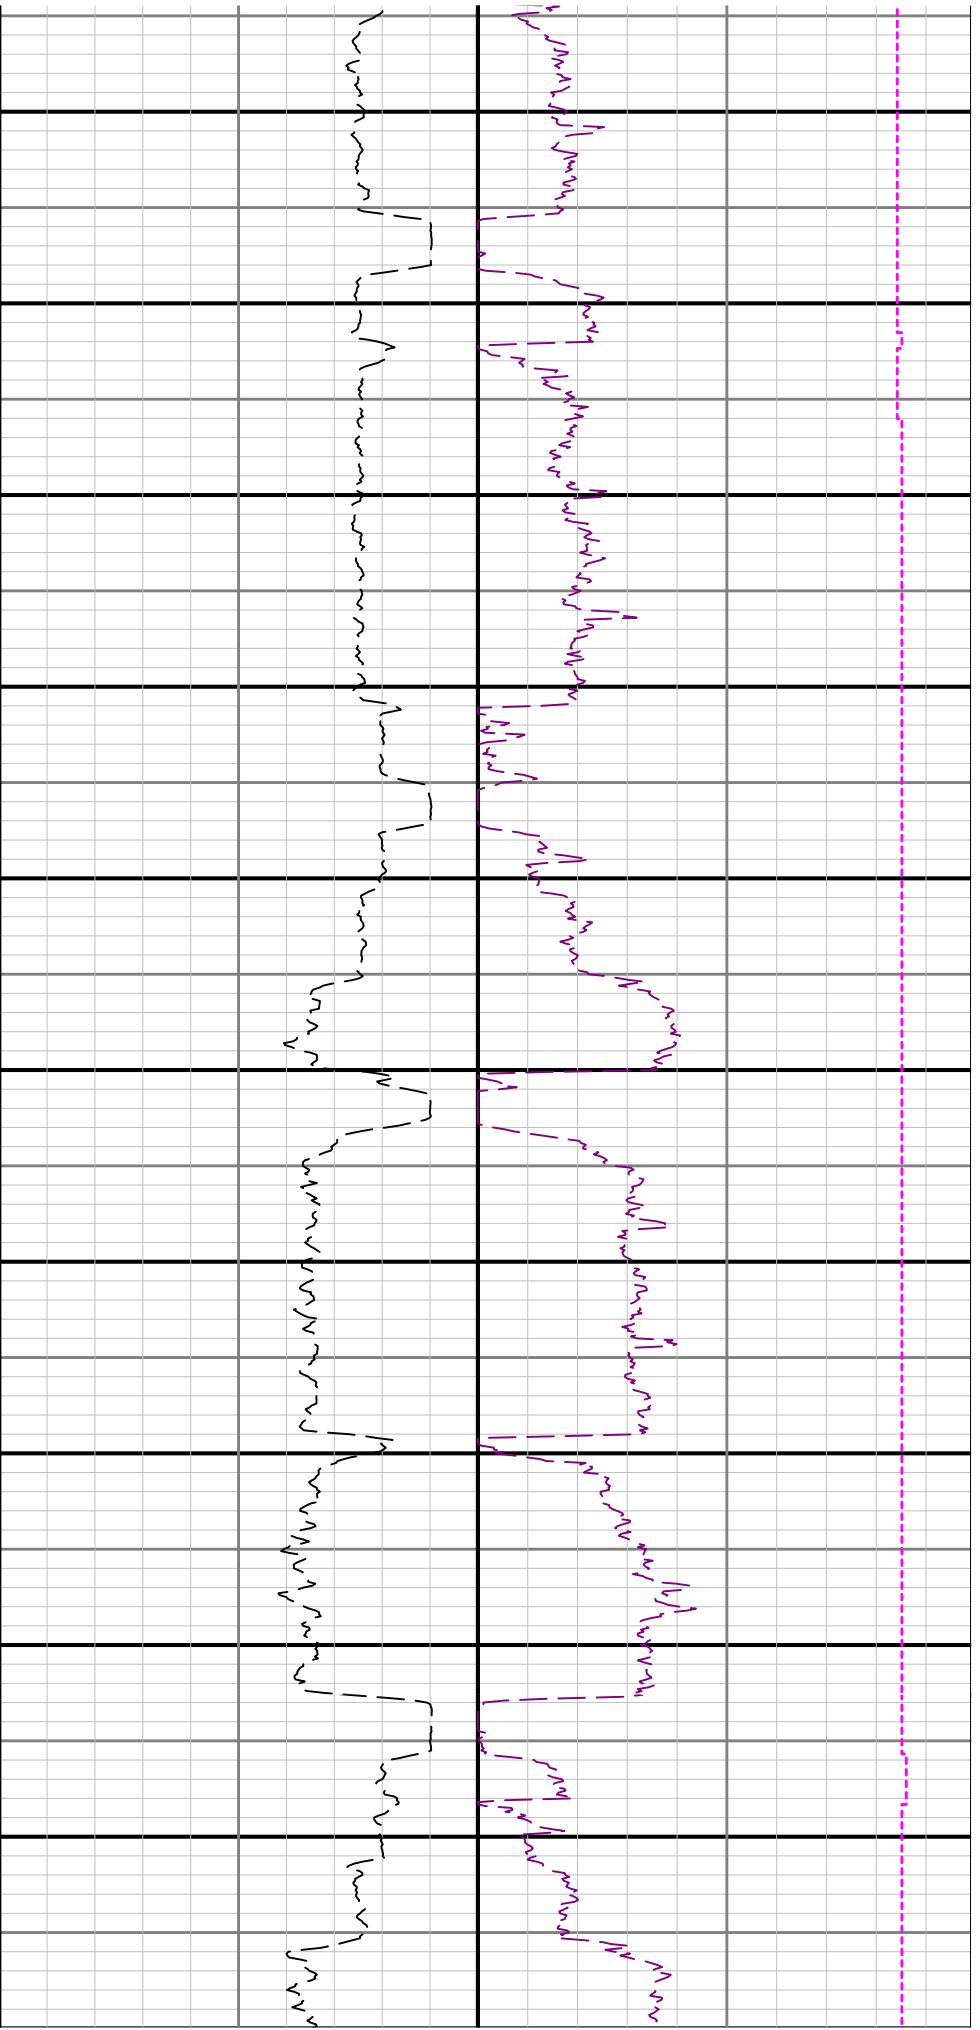

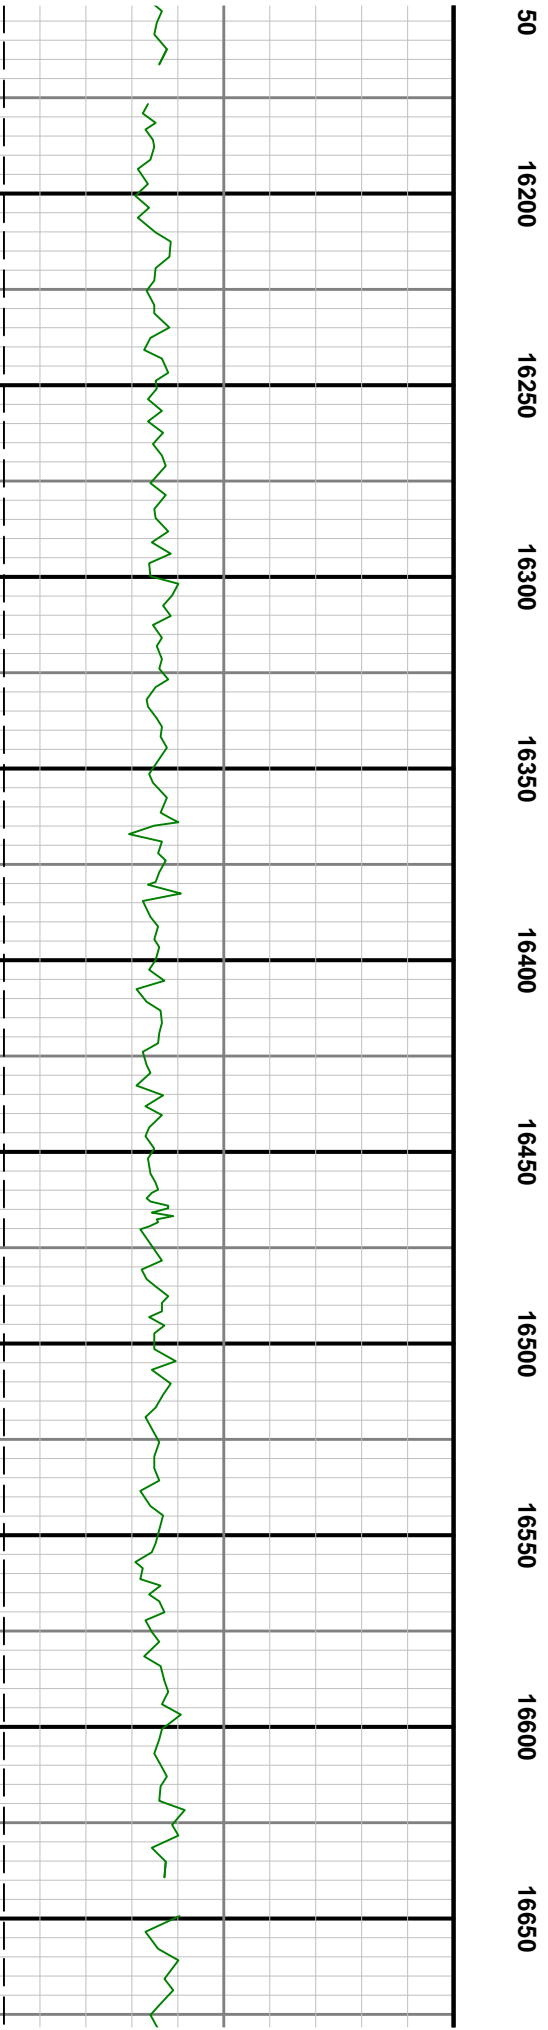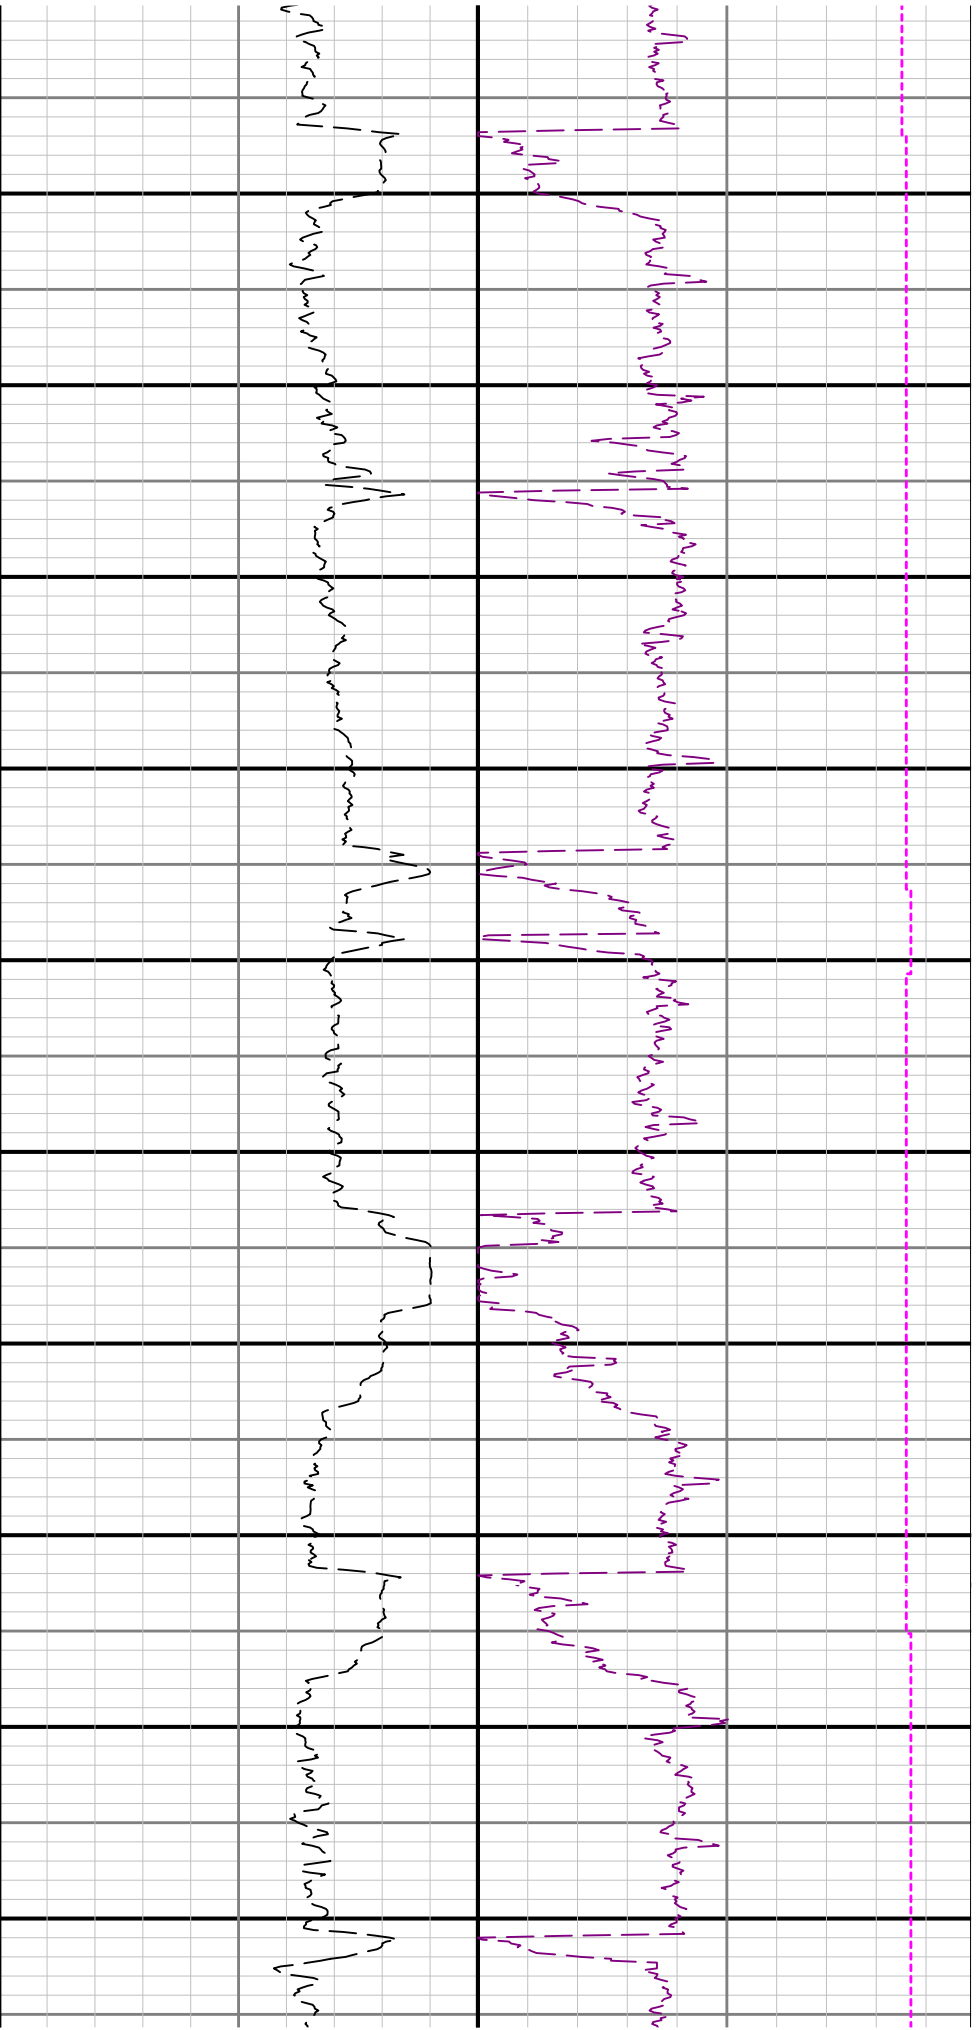

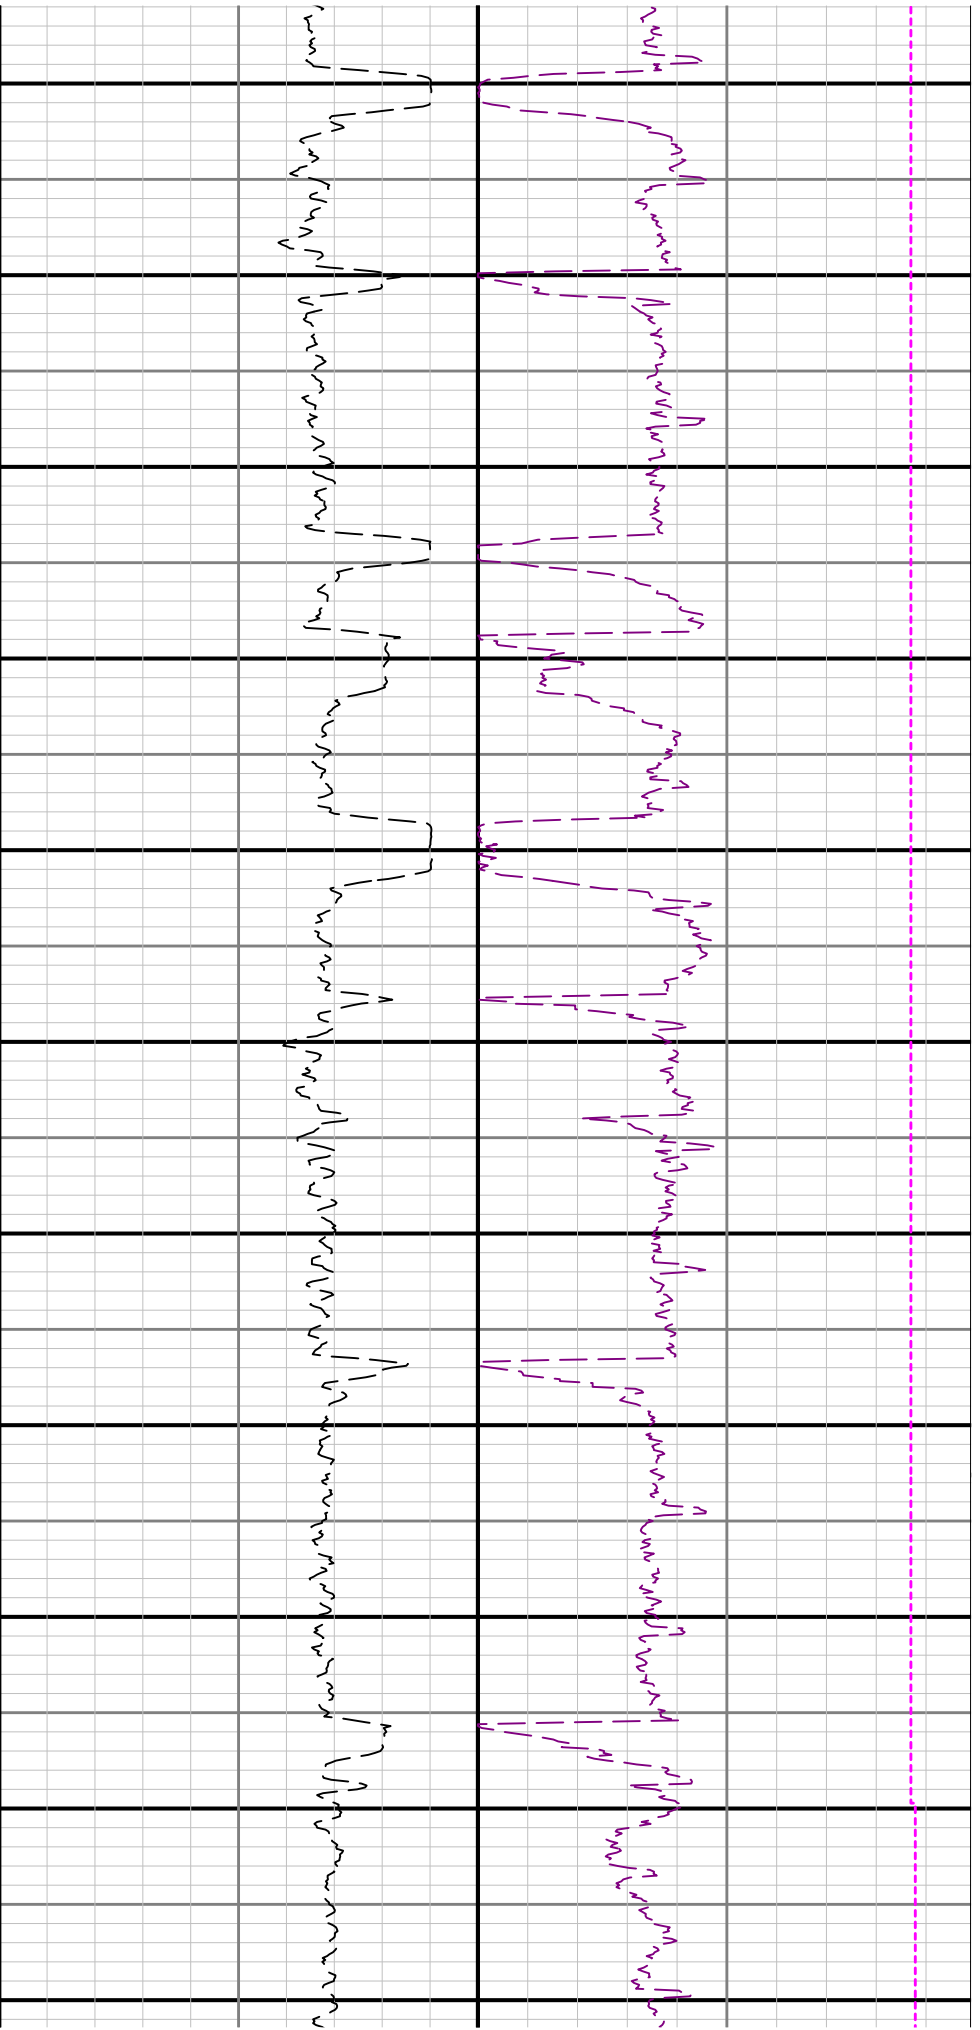

16700 16750 16800 16850 16900 16950 17000 17050 17100 17150 17200

