

REV: 3 11-06-18 T.L.L. (PAD & NAME CHANGES)

FINISHED GRADE ELEVATION = 8122.2'

NOTE: Earthwork calculations require a fill @ some location stakes for balance. All fill is to be compacted to a minimum of 95% of the maximum dry density obtained by AASHTO method t-99.

NOTES:

- Flare stack is to be located a min. of 100' from the wellhead.
- Contours shown at 2' intervals.
- Cut/Fill slopes 1 1/2:1 (Typ. except where noted).

SandRidge Exploration & Production, LLC





PRU ALCORN 0880 S10 PAD
NW 1/4 NE 1/4, SECTION 10, T8N, R80W, 6th P.M.
JACKSON COUNTY, COLORADO

SURVEYED BY	GREG WEIMER	09-14-17	SCALE
DRAWN BY	T.L.L.	09-27-17	1" = 60'
CONSTRUCTION LAYOUT			FIGURE #1



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

1" = 40'
X-Section
Scale
1" = 100'

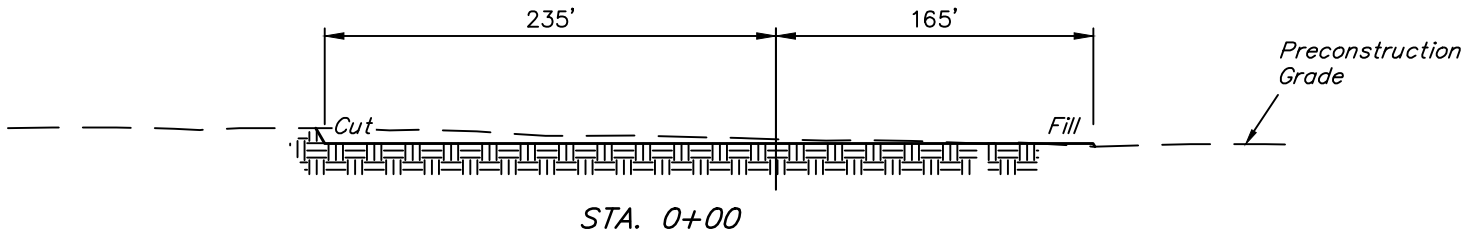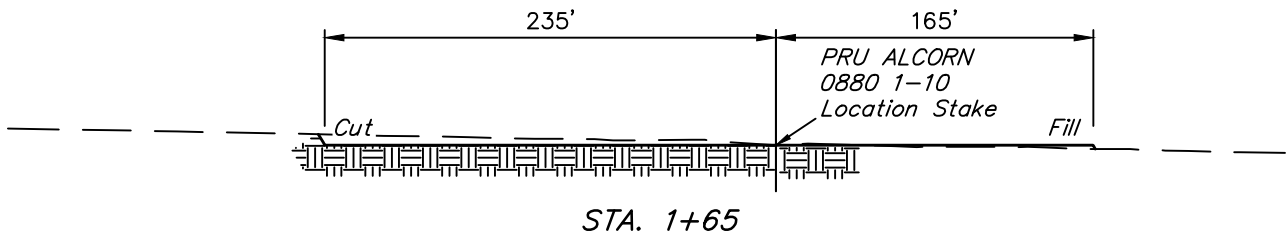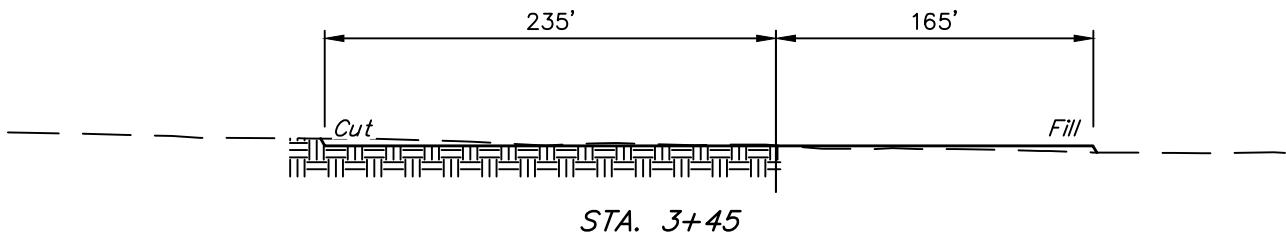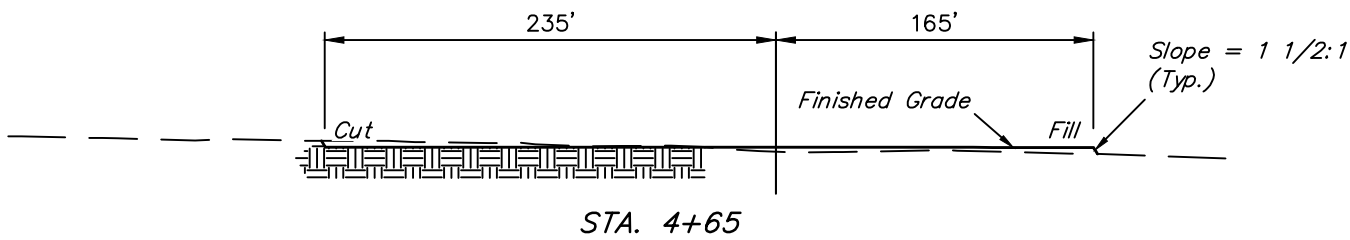

APPROXIMATE EARTHWORK QUANTITIES	
(6") TOPSOIL STRIPPING	3,410 Cu. Yds.
REMAINING LOCATION	2,610 Cu. Yds.
TOTAL CUT	6,020 Cu. Yds.
FILL	2,610 Cu. Yds.
EXCESS MATERIAL	3,410 Cu. Yds.
TOPSOIL	3,410 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	0 Cu. Yds.

APPROXIMATE SURFACE DISTURBANCE AREAS		
	DISTANCE	ACRES
WELL SITE DISTURBANCE	NA	±4.999
30' WIDE ACCESS ROAD R-O-W DISTURBANCE	±702'	±0.483
TOTAL SURFACE USE AREA		±5.482

REV: 3 11-06-18 T.L.L. (PAD & NAME CHANGES)

- NOTES:**
- Fill quantity includes 5% for compaction.
 - Calculations based on 6" of topsoil stripping.
 - Cut/Fill slopes 1 1/2:1 (Typ. except where noted).

SandRidge Exploration & Production, LLC

PRU ALCORN 0880 S10 PAD
NW 1/4 NE 1/4, SECTION 10, T8N, R80W, 6th P.M.
JACKSON COUNTY, COLORADO

SURVEYED BY	GREG WEIMER	09-14-17	SCALE
DRAWN BY	T.L.L.	09-27-17	AS SHOWN
CONSTRUCTION LAYOUT CROSS SECTIONS			FIGURE #2



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017