


C
O
P
Y

*Requested this be sent in.
Have no record of original
but signed by J. 12/23/54*

COLORADO OIL AND GAS CONSERVATION COMMISSION
SUNDRY NOTICES AND REPORTS OF WELLS

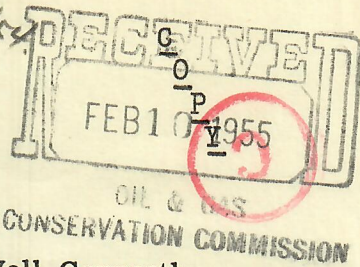

(Indicate nature of data by checking below)



00238699

Locate Well Correctly

		29	

Notice of intention to drill (attach plat) XXX
 Notice of intention to change plans _____
 Notice of date for test of water shut-off _____
 Report on result of test of water shut-off _____
 Notice of intention to re-drill or repair well _____
 Notice of intention to clean out well _____
 Statement of shooting _____
 Statement of perforating _____
 Notice to pull or otherwise alter casing _____
 Notice of intention to abandon well _____
 Report of work done on well since previous report _____

Notice to do work ☒
 Report of work done ☐

Land: Fee and Patented ☒
 State ☐

Lease No. _____

Colorado
 State

Logan
 County

Mt. Hope East
 Field

"G" #2 Green SW/4 29 9N 53W
 (Well No.) (Lease) (1/4 Sec.) (Sec.) (Twp.) (Range) (Meridian)

The Well is located XXXXXX (N) of Section Line and XXXXXXXXXX (E) of
Section Line. XX XX

C SE SW, Sec. 29

The elevation above sea level is 4160 Ft. KB. Est.

Details of Plan of Work: (State names of and expected depths to objective sands.
 Show sizes, weights, and length of proposed casings; indicate mudding jobs, cementing
 points, and all other important proposed work.)

To drill and test subject well to the "J" Sand of the Graneros Series. Surface Casing:
 9-5/8" OD Armco to be set at approx. 210' KB & cemented with 160 sax & circulated to
 surface. WOC 24 hrs. Production Casing: 5 1/2" OD 1515#, J-55 casing to be set thru the
 oil producing zone of the "J" Sand. Use centralizers & rotating type scratchers thru
 the "D" & "J" Sands & cement with 150 sax with 3% gel. WOC 72 hrs. Coring: None planned.
Testing: DST if content of sands based on electric log is questionable. Logging:
 Electric log from TD to surface casing. Detail from TD to approx. 100' above the Niobrara.
 Microlog & Laterolog from TD to 25' above the "D" Sand. Run Gamma Ray Log in conjunction
 with perforating. Drilling Time: Use Geolograph from 210' to TD. Drift Surveys: At
 50' intervals to 300'; thereafter at 250' intervals. Depth Measurements: SIM of drill
 pipe at approx. 150' above the Greenhorn, prior to DST, & at T.D. Samples: Collect 10'
 samples from 50' above expected top of Niobrara to 50' above expected top of "D" Sand;
 thereafter collect 5' samples to T.D. Completion Program: Whenever practicable, com-
 pletion will be with rotary.

Approved: Dec. 21, 1954

/s/ A. J. Jersin
 Director

Date December 20, 1954

Company BRITISH-AMERICAN OIL PRODUCING CO.

Address P. O. Box 180, Denver 1, Colorado

By /s/ Thomas M. Hogan

Title District Superintendent

Submit reports of proposed work, for approval, on this form in Duplicate for patented
 lands and in Triplicate for school and state lands.