




OFFICE OF STATE OIL INSPECTOR
SUMMARY NOTICES AND REPORTS OF WELLS
LOCATED ON PRIVATE LANDS

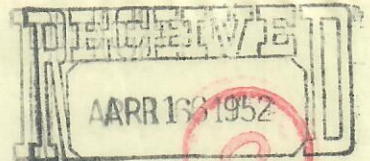

BEST IMAGE
AVAILABLE

(Indicate nature of data by checking below)

CONSERVATION COMMISSION

293-6

Notice of intention to drill X
Notice of intention to change plans _____
Notice of date for test of water shut-off _____
Report on result of test of water shut-off _____
Notice of intention to re-drill or repair well _____
Notice of intention to clean out well _____
Statement of shooting _____
Statement of perforating _____
Notice to pull or otherwise alter casing _____
Notice of intention to abandon well _____
Report of work done on well since previous report _____

Following is a (notice of intention to do work) April 10th 19 52
(XXXXXXXXXXXXXXXXXXXX) (On land) (patented) Described as follows:

COLORADO LOGAN WALKER
State County Field
5 RAMEY NE 1/4 Sec. 21 9N 53W
(Well No.) (Lease) (Sec. and 1/4 Sec.) (Twp.) (Range) (Meridian)

The well is located 355 ft. xxx of N Line and 915 ft. xxx of E Line
NE 1/4 Sec. 21 (S) (W)

The elevation above sea level is 4114' ft. K.B. Est.

Details of Plan of Work: (State names of and expected depths to objective sands; Shoe sizes, weights, and lengths of proposed casing; indicate mudding jobs, cementing points, and all other important proposed work.)

To drill and test subject well to the "J" Sand of the Graneros Series.
SURFACE CASING: 9-5/8" O.D. Armco Spiral Weld to be set at approximately 220' and cemented with 160 sax regular cement. Circulate cement to surface.
PRODUCTION STRING CASING: 5 1/2" O.D. 15.5# J-55 casing to be run thru the oil producing section of the "J" Sand. Cement with 250 sax.
TESTING: 1. No cores recommended. 2. DST "J" sand if warranted by sample inspection and/or electric log.
LOGGING: Schlumberger electric log from under surface casing to T.D. Run Micro log thru any shows in the "D" and "J" Sands.
DRIFT SURVEYS: At 50' intervals to 300'. Thereafter at 250' intervals.
DRILLING TIME: Use Geolograph from 4000'.
SAMPLES: As per direction of Geologist in charge.
DEPTH MEASUREMENTS: SLM of drill pipe at 4000', before DST and at T.D.
COMPLETION PROGRAM: Drill "J" Sand to a minus 825'. If commercial production is indicated, set casing thru and perforate for production.
EXPECTED FORMATION TOPS: Niobrara 3956'; Ft. Hays 4270'; Greenhorn 4514'; "D" Sand 4783'; "J" Sand 4885'.

APR 16 1952

J. J. Zouichak
DIRECTOR

The British American Oil Producing Co.

P. O. Box 620, Casper, Wyoming

Wm. Evelyn, Jr.

Sup't., Northwestern District

Submit reports of proposed work, for approval, on this form in Duplicate.