

Cement Verification Report - Cementer's Well Service, Inc.

P.O. BOX 336220 • GREELEY, CO 80633 • (970) 353-7299 • FAX (970) 353-7712

COGCC Operator Guidance

RULE #308.A.B(2)A.ii



CLIENT: PDC Energy

Cementor's
FIELD TICKET #

300351-D

Requested Operator Guidance:

Well Name & Number	Lease	Stugart	Well No.	21NA
--------------------	-------	---------	----------	------

Well API Number	05-123-51262
-----------------	--------------

Job Date	7/22/2022	Time on	18:50	24 hr time
----------	-----------	---------	-------	------------

Job Type	New Well Surface
----------	------------------

Cementing Company	Cementor's Well Service, Inc	Contact	Nate Kvamme - 303-324-4296
-------------------	------------------------------	---------	----------------------------

Ambient conditions	clear	74	temp deg F
--------------------	-------	----	------------

Slurry Description

a) Purpose	Surface - 9 5/8" 36# CSG, 13 1/2" hole
------------	--

b) Cement Class	ASTM C150 Type II
-----------------	-------------------

c) Cement Yield	1.61 cuft / sk
-----------------	----------------

d) Cement Density	13.9 PPG
-------------------	----------

e) Number of sks	768 sks (94# equiv)
------------------	---------------------

f) Mix Fluid Type

Water / Cement	8.5 Gal / sk
----------------	--------------

g) Slurry mixed	220.1 BBLs slurry
-----------------	-------------------

h) Additives used	1.5% CaCl2	3.0% Bentonite
-------------------	------------	----------------

Total Water Used	312.4 BBLs H2O
------------------	----------------

i) Displacement Fluid Vol	127.0 BBLs H2O
---------------------------	----------------

j) Method of Placement

k) Set Depth	1,684 feet (ft)
--------------	-----------------

l) Stage tool depth	n/a
---------------------	-----

m) Float Collar Depth	1,643 feet (ft)
-----------------------	-----------------

n) Designed Top of Cement	n/a to surface
---------------------------	----------------

o) Centralizer depths	0 feet (ft)
-----------------------	-------------

Charts - (pressure, density, pump rate)

Landed Plug @	1642 psi	Final Lift Pressure @	280 psi
---------------	----------	-----------------------	---------

Cement Density (as weighed during job) @	13.9 PPG
--	----------

Job notes

a) Plug down	<input checked="" type="radio"/> Y <input type="radio"/> N	Time	20:54	24 hr time
--------------	--	------	-------	------------

b) Floats held	<input checked="" type="radio"/> Y <input type="radio"/> N	7/22/2022
----------------	--	-----------

c) Full Returns	<input checked="" type="radio"/> Y <input type="radio"/> N	Lost Circulation	<input checked="" type="radio"/> Y <input type="radio"/> N
-----------------	--	------------------	--

d) Cement to surface	<input checked="" type="radio"/> Y <input type="radio"/> N	22.0 BBLs to surface
----------------------	--	----------------------

e) If no returns, top off	n/a BBLs
---------------------------	----------

f) Top off detail

g) Additional Detail

Cementer's Well Service, Inc.

P.O. BOX 336220 • GREELEY, CO 80633 • (970) 353-7299 • FAX (970) 353-7712



PDC Energy

Surface Cement Job Graph & Casing Pressure Test

COMPANY DETAILS

Date	7/22/2022	API #	05-123-51262	Well No.	21NA
County	Weld	State	CO	Lease	Stugart


Client PDC Energy

Contact / email

JOB DETAILS

TIME ON	18:50	24 hr	Depth	1,694	ft.	Pressure Test @	1,642	psi
START TIME	19:23	7/22/22	Bottom of Surface	1,684	ft.	10 min	1,662	psi
END TIME	21:31	7/22/22	Plug Landed @	1,643	ft.	20 min	1,676	psi
			Plug Landed @	20:54	24 hr	30 min	1,688	psi

SUMMARY GRAPH

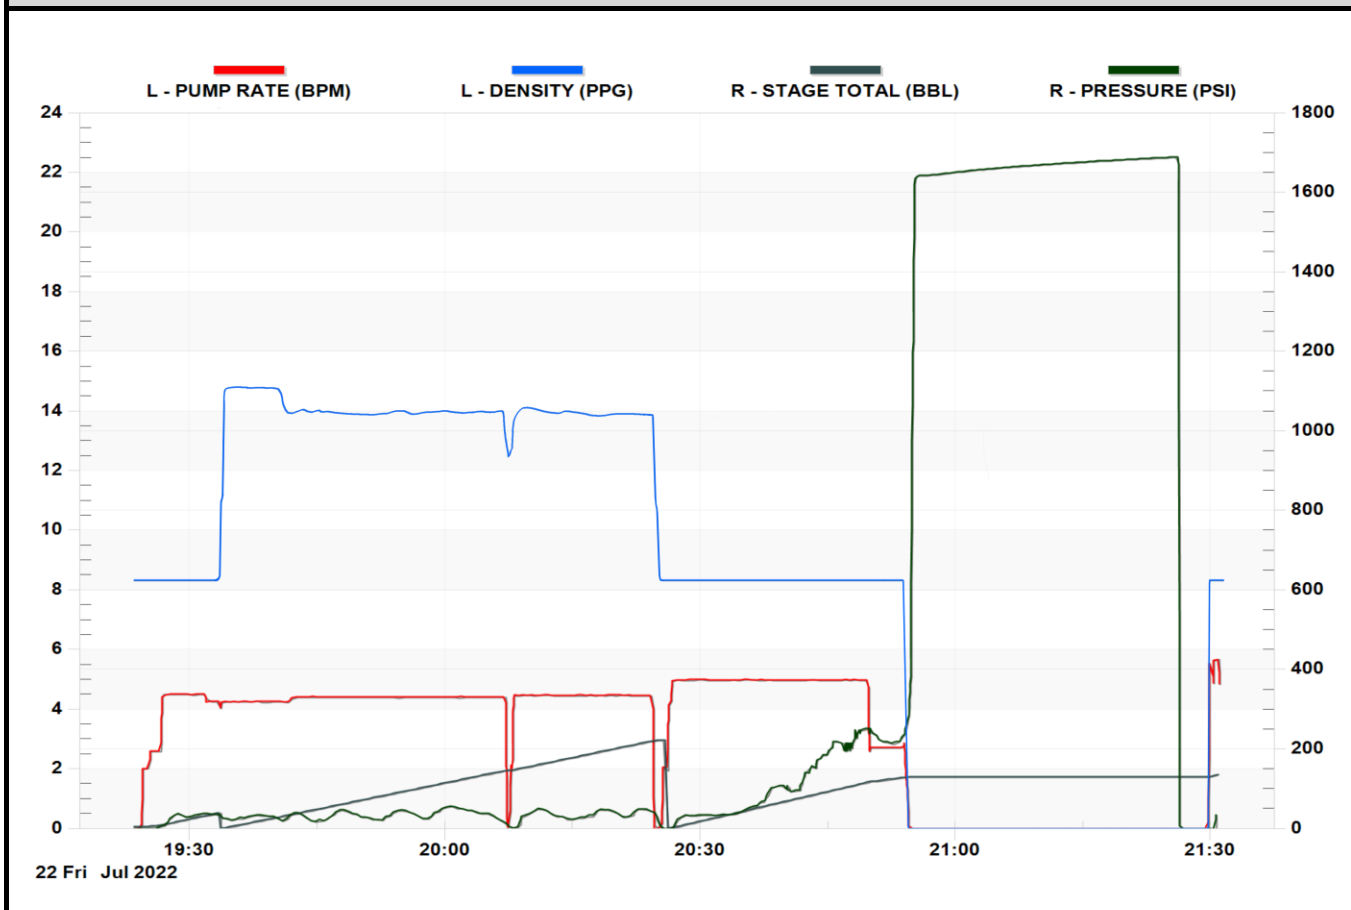



Centralizer Depths

Well Name: STUGART 21NA

Surface, Set Depth: 1,683.7ftKB

API 05123512620000		Surface Legal Location SENW 20-5N-66W		Field Name Wattenberg		State CO		Well Configuration Type Horizontal	
Ground Elevation (ft) 4,885.00	Original KB Elevation (ft) 4,898.00	KB-Ground Distance (ft) 13.00		Spud Date	Rig Release Date	On Production Date		Abandon Date	

Casing Run Tally

Run #	Ref #	Item Des	OD (in)	Wt (lb/ft)	Grade	Run?	Len (ft)	Centralized?	Ext Jwlry	Connections	Top (ftKB)	Cum Len (ft)
2		Casing joints	9 5/8	36.00	J-55	Yes	40.00	Yes		LT&C	1,641.9	41.85
3		Casing joints	9 5/8	36.00	J-55	Yes	42.16	Yes		LT&C	1,599.7	84.01
4		Casing joints	9 5/8	36.00	J-55	Yes	42.18	Yes		LT&C	1,557.5	126.19
8		Casing joints	9 5/8	36.00	J-55	Yes	42.20	Yes		LT&C	1,388.8	294.94
12		Casing joints	9 5/8	36.00	J-55	Yes	42.16	Yes		LT&C	1,220.0	463.69
16		Casing joints	9 5/8	36.00	J-55	Yes	42.19	Yes		LT&C	1,051.2	632.46
20		Casing joints	9 5/8	36.00	J-55	Yes	42.22	Yes		LT&C	884.6	799.06
24		Casing joints	9 5/8	36.00	J-55	Yes	42.19	Yes		LT&C	718.1	965.64
28		Casing joints	9 5/8	36.00	J-55	Yes	40.00	Yes		LT&C	555.6	1,128.14
32		Casing joints	9 5/8	36.00	J-55	Yes	40.20	Yes		LT&C	392.6	1,291.11
36		Casing joints	9 5/8	36.00	J-55	Yes	42.20	Yes		LT&C	223.8	1,459.92