




COLORADO OIL AND GAS CONSERVATION COMMISSION
SUNDRY NOTICES AND REPORTS OF WELLS

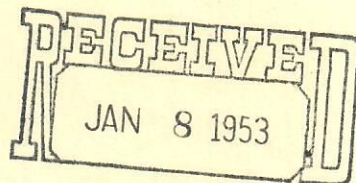

OIL & GAS
CONSERVATION COMMISSION

303-1

(Indicate nature of data by checking below)

Notice of intention to drill _____
 Notice of intention to change plans _____
 Notice of date for test of water shut-off _____
 Report on result of test of water shut-off _____
 Notice of intention to re-drill or repair well _____
 Notice of intention to clean out well _____
 Statement of shooting _____
 Statement of perforating X _____
 Notice to pull or otherwise alter casing _____
 Notice of intention to abandon well _____
 Report of work done on well since previous report _____
 Report of acidizing, pulling casing and abandoning well _____

Following is a ~~(notice of intention to do work)~~ (report of work done) January 6 19 53
 (On land) (patented) described as follows:

Colorado	Kiowa	East Eads
State	County	Field
<u>1</u>	<u>White-Brandon</u>	<u>SE 1/4 Sec. 20</u>
(Well No.)	(Lease)	(Sec. and 1/4 Sec.)
		<u>19S</u>
		(Twp.)
		<u>45W</u>
		(Range)
		(Meridian)

The well is located 330 ft. (N) of south and 330 ft. (E) of east
 line (S) (W)

The elevation above sea level is 3913 ft.

Details of Plan of Work: (State names of and expected depths to objective sands;
 Show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cement-
 ing points, and all other important proposed work.)

Completed in the Arbuckle formation as a dry hole. TD 5418. Drilled 13 3/4" hole to 260'. Set 10 3/4", 29# Armco spiral weld casing at 252'. Cemented with 140 sacks cement. WOC 42 hours. Drilled 9" hole to 5418'. Plugged back to 4800' with 30 sacks cement. Set 7" casing at 4171' and cemented with 200 sacks. WOC 34 hours. Perforated 4138-4144 and 4067'-4088' with four 15/32" holed per foot. Swabbed water. Set Lane Wells bridging plug at 4020'. Perforated 3932'-3918' with four 15/32" holes per foot, swabbed water with scum of oil. Acidized perforated interval 3932'-3918' with 1500 gallons XX acid, breakdown pressure 850#, final pressure 600#. Swabbed water. Squeezed perforations 3932'-3918' with 60 sacks cement. Perforated 3793 1/2'-3794 1/2' with four 15/32" holes and from 3798'-3810' with forty-eight 15/32" holes; swabbed water. Set 4 sack cement plug 3810'-3796'. Set Lane Wells bridging plug at 3790' and perforated 3774'-3789' with sixty 15/32" holes; swabbed water. Cemented off perforations, top of plug at 3765'. Shot casing and pulled 1951' of 7" casing from hole. Set 20 sack cement plug 240'-260', set 20 sack cement plug at surface with a marker in the surface plug. Intervals between plugs filled with heavy mud.

Approved: JAN 8 1953

Company Continental Oil Company

Address 1755 Glenarm Denver, Colo.

By H. T. Roberts

Title District Superintendent

Submit reports of proposed work, for approval, on this form in Duplicate for patented lands and in Triplicate for school and state lands.