



## BOREHOLE PROFILE

COMPANY	NAVEX RESOURCES LLC		
WELL	TRAVIS #1-10		
FIELD	WILDCAT		
COUNTY	KIT CARSON		
STATE	COLORADO		
LOCATION	2381' FNL & 1236' FEL		
SEC 10	TWP 111S	RGE 45W	Other Services
Latitude	39.108632	ARRAY INDUCTION	
Longitude	-102.432658	PHOTO-DENSITY	
API Number	05-063-06352	MICRO LOG	
Permanent Datum GL, Elevation 4365 feet			NEUTRON
Log Measured From KB, 13.00 feet above Permanent Datum			DIPole SONIC
Drilling Measured From KB			Elevations: KB 4378.00 DF 4377.00 GL 4365.00
Date	05-MAY-2023		
Run Number	ONE		
Service Order	T1-230505WFT		
Depth Driller	6069.00	feet	
Depth Logger	6068.00	feet	
First Reading	6011.00	feet	
Last Reading	653.00	feet	
Casing Driller	661.00	feet	
Casing Logger	653.00	feet	
Bit Size	7.875	inches	
Hole Fluid Type	WBM		
Density / Viscosity	9.10 lb/USg	55.00 sec/qt	
PH / Fluid Loss	10.00	8.00 ml/30Min	
Sample Source	FLOWLINE		
Rm @ Measured Temp	2.20 @ 75.0	ohm-m	
Rmf @ Measured Temp	1.65 @ 75.0	ohm-m	
Rmc @ Measured Temp	2.75 @ 75.0	ohm-m	
Source Rmf / Rmc	CALC	CALC	
Rm @ BHT	1.10 @154.0	ohm-m	
Time Since Circulation	8 HRS		
Max Recorded Temp	154.00	deg F	
Equipment / Base	10001	OKC	
Recorded By	M. JOHNSON		
Witnessed By	CRAIG ADAMS		
Rig Name	DUKE #9		

## BOREHOLE RECORD

Last Edited: 05-MAY-2023 10:15

Bit Size inches	Depth From feet	Depth To feet
12.250	0.00	653.00
7.875	653.00	6069.00

## CASING RECORD

Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURFACE	8.625	0.00	653.00	24.00

## REMARKS

WWLS VERSION 21.11

- TOOLSTRING:

RUN 1 : MAI, MFE, MTD, MRD, MDM, SKJ, MVC, MPD, MDN, MMR, MCG, SHA, MTA, CBHC

- HARDWARE USED:

MAI: 1" STANDOFF

MFE: 1" STANDOFF

MTD; 1" STANDOFFS

MRD: 1" STANDOFFS

MDN: DUAL ECCENTERED BOWSPRING


- 2.71 G/CC DENSITY MATRIX USED TO CALCULATE POROSITY.

- ANNULAR HOLE VOLUME WITH 5.5 INCH PRODUCTION CASING FROM TD TO SURFACE CASING



- CREW  
J. WILLIS, D. STEELE, J. OBI

In interpreting, communicating or providing information and/or making recommendations, either written or oral, as to logs or test or other data, type or amount of material, or Work or other service to be furnished, or manner of performance, or in predicting results to be obtained, the Contractor will give the Company the benefit of the Contractor's best judgment based on its experience and will perform all such Work in a good and workmanlike manner. Any interpretation of test or other data, and any recommendation or reservoir description based upon such interpretations, are opinions based upon inferences from measurements and empirical relationships and assumptions, which inferences and assumptions are not infallible, and with respect to which professional engineers and analysts may differ. ACCORDINGLY ANY INTERPRETATION OR RECOMMENDATION RESULTING FROM THE SERVICES WILL BE AT THE SOLE RISK OF THE COMPANY, AND THE CONTRACTOR CANNOT AND DOES NOT WARRANT THE ACCURACY, CORRECTNESS OR COMPLETENESS OF ANY SUCH INTERPRETATION OR RECOMMENDATION, WHICH INTERPRETATIONS AND RECOMMENDATIONS SHOULD NOT, THEREFORE, UNDER ANY CIRCUMSTANCES BE RELIED UPON AS THE SOLE OR MAIN BASIS FOR ANY DRILLING, COMPLETION, WELL TREATMENT, PRODUCTION OR FINANCIAL DECISION, OR ANY PROCEDURE INVOLVING ANY RISK TO THE SAFETY OF ANY DRILLING ACTIVITY, DRILLING RIG OR ITS CREW OR ANY OTHER INDIVIDUAL. THE COMPANY HAS FULL RESPONSIBILITY FOR ALL DECISIONS CONCERNING THE SERVICES.



Powered by Weatherford tools, acquisition systems, and software

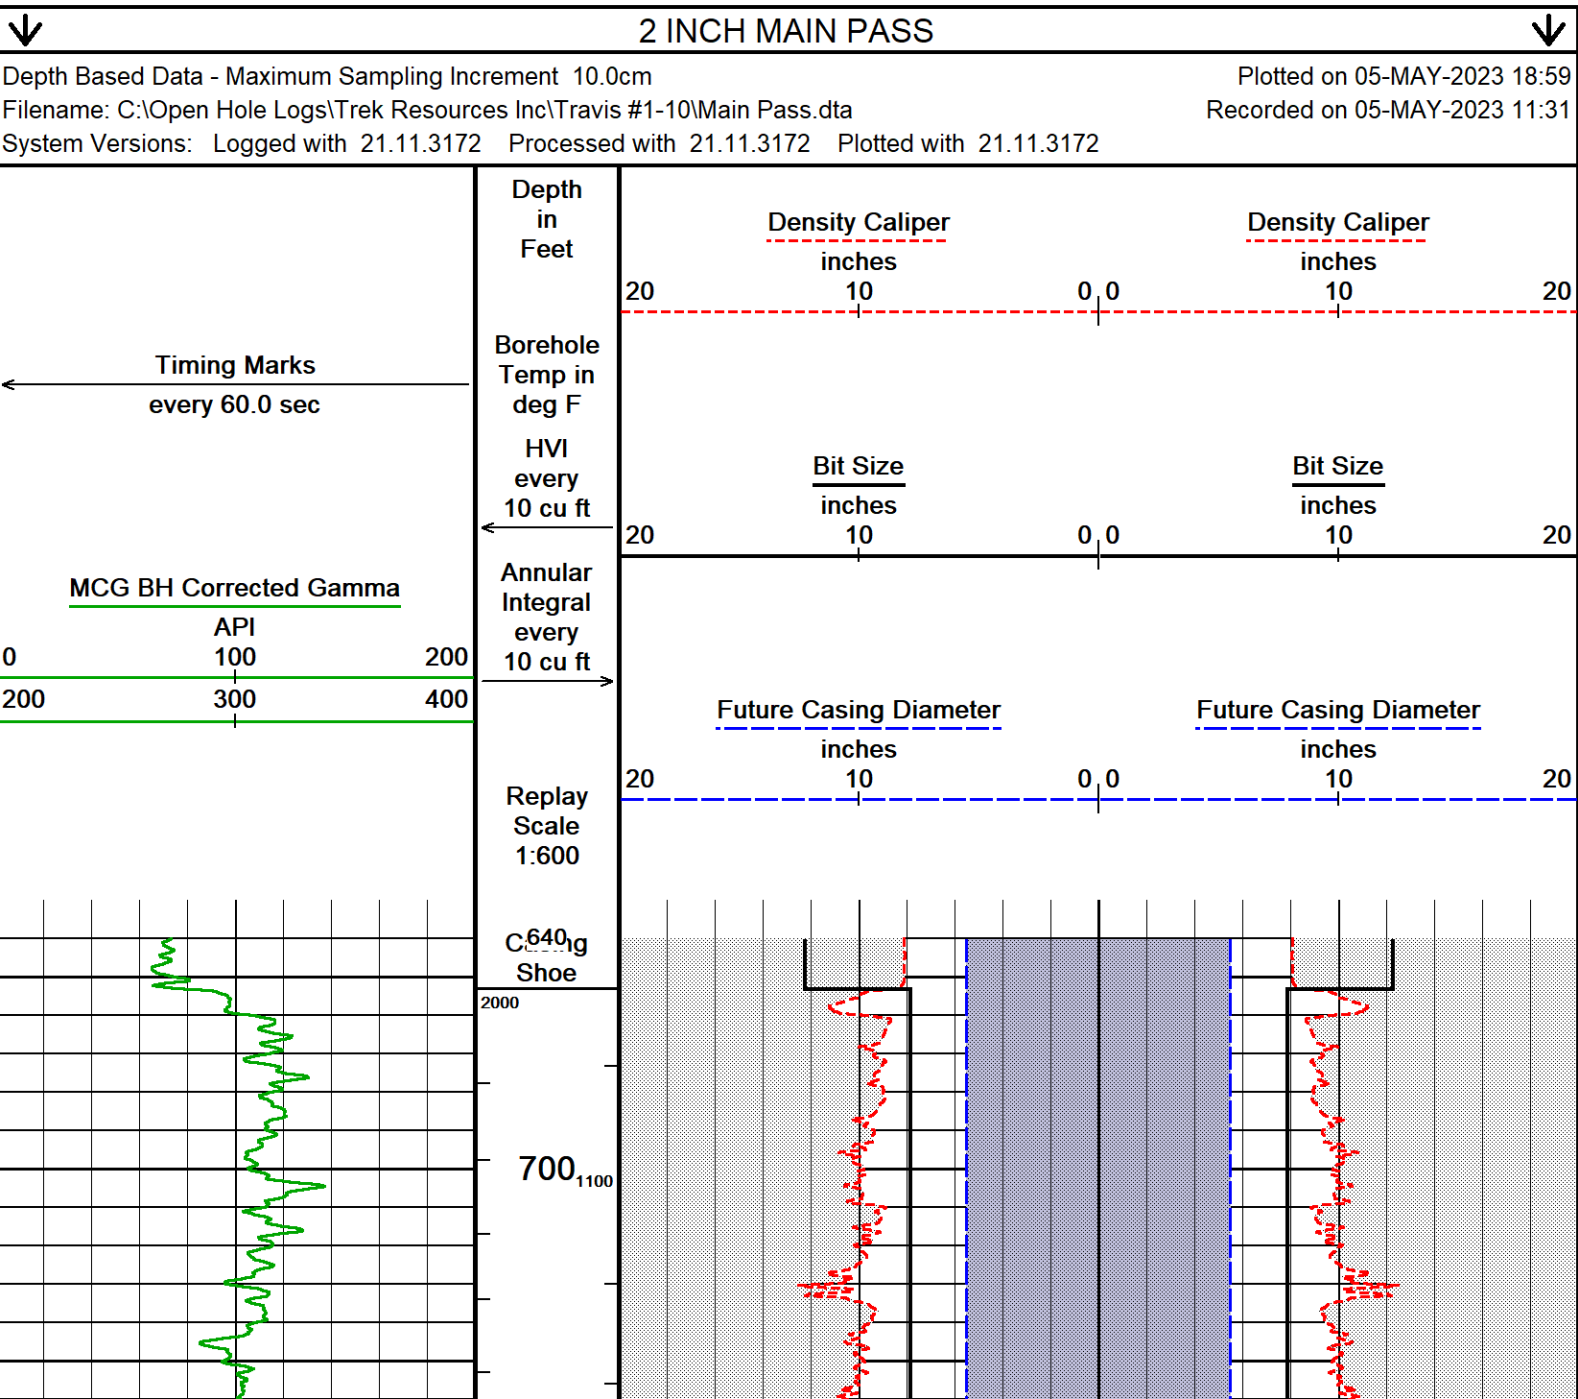





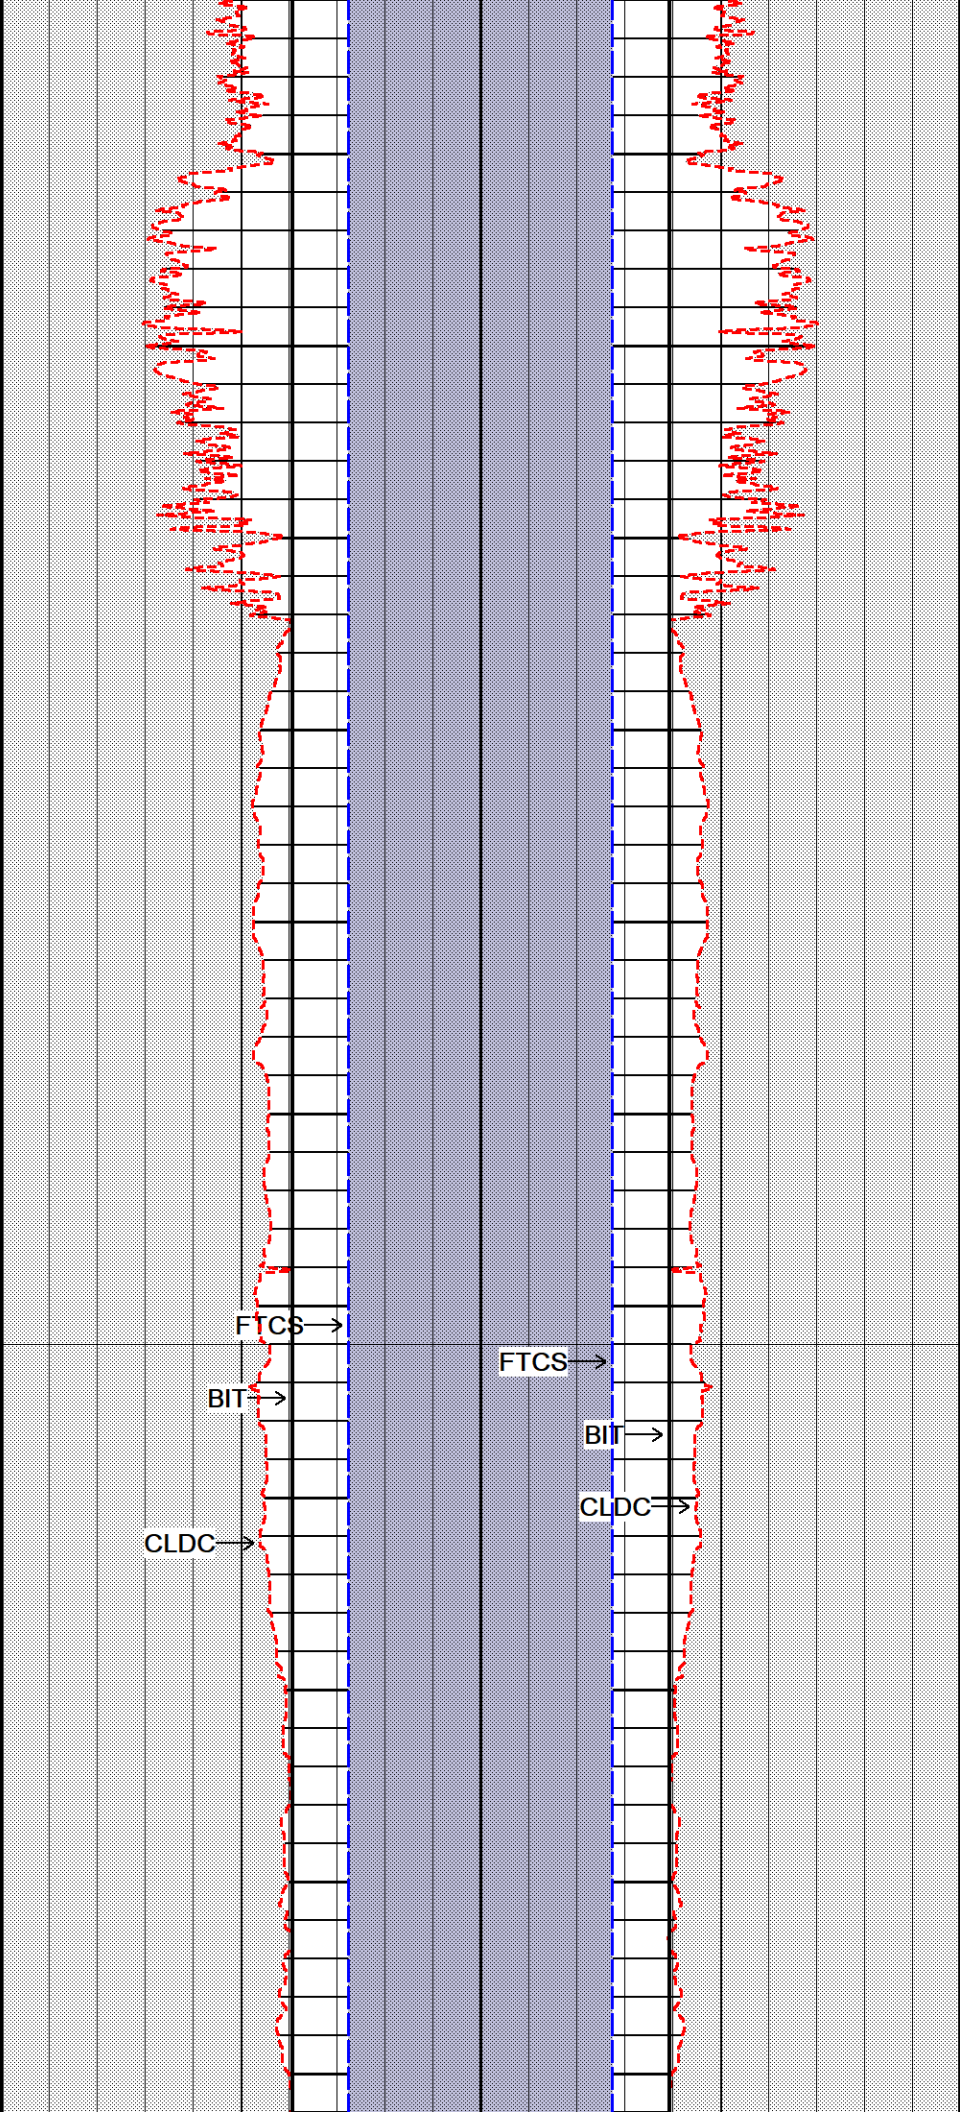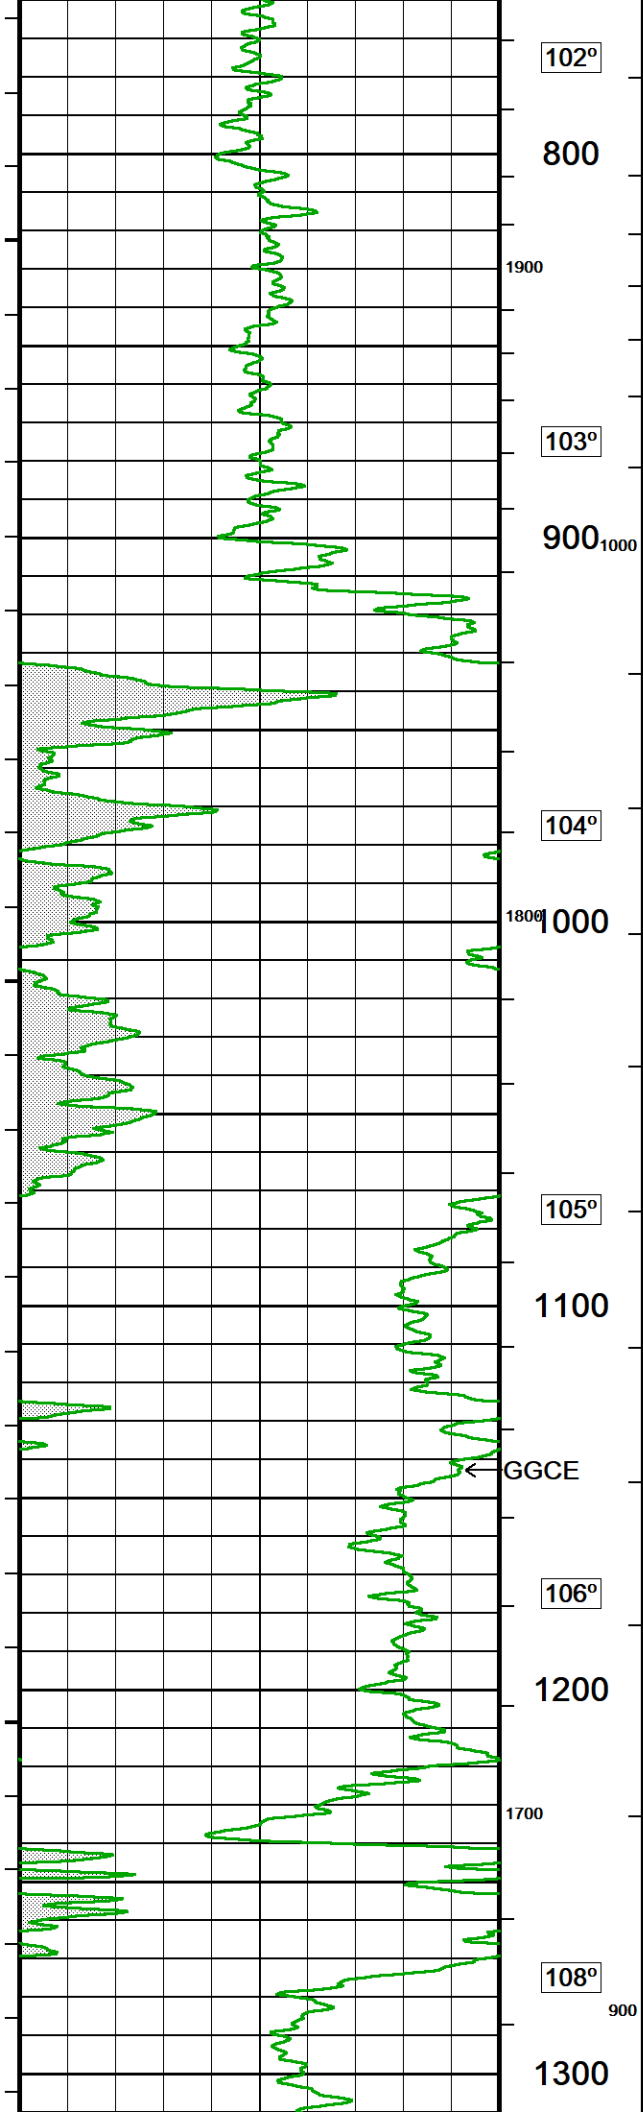





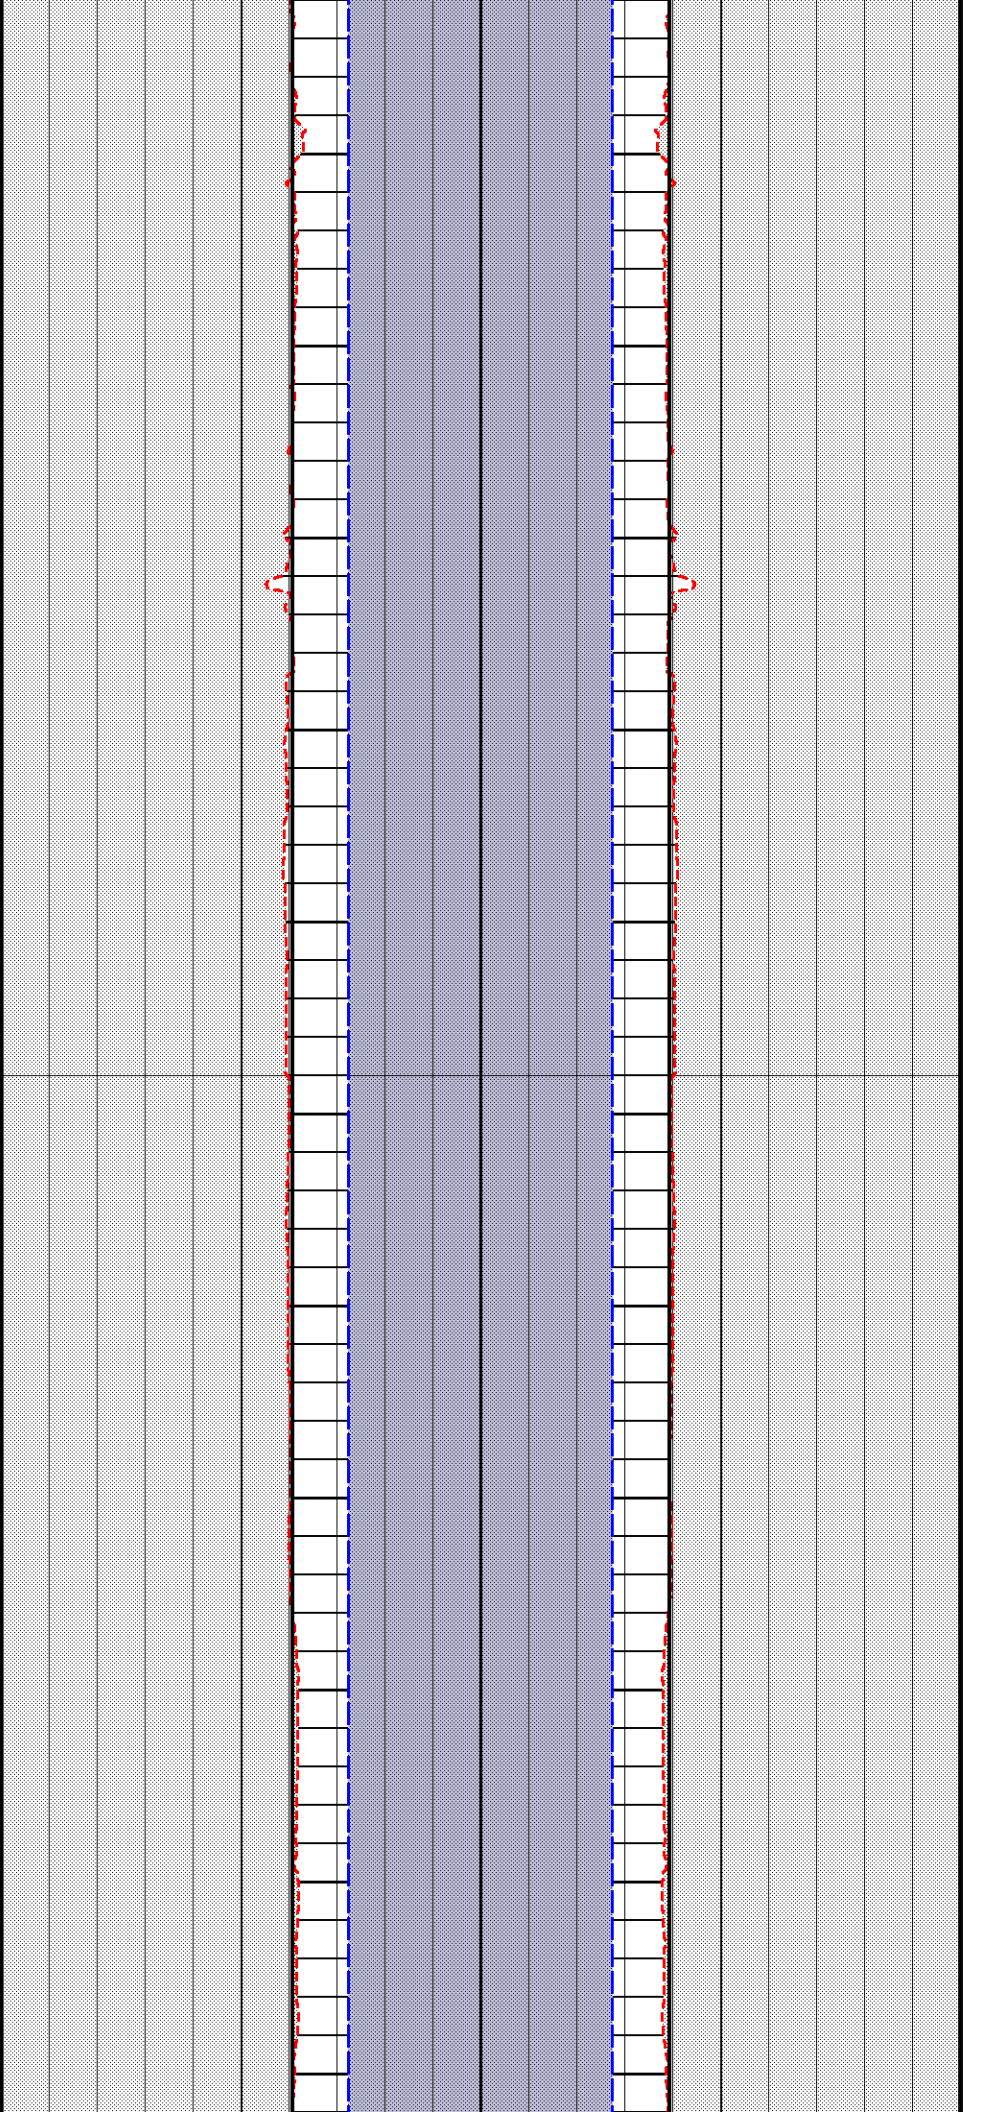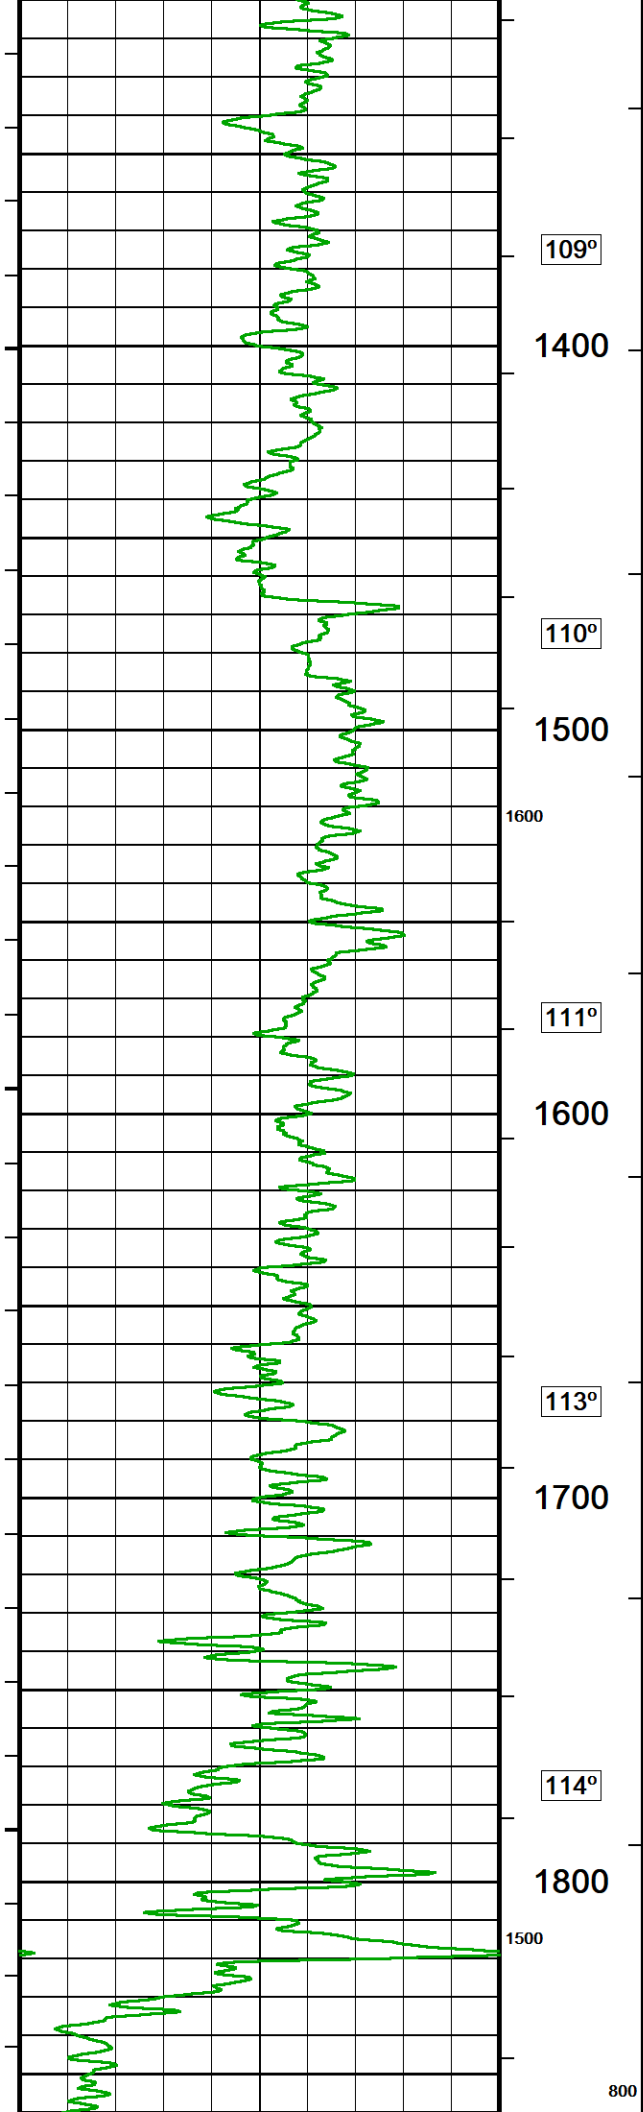





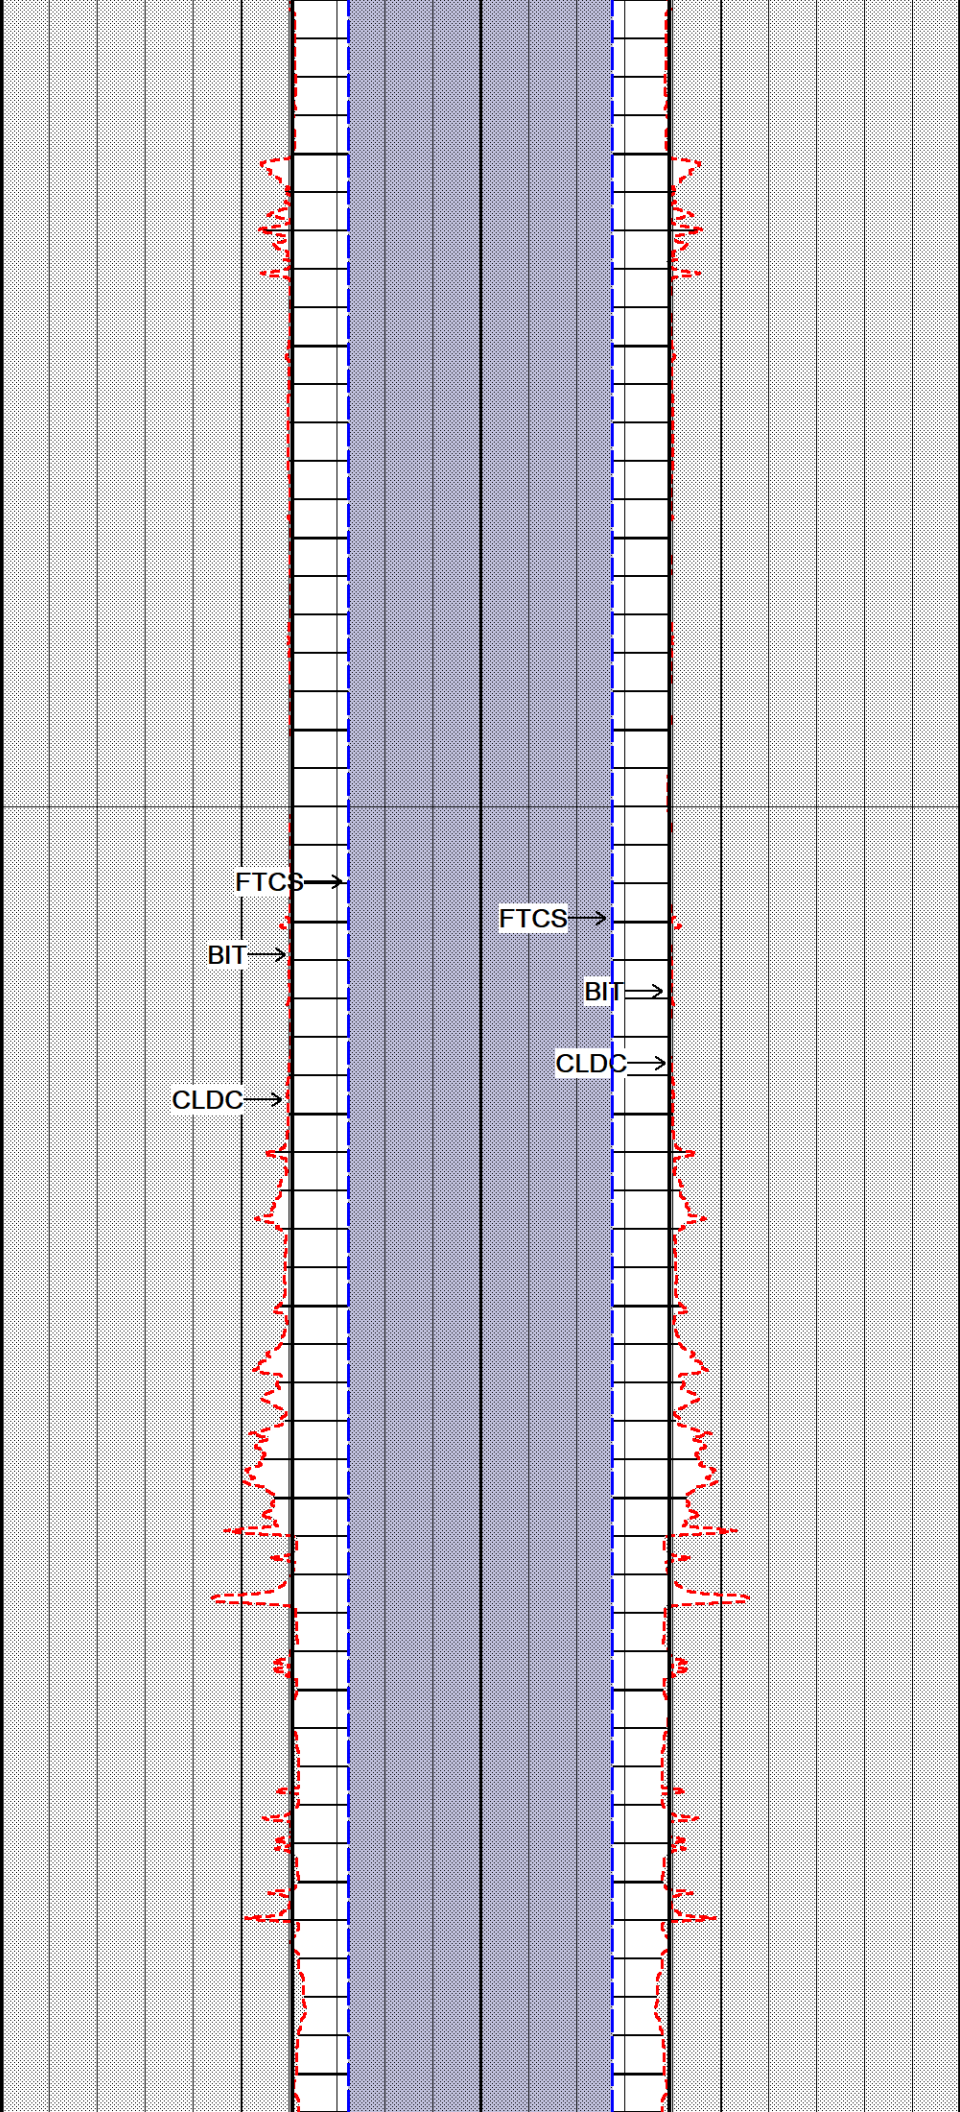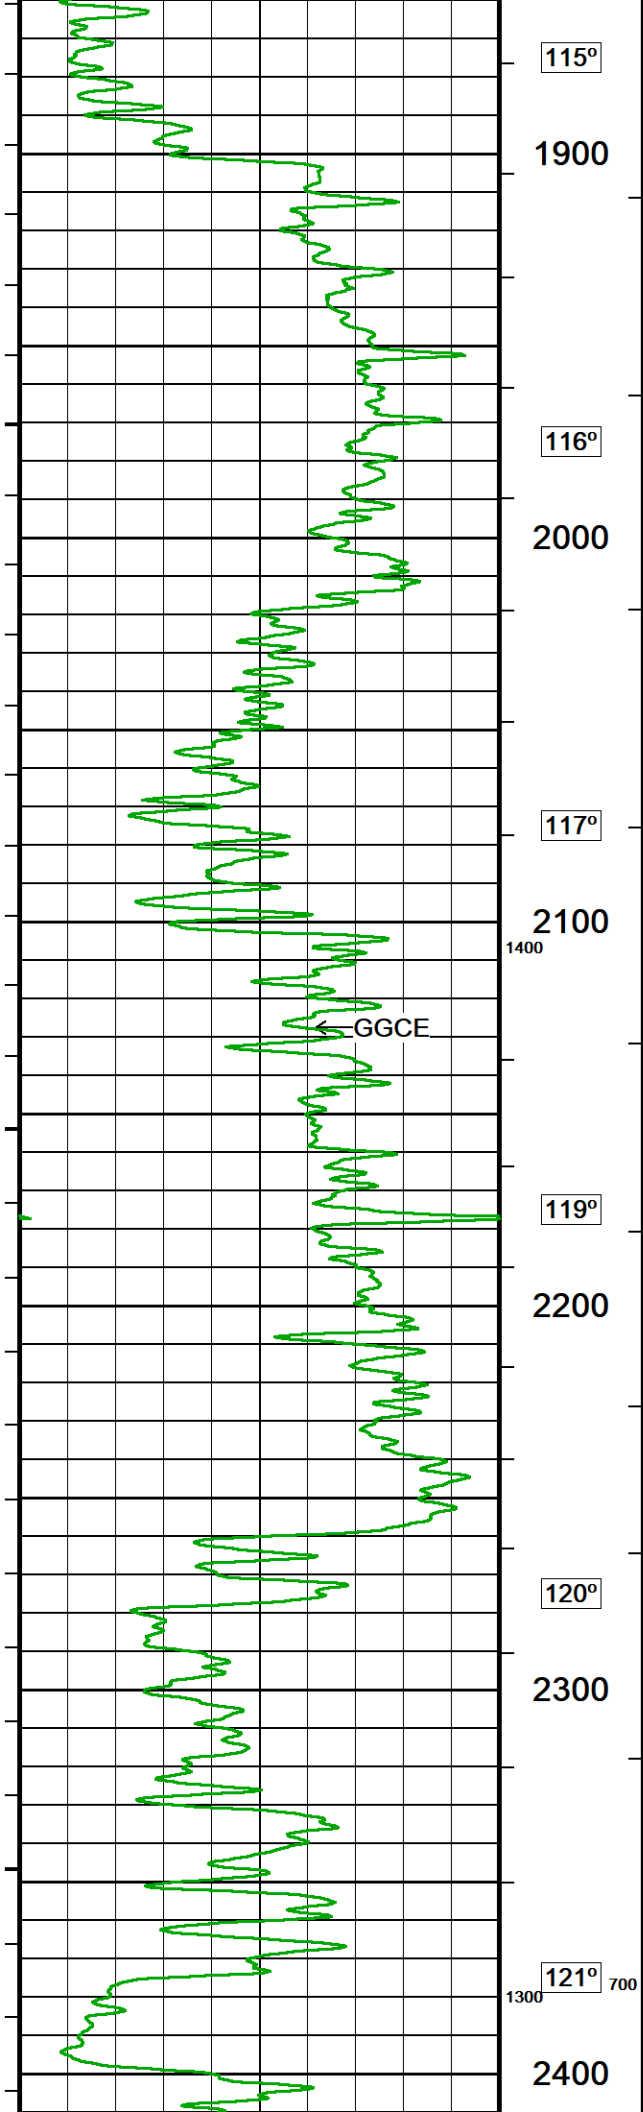





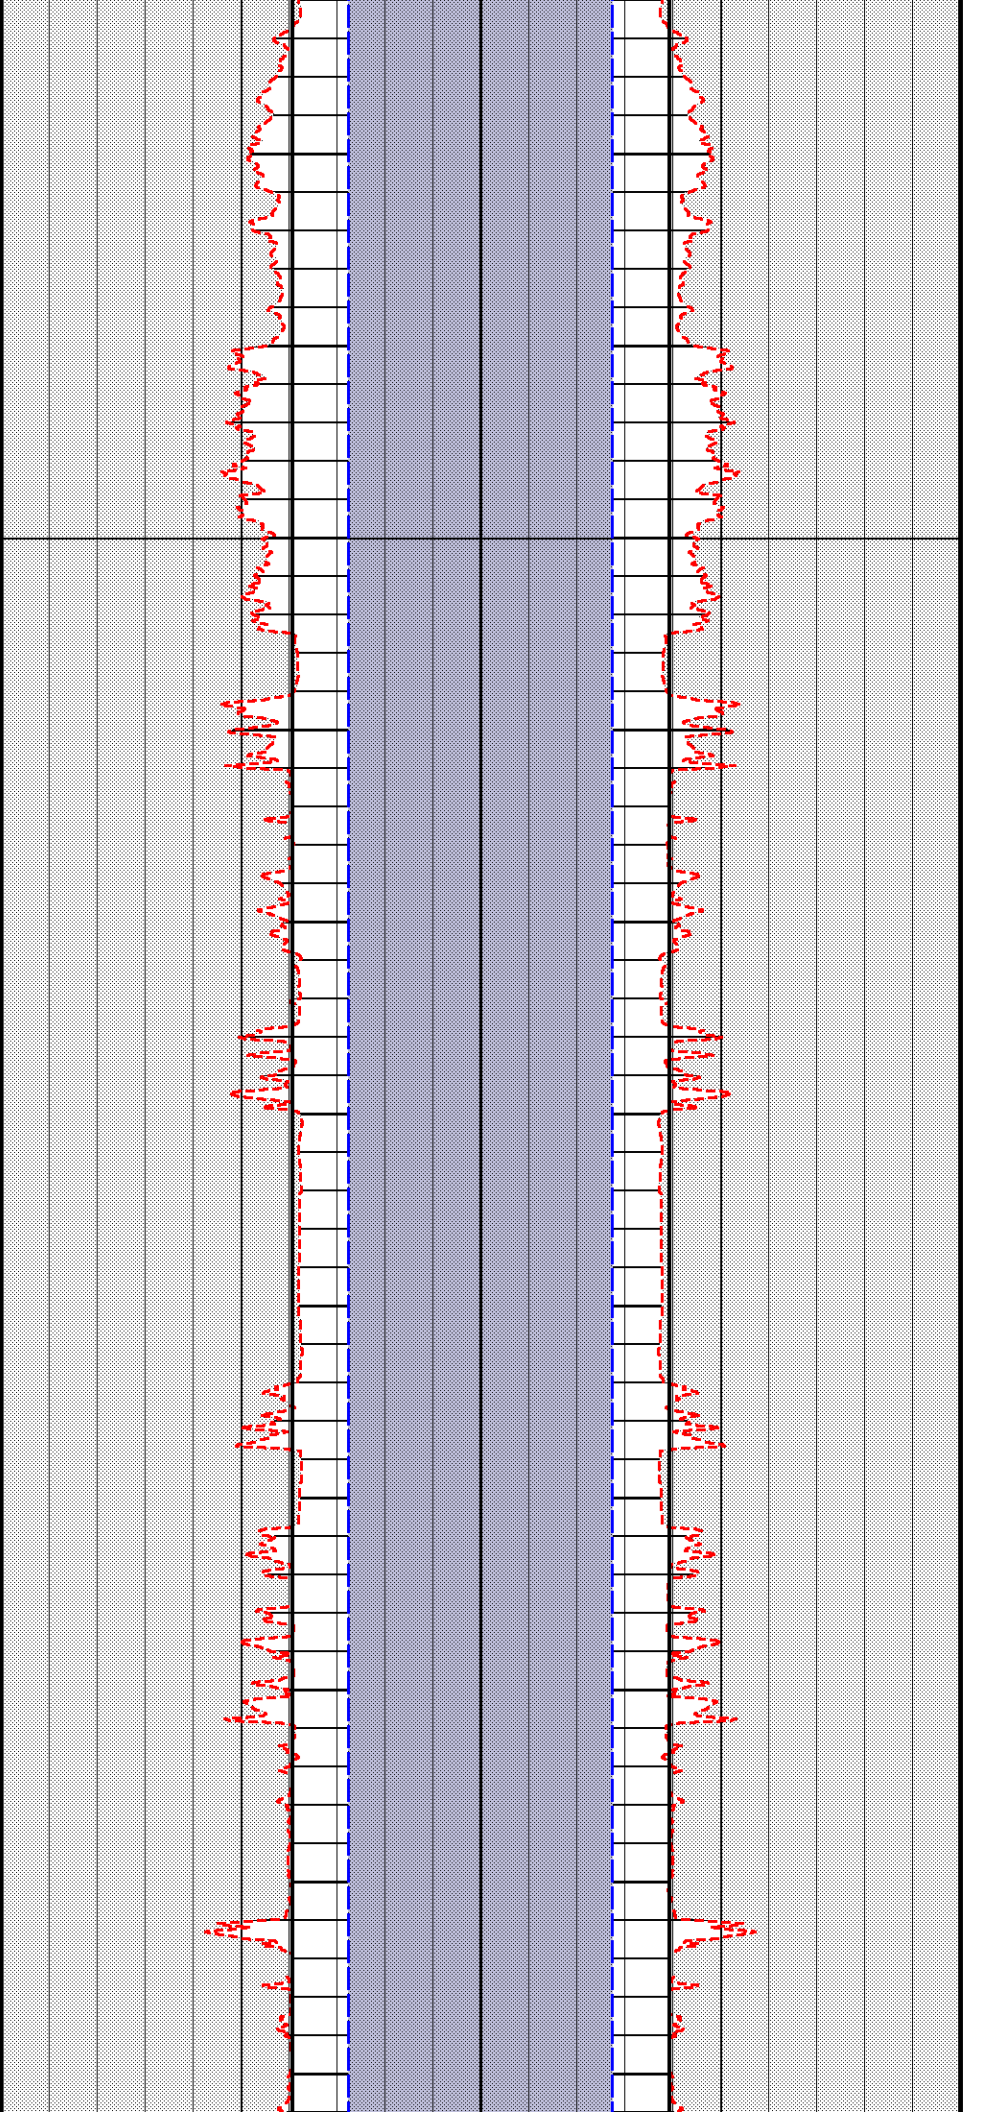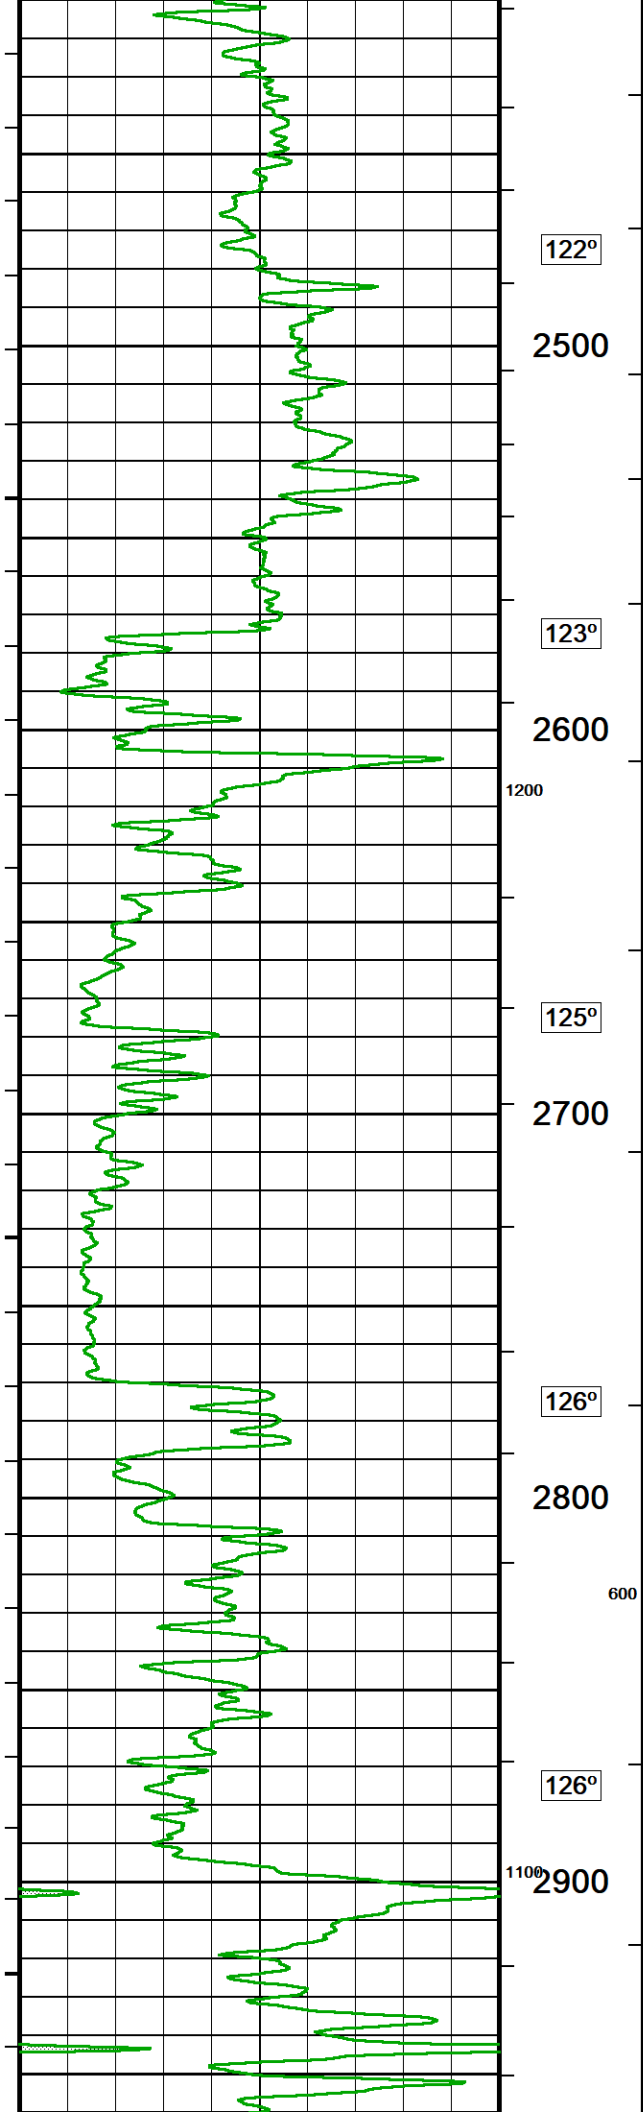





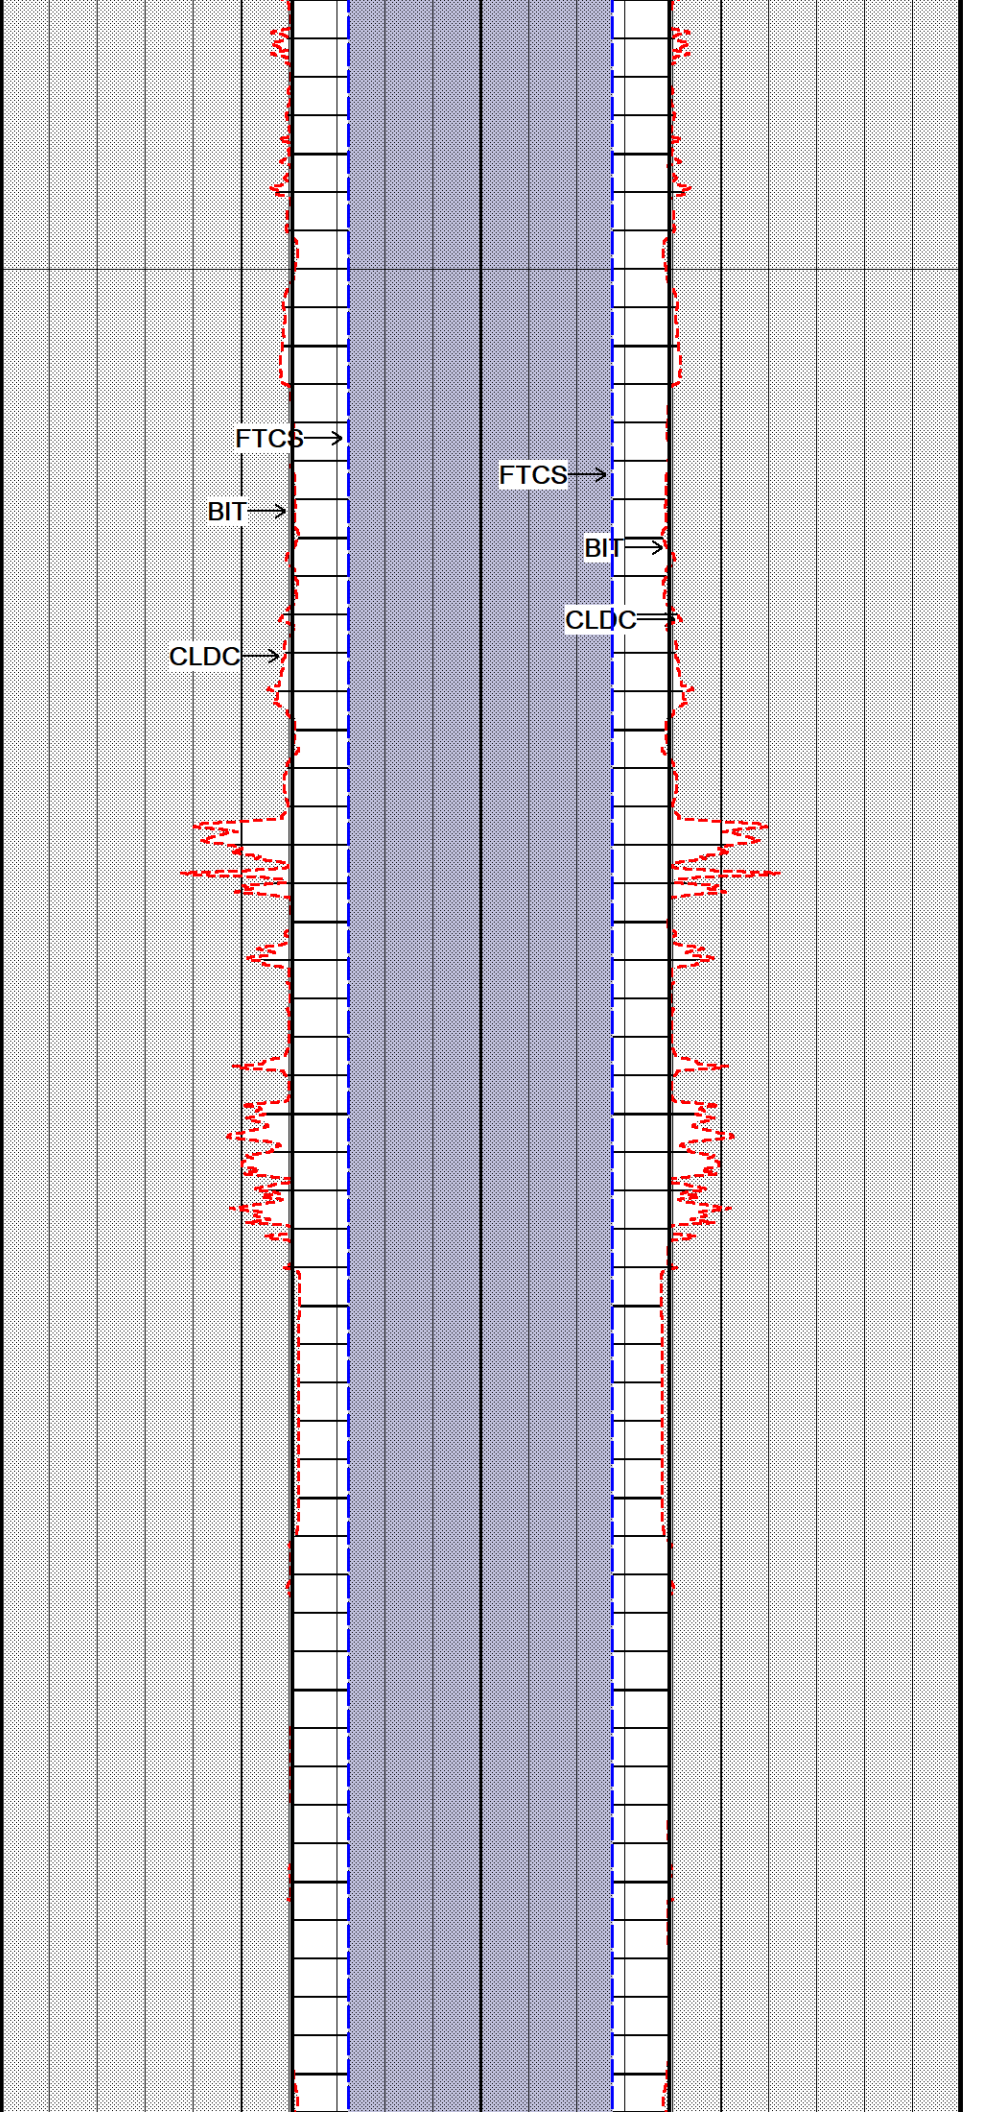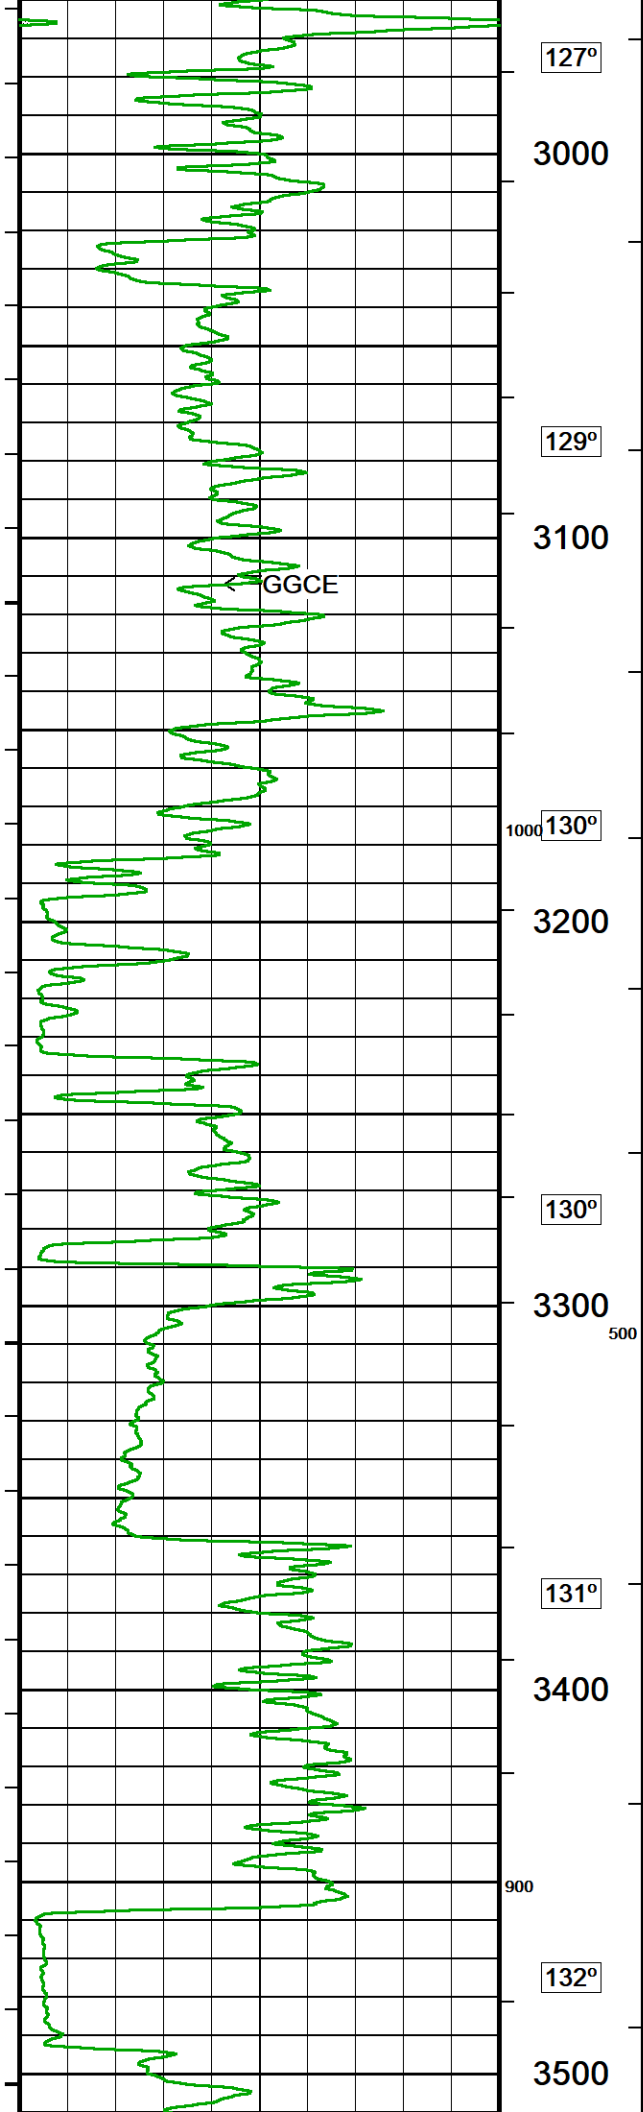





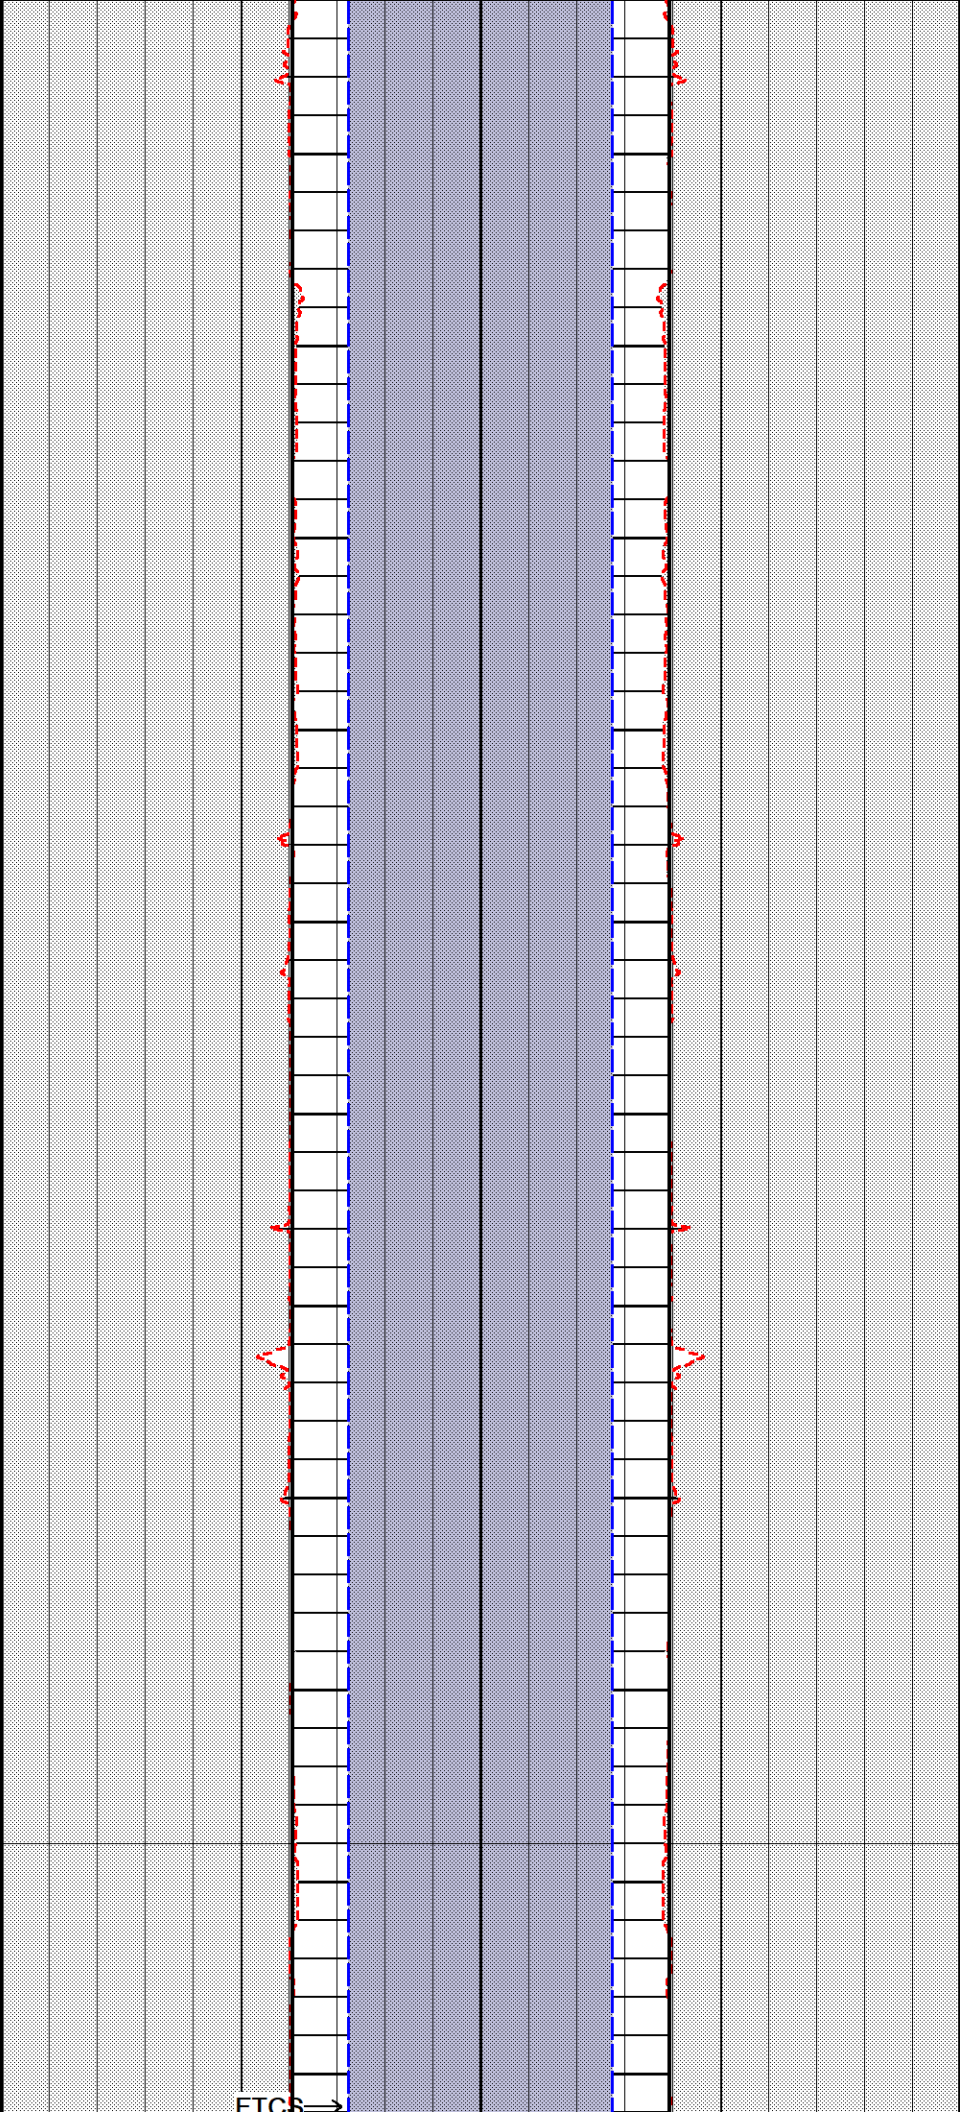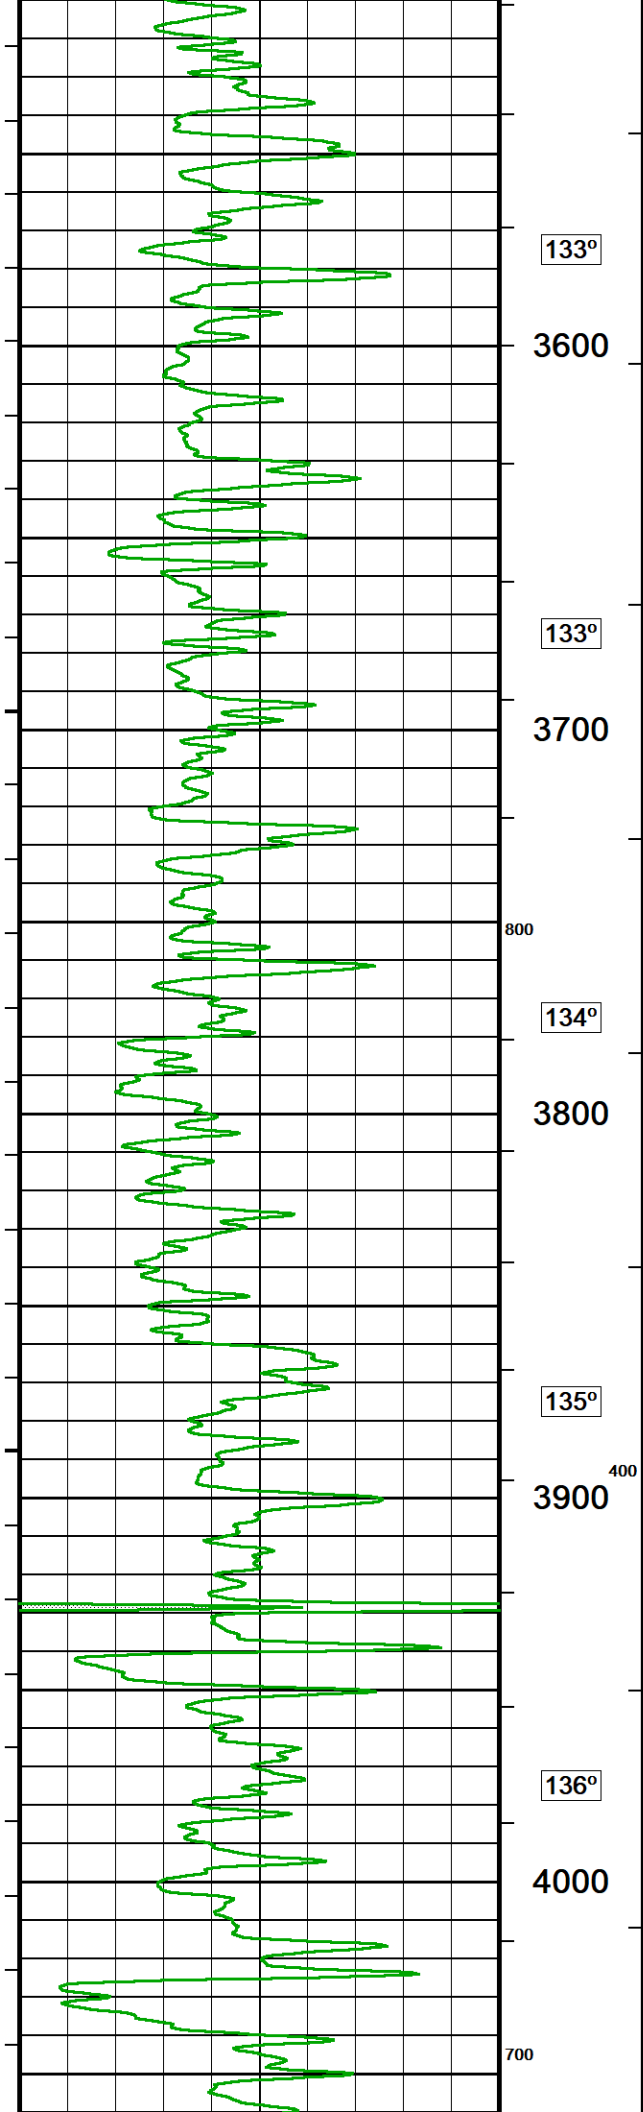





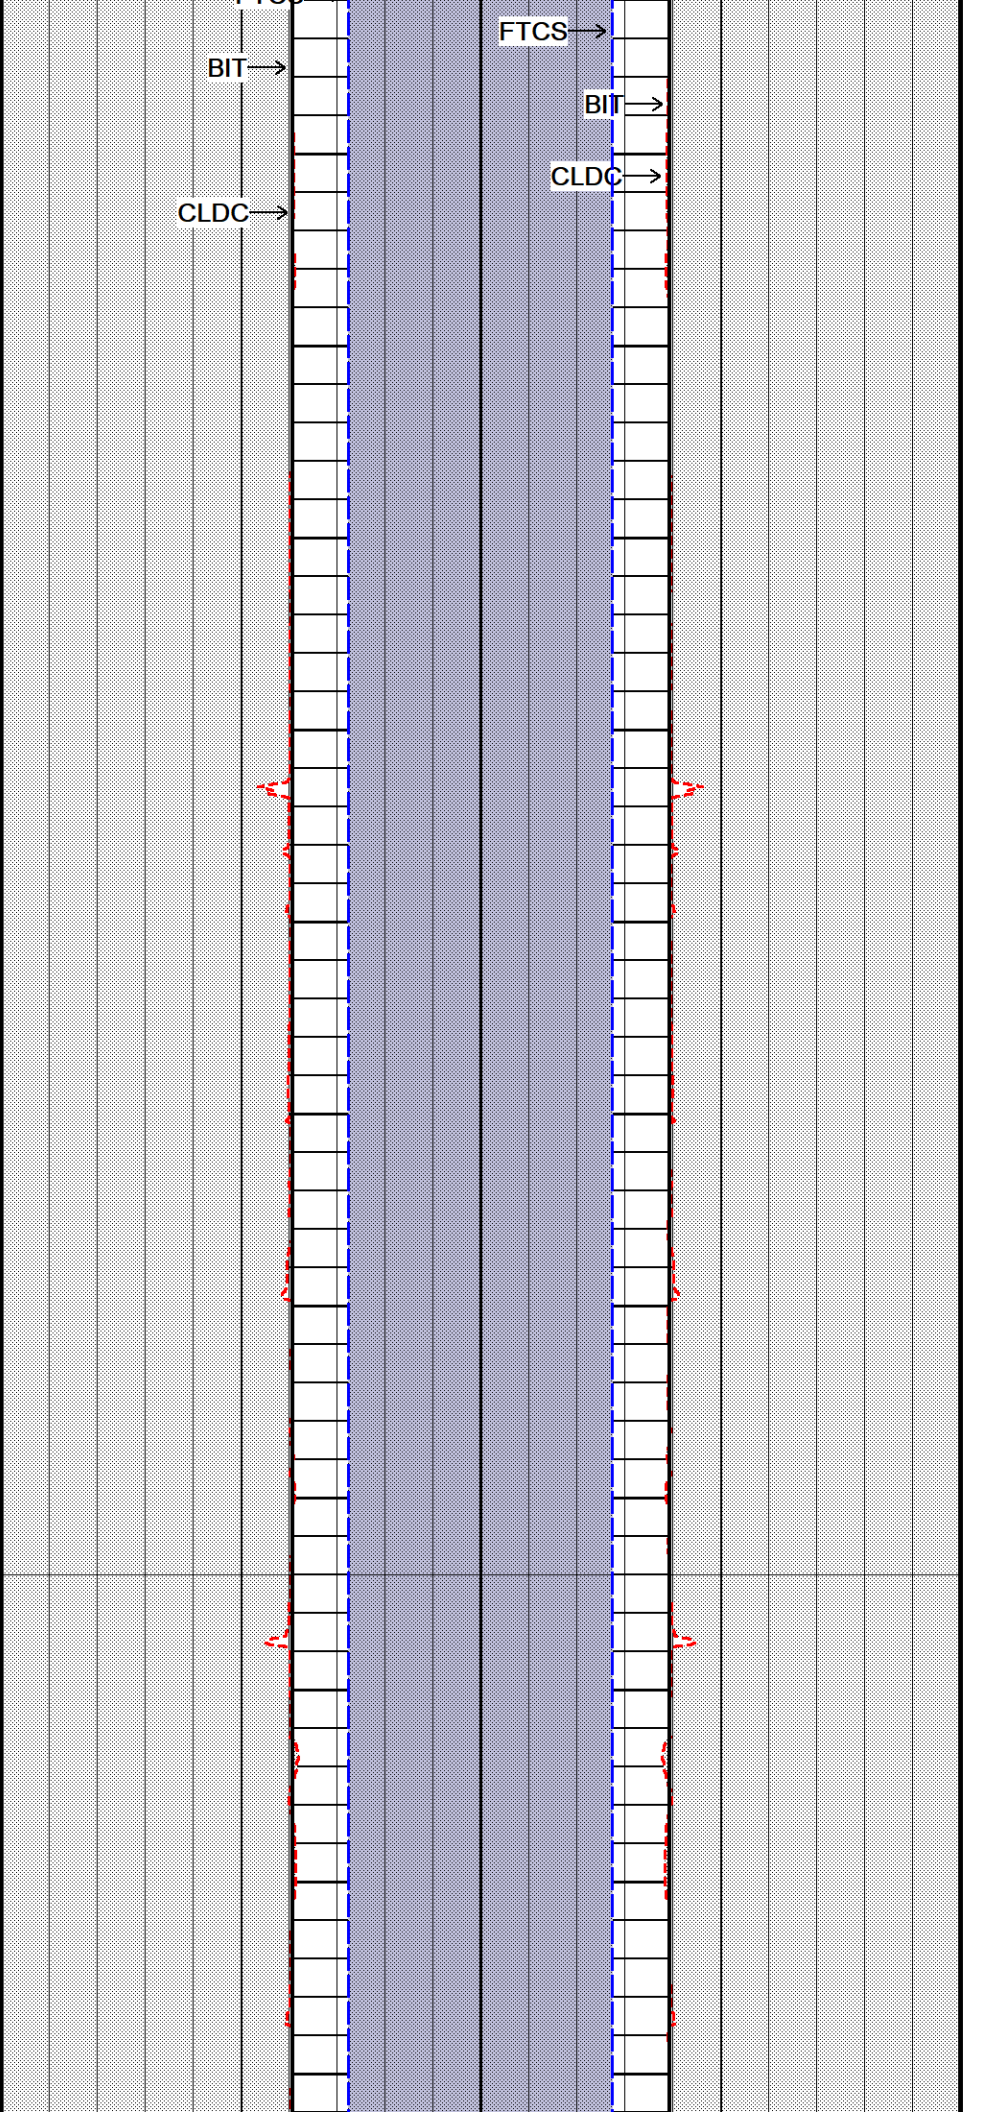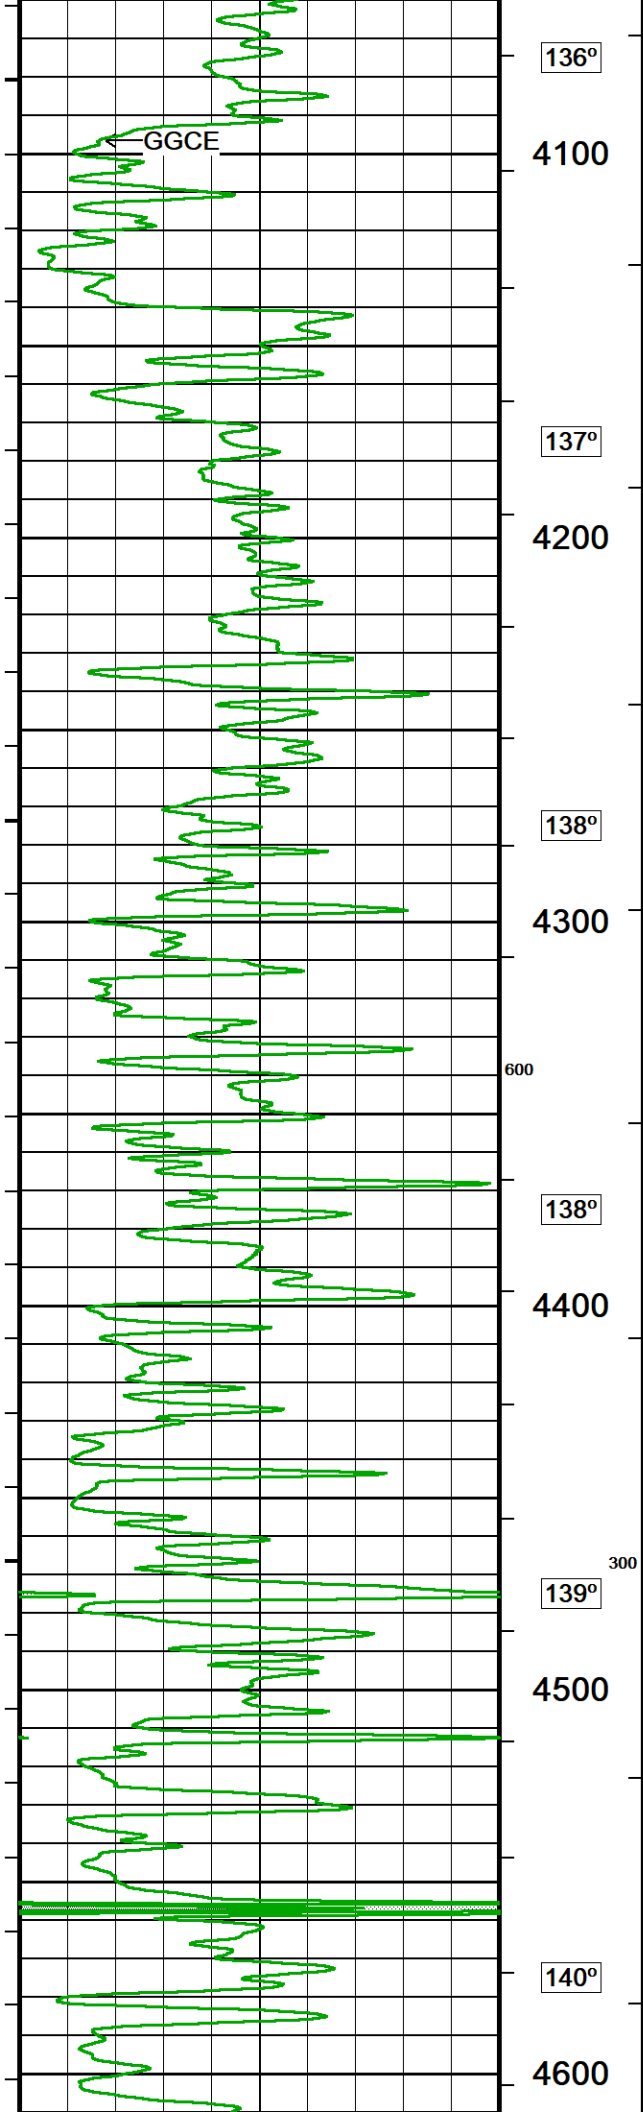




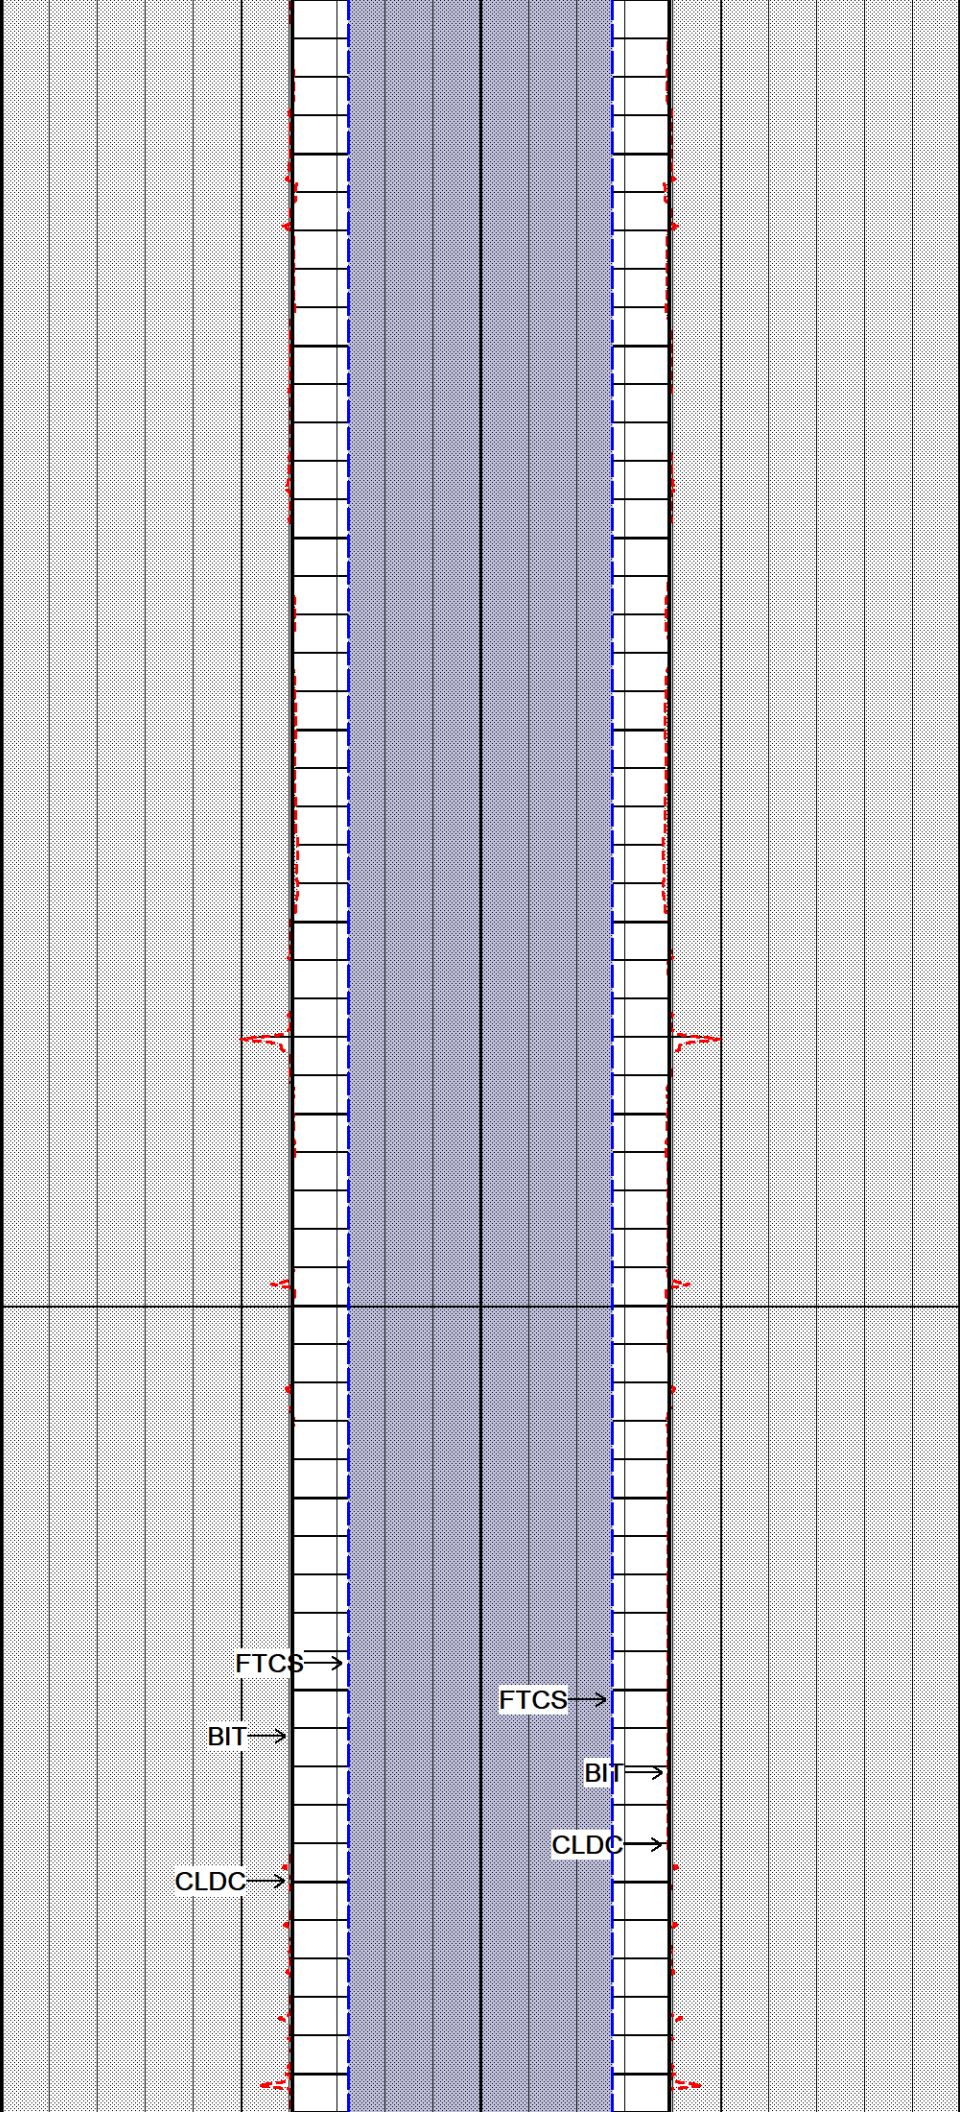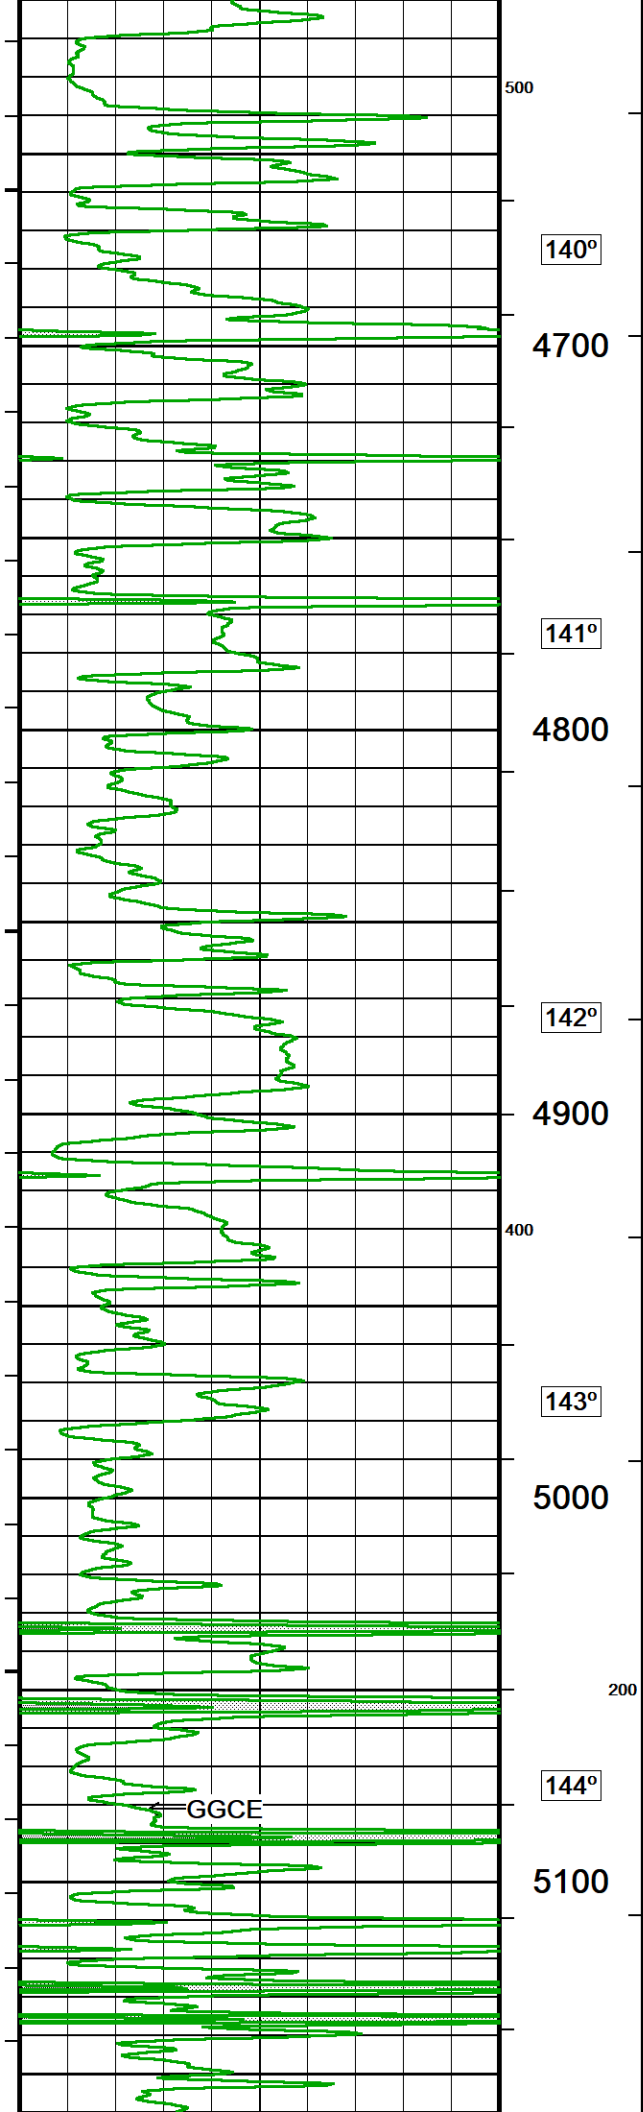





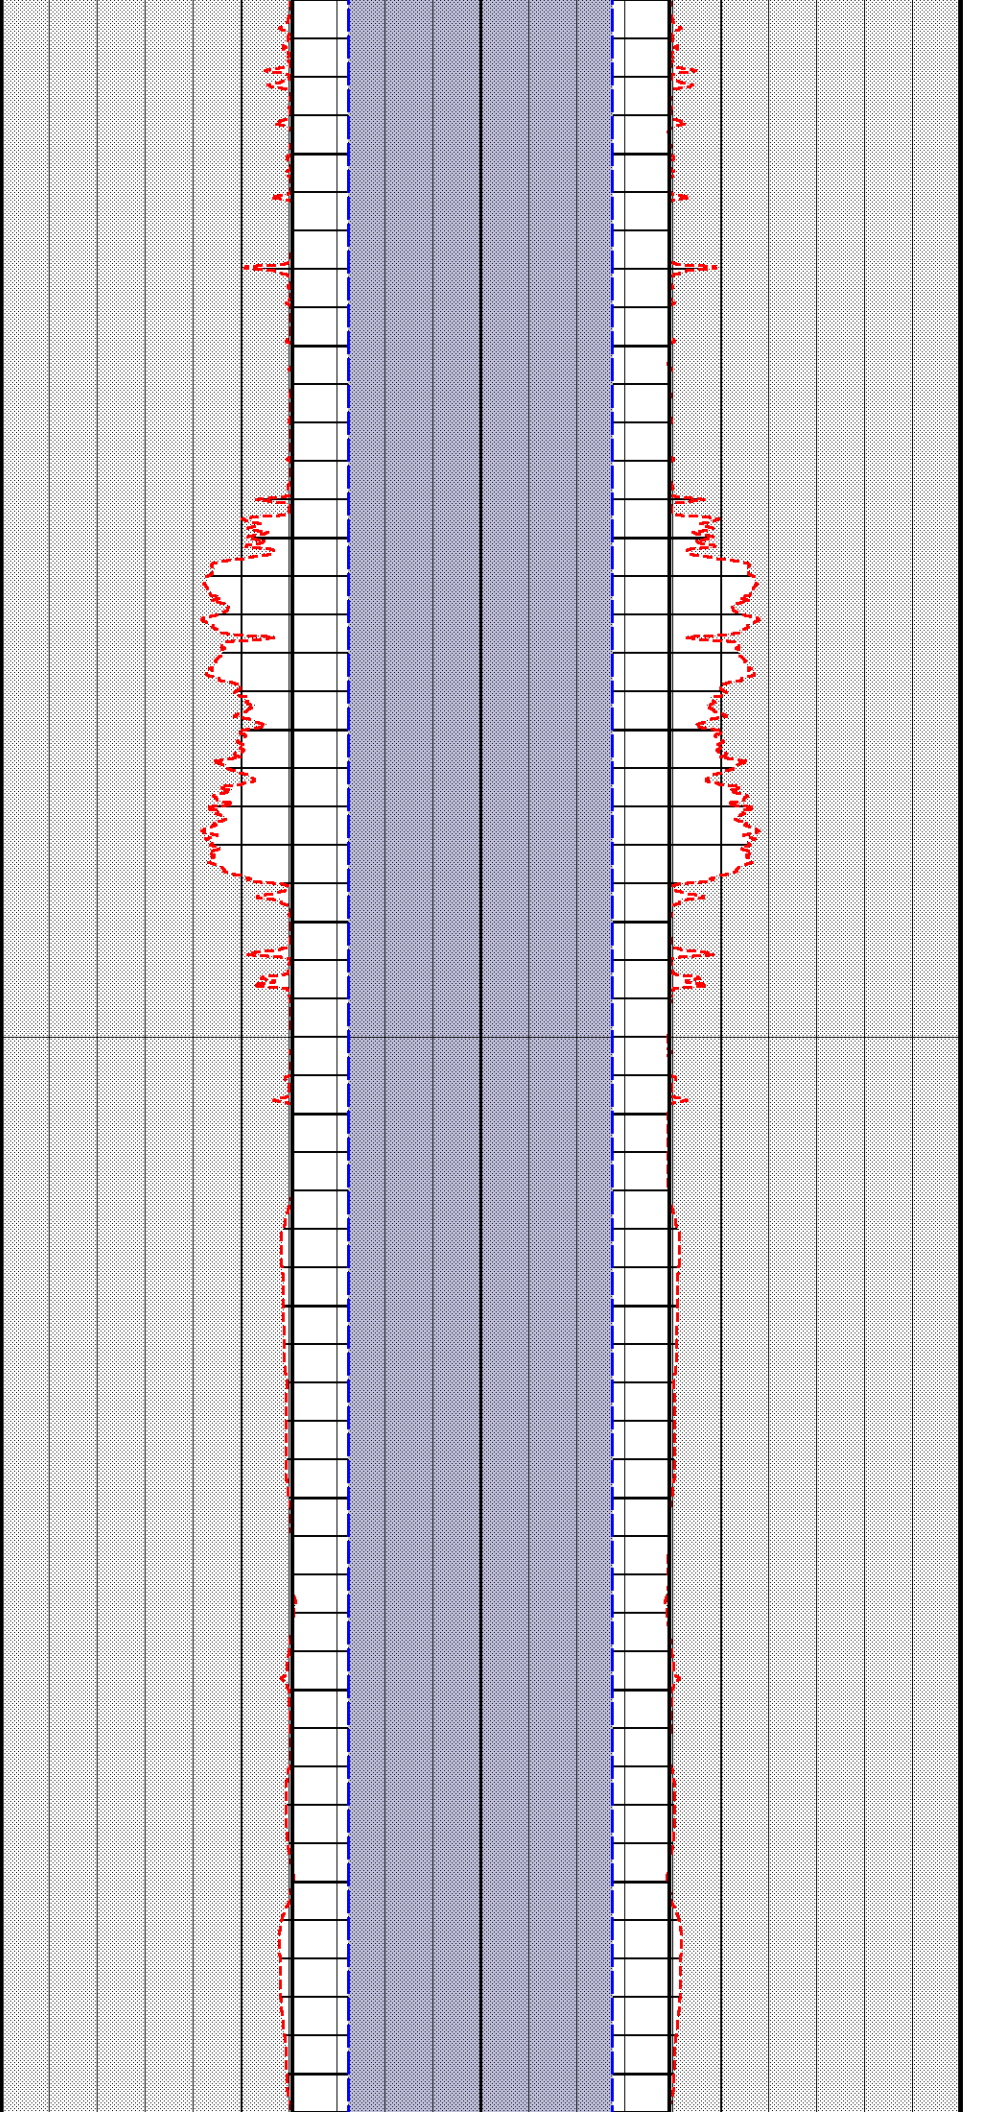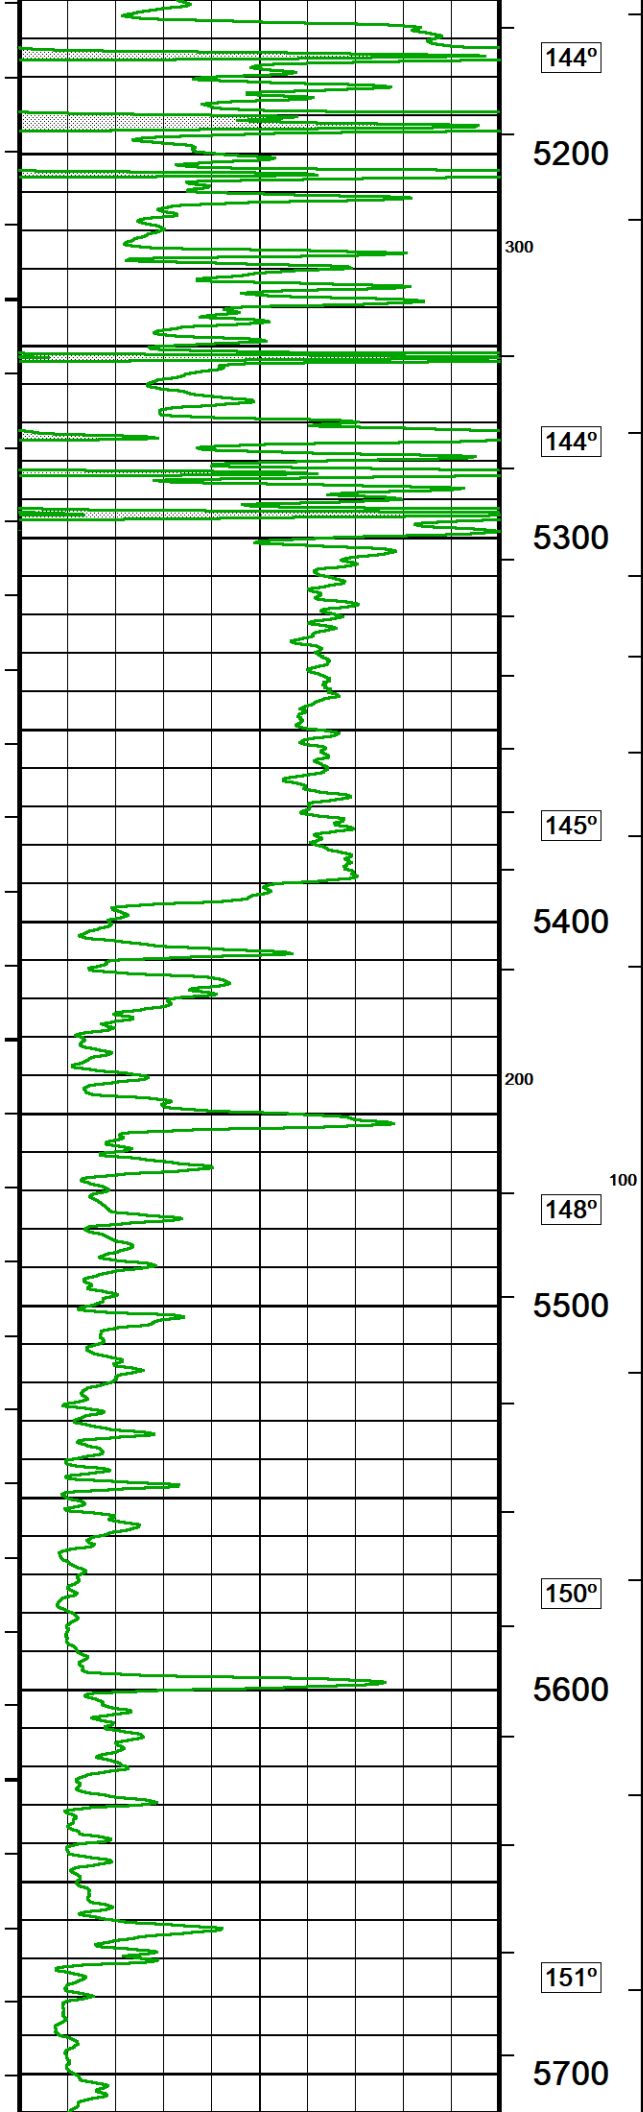




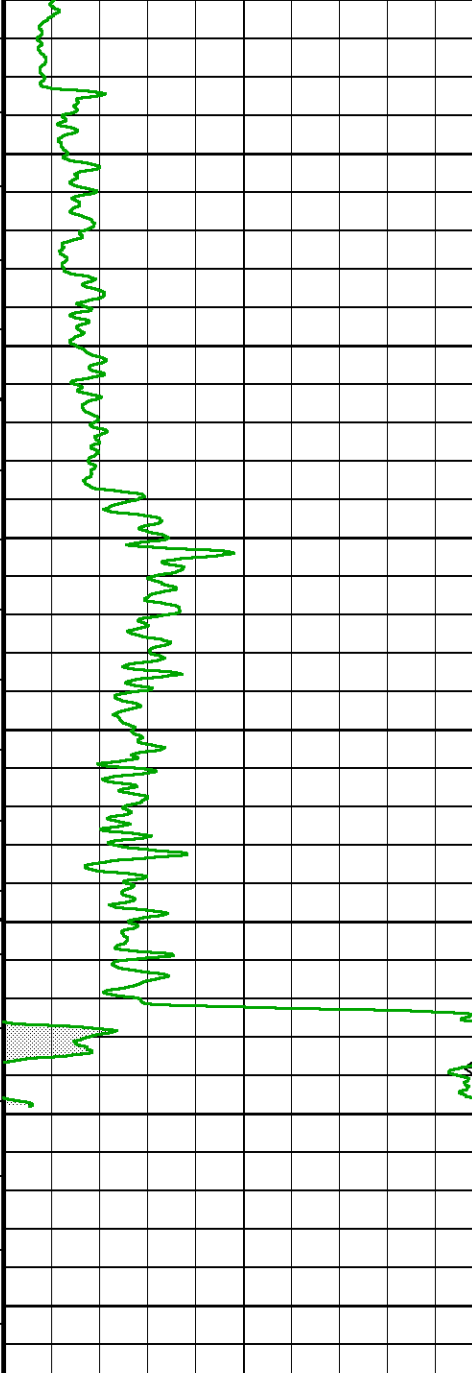

100  
153°  
5800  
154°  
5900  
153°  
FR  
6000  
0  
TD

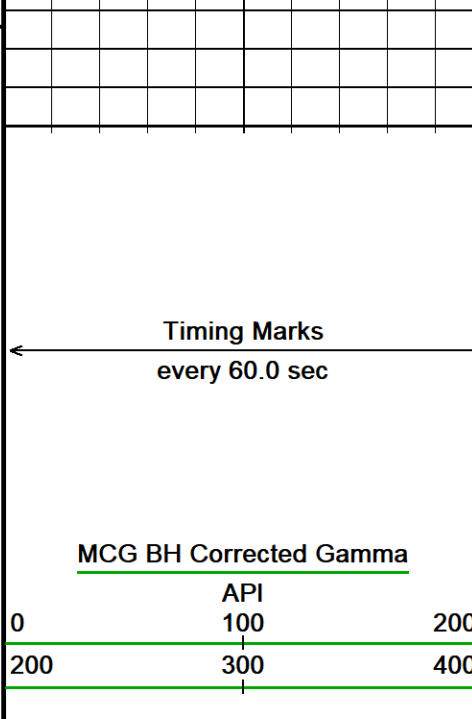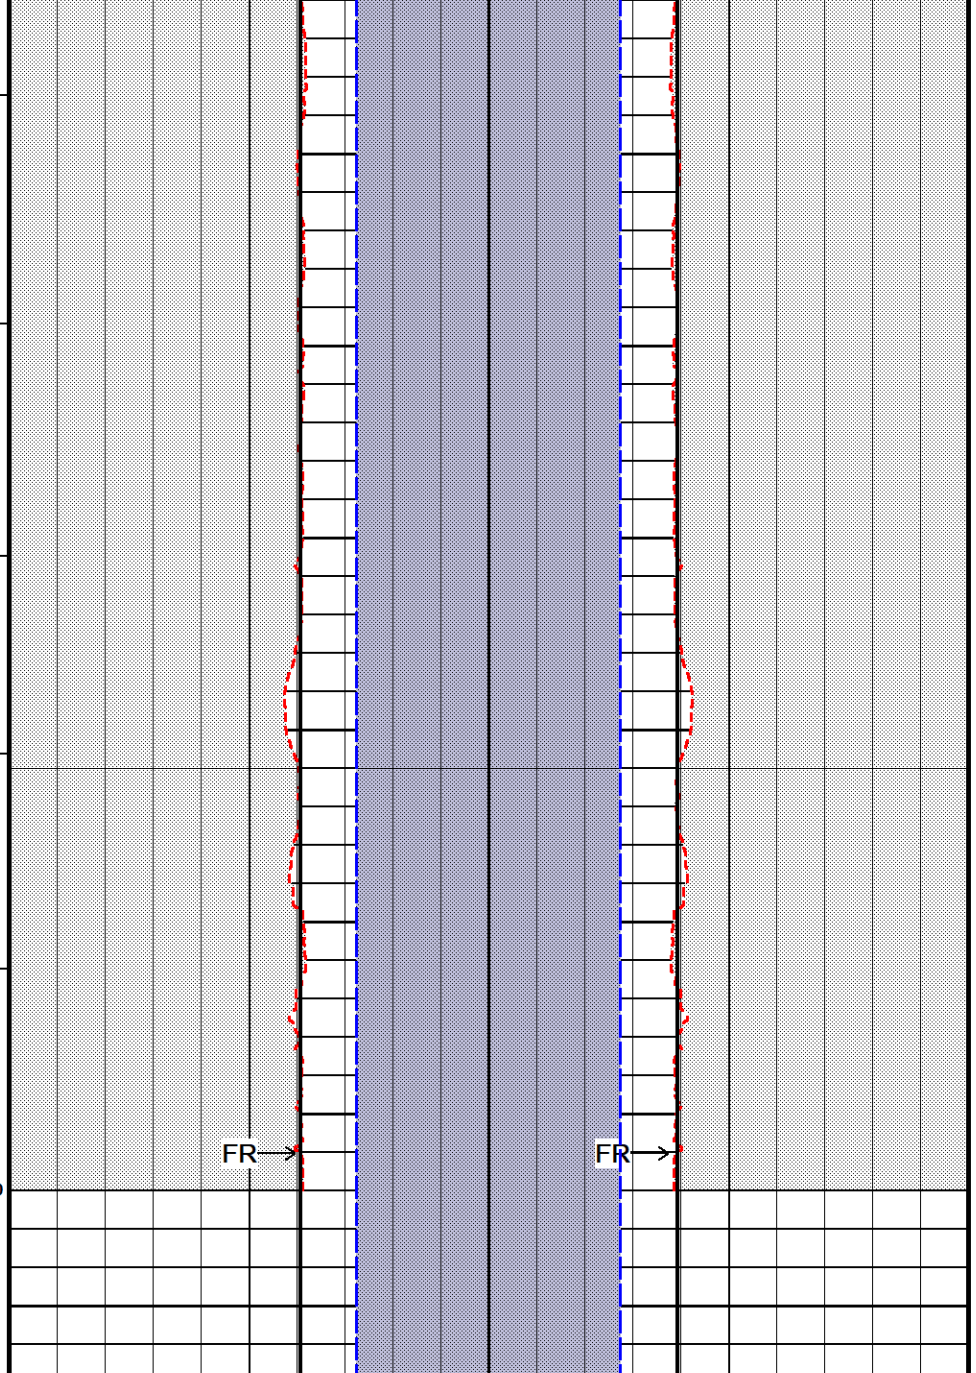

6100  
Depth  
in  
Feet  
  
Borehole  
Temp in  
deg F  
  
HVI  
every  
10 cu ft  
  
Annular  
Integral  
every  
10 cu ft

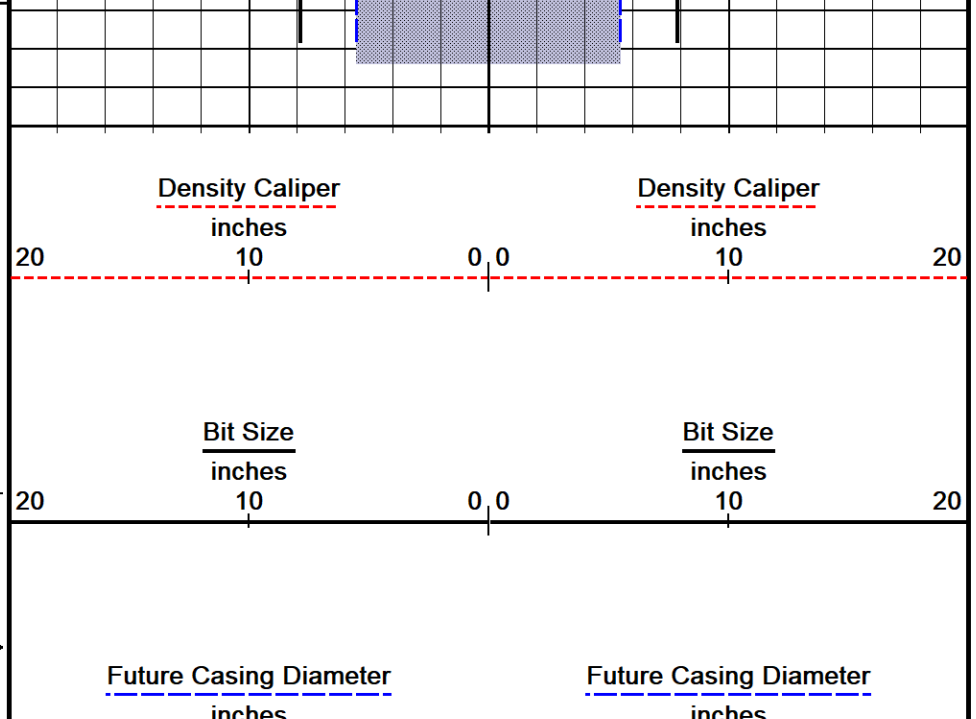




BEFORE SURVEY CALIBRATION				C:\Open Hole Logs\Trek Resources Inc\Travis #1-10\Main Pass.dta
General Constants All 000			Last Edited on 05-MAY-2023,10:12	
General Parameters				
Mud Resistivity	2.200	ohm-metres		
Mud Resistivity Temperature	75.000	degrees F		
Water Level	0.000	feet		
Borehole Fluid Processing	Wet Hole			
Hole/Annular Volume and Differential Caliper Parameters				
HVOL Method	Single Caliper			
HVOL Caliper 1	Density Caliper			
HVOL Caliper 2	N/A			
Annular Volume Diameter	5.500	inches		
Caliper for Differential Caliper	Density Caliper			
Rwa Parameters				
Porosity used	Limestone Density Por.			
Resistivity used	Array Ind. One Res Rt			
RWA Constant A	1.000			
RWA Constant M	2.000			
SW/APOR Tool Source	0.000			
Down-hole Tension Calibration SMS 0			Field Calibration on 25-APR-2023 19:13	
Reading No	Measured	Calibrated (lbs)		
1	15436.25	0.00		
2	16961.69	516.00		
High Resolution Temperature Constants MCG-E.A 551				
Pre-filter Length	11			
Gamma Calibration MCG-E.A 551			Field Calibration on 20-APR-2023 13:00	
	Measured	Calibrated (API)		
Background	52	35		
Calibrator (Gross)	860	568		
Calibrator (Net)	807	533		
Gamma Calibration Tolerances MCG-E.A 551				
Ratio	1.515	<div><div>1.40</div><div>1.475</div><div>1.55</div></div>	Counts/API	
Gamma Constants MCG-E.A 551			Last Edited on 05-MAY-2023,08:58	
Gamma Calibrator Number MCG 111				
GRC-M Calibrator Jig in Use?	NO			
Inactive Background Jig in Use?	NO			
Mud Density	1.09	gm/cc		
Caliper Source for Processing	Density Caliper			
Tool Position	Eccentred			
Potassium Equivalence	Chloride			
K Mud Concentration	0.00	%		
Caliper Calibration MMR-C.A 257			Base Calibration on 01-MAY-2023 11:12	
Base Calibration				
Reading No	Measured	Calibrator Size (in)		



1	13341	5.96
2	16469	7.97
3	19652	9.86
4	23513	11.88
5	0	0.00
6	N/A	N/A

Field Calibration

## Caliper Calibration Tolerances MMR-C.A 257

Short Arm Field Cal. 0.00  in

## Micro-Resistivity Caliper Constants MMR-C.A 257

Sonde Configuration Resistivity Mode









## Micro Normal and Micro Inverse Calibration MMR-C.A 257

Base Calibration on 01-MAY-2023 11:02

Field Check on 01-MAY-2023 11:04

	Resistor 1 (ohm)	Resistor 2 (ohm)
	10.0	50.0
Base Calibration		
	Measured	Calibrated (ohm-m)
Micro Normal	9.9 49.4	5.1100 25.5500
Micro Inverse	9.9 49.4	3.3800 16.9000
Channel	Base Check (ohm-m)	Field Check (ohm-m)
Micro Normal	94.3	94.3
Micro Inverse	62.3	62.3

## Micro Normal & Micro Inverse Calibration Tolerance MMR-C.A 257

Micro Normal Res. 1	9.9		ohm	Micro Normal Res. 2	49.4		ohm
Micro Inverse Res. 1	9.9		ohm	Micro Inverse Res. 2	49.4		ohm
Micro Normal Base Check	94.3		ohm-m				
Micro Inverse Base Check	62.3		ohm-m				
Micro Normal Field Check	94.3		ohm-m				
Micro Inverse Field Check	62.3		ohm-m				

## Micro Normal and Micro Inverse Constants MMR-C.A 257

Last Edited on 09-FEB-2023,09:37

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159
Micro Normal K Factor	0.5110
Micro Inverse K Factor	0.3380
Standoff Offset	0.0000 inches




## Micro Laterolog Calibration MMR-C.A 257

Base Calibration on 31-MAY-2021 11:30

Field Check on 31-MAY-2021 11:32

	Resistor 1 (ohm)		Resistor 2 (ohm)	
	0.0		10000.0	
Base Calibration				
	Measured		Calibrated (ohm-m)	
	Ref 1	Ref 2	Ref 1	Ref 2
	0.0	9858.5	0.0	128.0
	Base Check (ohm-m)		Field Check (ohm-m)	
	5.2		5.2	

## Micro Laterolog Calibration Tolerances MMR-C.A 257

Ref 2	9858.5		ohm
Base Check	5.2		ohm-m
Field Check	5.2		ohm-m



Pad Type	6 in Solid Nylon B23059	
Standoff Offset	0.5000	inches
Micro Laterolog K Factor	0.0128	
Micro Laterolog Rm K Factor	N/A	
Mudcake Thickness Correction Constants		
Mud Cake Source	Differential Caliper	
Mud Cake Thickness	N/A	inches
Mud Cake Thickness Caliper	MMR Caliper	
Mud Cake Resistivity	0.0470	ohm-m
Mud Cake Resistivity Temp.	72.00	Deg F
Mud Cake Resistivity Source	Temperature Corr	
Temp. for Rmc Corr.	MCG External Temperature	

Neutron Calibration MDN-C.A 399				Base Calibration on 19-APR-2023 11:09	
				Field Check on 19-APR-2023 11:27	
Base Calibration					
		Measured		Calibrated (cps)	
	Near	Far		Near	Far
	3110	96		3714	110
Ratio		32.539		33.764	
Field Calibrator at Base					
				Calibrated (cps)	
				2014	2960
Ratio				0.681	
Field Check					
				Calibrated (cps)	
				2016	2970
Ratio				0.679	

Neutron Calibration Tolerances MDN-C.A 399			
Ratio	32.539	<div> <div>-5%</div> <div>33</div> <div>+5%</div> </div>	
Base Check	0.681	<div> <div>0.65</div> <div>0.7</div> <div>0.75</div> </div>	
Field Check	0.679	<div> <div>0.661</div> <div>0.681</div> <div>0.701</div> </div>	

Neutron Constants MDN-C.A 399		Last Edited on 19-APR-2023,10:51	
Neutron Source Id	N-1054		
Neutron Jig Number	NJ5239		
Air Hole Processing	Modified Ratio		
Caliper Source for Processing	Bit Size		
Stand-off	0.00	inches	
Mud Density	1.00	gm/cc	
Limestone Sigma	7.10	cu	
Sandstone Sigma	4.26	cu	
Dolomite Sigma	4.70	cu	
Formation Pressure Source	None		
Formation Pressure	N/A	kpsi	
Temperature Source	None		
Temperature	N/A	degrees F	
Mud Salinity	0.00	kppm	
Salinity Correction	Not Applied		
Formation Fluid Salinity Source	None		
Formation Fluid Salinity	N/A	kppm	
Barite Mud Correction	Not Applied		

Caliper Calibration MVC-A.A 146			Base Calibration on 02-MAR-2023 08:28
			Field Calibration on 05-MAY-2023 10:04
Base Calibration			
Reading No	Measured	Calibrator Size (in)	
1	10494	4.01	
2	17351	5.96	
3	24456	7.97	
4	31239	9.86	
5	38707	11.88	



5	38707	11.88
6	N/A	N/A
Field Calibration	Measured Caliper (in) 8.22	Actual Caliper (in) 8.10
FE Calibration MFE-C.A 399		Base Calibration on 20-APR-2023 09:32
	Resistor 1 (ohm) 0.0	Resistor 2 (ohm) 1000.0
Base Calibration	Measured	Calibrated (ohm-m)
Reference 1	0.0	0.0
Reference 2	964.6	126.8
Base Check		281.2
Field Check		
FE Constants MFE-C.A 399		Last Edited on 05-MAY-2023,10:08
Running Mode	No Sleeve	
MFE K Factor	0.1268	
Borehole Correction Constants		
Sonde Position	1.0	inches
Hole Size Source	Density Caliper	
Hole Size Constant Value	N/A	inches
Rm Source	Global Value: Constant Temperature	
Temp. for Rm Corr.	N/A	
Induction Calibration MAI-C.A 490		Factory Loop Calibration 17-DEC-2012,20:04
Factory Loop Calibration		
High Conductivity Reference Resistor	3.3 ohm	
Low Conductivity Reference Resistor	333.3 ohm	
	Measured Signal (unitless)	Reference Conductivity (mmho/m)
Array	Low High	Low High
1 (near)	15.2 455.2	9.3 966.2
2	5.9 373.9	7.6 821.4
3	3.7 251.6	5.2 566.0
4 (far)	1.8 128.7	2.6 279.2
Array Temperature	75.6	Deg F
Tool Checks	10-MAY-2022 15:40	
	Factory Reference (mmho/m)	Before Survey (mmho/m)
Array	Low High	Low High
1 (near)	-2.2 2114.9	
2	14.0 1921.9	
3	14.0 1678.9	
4 (far)	10.3 1145.1	
Array Temperature	89.0	0.0 Deg F
Tool Zero Corrections		
Array		
1 (near)	0.0	mmho/m
2	0.0	mmho/m
3	0.0	mmho/m
4 (far)	0.0	mmho/m
Induction Constants MAI-C.A 490		Last Edited on 05-MAY-2023,09:03
Induction Model	RtAP	
Borehole Correction Constants		
Tool Centred	No	
Hole Size Source	Density Caliper	
Hole Size Constant Value	N/A	inches
Stand-off Type	Fins	



Stand-off		1.00	inches
Number of Fins on Stand-off		6.0000	
Stand-off Fin Angle		60.00	degrees
Stand-off Fin Width		0.5000	inches
Rm Source	Global Value: Temperature Corrected		
Temp. for Rm Corr.	MCG External Temperature		
Borehole Correction Method	Default		
Squasher Start		0.0020	mhos/metre
Squasher Offset		N/A	mhos/metre
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000
Calibration Site Corrections			
Channel 1		0.00	mmhos/metre
Channel 2		0.00	mmhos/metre
Channel 3		0.00	mmhos/metre
Channel 4		0.00	mmhos/metre
Symmetrised Receiver Gains			
Receiver 1		1.00	
Receiver 2		1.00	
Receiver 3		1.00	
Receiver 4		1.00	
Apparent Porosity and Water Saturation Constants			
Archie Constant (A)		1.00	
Cementation Exponent (M)		2.00	
Saturation Exponent (N)		2.00	
Saturation of Water for Apor		100.00	percent
Resistivity of Water for Apor and Sw		0.05	ohm-m
Resistivity of Mud Filtrate for Sw		0.00	ohm-m
Source for Rt		0.00	
Source for Rxo		0.00	

High Resolution Temperature Calibration MAI-C.A 490			Field Calibration on 17-DEC-2012,07:08
	Measured	Calibrated(Deg C)	
Lower	10.00	10.00	
Upper	100.00	100.00	

High Resolution Temperature Constants MAI-C.A 490			Last Edited on 17-DEC-2012,20:09
Pre-filter Length	11		

Photo Density Calibration MPD-C.J 438				Base Calibration on 06-APR-2023 14:01	
				Field Check on 06-APR-2023 14:07	
Density Calibration					
Base Calibration		Measured		Calibrated (sdu)	
		Near	Far	Near	Far
Background		973	1140		
Reference 1		44856	20382	59814	31141
Reference 2		18117	2083	24963	2524
Field Check at Base					
		972.8	1140.5		
Field Check					
		974.0	1140.0		
PE Calibration					
Base Calibration		Measured		Calibrated	
	WS	WH	Ratio	Ratio	
Background	183	877			
Reference 1	20347	44708	0.460	0.368	



Reference 2	5757	18012	0.325	0.273
Field Check at Base	182.7	877.2		
Field Check	182.8	875.9		

Photo Density Calibration Tolerances MPD-C.J 438

Near Density Ratio	2.56	<div> <div>-5%</div> <div>2.52</div> <div>+5%</div> </div>	Far Density Ratio	20.41	<div> <div>-5%</div> <div>21.00</div> <div>+5%</div> </div>
PE Calibration	0.131	<div> <div>0.089</div> <div>0.110</div> <div>0.131</div> </div>			
Near Den. Field Check	974.0	<div> <div>-3%</div> <div>972.8</div> <div>+3%</div> </div>	Far Den. Field Check	1140.0	<div> <div>-3%</div> <div>1140.5</div> <div>+3%</div> </div>
PE WS Field Check	182.8	<div> <div>-6%</div> <div>182.7</div> <div>+6%</div> </div>	PE WH Field Check	875.9	<div> <div>-6%</div> <div>877.2</div> <div>+6%</div> </div>

Density Constants MPD-C.J 438

Last Edited on 05-MAY-2023,08:57

Density Source Id	H79956B	
Nylon Calibrator Number	DNCE 687	
Aluminium Calibrator Number	DACD 526	
Density Shoe Profile	8 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.09	gm/cc
Mud Density Type	Non-Barite	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	
Precision Enhanced Density Processing	Applied	
Matrix Density (gm/cc)	Depth (ft)	
2.71	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	

Caliper Calibration MPD-C.J 438

Base Calibration on 06-APR-2023 14:51  
Field Calibration on 05-MAY-2023 10:02

Base Calibration		
Reading No	Measured	Calibrator Size (in)
1	15285	4.01
2	23599	5.96
3	32288	7.97
4	40480	9.86
5	49552	11.88
6	N/A	N/A
Field Calibration		
	Measured Caliper (in)	Actual Caliper (in)
	8.25	8.10

Caliper Calibration Tolerances MPD-C.J 438

Long Arm Field Cal.	8.25	<div> <div>7.70</div> <div>8.10</div> <div>8.50</div> </div>	in
---------------------	------	--	----

Dipole Constants and Gains MRD-C.A 230

Logging Mode	Standard	
Semblance Parameters		
Fluid Slowness	189	micro-sec/ft
Monopole Window Width	250	microseconds
Monopole Filter Lower Limit	5.0	kHz
Monopole Filter Upper Limit	15.0	kHz



Monopole Filter Upper Limit	15.0	kHz
Monopole Slowness Start	30	micro-sec/ft
Monopole Slowness Stop	190	micro-sec/ft
Monopole Edge Detection Discriminator	0	
Dipole Window Width	1000	microseconds
Dipole Filter Lower Limit	1.0	kHz
Dipole Filter Upper Limit	5.0	kHz
Dipole Slowness Start	40	micro-sec/ft
Dipole Slowness Stop	440	micro-sec/ft
Dipole Edge Detection Discriminator	0	
Stoneley Window Width	1200	microseconds
Stoneley Filter Lower Limit	0.5	kHz
Stoneley Filter Upper Limit	2.5	kHz
Stoneley Slowness Start	40	micro-sec/ft
Stoneley Slowness Stop	540	micro-sec/ft
Stoneley Edge Detection Discriminator	0	
Tracking Boxes Enabled In Processing	YES	
Real-Time Waveforms Used as Semblance Input		
Receiver Station 1	YES	
Receiver Station 2	YES	
Receiver Station 3	YES	
Receiver Station 4	YES	
Memory Waveforms Used as Semblance Input		
Receiver Station 1	YES	
Receiver Station 2	YES	
Receiver Station 3	YES	
Receiver Station 4	YES	
Receiver Station 5	YES	
Receiver Station 6	YES	
Receiver Station 7	YES	
Receiver Station 8	YES	
Monopole Transit Time Edge Detection Discriminator	4.00	

## DOWNHOLE EQUIPMENT

C:\Open Hole Logs\Trek Resources Inc\Travis #1-10\Main Pass.dta

Cablehead, 11 pin  
CBH-CC 348 LG: 2.40 ft WT: 24.3 lb OD: 2.244 in

11C-11B Compact Tool Adaptor  
MTA-KA 189 LG: 1.53 ft WT: 13.2 lb OD: 2.240 in

Compact Swivel Head Adaptor  
SHA-J.B 636 LG: 2.30 ft WT: 22.0 lb OD: 2.244 in


Compact Comms Gamma  
MCG-E.A 551 LG: 8.70 ft WT: 63.9 lb OD: 2.244 in

Compact Micro-Resistivity  
MMR-C.A 257 LG: 8.59 ft WT: 81.6 lb OD: 4.882 in

Compact Neutron  
MDN-C.A 399 LG: 5.04 ft WT: 50.7 lb OD: 2.244 in

Compact Density/Caliper  
MPD-C.J 438 LG: 9.59 ft WT: 90.4 lb OD: 2.449 in

Compact Vee Arm Caliper

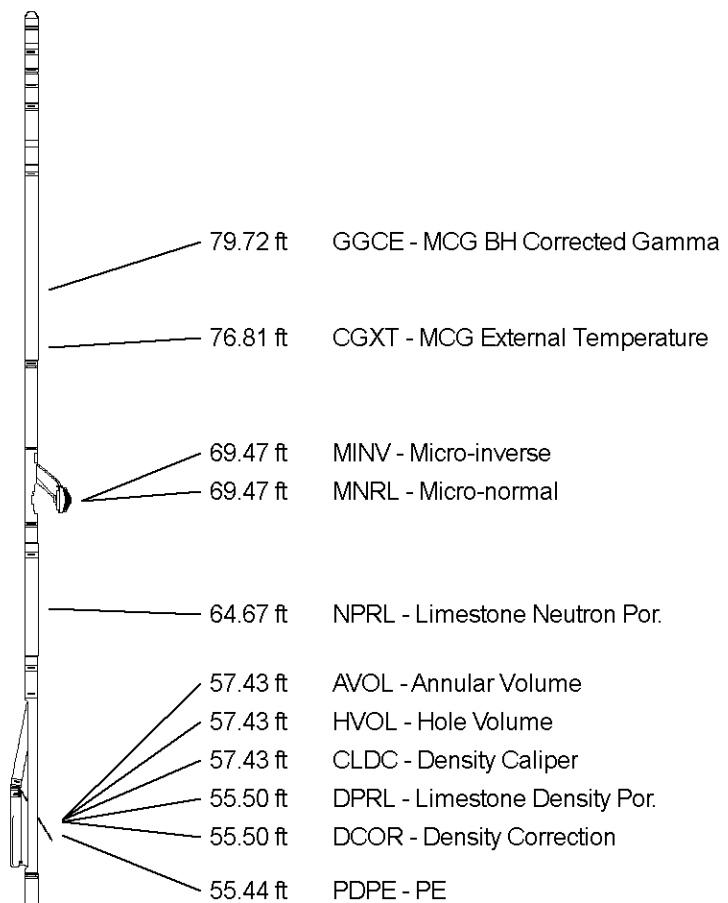

MVC-A.A 146 LG: 8.06 ft WT: 61.7 lb OD: 2.244 in

Compact Knuckle Joint  
SKJ-E.B 694 LG: 2.17 ft WT: 24.3 lb OD: 2.244 in

Compact Dipole Memory  
MDM-C.A 211 LG: 4.48 ft WT: 39.7 lb OD: 2.244 in

Compact Dipole Receiver  
MRD-C.A 230 LG: 8.89 ft WT: 88.2 lb OD: 2.244 in

Compact Dipole Transmitter  
MTD-C.A 230 LG: 12.63 ft WT: 110.2 lb OD: 2.244 in

Compact Focussed Electric  
MFE-C.A 399 LG: 6.05 ft WT: 48.5 lb OD: 2.244 in

Compact Induction  
MAI-C.A 490 LG: 10.81 ft WT: 48.5 lb OD: 2.244 in

Total Length: 91.22 ft Weight: 767.2 lb



27.71 ft MCDT - Compressional Delta T RT  
27.71 ft SEMB - Monopole Semblance RT

13.91 ft FEFE - Shallow FE

3.34 ft R20O - Array Ind. One Res 20  
3.34 ft R60O - Array Ind. One Res 60  
3.34 ft R40O - Array Ind. One Res 40  
3.34 ft R30O - Array Ind. One Res 30  
3.34 ft R85O - Array Ind. One Res 85  
3.34 ft RTAO - Array Ind. One Res Rt

0.23 ft SPCG - Spontaneous Potential

Tool Zero (0.13ft from bottom)

-0.13 ft SMTU - DST Uphole Tension

All measurements relative to tool zero.

COMPANY	NAVEX RESOURCES LLC
WELL	TRAVIS #1-10
FIELD	WILDCAT
PROVINCE/COUNTY	KIT CARSON
COUNTRY/STATE	COLORADO

Elevation Kelly Bushing	4378.00	feet
Elevation Drill Floor	4377.00	feet
Elevation Ground Level	4365.00	feet

Last Reading	653.00	feet
First Reading	6011.00	feet
Depth Driller	6069.00	feet
Depth Logger	6068.00	feet

**WIREFLINE**  
**LOGGING**  
**SOLUTIONS**

BOREHOLE PROFILE



