Company: CONOCO INC.
Well: Conoco Bend Unit 1-10
Field: WILDCAT
County: LAFAYETTE
State: LOUISIANA
Location: 660' FSL & 1980' FEL
Elevation: K.B. 5011 DF. GL. 5008
Permanent Datum: GL
Log Measured From: KB
Drilling Measured From: KB
Date: 10-14-80
Run No.: ONE
Depth-Driller: 5000
Depth-Logger: 4995
Bottom Log Interval: 4995
Top Log Interval: SURFACE
Casing-Driller: 9 5/8 @ 1200
Casing-Logger: NONE
Bit Size: 8 1/2
Type Fluid in Hole: WATER
Dens. / Visc.: 8.4 / 28
pH / Fluid Loss: 10.0 / NONE
Source of Sample: FLOWLINE
Rm @ Meas. Temp.: .4 @ 80°F
Rmf @ Meas. Temp.: .4 @ 80°F
Rmc @ Meas. Temp.: .4 @ 80°F
Source: Rmf / Rmc: MEASURED / MEASURED
Rm @ BHT: .4 @ 80°F
Time Since Circ.: 12 HRS
Max. Rec. Temp.: 80°F
Equipment Location: LAFAYETTE
Recorded By: J. BOLLINGER
Witnessed By: MR. BILL HAYES

	BOREHOLE RECORD			CASING RECORD			
No.	Bit	From	To	Size	Wgt.	From	To
1	8 1/2	0	5000	9 5/8	36	0	1200

	MUD RECORD						
No.	Type	Density	Viscosity	Fluid Loss	pH	Resistivity	Temp.
1	WATER	8.4	28	10.0	NONE	.4 @ 80°F	80°F

	MUD CAKE RECORD						
No.	Thickness	Resistivity	Temp.	Thickness	Resistivity	Temp.	Thickness	Resistivity	Temp.
1	2/32	.4 @ 80°F	80°F	2/32	.4 @ 80°F	80°F	2/32	.4 @ 80°F	80°F

GAMMA RAY	DEPTH	COMPRESSION WAVE AMPLITUDE	VARIABLE DENSITY
RADIATION INTENSITY INCREASING		AMPLITUDE UNDAMPED PIPE 0 14 100	FAST PIPE SIGNAL
		0 100	
			200 MICROSECONDS 1200

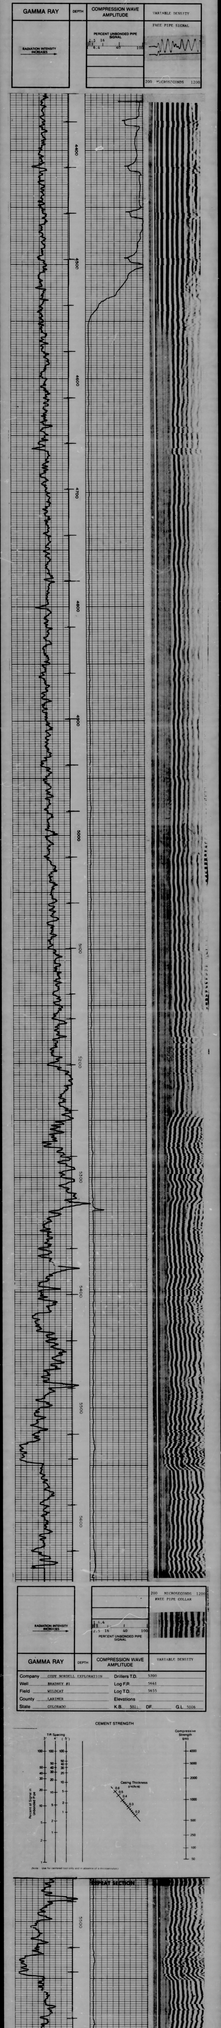

GAMMA RAY	DEPTH	COMPRESSION WAVE AMPLITUDE	VARIABLE DENSITY
RADIATION INTENSITY INCREASING		0 14 100 PERFECT UNDAMPED PIPE CASING	
		0 100	
			200 MICROSECONDS 1200

Company	CONOCO NEWFIELD EXPLORATION	Drillers T.D.	5000
Unit	BRANDT #1	Logg T.D.	4995
Field	WILDCAT	Log T.D.	5015
County	LAFAYETTE	Elevations	K.B. 5011 DF. GL. 5008
State	LOUISIANA		

CEMENT STRENGTH