


| | | | | | |
|-------|--------|-------|-----|------------|------|
| 100.0 | -1101+ | 200.0 | 0.2 | R(ILD) Ω-M | 2000 |
| 0 | GR API | 200 | 0.2 | R(ILM) Ω-M | 2000 |
| | | | 0.2 | R(LL) Ω-M | 2000 |

05-11-84 22:45 7663 5 281005 0042-31 0 0001-19 0

05-11-84 22:32 7340 5 281005 0042-31 0 0001-19 3

| | | | | | |
|-------|--------|-------|-----|------------|------|
| 100.0 | -1101+ | 200.0 | 0.2 | R(ILD) Ω-M | 2000 |
| 0 | GR API | 200 | 0.2 | R(ILM) Ω-M | 2000 |
| | | | 0.2 | R(LL) Ω-M | 2000 |

REPEAT SECTION

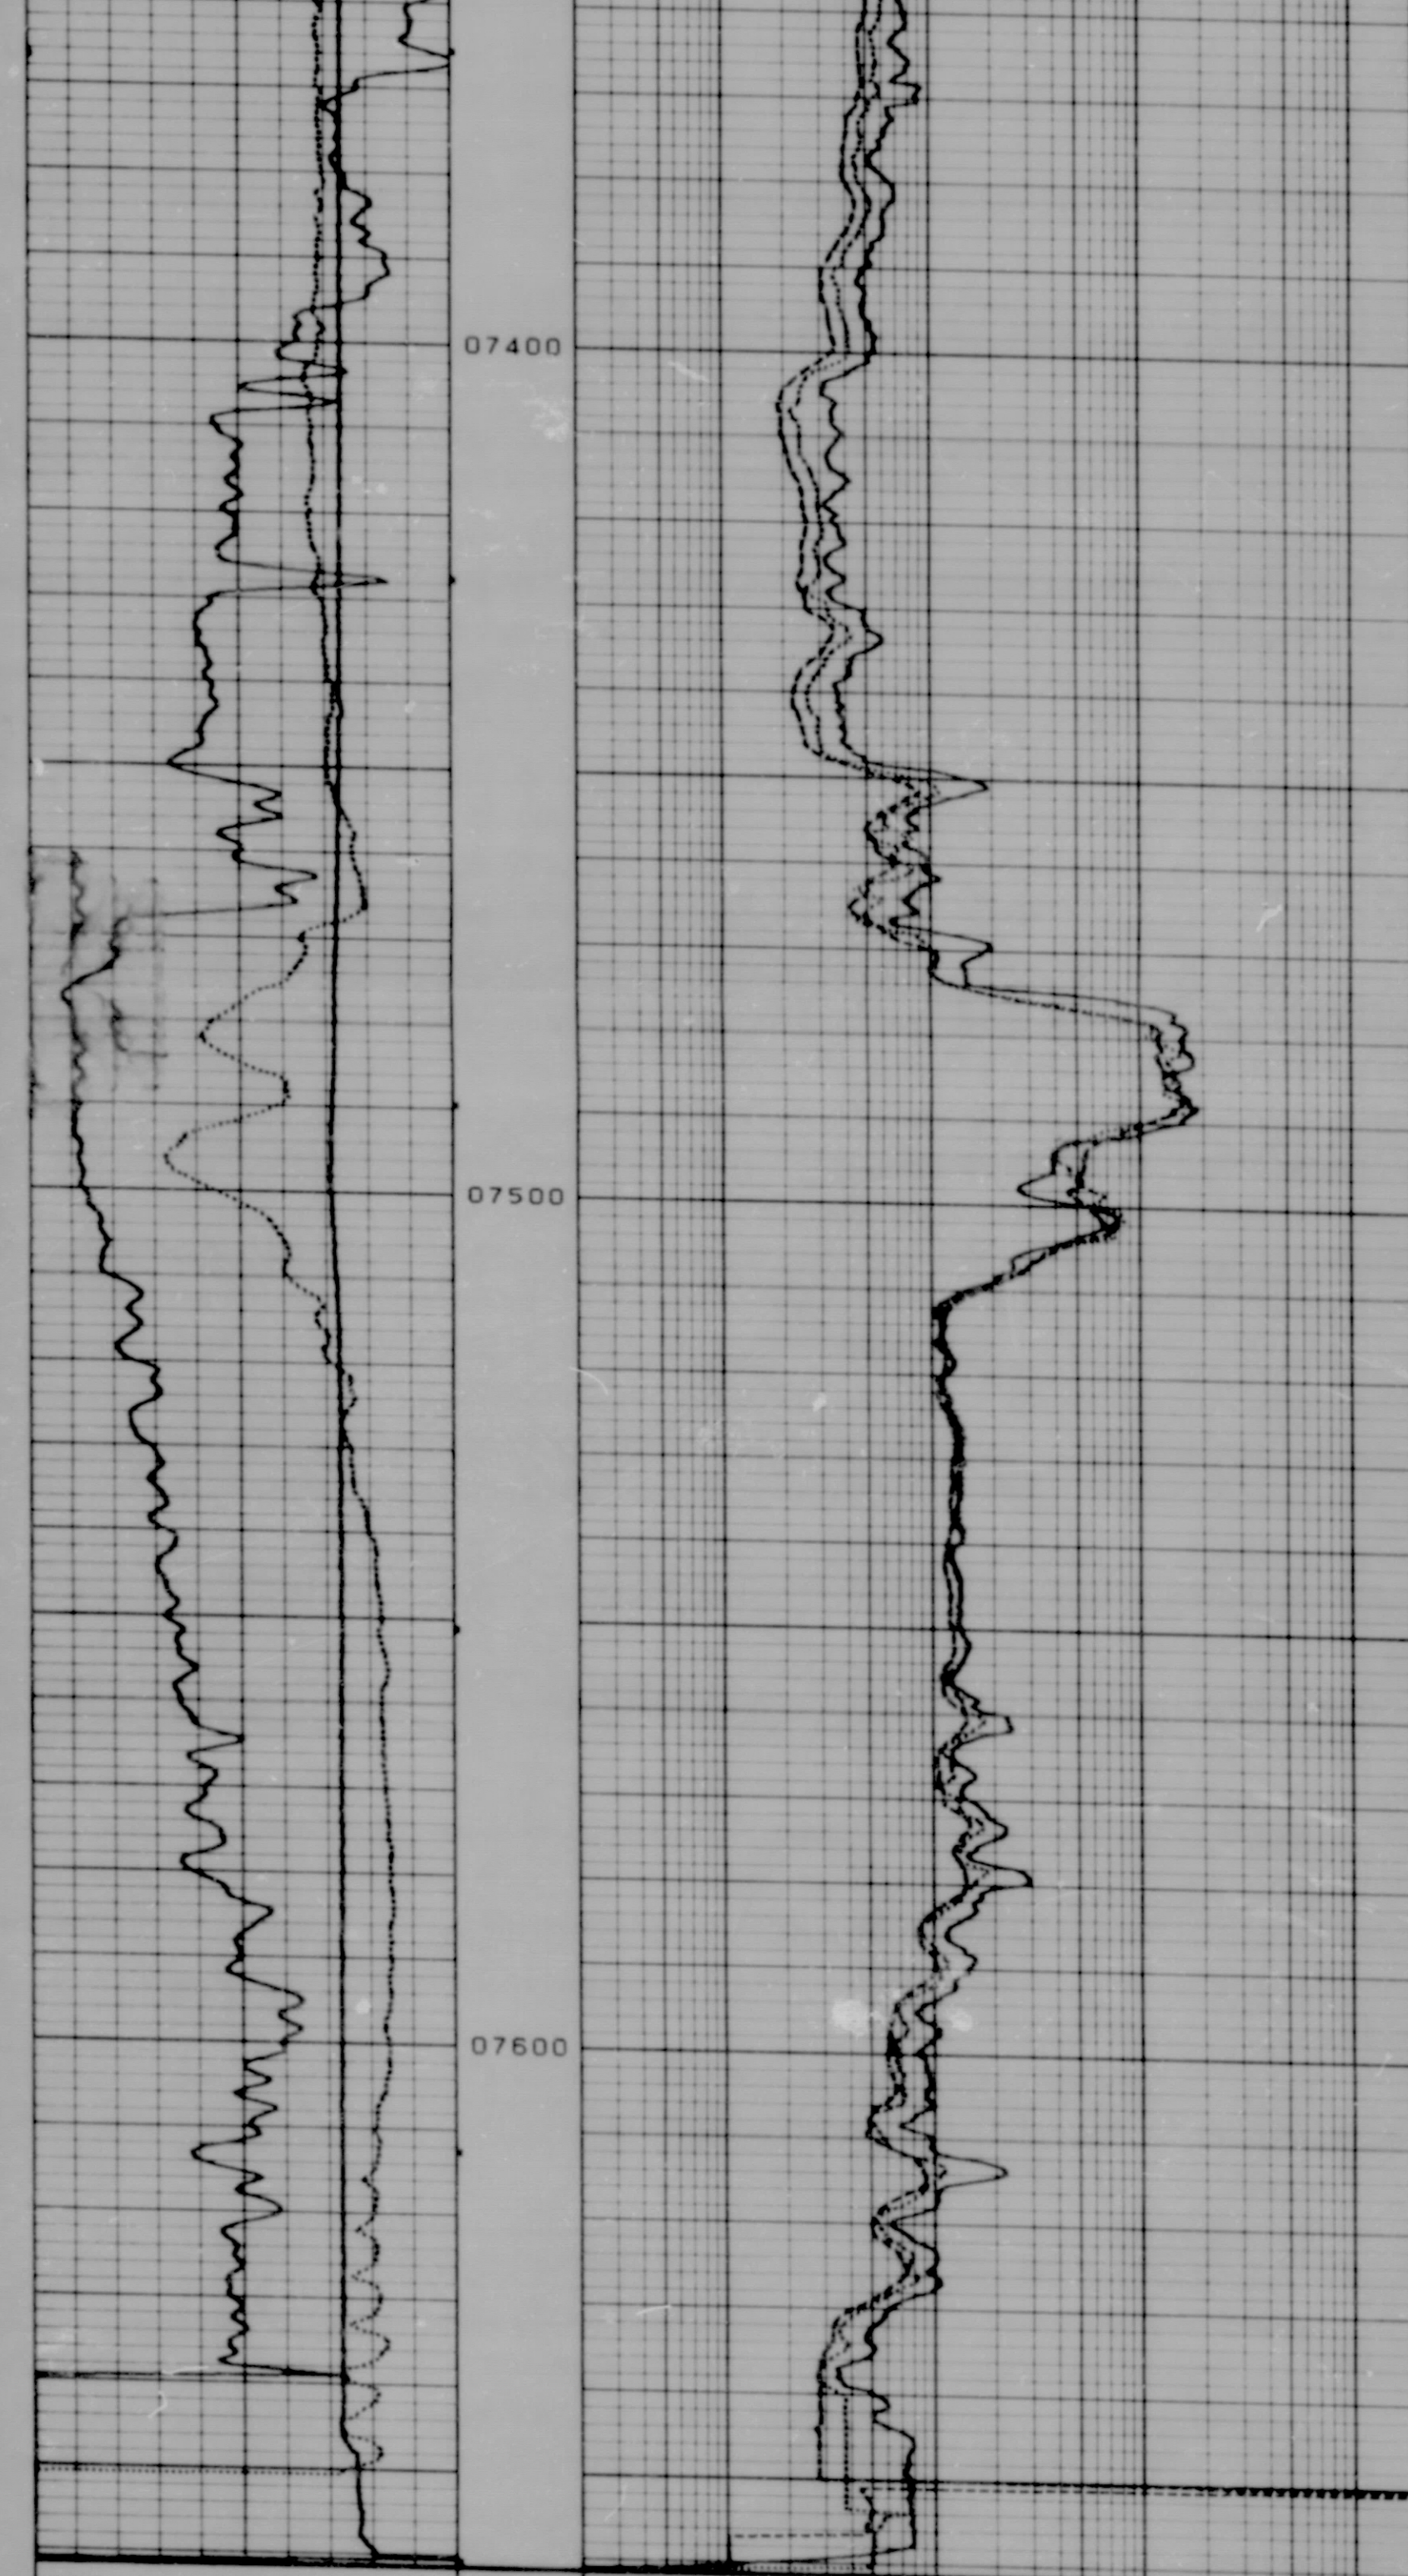

| | | | | | |
|-------|--------|-------|-----|------------|------|
| 100.0 | -1101+ | 200.0 | 0.2 | R(ILD) Ω-M | 2000 |
| 0 | GR API | 200 | 0.2 | R(ILM) Ω-M | 2000 |
| | | | 0.2 | R(LL) Ω-M | 2000 |

REPEAT SECTION

05-11-84 22:28 7661.0 281005 0042-31 0 0001-19 3

| DUAL INDUCTION AFTER SURVEY CALIBRATION | | | | | |
|---|--------|-------|--------|-------|-------|
| RESISTIVITY | | | | | |
| | LOW | | HIGH | | |
| | BEFORE | AFTER | BEFORE | AFTER | UNITS |
| ILD | 0.0 | -3.1 | 400.0 | 406.3 | MM/M |
| ILM | 0.0 | -0.6 | 464.0 | 469.7 | MM/M |
| LL | 2.0 | 0.8 | 500.0 | 500.0 | OHM-M |
| ILD SONDE ERROR CORRECTION: 4.4 MM/M | | | | | |
| ILM SONDE ERROR CORRECTION: -0.6 MM/M | | | | | |

| DUAL INDUCTION BEFORE SURVEY CALIBRATION | | | | | |
|--|----------|-------|------------|-------|-------|
| RESISTIVITY | | | | | |
| | MEASURED | | CALIBRATED | | |
| | LOW | HIGH | LOW | HIGH | UNITS |
| ILD | 3.1 | 410.8 | 0.0 | 400.0 | MM/M |
| ILM | 3.2 | 473.7 | 0.0 | 464.0 | MM/M |
| LL | 1.9 | 498.6 | 2.0 | 500.0 | OHM-M |
| ILD SONDE ERROR CORRECTION: 4.4 MM/M | | | | | |
| ILM SONDE ERROR CORRECTION: -0.6 MM/M | | | | | |

| GAMMA RAY | | | | |
|------------|------------|----------|-------|--|
| BACKGROUND | CALIBRATOR | STANDARD | UNITS | |

| DUAL INDUCTION SHOP CALIBRATION | | | | | | |
|---|-----------|---------------|----------|----------------|-------------|-------|
| DATE PERFORMED: 03-29-84 | | | | | | |
| PRIMARY CALIBRATION DATA | | | | | | |
| | ZERO(AIR) | LOOP CAL | INT ZERO | INT CAL | UNITS | |
| ILD | -8 | 621 | -1 | 638 | MV | |
| ILM | -1 | 724 | -2 | 732 | MV | |
| REFERENCE DATA | | | | | | |
| | LOOP STD | INTERNAL ZERO | CAL CAL | CALIBRATED LOW | HIGH | UNITS |
| ILD | 400 | -0.6 | 406.3 | 0.0 | 399.9 | MM/M |
| ILM | 464 | -1.2 | 469.2 | 0.0 | 463.9 | MM/M |
| ILD SONDE ERROR CORRECTION: 4.4 MM/M * ILM CONVR: 1.57 MV-MM/M | | | | | | |
| ILM SONDE ERROR CORRECTION: -0.6 MM/M * ILM CONVR: 1.56 MV-MM/M | | | | | | |
| Company <u>FARWELL COMPANY</u> | | | | | | |
| Well <u>HAYS NO. 1</u> | | | | | | |
| Field <u>WADENBAC</u> | | | | | | |
| | | | | GO FR | <u>7546</u> | |
| | | | | GO TO | <u>7548</u> | |
| | | | | DRLR TO | <u>7535</u> | |

| | | | |
|---------|-----------------|---------|----------|
| Company | PARSONS COMPANY | GO FR | 7666 |
| Well | HAYS NO. 1 | GO TD | 7668 |
| Field | WATKINBURG | DRLR TO | 7665 |
| County | WELD | State | COLORADO |
| | | Elev | |
| | | KB | 6865 |
| | | DF | 6866 |
| | | GL | 6830 |