

Great Western





Company: Great Western
Site: Raindance
Well: 30-54
Project: Weld County, Colorado (NAD 83)
Rig Name: Cade 22

MS Energy Services
WWW.MSENERGYSERVICES.COM

Planning: 936.442.2510 Fax: 936.442.2515
Operations: 936.442.2500 Fax: 936.442.2599

ANNOTATIONS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Vsect	Departure	Annotation
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	KOP, 2.00°/100' Build
600.00	8.00	327.61	598.70	23.54	-14.93	27.88	27.88	Begin 8.00° Tangent
1000.00	8.00	327.61	994.81	70.55	-44.76	83.55	83.55	Begin 2.00°/100' Build
1275.20	13.50	327.61	1265.08	113.89	-72.25	134.87	134.87	Begin 13.50° Tangent
5723.14	13.50	327.61	5590.04	991.00	-628.56	1173.53	1173.53	Begin 1.50°/100' Drop
6623.41	0.00	0.00	6482.00	1080.18	-685.12	1279.13	1279.13	Begin Vertical Hold
7647.41	0.00	0.00	7506.00	1080.18	-685.12	1279.13	1279.13	PBHL

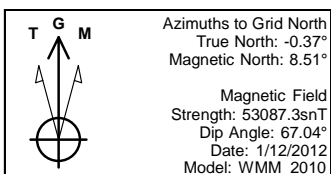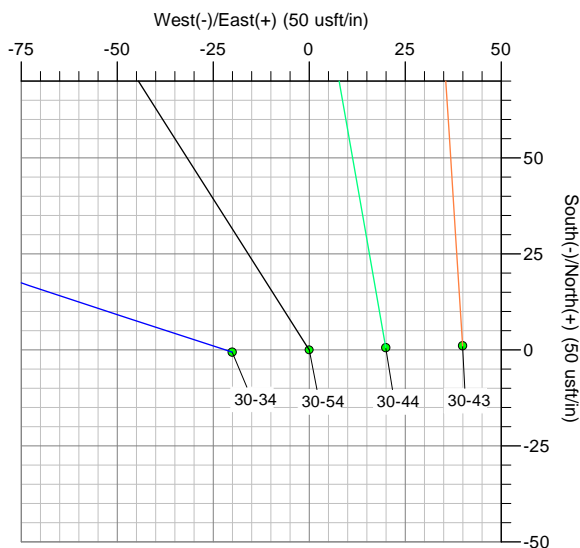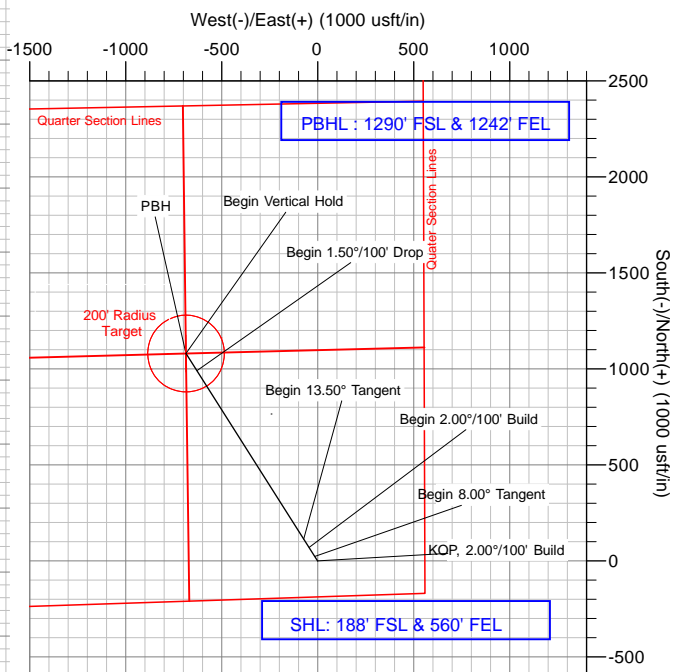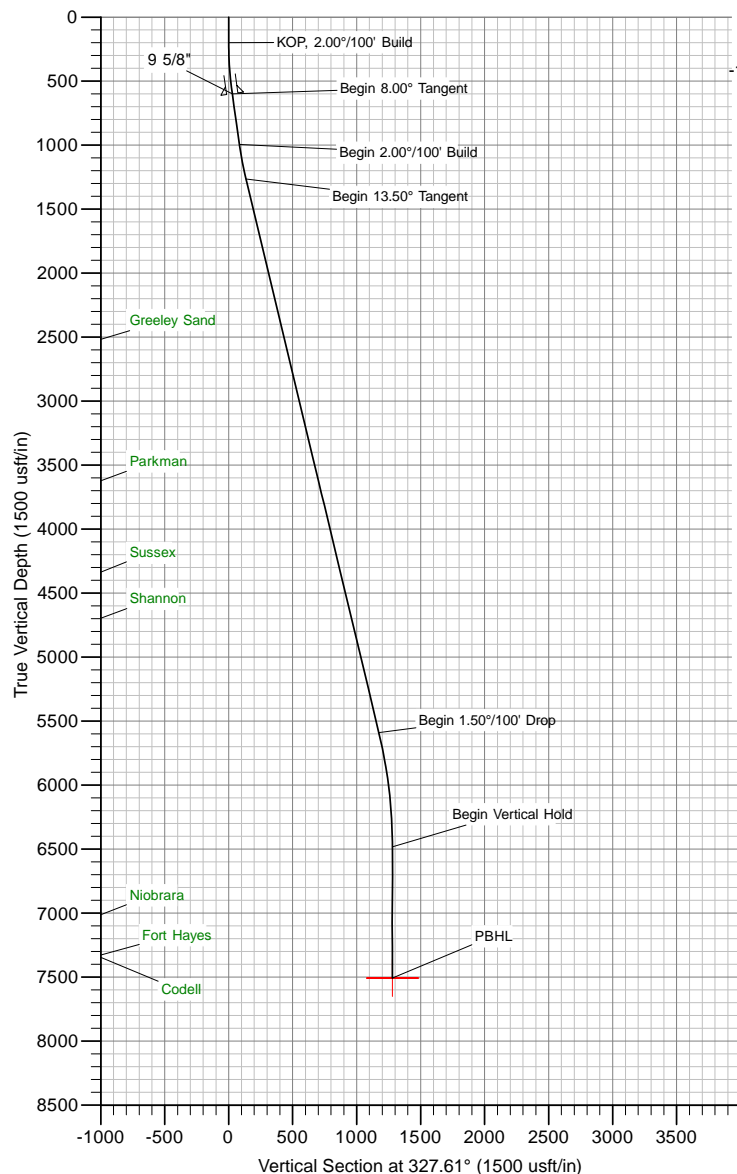

Created By: Marcus Mitcham
Date: 12:59, January 13 2012
Plan: Design #1

US State Plane 1983
Colorado Northern Zone


The customer should only rely on this document after independently verifying all paths, targets, coordinates, lease and hard lines represented. Any decisions made or wells drilled utilizing this or any other information supplied by MS Energy are at the sole risk and responsibility of the customer. MS Energy is not responsible for the accuracy of this schematic or the information contained herein.

Great Western

Company: Great Western
Site: Raindance
Well: 30-54
Project: Weld County, Colorado (NAD 83)
Rig Name: Cade 22

MS Energy Services
WWW.MSENERGYSERVICES.COM

Planning: 936.442.2510 Fax: 936.442.2515
Operations: 936.442.2500 Fax: 936.442.2599

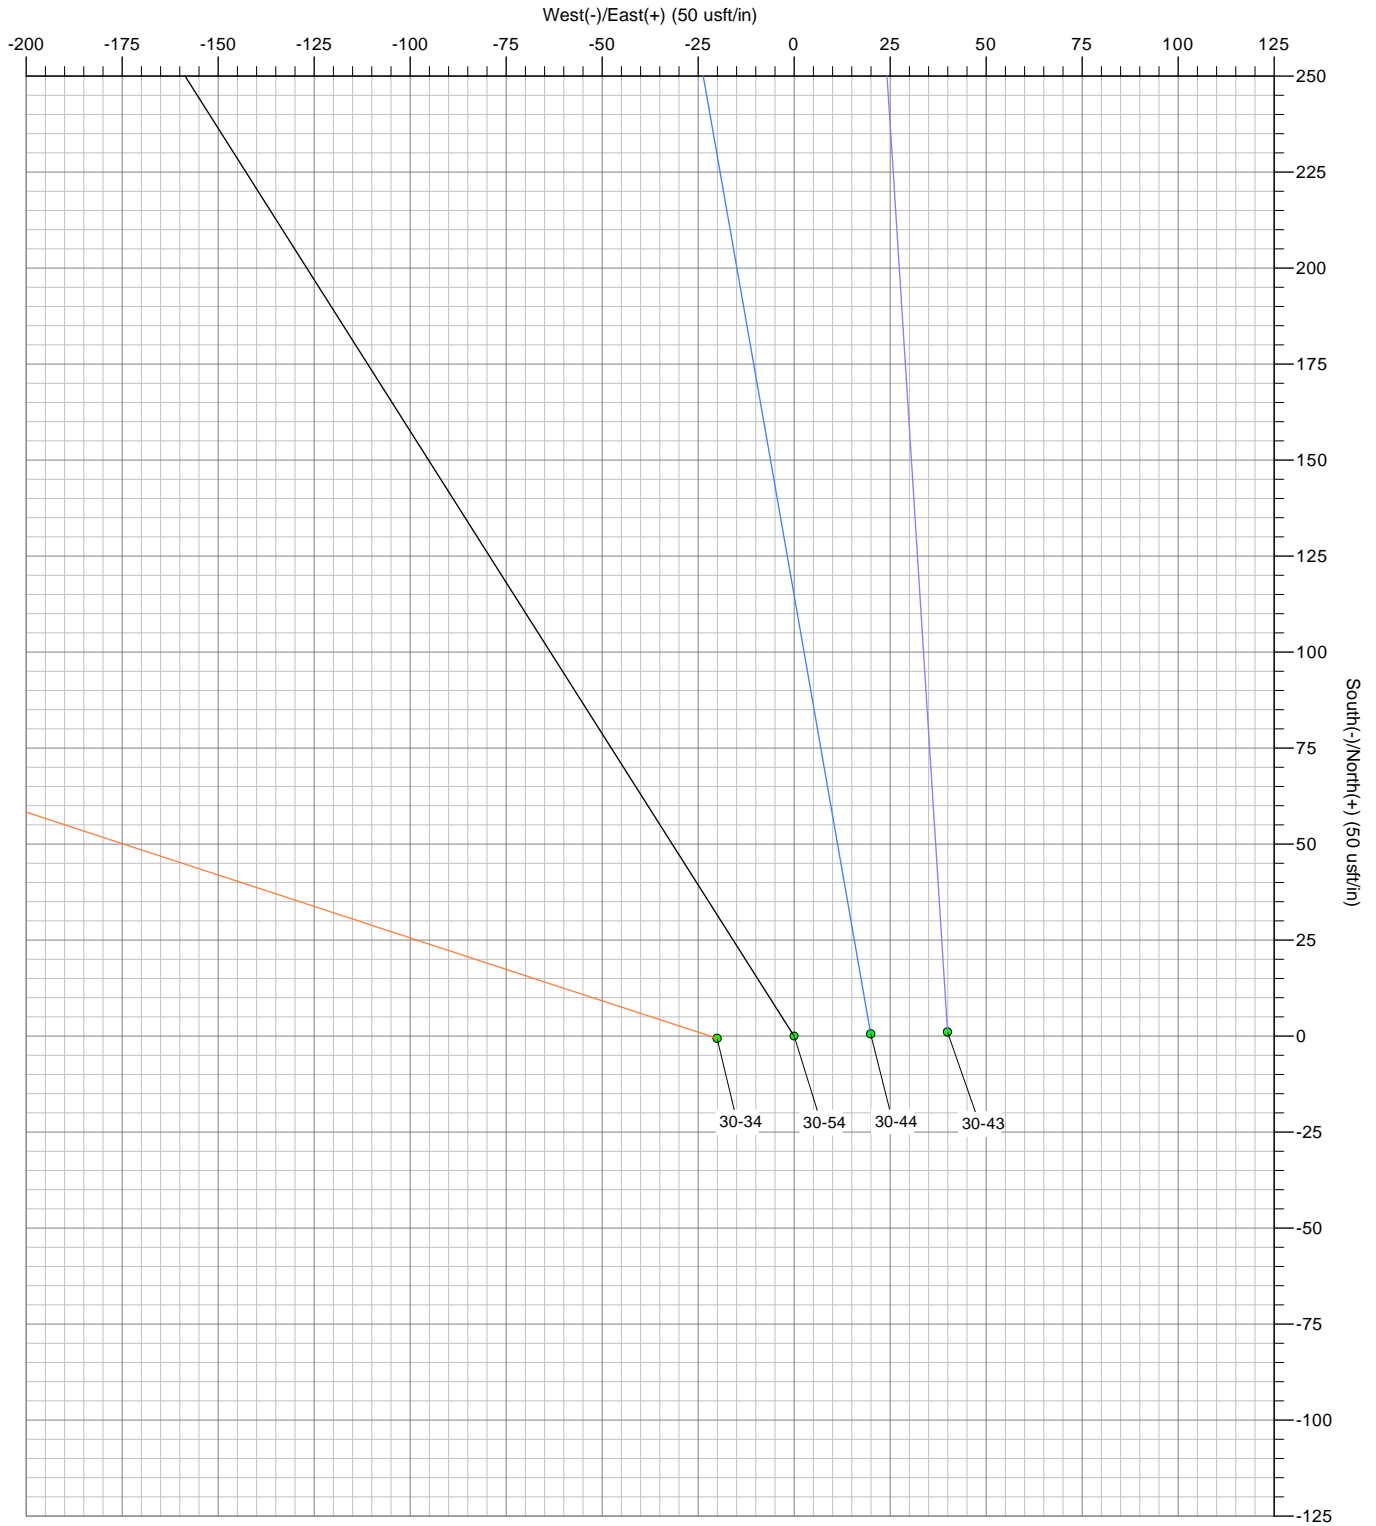

The customer should only rely on this document after independently verifying all paths, targets, coordinates, lease and hard lines represented. Any decisions made or wells drilled utilizing this or any other information supplied by MS Energy are at the sole risk and responsibility of the customer. MS Energy is not responsible for the accuracy of this schematic or the information contained herein.



Great Western

Weld County, Colorado (NAD 83)

Raindance

30-54

Wellbore #1

Plan: Design #1

Standard Planning Report

12 January, 2012

Database:	Local DB	Local Co-ordinate Reference:	Well 30-54
Company:	Great Western	TVD Reference:	WELL @ 4999.00usft (Cade 22)
Project:	Weld County, Colorado (NAD 83)	MD Reference:	WELL @ 4999.00usft (Cade 22)
Site:	Raindance	North Reference:	Grid
Well:	30-54	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	Weld County, Colorado (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Northern Zone		

Well	30-54			
Well Position	+N/-S	1,407,725.94 usft	Northing:	1,407,725.94 usft
	+E/-W	3,159,044.27 usft	Easting:	3,159,044.27 usft
Position Uncertainty		0.00 usft	Wellhead Elevation:	
			Latitude:	40° 27' 4.329 N
			Longitude:	104° 55' 42.640 W
			Ground Level:	4,985.00 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	WMM_2010	1/12/2012	8.87	67.04	53,087

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	327.61

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	
600.00	8.00	327.61	598.70	23.54	-14.93	2.00	2.00	0.00	327.61	
1,000.00	8.00	327.61	994.81	70.55	-44.76	0.00	0.00	0.00	0.00	
1,275.20	13.50	327.61	1,265.08	113.89	-72.25	2.00	2.00	0.00	0.01	
5,723.14	13.50	327.61	5,590.04	991.00	-628.56	0.00	0.00	0.00	0.00	
6,623.41	0.00	0.00	6,482.00	1,080.18	-685.12	1.50	-1.50	0.00	180.00	
7,647.41	0.00	0.00	7,506.00	1,080.18	-685.12	0.00	0.00	0.00	0.00	PBHL v1 - Raindance



Database:	Local DB	Local Co-ordinate Reference:	Well 30-54
Company:	Great Western	TVD Reference:	WELL @ 4999.00usft (Cade 22)
Project:	Weld County, Colorado (NAD 83)	MD Reference:	WELL @ 4999.00usft (Cade 22)
Site:	Raindance	North Reference:	Grid
Well:	30-54	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP, 2.00°/100' Build									
300.00	2.00	327.61	299.98	1.47	-0.93	1.75	2.00	2.00	0.00
400.00	4.00	327.61	399.84	5.89	-3.74	6.98	2.00	2.00	0.00
500.00	6.00	327.61	499.45	13.25	-8.41	15.69	2.00	2.00	0.00
600.00	8.00	327.61	598.70	23.54	-14.93	27.88	2.00	2.00	0.00
Begin 8.00° Tangent									
601.31	8.00	327.61	600.00	23.70	-15.03	28.06	0.00	0.00	0.00
9 5/8"									
700.00	8.00	327.61	697.73	35.29	-22.39	41.80	0.00	0.00	0.00
800.00	8.00	327.61	796.76	47.05	-29.85	55.71	0.00	0.00	0.00
900.00	8.00	327.61	895.78	58.80	-37.30	69.63	0.00	0.00	0.00
1,000.00	8.00	327.61	994.81	70.55	-44.76	83.55	0.00	0.00	0.00
Begin 2.00°/100' Build									
1,100.00	10.00	327.61	1,093.57	83.76	-53.13	99.19	2.00	2.00	0.00
1,200.00	12.00	327.61	1,191.73	99.87	-63.35	118.27	2.00	2.00	0.00
1,275.20	13.50	327.61	1,265.08	113.89	-72.25	134.87	2.00	2.00	0.00
Begin 13.50° Tangent									
1,300.00	13.50	327.61	1,289.19	118.78	-75.35	140.66	0.00	0.00	0.00
1,400.00	13.50	327.61	1,386.42	138.50	-87.85	164.01	0.00	0.00	0.00
1,500.00	13.50	327.61	1,483.66	158.22	-100.36	187.36	0.00	0.00	0.00
1,600.00	13.50	327.61	1,580.89	177.94	-112.87	210.72	0.00	0.00	0.00
1,700.00	13.50	327.61	1,678.13	197.66	-125.38	234.07	0.00	0.00	0.00
1,800.00	13.50	327.61	1,775.36	217.38	-137.88	257.42	0.00	0.00	0.00
1,900.00	13.50	327.61	1,872.60	237.10	-150.39	280.77	0.00	0.00	0.00
2,000.00	13.50	327.61	1,969.84	256.82	-162.90	304.12	0.00	0.00	0.00
2,100.00	13.50	327.61	2,067.07	276.54	-175.40	327.47	0.00	0.00	0.00
2,200.00	13.50	327.61	2,164.31	296.26	-187.91	350.82	0.00	0.00	0.00
2,300.00	13.50	327.61	2,261.54	315.97	-200.42	374.18	0.00	0.00	0.00
2,400.00	13.50	327.61	2,358.78	335.69	-212.93	397.53	0.00	0.00	0.00
2,500.00	13.50	327.61	2,456.01	355.41	-225.43	420.88	0.00	0.00	0.00
2,562.72	13.50	327.61	2,517.00	367.78	-233.28	435.53	0.00	0.00	0.00
Greeley Sand									
2,600.00	13.50	327.61	2,553.25	375.13	-237.94	444.23	0.00	0.00	0.00
2,700.00	13.50	327.61	2,650.48	394.85	-250.45	467.58	0.00	0.00	0.00
2,800.00	13.50	327.61	2,747.72	414.57	-262.96	490.93	0.00	0.00	0.00
2,900.00	13.50	327.61	2,844.95	434.29	-275.46	514.29	0.00	0.00	0.00
3,000.00	13.50	327.61	2,942.19	454.01	-287.97	537.64	0.00	0.00	0.00
3,100.00	13.50	327.61	3,039.42	473.73	-300.48	560.99	0.00	0.00	0.00
3,200.00	13.50	327.61	3,136.66	493.45	-312.98	584.34	0.00	0.00	0.00
3,300.00	13.50	327.61	3,233.89	513.17	-325.49	607.69	0.00	0.00	0.00
3,400.00	13.50	327.61	3,331.13	532.89	-338.00	631.04	0.00	0.00	0.00
3,500.00	13.50	327.61	3,428.37	552.61	-350.51	654.39	0.00	0.00	0.00
3,600.00	13.50	327.61	3,525.60	572.33	-363.01	677.75	0.00	0.00	0.00
3,698.11	13.50	327.61	3,621.00	591.68	-375.28	700.66	0.00	0.00	0.00
Parkman									
3,700.00	13.50	327.61	3,622.84	592.05	-375.52	701.10	0.00	0.00	0.00
3,800.00	13.50	327.61	3,720.07	611.77	-388.03	724.45	0.00	0.00	0.00
3,900.00	13.50	327.61	3,817.31	631.49	-400.53	747.80	0.00	0.00	0.00
4,000.00	13.50	327.61	3,914.54	651.21	-413.04	771.15	0.00	0.00	0.00
4,100.00	13.50	327.61	4,011.78	670.93	-425.55	794.50	0.00	0.00	0.00

Database:	Local DB	Local Co-ordinate Reference:	Well 30-54
Company:	Great Western	TVD Reference:	WELL @ 4999.00usft (Cade 22)
Project:	Weld County, Colorado (NAD 83)	MD Reference:	WELL @ 4999.00usft (Cade 22)
Site:	Raindance	North Reference:	Grid
Well:	30-54	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,200.00	13.50	327.61	4,109.01	690.65	-438.06	817.85	0.00	0.00	0.00
4,300.00	13.50	327.61	4,206.25	710.37	-450.56	841.21	0.00	0.00	0.00
4,400.00	13.50	327.61	4,303.48	730.09	-463.07	864.56	0.00	0.00	0.00
4,432.41	13.50	327.61	4,335.00	736.48	-467.12	872.13	0.00	0.00	0.00
Sussex									
4,500.00	13.50	327.61	4,400.72	749.80	-475.58	887.91	0.00	0.00	0.00
4,600.00	13.50	327.61	4,497.95	769.52	-488.09	911.26	0.00	0.00	0.00
4,700.00	13.50	327.61	4,595.19	789.24	-500.59	934.61	0.00	0.00	0.00
4,800.00	13.50	327.61	4,692.42	808.96	-513.10	957.96	0.00	0.00	0.00
4,803.68	13.50	327.61	4,696.00	809.69	-513.56	958.82	0.00	0.00	0.00
Shannon									
4,900.00	13.50	327.61	4,789.66	828.68	-525.61	981.31	0.00	0.00	0.00
5,000.00	13.50	327.61	4,886.89	848.40	-538.11	1,004.67	0.00	0.00	0.00
5,100.00	13.50	327.61	4,984.13	868.12	-550.62	1,028.02	0.00	0.00	0.00
5,200.00	13.50	327.61	5,081.37	887.84	-563.13	1,051.37	0.00	0.00	0.00
5,300.00	13.50	327.61	5,178.60	907.56	-575.64	1,074.72	0.00	0.00	0.00
5,400.00	13.50	327.61	5,275.84	927.28	-588.14	1,098.07	0.00	0.00	0.00
5,500.00	13.50	327.61	5,373.07	947.00	-600.65	1,121.42	0.00	0.00	0.00
5,600.00	13.50	327.61	5,470.31	966.72	-613.16	1,144.77	0.00	0.00	0.00
5,700.00	13.50	327.61	5,567.54	986.44	-625.66	1,168.13	0.00	0.00	0.00
5,723.14	13.50	327.61	5,590.04	991.00	-628.56	1,173.53	0.00	0.00	0.00
Begin 1.50°/100' Drop									
5,800.00	12.35	327.61	5,664.95	1,005.52	-637.77	1,190.72	1.50	-1.50	0.00
5,900.00	10.85	327.61	5,762.91	1,022.50	-648.54	1,210.83	1.50	-1.50	0.00
6,000.00	9.35	327.61	5,861.35	1,037.31	-657.93	1,228.37	1.50	-1.50	0.00
6,100.00	7.85	327.61	5,960.23	1,049.94	-665.94	1,243.33	1.50	-1.50	0.00
6,200.00	6.35	327.61	6,059.46	1,060.38	-672.56	1,255.69	1.50	-1.50	0.00
6,300.00	4.85	327.61	6,158.98	1,068.63	-677.79	1,265.45	1.50	-1.50	0.00
6,400.00	3.35	327.61	6,258.72	1,074.66	-681.62	1,272.60	1.50	-1.50	0.00
6,500.00	1.85	327.61	6,358.61	1,078.50	-684.05	1,277.14	1.50	-1.50	0.00
6,600.00	0.35	327.61	6,458.59	1,080.12	-685.08	1,279.06	1.50	-1.50	0.00
6,623.41	0.00	0.00	6,482.00	1,080.18	-685.12	1,279.13	1.50	-1.50	0.00
Begin Vertical Hold									
6,700.00	0.00	0.00	6,558.59	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
6,800.00	0.00	0.00	6,658.59	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
6,900.00	0.00	0.00	6,758.59	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
7,000.00	0.00	0.00	6,858.59	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
7,100.00	0.00	0.00	6,958.59	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
7,153.41	0.00	0.00	7,012.00	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
Niobrara									
7,200.00	0.00	0.00	7,058.59	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
7,300.00	0.00	0.00	7,158.59	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
7,400.00	0.00	0.00	7,258.59	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
7,467.41	0.00	0.00	7,326.00	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
Fort Hayes									
7,487.41	0.00	0.00	7,346.00	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
Codell									
7,500.00	0.00	0.00	7,358.59	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
7,600.00	0.00	0.00	7,458.59	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
7,647.41	0.00	0.00	7,506.00	1,080.18	-685.12	1,279.13	0.00	0.00	0.00
PBHL									

Database:	Local DB	Local Co-ordinate Reference:	Well 30-54
Company:	Great Western	TVD Reference:	WELL @ 4999.00usft (Cade 22)
Project:	Weld County, Colorado (NAD 83)	MD Reference:	WELL @ 4999.00usft (Cade 22)
Site:	Raindance	North Reference:	Grid
Well:	30-54	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
PBHL v1 - Raindance 3C	0.00	0.00	7,506.00	1,080.18	-685.12	1,408,806.12	3,158,359.15	40° 27' 15.047 N	104° 55' 51.412 W
- plan hits target center									
- Point									

Casing Points				
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
601.31	600.00	9 5/8"	9-5/8	12-1/4

Formations					
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
2,562.72	2,517.00	Greeley Sand		0.00	
3,698.11	3,621.00	Parkman		0.00	
4,432.41	4,335.00	Sussex		0.00	
4,803.68	4,696.00	Shannon		0.00	
7,153.41	7,012.00	Niobrara		0.00	
7,467.41	7,326.00	Fort Hayes		0.00	
7,487.41	7,346.00	Codell		0.00	

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
200.00	200.00	0.00	0.00	KOP, 2.00°/100' Build
600.00	598.70	23.54	-14.93	Begin 8.00° Tangent
1,000.00	994.81	70.55	-44.76	Begin 2.00°/100' Build
1,275.20	1,265.08	113.89	-72.25	Begin 13.50° Tangent
5,723.14	5,590.04	991.00	-628.56	Begin 1.50°/100' Drop
6,623.41	6,482.00	1,080.18	-685.12	Begin Vertical Hold
7,647.41	7,506.00	1,080.18	-685.12	PBHL