


T7S, R95W, 6th P.M.

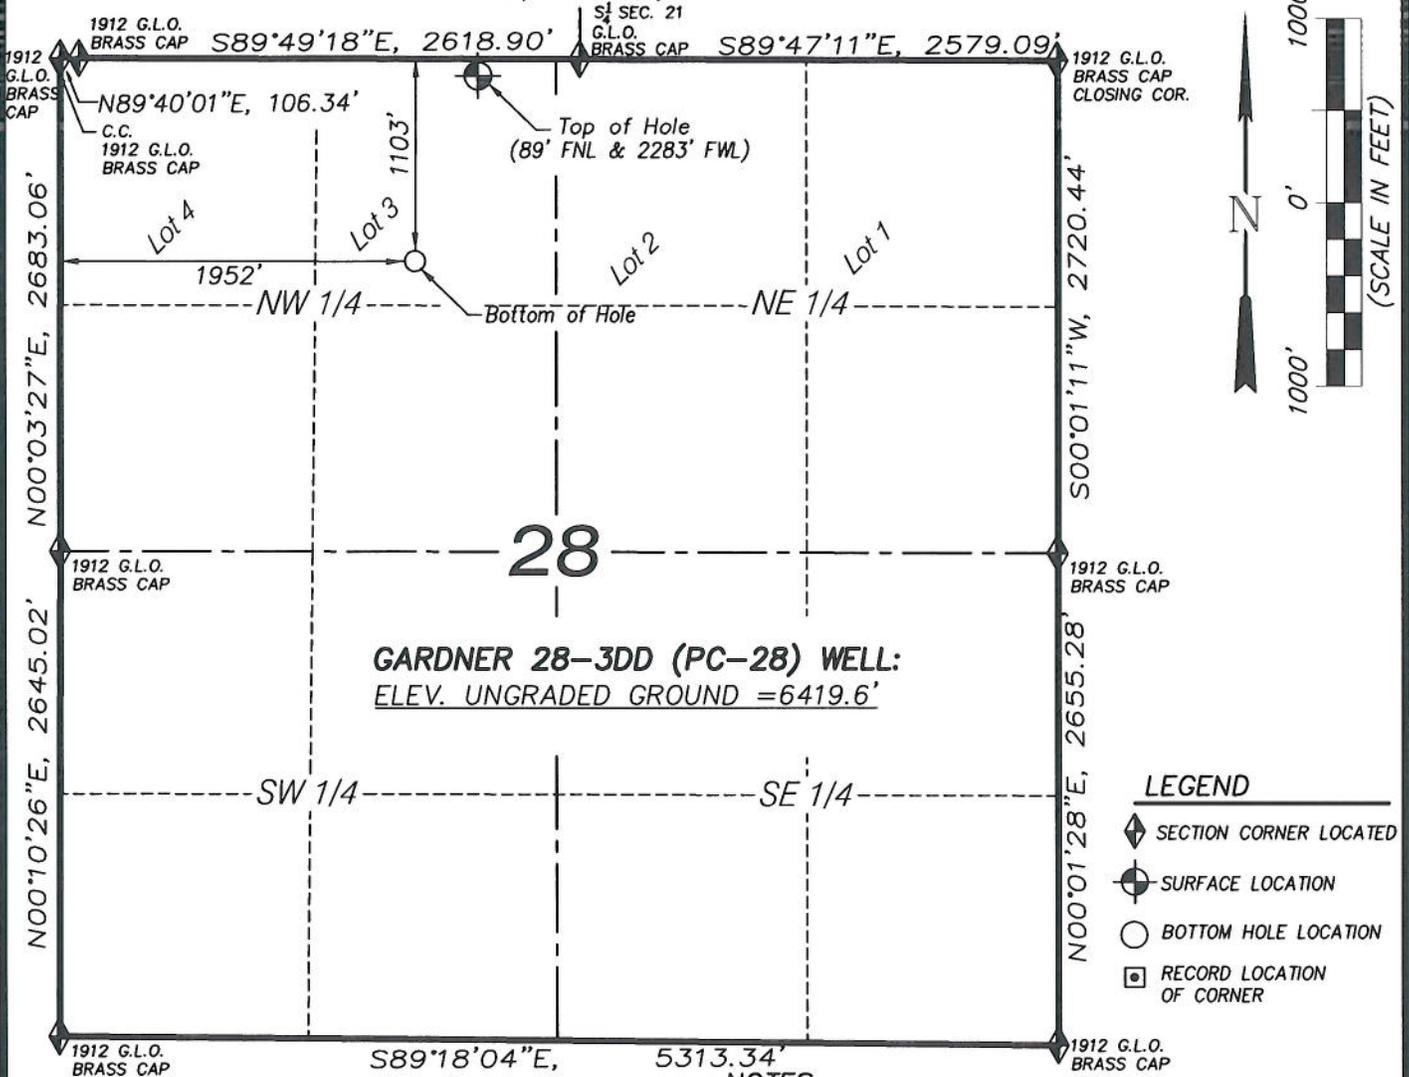

**GARDNER 28-3DD (PC-28) WELL:**  
 ELEV. UNGRADED GROUND = 6419.6'

**LEGEND**

- SECTION CORNER LOCATED
- SURFACE LOCATION
- BOTTOM HOLE LOCATION
- RECORD LOCATION OF CORNER

**NOTES**

1. WELL FOOTAGES ARE MEASURED AT RIGHT ANGLES TO SECTION LINES.
2. BASIS OF BEARING: GEODETIC- BASED ON GPS OBSERVATIONS.
3. ELEVATIONS BASED ON GPS OBSERVATIONS, NAVD 88 (GEOID 03), POST PROCESSED USING NGS OPUS.
4. THE BOTTOM HOLE BEARS S18°08'40"W, 1067' FROM TOP OF HOLE.
5. SEE ADDENDUM TO LEGAL PLAT (SHEET 1K) FOR VISIBLE IMPROVEMENTS WITHIN 400 FEET OF THE PROPOSED OIL & GAS LOCATION.
6. CONTROL FOR SURVEY WAS ESTABLISHED USING DIFFERENTIALLY CORRECTED GPS FROM AN OPUS BASED CONTROL NETWORK. WELL LOCATION WAS ESTABLISHED USING NON-GPS CONVENTIONAL METHODS, THEREFORE NO PPOF READING WAS TAKEN.

**GARDNER 28-3DD (PC-28) WELL**  
 (WELLHEAD LOCATION) NAD 83  
 LATITUDE = 39.415542° N  
 LONGITUDE = 108.003545° W  
 (BOTTOM HOLE LOCATION) NAD 83  
 LATITUDE = 39.412757° N  
 LONGITUDE = 108.004708° W

**CERTIFICATE OF SURVEYOR**

I, TED TAGGART OF FRUITA, COLORADO HEREBY CERTIFY THAT THIS MAP WAS MADE FROM NOTES TAKEN DURING AN ACTUAL SURVEY MADE BY ME OR UNDER MY DIRECTION FOR ENCANA OIL & GAS (USA) INC. AND THAT THIS LOCATION HAS BEEN STAKED ON THE GROUND AS SHOWN HEREON.



906 Main Street  
 Evanston, Wyoming 82930  
 Phone No. (307) 789-4545

**MAP to ACCOMPANY**  
 APPLICATION for PERMIT to DRILL  
**EnCana Oil & Gas (USA) Inc.**  
**Gardner 28-3DD (PC-28) Well**  
 NE1/4 NW1/4 (Lot 3), SECTION 28  
 T7S, R95W, 6th P.M.  
 GARFIELD COUNTY, COLORADO

<i>Location Plat</i>		Scale: 1" = 1000'	SHEET
Project No.	10-04-63	Date Surveyed:	<b>1f</b>
Date Drawn:	11/09/10	Latest Revision Date:	OF 10
			8/11/10
			5/16/12